

# ENFOCUS



**PITSTOP  
PRO<sup>25</sup>**

Action Manual

# Contents

|                                                                               |           |
|-------------------------------------------------------------------------------|-----------|
| <b>1. What's new?</b>                                                         | <b>21</b> |
| 1.1. New and changed Actions in PitStop 25.07                                 | 21        |
| 1.2. New and changed Actions in PitStop 25.03                                 | 22        |
| <b>2. Automating tasks with Action Lists</b>                                  | <b>25</b> |
| 2.1. About Actions and Action Lists                                           | 25        |
| 2.1.1. Actions and Action Lists: An example                                   | 26        |
| 2.2. Where to find Actions and Action Lists                                   | 27        |
| 2.2.1. The Action Lists dialog                                                | 28        |
| 2.2.2. The Action List Editor                                                 | 30        |
| 2.2.3. Actions overview                                                       | 32        |
| 2.3. Working with Action Lists                                                | 34        |
| 2.3.1. Working with Action Lists - how to proceed                             | 34        |
| 2.3.2. Creating and editing an Action List                                    | 35        |
| 2.3.3. Running an Action List                                                 | 48        |
| 2.3.4. Checking the results of an Action List                                 | 49        |
| 2.3.5. Fixing problems                                                        | 55        |
| 2.4. Managing Action Lists                                                    | 56        |
| 2.4.1. Exporting an Action List                                               | 57        |
| 2.4.2. Importing an Action List                                               | 57        |
| 2.4.3. Locking an Action List                                                 | 58        |
| 2.5. Troubleshooting Action Lists using the Action List Visualizer            | 59        |
| 2.5.1. Troubleshooting Action Lists - How it works                            | 59        |
| 2.5.2. The Action List Visualizer User Interface                              | 60        |
| 2.5.3. Starting the Action List Visualizer                                    | 62        |
| 2.5.4. Visualizing an Action List at a particular speed (Run mode)            | 62        |
| 2.5.5. Visualizing an Action List at your own speed (Step mode)               | 63        |
| 2.5.6. Changing the Action List during visualization                          | 64        |
| 2.6. Action Lists in practice - a use case                                    | 64        |
| 2.6.1. Given: PDF documents of booklets with creep                            | 65        |
| 2.6.2. Creating an Action List that changes the page layout of a PDF document | 66        |
| <b>3. Actions sorted per Type</b>                                             | <b>68</b> |
| 3.1. Changes                                                                  | 68        |
| 3.1.1. Add                                                                    | 68        |
| 3.1.2. Color                                                                  | 95        |
| 3.1.3. Document                                                               | 120       |
| 3.1.4. General                                                                | 129       |
| 3.1.5. Image                                                                  | 141       |
| 3.1.6. Layers                                                                 | 148       |

3.1.7. Line Art.....157

3.1.8. Metadata..... 177

3.1.9. Operators..... 194

3.1.10. Packaging.....197

3.1.11. Page..... 198

3.1.12. PDF 2.0..... 225

3.1.13. Position and size.....236

3.1.14. Prepress..... 255

3.1.15. Remove.....275

3.1.16. Text.....279

3.2. Checks..... 294

3.2.1. Color..... 294

3.2.2. Document.....320

3.2.3. General..... 328

3.2.4. Image.....336

3.2.5. Layers..... 341

3.2.6. Line Art..... 345

3.2.7. Metadata..... 348

3.2.8. Packaging.....367

3.2.9. Page..... 369

3.2.10. PDF 2.0..... 381

3.2.11. Position and size.....388

3.2.12. Prepress.....393

3.2.13. Text..... 406

3.3. Informs.....416

3.3.1. Color..... 416

3.3.2. Document..... 417

3.3.3. Image.....418

3.3.4. Layers..... 419

3.3.5. Metadata.....420

3.3.6. Page..... 420

3.3.7. Text..... 421

3.4. Selections.....422

3.4.1. Color..... 422

3.4.2. Document..... 443

3.4.3. General..... 444

3.4.4. Image.....448

3.4.5. Layers..... 453

3.4.6. Line Art.....457

3.4.7. Metadata..... 463

3.4.8. Operators.....470

3.4.9. Packaging.....478

3.4.10. Page.....480

- 3.4.11. PDF 2.0..... 489
  - 3.4.12. Position and size..... 492
  - 3.4.13. Prepress..... 500
  - 3.4.14. Text..... 505
- 3.5. Settings..... 515
  - 3.5.1. Color..... 515
  - 3.5.2. General..... 516
  - 3.5.3. Image..... 519
  - 3.5.4. Page..... 520
- 4. Actions sorted per Category..... 521**
  - 4.1. Add..... 521
    - 4.1.1. Changes..... 521
  - 4.2. Color..... 548
    - 4.2.1. Changes..... 548
    - 4.2.2. Checks..... 574
    - 4.2.3. Informs..... 600
    - 4.2.4. Selections..... 600
    - 4.2.5. Settings..... 621
  - 4.3. Document..... 622
    - 4.3.1. Changes..... 622
    - 4.3.2. Checks..... 632
    - 4.3.3. Informs..... 641
    - 4.3.4. Selections..... 642
  - 4.4. General..... 642
    - 4.4.1. Changes..... 642
    - 4.4.2. Checks..... 655
    - 4.4.3. Selections..... 663
    - 4.4.4. Settings..... 668
  - 4.5. Image..... 672
    - 4.5.1. Changes..... 672
    - 4.5.2. Checks..... 678
    - 4.5.3. Informs..... 684
    - 4.5.4. Selections..... 685
    - 4.5.5. Settings..... 689
  - 4.6. Layers..... 690
    - 4.6.1. Changes..... 690
    - 4.6.2. Selections..... 699
    - 4.6.3. Checks..... 702
    - 4.6.4. Informs..... 705
  - 4.7. Line Art..... 706
    - 4.7.1. Changes..... 706
    - 4.7.2. Checks..... 724
    - 4.7.3. Selections..... 728



- 4.8. Metadata..... 734
  - 4.8.1. Changes..... 734
  - 4.8.2. Checks..... 750
  - 4.8.3. Informs..... 768
  - 4.8.4. Selections..... 768
- 4.9. Operators..... 776
  - 4.9.1. Selections..... 776
  - 4.9.2. Changes..... 783
- 4.10. Packaging..... 786
  - 4.10.1. Changes..... 786
  - 4.10.2. Checks..... 787
  - 4.10.3. Selections..... 790
- 4.11. Page..... 792
  - 4.11.1. Changes..... 792
  - 4.11.2. Checks..... 819
  - 4.11.3. Informs..... 832
  - 4.11.4. Selections..... 832
  - 4.11.5. Settings..... 842
- 4.12. PDF 2.0..... 843
  - 4.12.1. Selections..... 843
  - 4.12.2. Changes..... 846
  - 4.12.3. Checks..... 857
- 4.13. Position and Size..... 864
  - 4.13.1. Changes..... 864
  - 4.13.2. Checks..... 882
  - 4.13.3. Selections..... 887
- 4.14. Prepress..... 896
  - 4.14.1. Changes..... 896
  - 4.14.2. Checks..... 917
  - 4.14.3. Selections..... 927
- 4.15. Remove..... 933
  - 4.15.1. Changes..... 933
- 4.16. Text..... 939
  - 4.16.1. Changes..... 939
  - 4.16.2. Checks..... 953
  - 4.16.3. Informs..... 963
  - 4.16.4. Selections..... 964
- 5. Actions sorted alphabetically..... 975**
  - 5.1. A..... 975
    - 5.1.1. Add alternate images..... 975
    - 5.1.2. Add background..... 975
    - 5.1.3. Add barcode..... 976
    - 5.1.4. Add bleed..... 979

|                                                                                                   |      |
|---------------------------------------------------------------------------------------------------|------|
| 5.1.5. Add bleed around contour.....                                                              | 982  |
| 5.1.6. Add bookmarks.....                                                                         | 986  |
| 5.1.7. Add color bar.....                                                                         | 988  |
| 5.1.8. Add copied graphics.....                                                                   | 990  |
| 5.1.9. Add default color spaces for color spaces that are not compliant to the Output Intent..... | 992  |
| 5.1.10. Add font metadata.....                                                                    | 992  |
| 5.1.11. Add hems or pockets.....                                                                  | 993  |
| 5.1.12. Add missing creation and modification date.....                                           | 994  |
| 5.1.13. Add object.....                                                                           | 994  |
| 5.1.14. Add objects to layer.....                                                                 | 997  |
| 5.1.15. Add objects to layer with name.....                                                       | 997  |
| 5.1.16. Add page box marks.....                                                                   | 998  |
| 5.1.17. Add page number.....                                                                      | 998  |
| 5.1.18. Add pages.....                                                                            | 1000 |
| 5.1.19. Add pages with extracted content to document.....                                         | 1001 |
| 5.1.20. Add registration marks.....                                                               | 1002 |
| 5.1.21. Add separation names.....                                                                 | 1003 |
| 5.1.22. Add separation pages to document.....                                                     | 1004 |
| 5.1.23. Add trace path.....                                                                       | 1007 |
| 5.1.24. Add unique document IDs.....                                                              | 1011 |
| 5.1.25. Align or distribute objects.....                                                          | 1011 |
| 5.1.26. AND.....                                                                                  | 1012 |
| 5.1.27. Apply a gaussian blur to an image.....                                                    | 1013 |
| 5.1.28. Apply CMYK curve.....                                                                     | 1013 |
| 5.1.29. Apply color curve.....                                                                    | 1014 |
| 5.1.30. Apply DeviceLink.....                                                                     | 1015 |
| 5.1.31. Apply Gray curve.....                                                                     | 1016 |
| 5.1.32. Apply Lab curve.....                                                                      | 1017 |
| 5.1.33. Apply page rotation.....                                                                  | 1018 |
| 5.1.34. Apply page scaling factor.....                                                            | 1018 |
| 5.1.35. Apply RGB curve.....                                                                      | 1019 |
| 5.1.36. Apply transfer function.....                                                              | 1020 |
| 5.2. C (Part 1: Center - Change).....                                                             | 1021 |
| 5.2.1. Center page content.....                                                                   | 1021 |
| 5.2.2. Change annotation flags.....                                                               | 1021 |
| 5.2.3. Change annotations print setting.....                                                      | 1022 |
| 5.2.4. Change art box.....                                                                        | 1022 |
| 5.2.5. Change binding.....                                                                        | 1022 |
| 5.2.6. Change bleed box.....                                                                      | 1023 |
| 5.2.7. Change blending color space.....                                                           | 1023 |
| 5.2.8. Change character spacing.....                                                              | 1024 |
| 5.2.9. Change color.....                                                                          | 1024 |
| 5.2.10. Change corrupt font widths.....                                                           | 1025 |

5.2.11. Change crop box.....1025

5.2.12. Change dash pattern.....1026

5.2.13. Change default color spaces.....1026

5.2.14. Change document encoding..... 1027

5.2.15. Change document info.....1027

5.2.16. Change document information dictionary compliance.....1029

5.2.17. Change fill and/or stroke..... 1030

5.2.18. Change fill type..... 1030

5.2.19. Change flatness.....1031

5.2.20. Change font..... 1032

5.2.21. Change Gray to CMYK Black..... 1033

5.2.22. Change halftone origin.....1033

5.2.23. Change image brightness and contrast.....1034

5.2.24. Change image compression.....1035

5.2.25. Change initial view.....1035

5.2.26. Change inline image syntax..... 1036

5.2.27. Change layer processing steps - ISO 19593-1..... 1037

5.2.28. Change layer print state.....1037

5.2.29. Change layer properties.....1038

5.2.30. Change line cap.....1039

5.2.31. Change line join.....1039

5.2.32. Change line weight.....1039

5.2.33. Change media box.....1040

5.2.34. Change miter limit.....1041

5.2.35. Change object order.....1041

5.2.36. Change objects that are close to the page edge.....1042

5.2.37. Change OPI info.....1042

5.2.38. Change Requirements.....1043

5.2.39. Change Output Intent.....1043

5.2.40. Change overprint.....1043

5.2.41. Change overprint mode.....1044

5.2.42. Change page box layout.....1045

5.2.43. Change page format.....1046

5.2.44. Change page labels.....1046

5.2.45. Change page orientation.....1047

5.2.46. Change page scaling factor.....1047

5.2.47. Change PDF text string encoding..... 1049

5.2.48. Change PDF/A version key..... 1050

5.2.49. Change PDF/X version key..... 1050

5.2.50. Change point size.....1051

5.2.51. Change position.....1051

5.2.52. Change ProcSet resources.....1051

5.2.53. Change rendering intent.....1052

|                                                                          |      |
|--------------------------------------------------------------------------|------|
| 5.2.54. Change rendering parameter.....                                  | 1053 |
| 5.2.55. Change smoothness.....                                           | 1053 |
| 5.2.56. Change spot color suffix.....                                    | 1053 |
| 5.2.57. Change stroke adjustment.....                                    | 1055 |
| 5.2.58. Change transparency.....                                         | 1055 |
| 5.2.59. Change transparency group settings.....                          | 1056 |
| 5.2.60. Change trapped flag.....                                         | 1057 |
| 5.2.61. Change trim box.....                                             | 1058 |
| 5.2.62. Change word spacing.....                                         | 1058 |
| 5.3. C (Part 2: Check - Crop).....                                       | 1059 |
| 5.3.1. Check access control.....                                         | 1059 |
| 5.3.2. Check annotation flags settings.....                              | 1059 |
| 5.3.3. Check annotations print setting.....                              | 1060 |
| 5.3.4. Check annotations type.....                                       | 1060 |
| 5.3.5. Check appearances of annotations and interactive form fields..... | 1060 |
| 5.3.6. Check article threads.....                                        | 1061 |
| 5.3.7. Check barcode.....                                                | 1061 |
| 5.3.8. Check binding.....                                                | 1062 |
| 5.3.9. Check black point compensation.....                               | 1063 |
| 5.3.10. Check bleed.....                                                 | 1064 |
| 5.3.11. Check bleed around contour.....                                  | 1067 |
| 5.3.12. Check bleed contours.....                                        | 1070 |
| 5.3.13. Check bookmarks.....                                             | 1071 |
| 5.3.14. Check Certified PDF state.....                                   | 1071 |
| 5.3.15. Check CMap.....                                                  | 1072 |
| 5.3.16. Check color type.....                                            | 1072 |
| 5.3.17. Check contents compression.....                                  | 1072 |
| 5.3.18. Check corrupt font widths.....                                   | 1073 |
| 5.3.19. Check creation and modification date.....                        | 1073 |
| 5.3.20. Check data format.....                                           | 1074 |
| 5.3.21. Check default color spaces.....                                  | 1074 |
| 5.3.22. Check DeviceN attributes.....                                    | 1075 |
| 5.3.23. Check DPart metadata.....                                        | 1075 |
| 5.3.24. Check DeviceN colorants.....                                     | 1076 |
| 5.3.25. Check DeviceN for process color spaces.....                      | 1076 |
| 5.3.26. Check document info.....                                         | 1077 |
| 5.3.27. Check document information dictionary compliance.....            | 1078 |
| 5.3.28. Check document permissions.....                                  | 1078 |
| 5.3.29. Check document security.....                                     | 1079 |
| 5.3.30. Check document trapped flag.....                                 | 1079 |
| 5.3.31. Check document unique IDs.....                                   | 1080 |
| 5.3.32. Check embedded font is OpenType.....                             | 1080 |
| 5.3.33. Check encoding of name objects.....                              | 1081 |

|                                                                            |      |
|----------------------------------------------------------------------------|------|
| 5.3.34. Check enforced viewer preferences.....                             | 1081 |
| 5.3.35. Check Esko barcode value.....                                      | 1081 |
| 5.3.36. Check Esko barcode type.....                                       | 1082 |
| 5.3.37. Check external hyperlink annotations.....                          | 1082 |
| 5.3.38. Check file identifiers in document XMP metadata.....               | 1083 |
| 5.3.39. Check file specification keys.....                                 | 1083 |
| 5.3.40. Check flatness.....                                                | 1084 |
| 5.3.41. Check font by name.....                                            | 1084 |
| 5.3.42. Check font embedding.....                                          | 1084 |
| 5.3.43. Check font license.....                                            | 1085 |
| 5.3.44. Check font metadata.....                                           | 1085 |
| 5.3.45. Check font subsetting.....                                         | 1086 |
| 5.3.46. Check font type.....                                               | 1086 |
| 5.3.47. Check font vendor.....                                             | 1087 |
| 5.3.48. Check for action dictionaries.....                                 | 1087 |
| 5.3.49. Check for additional actions.....                                  | 1087 |
| 5.3.50. Check for alternate images.....                                    | 1088 |
| 5.3.51. Check for alternate presentations.....                             | 1088 |
| 5.3.52. Check for annotations inside art box or trim box.....              | 1088 |
| 5.3.53. Check for annotations inside printable area.....                   | 1089 |
| 5.3.54. Check for artificial font style.....                               | 1089 |
| 5.3.55. Check for associated files.....                                    | 1089 |
| 5.3.56. Check for city fonts.....                                          | 1090 |
| 5.3.57. Check for custom black generation.....                             | 1090 |
| 5.3.58. Check for custom halftone.....                                     | 1090 |
| 5.3.59. Check for custom transfer function.....                            | 1091 |
| 5.3.60. Check for custom undercolor removal.....                           | 1091 |
| 5.3.61. Check for deprecated attributes in XMP metadata.....               | 1092 |
| 5.3.62. Check for differences in page boxes.....                           | 1092 |
| 5.3.63. Check for embedded PostScript fragments.....                       | 1093 |
| 5.3.64. Check for empty layers.....                                        | 1093 |
| 5.3.65. Check for empty pages.....                                         | 1094 |
| 5.3.66. Check for external streams.....                                    | 1094 |
| 5.3.67. Check for file specifications.....                                 | 1094 |
| 5.3.68. Check for file structure problems.....                             | 1095 |
| 5.3.69. Check for flipped objects.....                                     | 1095 |
| 5.3.70. Check for garbage after the PDF End-Of-File marker %%EOF.....      | 1095 |
| 5.3.71. Check for images with 16 bits per channel.....                     | 1096 |
| 5.3.72. Check for inconsistent Type 3 font width information.....          | 1096 |
| 5.3.73. Check for invisible objects without fill and stroke.....           | 1096 |
| 5.3.74. Check for Javascript.....                                          | 1097 |
| 5.3.75. Check for NChannel colors with non-trivial process dictionary..... | 1097 |
| 5.3.76. Check for non-PDF/X compliant halftone.....                        | 1098 |

|                                                                                     |      |
|-------------------------------------------------------------------------------------|------|
| 5.3.77. Check for non-standard blend modes.....                                     | 1098 |
| 5.3.78. Check for objects with negative dash pattern phase.....                     | 1099 |
| 5.3.79. Check for pre-separated pages.....                                          | 1100 |
| 5.3.80. Check for reference Xobjects.....                                           | 1100 |
| 5.3.81. Check for rotated objects.....                                              | 1100 |
| 5.3.82. Check for sheared objects.....                                              | 1103 |
| 5.3.83. Check for solids and tints.....                                             | 1103 |
| 5.3.84. Check for spot color ambiguity.....                                         | 1104 |
| 5.3.85. Check for sub-page navigation support.....                                  | 1105 |
| 5.3.86. Check for transparent objects.....                                          | 1105 |
| 5.3.87. Check for unknown objects.....                                              | 1106 |
| 5.3.88. Check for unreadable data in front of the PDF header signature.....         | 1106 |
| 5.3.89. Check for XFA forms.....                                                    | 1107 |
| 5.3.90. Check for XMP schema definitions as required by PDF/A.....                  | 1107 |
| 5.3.91. Check form fields.....                                                      | 1107 |
| 5.3.92. Check halftone origin.....                                                  | 1108 |
| 5.3.93. Check halftone phase.....                                                   | 1108 |
| 5.3.94. Check ICC profile version.....                                              | 1108 |
| 5.3.95. Check ICC tagging.....                                                      | 1109 |
| 5.3.96. Check processing steps - ISO 19593-1.....                                   | 1110 |
| 5.3.97. Check if a subset font contains a complete CharSet or CIDSet.....           | 1110 |
| 5.3.98. Check if blending color space is defined.....                               | 1111 |
| 5.3.99. Check if compression filters are PDF/X compliant.....                       | 1111 |
| 5.3.100. Check if date is present in document XMP metadata.....                     | 1112 |
| 5.3.101. Check if DeviceN printing order is consistent.....                         | 1112 |
| 5.3.102. Check if document does not need repair.....                                | 1113 |
| 5.3.103. Check if document has enough high-ASCII bytes in the PDF header.....       | 1113 |
| 5.3.104. Check if document is optimized for Fast Web View.....                      | 1113 |
| 5.3.105. Check if document is produced by PDFWriter.....                            | 1114 |
| 5.3.106. Check if document metadata is consistent.....                              | 1114 |
| 5.3.107. Check if document requires PostScript LanguageLevel 3.....                 | 1115 |
| 5.3.108. Check if document XMP metadata types are valid.....                        | 1115 |
| 5.3.109. Check if document XMP name space uses correct prefix.....                  | 1116 |
| 5.3.110. Check if font contains all glyphs and metrics for all characters used..... | 1116 |
| 5.3.111. Check if ICC profile differs from ICC profile in PDF/X Output Intent.....  | 1116 |
| 5.3.112. Check if invalid character (.notdef glyph) is used.....                    | 1117 |
| 5.3.113. Check if JPEG 2000 compressed images are PDF/X compliant.....              | 1118 |
| 5.3.114. Check if layer is PDF/X-4 compliant.....                                   | 1118 |
| 5.3.115. Check if metadata streams do not have a compression filter.....            | 1118 |
| 5.3.116. Check if object is close to the page edge.....                             | 1119 |
| 5.3.117. Check if object is completely outside page box.....                        | 1119 |
| 5.3.118. Check if object is set to knockout.....                                    | 1119 |
| 5.3.119. Check if object is set to overprint.....                                   | 1120 |

|                                                                         |      |
|-------------------------------------------------------------------------|------|
| 5.3.120. Check if Output Intents are used.....                          | 1120 |
| 5.3.121. Check if page box is defined.....                              | 1120 |
| 5.3.122. Check if page box is too large.....                            | 1121 |
| 5.3.123. Check if page scaling factor is used.....                      | 1121 |
| 5.3.124. Check if Requirements are used.....                            | 1121 |
| 5.3.125. Check if solidities of DeviceN colorants are consistent.....   | 1122 |
| 5.3.126. Check if the color spaces used match the blend colorspace..... | 1122 |
| 5.3.127. Check if trim marks match page box.....                        | 1122 |
| 5.3.128. Check if TrueType fonts are PDF/X compliant.....               | 1124 |
| 5.3.129. Check if URLs in Link Annotations are valid.....               | 1124 |
| 5.3.130. Check if visual content exists.....                            | 1125 |
| 5.3.131. Check if XMP metadata is well-formed.....                      | 1127 |
| 5.3.132. Check image compression.....                                   | 1128 |
| 5.3.133. Check image compression ratio.....                             | 1128 |
| 5.3.134. Check image interpolation.....                                 | 1129 |
| 5.3.135. Check ink coverage (basic object check).....                   | 1129 |
| 5.3.136. Check ink coverage (total page check).....                     | 1129 |
| 5.3.137. Check inline image syntax.....                                 | 1130 |
| 5.3.138. Check layer print state.....                                   | 1130 |
| 5.3.139. Check layer properties.....                                    | 1131 |
| 5.3.140. Check layers.....                                              | 1132 |
| 5.3.141. Check line art by length.....                                  | 1133 |
| 5.3.142. Check line weight.....                                         | 1133 |
| 5.3.143. Check marked content.....                                      | 1134 |
| 5.3.144. Check maximum path length.....                                 | 1134 |
| 5.3.145. Check media box origin.....                                    | 1134 |
| 5.3.146. Check number of color plates (basic object check).....         | 1135 |
| 5.3.147. Check number of images on page.....                            | 1135 |
| 5.3.148. Check number of pages.....                                     | 1135 |
| 5.3.149. Check number of paths on page.....                             | 1136 |
| 5.3.150. Check number of separations (total page check).....            | 1136 |
| 5.3.151. Check number of spot colors.....                               | 1137 |
| 5.3.152. Check object compression.....                                  | 1137 |
| 5.3.153. Check objects by tiling pattern.....                           | 1138 |
| 5.3.154. Check OPI path.....                                            | 1138 |
| 5.3.155. Check OPI type.....                                            | 1139 |
| 5.3.156. Check optimal compression.....                                 | 1139 |
| 5.3.157. Check Output Intent.....                                       | 1140 |
| 5.3.158. Check Output Intents for DotGain.....                          | 1140 |
| 5.3.159. Check overprint mode.....                                      | 1140 |
| 5.3.160. Check page bleed box.....                                      | 1141 |
| 5.3.161. Check page boxes consistency.....                              | 1141 |
| 5.3.162. Check page box layout.....                                     | 1142 |

|                                                                    |      |
|--------------------------------------------------------------------|------|
| 5.3.163. Check page format.....                                    | 1142 |
| 5.3.164. Check page orientation.....                               | 1143 |
| 5.3.165. Check page rotation angle.....                            | 1143 |
| 5.3.166. Check page safe type zone.....                            | 1144 |
| 5.3.167. Check page size.....                                      | 1145 |
| 5.3.168. Check pages have same size.....                           | 1145 |
| 5.3.169. Check PDF text string encoding.....                       | 1146 |
| 5.3.170. Check PDF/A version key.....                              | 1146 |
| 5.3.171. Check PDF/Acrobat compatibility.....                      | 1146 |
| 5.3.172. Check PDF/X version key.....                              | 1147 |
| 5.3.173. Check PDF/X viewer preferences.....                       | 1147 |
| 5.3.174. Check pdfxid prefix in XMP name space.....                | 1148 |
| 5.3.175. Check presence of document metadata stream.....           | 1148 |
| 5.3.176. Check presence of ToUnicode map in font.....              | 1148 |
| 5.3.177. Check rendering intent.....                               | 1149 |
| 5.3.178. Check required color set.....                             | 1149 |
| 5.3.179. Check resolution.....                                     | 1150 |
| 5.3.180. Check resource locations in Type 3 fonts.....             | 1150 |
| 5.3.181. Check Spectral Data in Output Intent.....                 | 1151 |
| 5.3.182. Check spot color by alternate color space.....            | 1151 |
| 5.3.183. Check spot color by name.....                             | 1152 |
| 5.3.184. Check spot color by PANTONE library.....                  | 1153 |
| 5.3.185. Check spot color suffix.....                              | 1153 |
| 5.3.186. Check text point size.....                                | 1154 |
| 5.3.187. Check text x-height.....                                  | 1155 |
| 5.3.188. Check that composite TrueType CIDToGIDMap is present..... | 1155 |
| 5.3.189. Check thumbnails.....                                     | 1155 |
| 5.3.190. Check total number of nodes on page.....                  | 1156 |
| 5.3.191. Check Trapnets for PDF/X.....                             | 1156 |
| 5.3.192. Check TrueType font encoding according to PDF/A.....      | 1157 |
| 5.3.193. Check unused destinations.....                            | 1157 |
| 5.3.194. Check usage of device color spaces for PDF/X.....         | 1158 |
| 5.3.195. Check version compatibility with PDF/A-2.....             | 1158 |
| 5.3.196. Check version compatibility with PDF/X-6.....             | 1158 |
| 5.3.197. Check XY scaling difference.....                          | 1159 |
| 5.3.198. Clean up unused resources.....                            | 1159 |
| 5.3.199. Clip bleed around contour.....                            | 1159 |
| 5.3.200. Close path.....                                           | 1160 |
| 5.3.201. Combine subpaths.....                                     | 1160 |
| 5.3.202. Combine and divide shapes.....                            | 1160 |
| 5.3.203. Compare gamuts.....                                       | 1162 |
| 5.3.204. Consolidate fonts.....                                    | 1165 |
| 5.3.205. Convert alternate color space to CMYK.....                | 1165 |



|                                                                             |      |
|-----------------------------------------------------------------------------|------|
| 5.3.206. Convert color.....                                                 | 1166 |
| 5.3.207. Convert color to shading color space.....                          | 1166 |
| 5.3.208. Convert fill to stroke.....                                        | 1166 |
| 5.3.209. Convert images to indexed color space.....                         | 1168 |
| 5.3.210. Convert indexed color space to base color space.....               | 1169 |
| 5.3.211. Convert PDF/X-4p Output Intent to PDF/X-4.....                     | 1169 |
| 5.3.212. Convert process to DeviceN.....                                    | 1169 |
| 5.3.213. Convert shading color space to solid color.....                    | 1170 |
| 5.3.214. Convert shading to images.....                                     | 1170 |
| 5.3.215. Convert shading to path.....                                       | 1171 |
| 5.3.216. Convert spot color to equivalent CMYK color.....                   | 1172 |
| 5.3.217. Convert stroke to fill.....                                        | 1172 |
| 5.3.218. Convert text to outlines.....                                      | 1173 |
| 5.3.219. Copy attributes of selected objects.....                           | 1173 |
| 5.3.220. Copy or cut objects to clipboard.....                              | 1175 |
| 5.3.221. Create varnish.....                                                | 1176 |
| 5.3.222. Crop images.....                                                   | 1176 |
| 5.3.223. Crop line art.....                                                 | 1176 |
| 5.4. D.....                                                                 | 1179 |
| 5.4.1. Duplicate top of selection stack.....                                | 1179 |
| 5.5. E.....                                                                 | 1180 |
| 5.5.1. Embed font.....                                                      | 1180 |
| 5.6. F.....                                                                 | 1180 |
| 5.6.1. Find and replace text.....                                           | 1180 |
| 5.6.2. Fix bounding box values of Type 3 fonts.....                         | 1181 |
| 5.6.3. Fix inconsistent Type 3 font width information.....                  | 1182 |
| 5.6.4. Fix invalid characters (.notdef usage).....                          | 1182 |
| 5.6.5. Fix layers.....                                                      | 1183 |
| 5.6.6. Fix missing DeviceN colorants.....                                   | 1184 |
| 5.6.7. Fix negative dash pattern phase.....                                 | 1184 |
| 5.6.8. Fix non well-formed XMP metadata.....                                | 1185 |
| 5.6.9. Fix PDF/A extension schema definitions in document XMP metadata..... | 1186 |
| 5.6.10. Fix version compatibility with PDF/A-2.....                         | 1186 |
| 5.6.11. Fix version compatibility with PDF/X-6.....                         | 1187 |
| 5.6.12. Flatten annotations.....                                            | 1187 |
| 5.6.13. Flatten form fields.....                                            | 1188 |
| 5.6.14. Flatten forms.....                                                  | 1188 |
| 5.6.15. Flatten layers.....                                                 | 1189 |
| 5.6.16. Flatten objects in layer.....                                       | 1190 |
| 5.6.17. Flip content.....                                                   | 1191 |
| 5.6.18. Flip selection.....                                                 | 1191 |
| 5.7. G.....                                                                 | 1192 |
| 5.7.1. Gather color information.....                                        | 1192 |

|                                                        |      |
|--------------------------------------------------------|------|
| 5.7.2. Gather filters information.....                 | 1192 |
| 5.7.3. Gather font information.....                    | 1193 |
| 5.7.4. Gather image information.....                   | 1193 |
| 5.7.5. Gather ink information.....                     | 1194 |
| 5.7.6. Gather layer information.....                   | 1194 |
| 5.7.7. Gather OPI information.....                     | 1195 |
| 5.7.8. Gather Output Intent information.....           | 1196 |
| 5.7.9. Gather page box information.....                | 1196 |
| 5.7.10. Gather pages information.....                  | 1196 |
| 5.7.11. Group Actions.....                             | 1197 |
| 5.8. I.....                                            | 1198 |
| 5.8.1. Impose document.....                            | 1198 |
| 5.9. L.....                                            | 1200 |
| 5.9.1. Log selection.....                              | 1200 |
| 5.9.2. Log text object properties.....                 | 1202 |
| 5.10. M.....                                           | 1202 |
| 5.10.1. Make DeviceN without NChannel information..... | 1202 |
| 5.10.2. Make document metadata consistent.....         | 1203 |
| 5.10.3. Make mask.....                                 | 1204 |
| 5.10.4. Make viewer preferences PDF/X compliant.....   | 1204 |
| 5.10.5. Match fill and stroke colors.....              | 1204 |
| 5.10.6. Merge into text lines.....                     | 1205 |
| 5.10.7. Move media box to 0.0.....                     | 1205 |
| 5.10.8. Move objects into the page box.....            | 1206 |
| 5.10.9. Move objects out of the page box.....          | 1206 |
| 5.10.10. Move objects to corner.....                   | 1206 |
| 5.10.11. Move page box.....                            | 1207 |
| 5.10.12. Move page content.....                        | 1207 |
| 5.10.13. Move page content to corner.....              | 1208 |
| 5.10.14. Make TrueType fonts PDF/X compliant.....      | 1208 |
| 5.11. N.....                                           | 1209 |
| 5.11.1. Normalize line weight.....                     | 1209 |
| 5.11.2. Normalize page boxes.....                      | 1209 |
| 5.11.3. Normalize Page Rotate Key.....                 | 1210 |
| 5.11.4. Normalize PANTONE library names.....           | 1210 |
| 5.11.5. NOT.....                                       | 1211 |
| 5.12. O.....                                           | 1211 |
| 5.12.1. Offset path.....                               | 1212 |
| 5.12.2. Open path.....                                 | 1213 |
| 5.12.3. Optimize document structure.....               | 1213 |
| 5.12.4. Optimize stream compression.....               | 1214 |
| 5.12.5. OR.....                                        | 1214 |
| 5.12.6. Overlay PDF.....                               | 1214 |

|                                                         |      |
|---------------------------------------------------------|------|
| 5.12.7. Overprint on all separations.....               | 1218 |
| 5.12.8. Override color management settings.....         | 1218 |
| 5.12.9. Override default image recompression.....       | 1218 |
| 5.12.10. Override page box defaults.....                | 1219 |
| 5.12.11. Override rounding rules.....                   | 1219 |
| 5.13. P.....                                            | 1220 |
| 5.13.1. Put selection in form.....                      | 1220 |
| 5.13.2. Paste objects from clipboard.....               | 1220 |
| 5.14. R.....                                            | 1222 |
| 5.14.1. Rasterize page content, keeping text.....       | 1222 |
| 5.14.2. Rasterize selection.....                        | 1223 |
| 5.14.3. Release mask.....                               | 1225 |
| 5.14.4. Remap all PANTONE library colors.....           | 1225 |
| 5.14.5. Remap alternate color space to CMYK.....        | 1226 |
| 5.14.6. Remap color.....                                | 1226 |
| 5.14.7. Remap PANTONE library colors.....               | 1228 |
| 5.14.8. Remap spot color.....                           | 1229 |
| 5.14.9. Remove action dictionaries.....                 | 1230 |
| 5.14.10. Remove additional actions.....                 | 1230 |
| 5.14.11. Remove alternate images.....                   | 1230 |
| 5.14.12. Remove alternate presentations.....            | 1231 |
| 5.14.13. Remove alternative blend modes.....            | 1231 |
| 5.14.14. Remove art box.....                            | 1232 |
| 5.14.15. Remove associated files.....                   | 1233 |
| 5.14.16. Remove black generation.....                   | 1233 |
| 5.14.17. Remove black point compensation.....           | 1233 |
| 5.14.18. Remove bleed box.....                          | 1234 |
| 5.14.19. Remove bookmarks.....                          | 1234 |
| 5.14.20. Remove CharSet or CIDSet.....                  | 1235 |
| 5.14.21. Remove Certified PDF workflow information..... | 1235 |
| 5.14.22. Remove concealed segments from line art.....   | 1236 |
| 5.14.23. Remove crop box.....                           | 1236 |
| 5.14.24. Remove custom transfer function.....           | 1236 |
| 5.14.25. Remove DPart metadata.....                     | 1237 |
| 5.14.26. Remove empty layers.....                       | 1237 |
| 5.14.27. Remove empty page.....                         | 1238 |
| 5.14.28. Remove enforcements on viewer preferences..... | 1239 |
| 5.14.29. Remove file specification from streams.....    | 1239 |
| 5.14.30. Remove file specification keys.....            | 1239 |
| 5.14.31. Remove form fields.....                        | 1240 |
| 5.14.32. Remove halftone.....                           | 1240 |
| 5.14.33. Remove halftone phase.....                     | 1241 |
| 5.14.34. Remove ICC tag.....                            | 1241 |

|                                                                |      |
|----------------------------------------------------------------|------|
| 5.14.35. Remove invisible objects without fill and stroke..... | 1242 |
| 5.14.36. Remove Javascript.....                                | 1242 |
| 5.14.37. Remove marked content.....                            | 1243 |
| 5.14.38. Remove metadata.....                                  | 1243 |
| 5.14.39. Remove name from XObjects.....                        | 1244 |
| 5.14.40. Remove non-PDF/X compliant halftone.....              | 1244 |
| 5.14.41. Remove object compression.....                        | 1244 |
| 5.14.42. Remove objects from layers.....                       | 1245 |
| 5.14.43. Remove OPI.....                                       | 1246 |
| 5.14.44. Remove Output Intents.....                            | 1247 |
| 5.14.45. Remove pages.....                                     | 1247 |
| 5.14.46. Remove page scaling factor.....                       | 1247 |
| 5.14.47. Remove PDF/A version key.....                         | 1248 |
| 5.14.48. Remove PDF/X version key.....                         | 1248 |
| 5.14.49. Remove PostScript.....                                | 1248 |
| 5.14.50. Remove processing steps - ISO 19593-1.....            | 1249 |
| 5.14.51. Remove rendering intent.....                          | 1249 |
| 5.14.52. Remove selection.....                                 | 1250 |
| 5.14.53. Remove specific Output Intent keys.....               | 1250 |
| 5.14.54. Remove sub-page navigation support.....               | 1251 |
| 5.14.55. Remove top of selection stack.....                    | 1251 |
| 5.14.56. Remove transparency.....                              | 1251 |
| 5.14.57. Remove trim box.....                                  | 1252 |
| 5.14.58. Remove undercolor removal.....                        | 1252 |
| 5.14.59. Remove unused destinations.....                       | 1253 |
| 5.14.60. Rename layer.....                                     | 1253 |
| 5.14.61. Rename spot color.....                                | 1254 |
| 5.14.62. Reorder pages.....                                    | 1256 |
| 5.14.63. Replace page content by bitmap.....                   | 1257 |
| 5.14.64. Resample image.....                                   | 1258 |
| 5.14.65. Restore previous color management settings.....       | 1258 |
| 5.14.66. Restore selection.....                                | 1259 |
| 5.14.67. Reverse path.....                                     | 1259 |
| 5.14.68. ROLL.....                                             | 1260 |
| 5.14.69. Rotate content.....                                   | 1261 |
| 5.14.70. Rotate object.....                                    | 1261 |
| 5.14.71. Rotate objects as group.....                          | 1262 |
| 5.14.72. Rotate page.....                                      | 1262 |
| 5.15. S.....                                                   | 1263 |
| 5.15.1. Save color management settings.....                    | 1263 |
| 5.15.2. Save selection.....                                    | 1263 |
| 5.15.3. Scale page boxes.....                                  | 1264 |
| 5.15.4. Scale page content.....                                | 1264 |

|                                                                                                |      |
|------------------------------------------------------------------------------------------------|------|
| 5.15.5. Scale page content to fit.....                                                         | 1265 |
| 5.15.6. Scale selection.....                                                                   | 1266 |
| 5.15.7. Scale to fit page size.....                                                            | 1269 |
| 5.15.8. Select all.....                                                                        | 1270 |
| 5.15.9. Select annotations.....                                                                | 1271 |
| 5.15.10. Select annotations appearance streams contents according to annotation selection..... | 1271 |
| 5.15.11. Select annotations by print setting.....                                              | 1272 |
| 5.15.12. Select black & white objects.....                                                     | 1272 |
| 5.15.13. Select black point compensation.....                                                  | 1274 |
| 5.15.14. Select by alternate images.....                                                       | 1275 |
| 5.15.15. Select by binding.....                                                                | 1276 |
| 5.15.16. Select by blend modes.....                                                            | 1276 |
| 5.15.17. Select by blending color space.....                                                   | 1276 |
| 5.15.18. Select by color space.....                                                            | 1277 |
| 5.15.19. Select by color space in PDF/X Output Intent.....                                     | 1277 |
| 5.15.20. Select by document encoding.....                                                      | 1278 |
| 5.15.21. Select by document info.....                                                          | 1278 |
| 5.15.22. Select by halftone origin.....                                                        | 1279 |
| 5.15.23. Select by graphic state attributes.....                                               | 1280 |
| 5.15.24. Select by ICC tag subtype.....                                                        | 1280 |
| 5.15.25. Select by image resolution.....                                                       | 1281 |
| 5.15.26. Select by image size.....                                                             | 1281 |
| 5.15.27. Select by inconsistent Type 3 font width information.....                             | 1281 |
| 5.15.28. Select by ink coverage (basic object check).....                                      | 1282 |
| 5.15.29. Select by intersecting bounding boxes.....                                            | 1282 |
| 5.15.30. Select by line weight.....                                                            | 1283 |
| 5.15.31. Select by media box origin.....                                                       | 1283 |
| 5.15.32. Select by number of color plates.....                                                 | 1283 |
| 5.15.33. Select by overprint.....                                                              | 1284 |
| 5.15.34. Select by overprint mode.....                                                         | 1285 |
| 5.15.35. Select by page orientation.....                                                       | 1285 |
| 5.15.36. Select by page rotation angle.....                                                    | 1286 |
| 5.15.37. Select by page size.....                                                              | 1286 |
| 5.15.38. Select by PDF version.....                                                            | 1286 |
| 5.15.39. Select by rendering intent.....                                                       | 1287 |
| 5.15.40. Select rotated objects.....                                                           | 1288 |
| 5.15.41. Select by spot color suffix.....                                                      | 1290 |
| 5.15.42. Select by tagged ICC Profile.....                                                     | 1291 |
| 5.15.43. Select by tiling pattern.....                                                         | 1292 |
| 5.15.44. Select by trapped flag.....                                                           | 1292 |
| 5.15.45. Select clipping and non-clipping text.....                                            | 1293 |
| 5.15.46. Select clipping objects.....                                                          | 1293 |
| 5.15.47. Select closed paths.....                                                              | 1293 |

|                                                                               |      |
|-------------------------------------------------------------------------------|------|
| 5.15.48. Select color.....                                                    | 1294 |
| 5.15.49. Select color bars.....                                               | 1294 |
| 5.15.50. Select color range.....                                              | 1295 |
| 5.15.51. Select concealed objects.....                                        | 1296 |
| 5.15.52. Select corrupt font widths.....                                      | 1296 |
| 5.15.53. Select default color spaces.....                                     | 1297 |
| 5.15.54. Select DeviceN with attributes.....                                  | 1297 |
| 5.15.55. Select document.....                                                 | 1298 |
| 5.15.56. Select document if document XMP metadata contains invalid types..... | 1298 |
| 5.15.57. Select document if XMP file identifiers are not present.....         | 1299 |
| 5.15.58. Select embedded fonts.....                                           | 1299 |
| 5.15.59. Select embedded PostScript fragments.....                            | 1300 |
| 5.15.60. Select empty pages.....                                              | 1300 |
| 5.15.61. Select Esko barcode.....                                             | 1300 |
| 5.15.62. Select Esko barcode type.....                                        | 1301 |
| 5.15.63. Select external hyperlink annotations.....                           | 1301 |
| 5.15.64. Select flatness.....                                                 | 1302 |
| 5.15.65. Select fonts by license.....                                         | 1302 |
| 5.15.66. Select fonts by name.....                                            | 1303 |
| 5.15.67. Select fonts by type.....                                            | 1303 |
| 5.15.68. Select fonts that can be emulated.....                               | 1304 |
| 5.15.69. Select form contents according to form selection.....                | 1304 |
| 5.15.70. Select form if content is selected.....                              | 1305 |
| 5.15.71. Select forms.....                                                    | 1306 |
| 5.15.72. Select gray.....                                                     | 1306 |
| 5.15.73. Select if document metadata is inconsistent.....                     | 1307 |
| 5.15.74. Select if document XMP contains an invalid name space prefix.....    | 1307 |
| 5.15.75. Select image by filter type.....                                     | 1308 |
| 5.15.76. Select image type.....                                               | 1308 |
| 5.15.77. Select images.....                                                   | 1309 |
| 5.15.78. Select images with OPI info.....                                     | 1309 |
| 5.15.79. Select incorrectly defined process color spaces in DeviceN.....      | 1310 |
| 5.15.80. Select inline image syntax.....                                      | 1310 |
| 5.15.81. Select inside or outside contour.....                                | 1311 |
| 5.15.82. Select invisible objects without fill and stroke.....                | 1313 |
| 5.15.83. Select last added objects.....                                       | 1313 |
| 5.15.84. Select layers.....                                                   | 1313 |
| 5.15.85. Select layers by name.....                                           | 1314 |
| 5.15.86. Select layers by print state.....                                    | 1314 |
| 5.15.87. Select layers by processing steps - ISO 19593-1.....                 | 1315 |
| 5.15.88. Select line art.....                                                 | 1316 |
| 5.15.89. Select line art by total number of nodes.....                        | 1316 |
| 5.15.90. Select non-compliant Output Intent.....                              | 1316 |

|                                                                                           |      |
|-------------------------------------------------------------------------------------------|------|
| 5.15.91. Select non-PDF/X or PDF/A compliant TrueType fonts.....                          | 1317 |
| 5.15.92. Select objects close to the page edge.....                                       | 1317 |
| 5.15.93. Select objects if page is selected.....                                          | 1318 |
| 5.15.94. Select objects in areas with dense graphics.....                                 | 1318 |
| 5.15.95. Select objects in layers by layer properties.....                                | 1318 |
| 5.15.96. Select objects in layers by name.....                                            | 1319 |
| 5.15.97. Select objects in selected layers.....                                           | 1320 |
| 5.15.98. Select objects inside or outside region.....                                     | 1320 |
| 5.15.99. Select objects of which ICC profile is equal to ICC profile in PDF/X output..... | 1321 |
| 5.15.100. Select objects that are completely clipped away.....                            | 1322 |
| 5.15.101. Select objects that have a clipping path.....                                   | 1322 |
| 5.15.102. Select objects that use neither stroke nor fill.....                            | 1322 |
| 5.15.103. Select objects with negative dash pattern phase.....                            | 1323 |
| 5.15.104. Select OpenType embedded fonts.....                                             | 1324 |
| 5.15.105. Select overlapping objects.....                                                 | 1324 |
| 5.15.106. Select page by gray surface.....                                                | 1325 |
| 5.15.107. Select page by ink coverage (non-Black only).....                               | 1326 |
| 5.15.108. Select page by its page box properties.....                                     | 1327 |
| 5.15.109. Select page by total number of nodes.....                                       | 1327 |
| 5.15.110. Select page by number of images.....                                            | 1328 |
| 5.15.111. Select page by number of paths.....                                             | 1328 |
| 5.15.112. Select page if content is selected.....                                         | 1328 |
| 5.15.113. Select pages.....                                                               | 1329 |
| 5.15.114. Select pages with bookmarks.....                                                | 1330 |
| 5.15.115. Select pages with page label.....                                               | 1330 |
| 5.15.116. Select objects with PieceInfo.....                                              | 1331 |
| 5.15.117. Select pages with transparent objects.....                                      | 1331 |
| 5.15.118. Select parent content object.....                                               | 1332 |
| 5.15.119. Select paths by fill type.....                                                  | 1332 |
| 5.15.120. Select process colorant.....                                                    | 1333 |
| 5.15.121. Select registration marks.....                                                  | 1334 |
| 5.15.122. Select rendering objects.....                                                   | 1334 |
| 5.15.123. Select required color set.....                                                  | 1335 |
| 5.15.124. Select shading objects.....                                                     | 1336 |
| 5.15.125. Select single image page images.....                                            | 1336 |
| 5.15.126. Select size.....                                                                | 1336 |
| 5.15.127. Select spot color.....                                                          | 1337 |
| 5.15.128. Select spot color by alternate color space.....                                 | 1338 |
| 5.15.129. Select spot color by alternate values.....                                      | 1339 |
| 5.15.130. Select standard 14 fonts.....                                                   | 1340 |
| 5.15.131. Select subpaths.....                                                            | 1341 |
| 5.15.132. Select subset fonts.....                                                        | 1341 |
| 5.15.133. Select text by key phrase.....                                                  | 1342 |

|                                                                                    |             |
|------------------------------------------------------------------------------------|-------------|
| 5.15.134. Select text by point size.....                                           | 1342        |
| 5.15.135. Select text by x-height.....                                             | 1343        |
| 5.15.136. Select text segments.....                                                | 1343        |
| 5.15.137. Select text with missing glyphs in its font.....                         | 1343        |
| 5.15.138. Select thin objects.....                                                 | 1344        |
| 5.15.139. Select tiling pattern contents according to parent object selection..... | 1344        |
| 5.15.140. Select transparent objects.....                                          | 1345        |
| 5.15.141. Select trim marks.....                                                   | 1346        |
| 5.15.142. Select undefined DeviceN colorants.....                                  | 1347        |
| 5.15.143. Select visible objects.....                                              | 1348        |
| 5.15.144. Select XObjects.....                                                     | 1349        |
| 5.15.145. Separate stroke and fill.....                                            | 1349        |
| 5.15.146. Set correct document XMP name spaces.....                                | 1350        |
| 5.15.147. Set black point compensation.....                                        | 1350        |
| 5.15.148. Set page size to the largest in document.....                            | 1351        |
| 5.15.149. Set page size to the smallest in document.....                           | 1352        |
| 5.15.150. Set XMP file identifiers.....                                            | 1352        |
| 5.15.151. Sharpen an image with unsharp mask.....                                  | 1352        |
| 5.15.152. Shrink page content to fit.....                                          | 1353        |
| 5.15.153. Snap color to color set.....                                             | 1353        |
| 5.15.154. Split Action List.....                                                   | 1354        |
| 5.15.155. Simplify line art.....                                                   | 1355        |
| 5.15.156. Split in characters.....                                                 | 1357        |
| 5.15.157. Split in subpaths.....                                                   | 1358        |
| 5.15.158. Split in words.....                                                      | 1358        |
| 5.15.159. Split line art in segments.....                                          | 1359        |
| 5.15.160. Split pages in half.....                                                 | 1359        |
| 5.15.161. Strip OpenType embedded fonts.....                                       | 1360        |
| 5.16. T.....                                                                       | 1360        |
| 5.16.1. Tag object with an ICC profile.....                                        | 1360        |
| 5.17. U.....                                                                       | 1361        |
| 5.17.1. Unembed font.....                                                          | 1361        |
| 5.17.2. Use flags to select annotation.....                                        | 1361        |
| 5.17.3. Use trim marks to set page box.....                                        | 1362        |
| <b>6. Copyrights.....</b>                                                          | <b>1364</b> |



# 1. What's new?

---

This section lists which Actions have been changed or added in the latest PitStop releases.

## 1.1. New and changed Actions in PitStop 25.07

---

This release includes the following changes related to Actions:

### **New Actions**

- [\*Copy attributes of selected objects\*](#)
- [\*Paste attributes to selected objects\*](#)
- [\*Make TrueType fonts PDF/X compliant\*](#)
- [\*Select spot color by alternate values\*](#)
- [\*Select text with missing glyphs in its font\*](#)
- [\*Optimize stream compression\*](#)
- [\*Remove concealed segments from line art\*](#)
- [\*Split line art in segments\*](#)


### **Improved Actions**

- [\*Change image compression\*](#) now allows adding extra ZIP compression for JPEG files. The logging was also improved and now mentions all filters that were applied.
- [\*Embed font\*](#) now has an option to disable the embedding of CMaps of Type0 CID fonts during subsetting.
- [\*Add object\*](#), when used to add text, now accepts end of line characters in the input text.
- The EAN-13 Iceland Foods barcode has been added to the list of barcodes in the following Actions: [\*Select Esko barcode\*](#), [\*Select Esko barcode type\*](#), [\*Check Esko barcode\*](#) and [\*Check Esko barcode type\*](#).
- [\*Remove metadata\*](#) now also removes PieceInfo at document and form level (in addition to page level). This can have an impact on the file size.
- [\*Check for corrupt images\*](#) now detects more types of corrupt images, such as images that do not have enough data.
- [\*Select transparent objects\*](#) now allows restricting the selection based on the level of transparency (alpha value).
- [\*Select pages with PieceInfo\*](#) has been renamed to "Select *objects* with PieceInfo", because this Action now also selects PieceInfo at document and form level (in addition to page level).

### **UX improvements**

- When creating an Action List from a *read-only* location (e.g. the Standard folder), you can now choose yourself where to save the new Action List; either in a local folder or in a Cloud folder.
- Embedded Action Lists that are created as part of a Preflight Profile can now be saved. Before, it was only possible to export and re-import the embedded Action List.

- The context menu and the Action menu in the Action List dialog now have an extra option that allows you to locate the (local) Action Lists on your system: Reveal in Finder (Mac) / Show in Explorer (Windows).

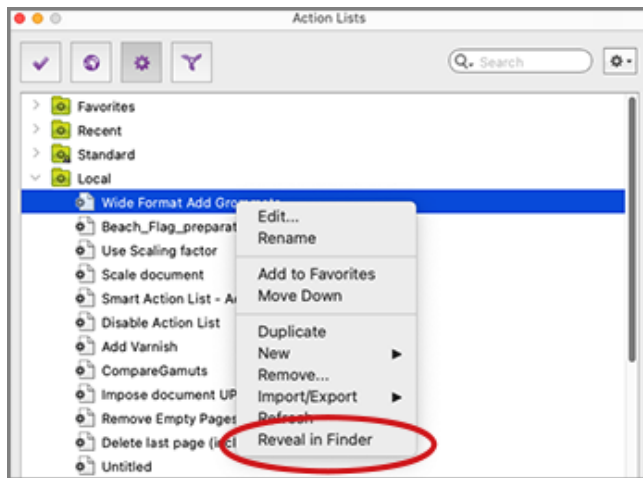
**Note:**

- This option is available for all Presets (so also for Preflight Profiles, Global Changes, QuickRuns, etc.).
- It is not available for Presets in Cloud or Standard folders, and not for virtual databases, such as the Pantone colors or the document colors.

## 1.2. New and changed Actions in PitStop 25.03

This release includes the following changes related to Actions:

### **New Actions**

- [Compare gamuts](#)
- [Convert shading to path](#)

### **Improved Actions**

- [Convert fill to stroke](#) now better detects and converts the different types of line joins (round, beveled, or mitered). The Action now also generates longer segments, so paths with fewer nodes.
- [Change image compression](#) now has a slightly enhanced interface, which makes it clear that the Action works on soft-mask images, not soft-mask dictionaries.
- [Apply DeviceLink](#) now also works when color management is disabled. That was not the case in the past.


### **Option to disable Actions in an Action List**

It's now possible to disable Actions in your Action List, so you can see how removing one or more Actions would impact your Action List without actually removing them. You can use this functionality both in normal and debug mode (in the Action List Visualizer). See [Disabling Actions in an Action List](#) on page 39.

### Variables in dropdowns

From this version onwards, it's possible to use variables in most dropdowns. That means that when you enable variables in an Action (by clicking **Actions > Enable Variable Names**), you'll see a Variables icon ⓘ next to the dropdowns that support variables. See [Using variables instead of fixed values in Action Lists](#).


In the example below, you can see that the Reference and Target Output Profile do not support variables, whereas Spot Color Policy and Color Difference Metric do.

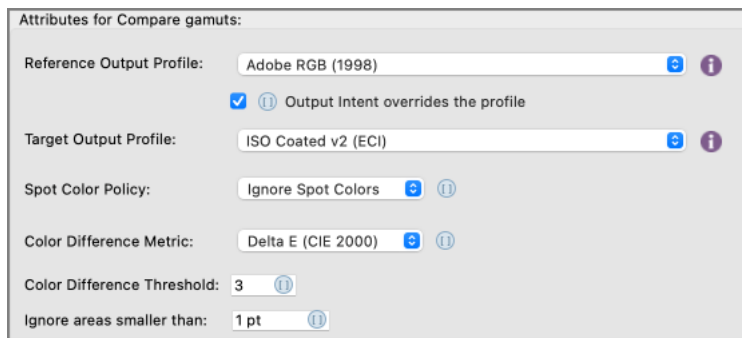


### UX improvements

The **search functionality** in the Enfocus Preset Manager has been improved.


In previous versions, only the matching resources were returned. Now also matching group names are shown in the search results.

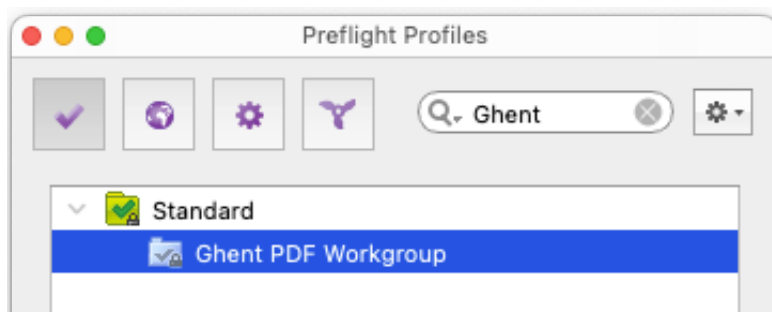

Also, results are now shown in a nice tree view instead of a flat list.

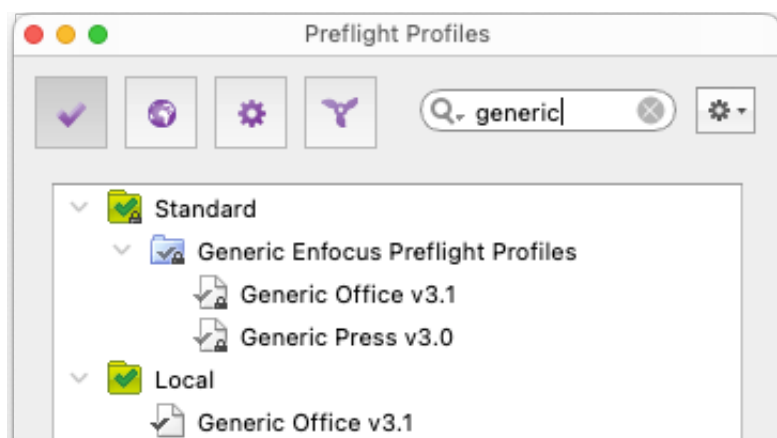

We now provide some extra explanatory information in the attributes pane of the operators (AND, OR, NOT, ...).

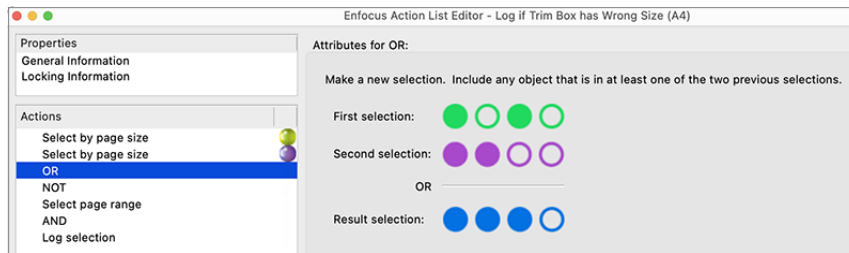

### **Standard Action List adjustments**

The *Minimize File Size* and *Minimize File Size 3.0* Action Lists have been adjusted to ignore 1-bit images, because resampling 1-bit images degrades the image quality and usually leads to unwanted results.

## 2. Automating tasks with Action Lists

---

Read this chapter if you want to know what Actions and Action Lists are, and how you can use them to automate your work.

### 2.1. About Actions and Action Lists

---

One of the main reasons for using PitStop Pro is editing PDF documents. For example, you may want to change text (or its formatting) or objects, or you may want to change the page layout or to prepare your document for either print or screen viewing,...

You can make these changes manually, one by one, but if you have to perform these tasks a number of times, either within a single PDF document or in multiple PDF documents, it may be preferable to **automate** them, **using Actions and Action Lists**.

#### **Actions**

**Actions** are *pre-defined tasks* provided to you by PitStop Pro. You can use them as they are, or you can adjust them to your needs (by changing the attributes) or you can even record your own Actions and re-use them later on.

Some examples:

- Change font color
- Normalize line weight
- Add background

The listed Actions are examples of Actions that allow you to change and edit a PDF, but you can also use Actions for making selections, gathering information and checking if a PDF conforms to certain standards.

#### **Action Lists**

Actions are always included in **Action Lists**. Action Lists are *sequences of one or more tasks*. As most of the time, several tasks have to be performed one after the other, and often in a fixed order, these Action Lists allow you to perform complex operations on PDF files.

For example, if you change the layout of the text in your document, you will probably carry out 4 different tasks (4 "Actions"): first you'll select the text, and then you'll change the font, the font size, and the font color as required. You can group them into one Action List, and run this Action List only once. If you later have to do the same, for example in another PDF, you can simply re-use the Action List.


Note that you can use Action Lists in other Enfocus products as well, for example in a PDF Queue in Enfocus Instant PDF, in a Connector in Enfocus Connect and in a hot folder in Enfocus PitStop Server.

2.1.1. Actions and Action Lists: An example

About the job

Suppose you have a line art object in several PDF documents. In all these PDF documents, you want to:




- Change the fill colors of a number of areas of this object.
- Change the line weight of all lines in the object that are thinner than a given line weight.

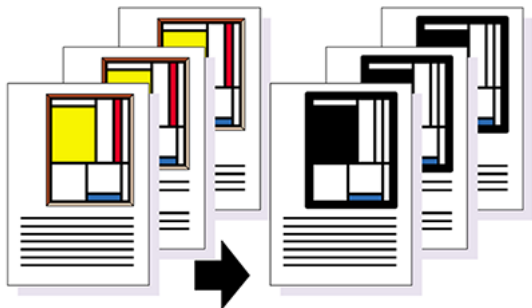

Automating the job using an Action List

This job consists of a number of sequential tasks or "Actions" (as shown in the table below). These individual tasks can be grouped into one Action List "Changing the properties of line art", which can then be applied to a range of pages in one or more PDF documents or to complete PDF documents.

| Step | Action                                       | Illustration |
|------|----------------------------------------------|--------------|
| 1    | Select the fill color of an object.          |              |
| 2    | Change the selected fill color of an object. |              |

| Step | Action                                              | Illustration                                                                          |
|------|-----------------------------------------------------|---------------------------------------------------------------------------------------|
| 3    | Select another fill color of the object.            |    |
| 4    | Remove the selected fill color of the object.       |    |
| 5    | Select lines of an object with a given line weight. |   |
| 6    | Change the selected line weight.                    |  |

## 2.2. Where to find Actions and Action Lists

Actions and Action Lists can be accessed via the **Action Lists** dialog in PitStop Pro. Its location depends on your Acrobat version.

The following table explains how you can open the Action Lists dialog.

| OS/Acrobat               | Do one of the following                                                                                                                                                                                                                                                                     |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Acrobat                  | <ul style="list-style-type: none"><li>In the menu bar, click <b>PitStop Pro &gt; Action Lists</b>.</li><li>In the <b>Tools</b> pane, click <b>PitStop Process</b> &gt;  <b>Action Lists</b>.</li></ul> |
| Acrobat (new Acrobat UI) | <ul style="list-style-type: none"><li>In the menu bar, click <b>Plugins &gt; PitStop Pro &gt; Action Lists</b>.</li></ul>                                                                                                                                                                   |

| OS/Acrobat       | Do one of the following                                                                                                                                                                                                  |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                  | <ul style="list-style-type: none"><li>In the <b>All tools</b> pane, click <b>PitStop Process</b> &gt;  <b>Action Lists</b>.</li></ul> |
| Windows shortcut | Press Alt+Ctrl+A.                                                                                                                                                                                                        |
| Mac shortcut     | Press   A.                                             |


### 2.2.1. The Action Lists dialog

---

The **Action Lists** dialog allows you to organize, access and run Action Lists:

- You can open an existing Action List or a blank Action List (to create a new one).
- You can import, export, duplicate, and group Action Lists
- You can run Action Lists, i.e. apply them to one or more pages of the PDF you're editing.



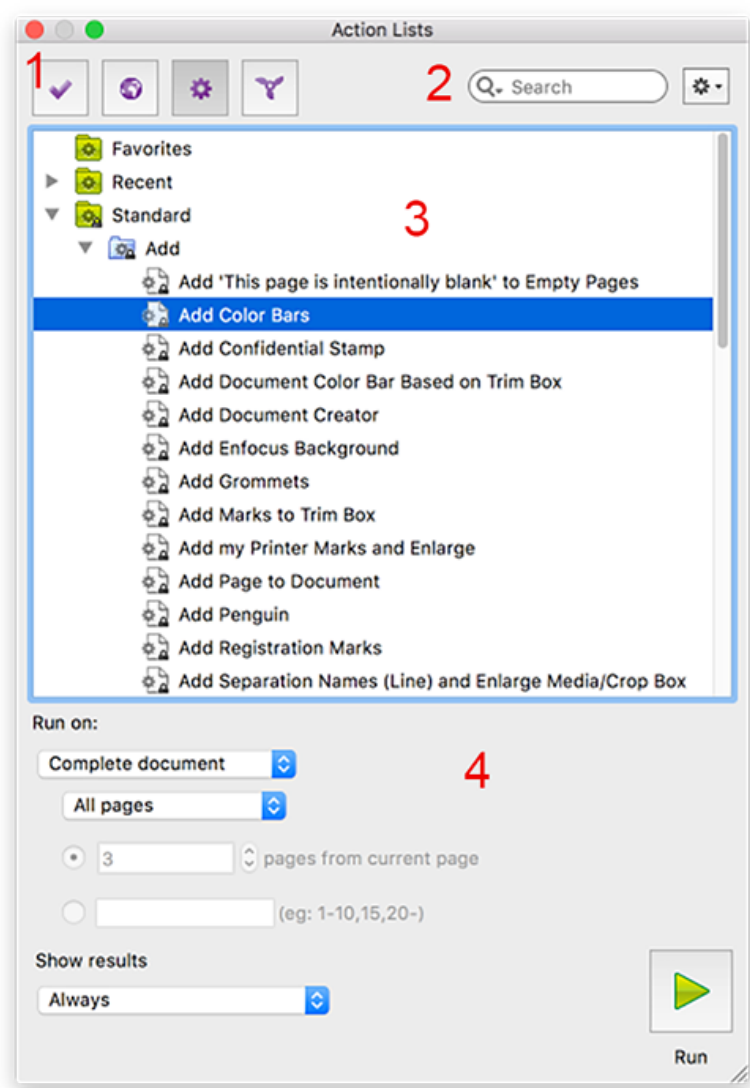

The **Action Lists** dialog consists of the following screen parts:


| # | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Buttons to switch between Action Lists (  ) and other Presets (Preflight Profiles  , Global Changes  and QuickRuns  ). |
| 2 | A search field (allowing you to search for a particular Action List) and an Action menu (  ) (allowing you to organize the Action Lists).                                                                                                                                                                                                                                       |
| 3 | A workspace, which displays the available Action Lists. The Action Lists are organized in folders, called "databases". By default, the following folders can be found: <ul style="list-style-type: none"><li>• <b>Favorites:</b> Action Lists marked as your favorites. This provides you fast access to the Action Lists you need often.</li><li>• <b>Recent:</b> The 10 most recently used Action Lists.</li></ul>                                                 |

| # | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|   | <ul style="list-style-type: none"><li>• <b>Standard:</b> The default Action Lists installed with PitStop Pro (grouped in subfolders, such as Color, Fonts, Image,...).</li></ul> <div> <b>Tip:</b> To learn what an Action List can do, double-click it, and check the content (the Actions it contains) and the description.</div> <ul style="list-style-type: none"><li>• <b>Local:</b> Action Lists edited and created by you, and saved locally.</li></ul> <div> <b>Note:</b> You may see one or more extra folders, preceded by a pink icon. These pink icons refer to resources that are shared through the Enfocus Cloud. For more information, refer to <a href="#">Sharing resources through the Enfocus Cloud</a>.</div> |
| 4 | The bottom part of the dialog allows you to <i>run the Action List selected in the upper part of the dialog</i> . You must indicate on which page(s) the Action List should run and whether or not the results should be shown in <a href="#">The Enfocus Navigator</a> on page 49.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

2.2.2. The Action List Editor

The **Action List Editor** is accessible from within the Action List dialog: when double-clicking an Action (or selecting **New > New** from the contex menu), this dialog appears. It allows you to change the *content of an Action List*:

- You can change the description of the Action List or protect the Action List with a password.
- You can add Actions to the Action List or remove them.
- You can organize the Actions within the Action List (e.g. group them or change the sequence).
- You can change the attributes of each of the Actions within the Action List.

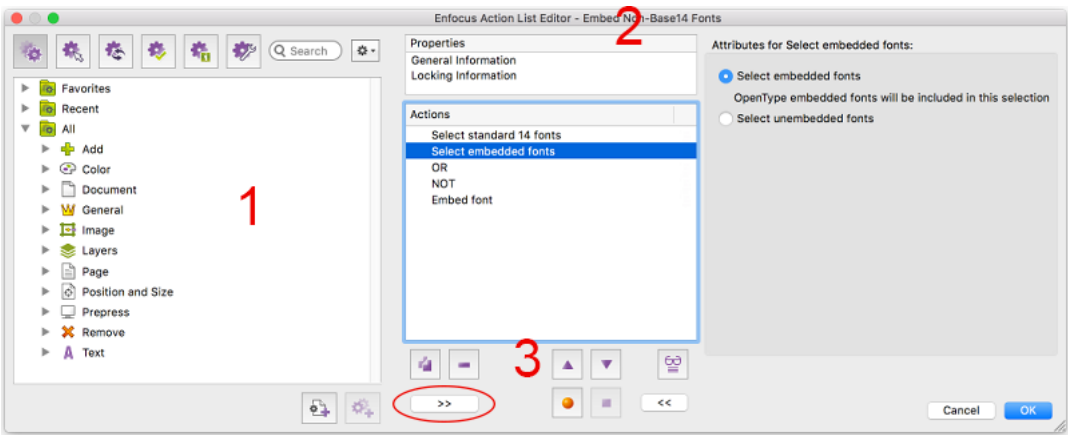

The **Action List Editor** consists of the following screen parts:

| # | Description                                                                                                                                                                                                         |
|---|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | A list of available Actions. This list is collapsed by default, but can be easily expanded by clicking the Show Actions button.  |

| # | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|   | All these Actions can be used in your Action List.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 2 | <p>The center and right part of the dialog apply to the selected (or new) Action List. It contains:</p> <ul style="list-style-type: none"> <li>• <b>General information</b>, for example the name of the Action List and a description</li> <li>• <b>Locking information</b>, indicating whether or not the Action List is password protected</li> <li>• An overview of the <b>Actions</b> included in the Action List.</li> </ul> <p> <b>Note:</b> Clicking an item under <b>Properties</b> or <b>Actions</b>, displays the corresponding information at the right side of the dialog. In the example above, the right-hand pane shows the attributes of the selected Action ("Select embedded fonts").</p> |
| 3 | A number of buttons allowing you to manipulate the content of the Action List. The meaning of these buttons is explained in the table below.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

#### Buttons

| Button                                                                              | Click to                                                                                                                        |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
|  | Display the list of Actions that can be added to the current Action List. See <a href="#">Actions overview</a> on page 32.      |
|  | Import a complete Action List into the current Action List. See <a href="#">Using operators in Action Lists</a> on page 40.     |
|  | Add an Action (selected in the list of available Actions) to the Action List.                                                   |
|  | Duplicate an Action selected in the Action List.                                                                                |
|  | Remove a selected Action from the Action List.                                                                                  |
|  | Move the selected Action <b>up</b> in the Action List.                                                                          |
|  | Move the selected Action <b>down</b> in the Action List.                                                                        |
|  | Start recording.                                                                                                                |
|  | Stop recording.                                                                                                                 |
|  | Start the Action List Visualizer. See <a href="#">Troubleshooting Action Lists using the Action List Visualizer</a> on page 59. |



**Note:** Most of these manipulations can also be performed using the context menu (e.g. duplicating Actions, or moving Actions up or down).


## 2.2.3. Actions overview

All Actions that can be used in Action Lists are listed in the left panel of the Action List Editor. As there are more than 500 different Actions, and to make it easier to find the Action(s) you need, Actions are *sorted by type and category*.

### Action types



**Tip:** You can use the buttons at the top of the dialog to switch between the different Action types. The first button displays *all* Action types.



-  **Selections**

Before you can change something in a PDF document, you evidently have to select it. All Actions that allow you to select something in a PDF document are listed in the **Selections** category, together with the logical operators ("AND", "NOT", "OR", ...).

-  **Changes**

A lot of Actions allow you to make changes. The list of changes includes almost anything which professional PDF editing tools like PitStop Pro can do, including:

- Adding objects, or page numbers
- Changing a wide variety of properties, including page boxes
- Color conversions
- Removing objects
- Rotating and scaling page content
- Font- and color-related changes



**Note:** For each "change" Action; you can decide whether or not to log the changes in a Report.

-  **Checks**

Action Lists do not necessarily have to change PDF documents. You can also create them to check various properties in PDF documents or detect specific objects or elements. For example, an Action List can check font-related properties or detect empty pages in a PDF document.



**Note:** For each "check" Action, you can decide whether or not to log it in a Report, and if you log it, you can assign it a status ("Information", "Warning", "Sign-Off Error" or "Error"). For more information, refer to [The Enfocus Navigator](#) on page 49.

-  **Informs**


Action Lists can also gather information from PDF documents. This can be information about fonts, colors, OPI, etc. This information will be presented in a Report, available via the Enfocus Navigator. Refer to [The Enfocus Navigator](#) on page 49.

-  **Settings**

Action Lists can also be used to change certain default PitStop Pro settings like the image recompression, page box, and color management settings, or the number of decimal places that is taken into account when checking values.

### **Action Categories**

The Actions are further grouped into different Categories, referring to the domain they apply to (e.g. Color, Page, Prepress).

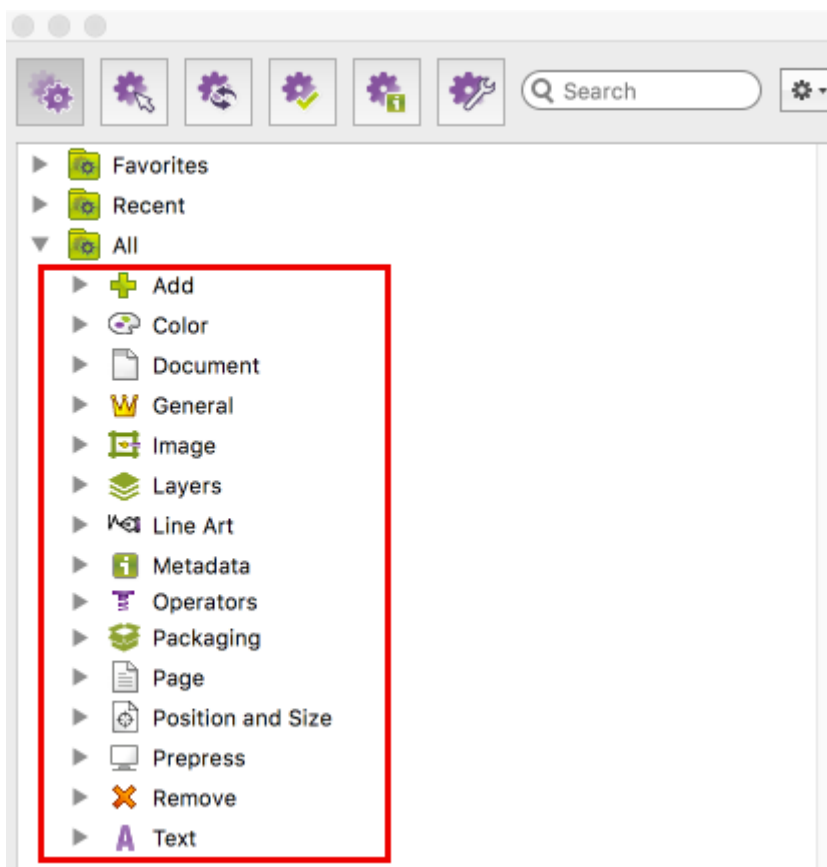

### **Search field**

To find the Actions you need, you can type a key word in the Search field at the top of the pane. Note that the search is limited to the selected Action Type; for example, if you've clicked the "Checks" icon at the top of the pane, PitStop Pro will only search for the entered keywords in the list of "check" Actions.

If you don't want to limit your search to a specific Action type, make sure to switch to the *All Actions* view ()

## 2.3. Working with Action Lists

---

This chapter explains everything you should know to be able to edit, create and run Action Lists.

### 2.3.1. Working with Action Lists - how to proceed

---

Working with Action Lists includes the following steps:

1. First you have to create a new or edit an existing Action List. See [Creating and editing an Action List](#) on page 35.

This means that you have to select an existing Action List or open a new, blank one and adapt it to your needs. You will hardly ever be able to use an Action List without having to change anything.

Next, you have to design your Action List:

- Add or remove any Actions as required. Alternatively you can record Actions or import an other Action List. You can organize the Actions inside your Action List as required (e.g. by grouping them).
  - Make sure to use the correct operators (AND, OR, NOT).
  - Set the attributes of each of the Actions in your Action List:
    - Enter the required values, optionally using variables or regular expressions; in some cases you can "grab" values from the document you're editing.
    - Enter the required log level ("check" Actions only) or indicate whether or not the changes should be logged ('change' Actions).
2. Once the Action List is ready, you can save and run it, to see if it works as expected. See [Running an Action List](#) on page 48.



**Tip:** In case of complex Action Lists, you may want to use the Action List Visualizer to debug your Action List.

3. Next, you can check the results of your Action List, using the Enfocus Navigator, and export a Report as required. See [Checking the results of an Action List](#) on page 49.
4. If applicable, you can fix the problems that were reported by the Enfocus Navigator or in the Preflight Report. [Fixing problems](#) on page 55

#### **Remark**

Most Action Lists start with a *selection* (e.g. the Action "Select all") followed by on or more *checks* or *changes* (e.g. check the colors of the selected objects, change the font of the selected text, ...).

By default, when selecting objects, objects that are completely clipped away (hence are invisible) are selected as well. If you don't want this, we recommend removing them first. You can use the Actions "Select objects that are completely clipped away" and "Remove selection" to do so.

## 2.3.2. Creating and editing an Action List

---

### ***Why edit an Action List***

Most of the time, you will not be able to use the pre-defined Action Lists without adapting them to your needs. For example, you probably don't want to add an *Enfocus* background to your PDFs (using the "Add Enfocus Background" Action List), but your own company background. The easiest way to do so, is by editing the existing "Add Enfocus Background" Action List and replacing the Enfocus background image with your own background image.

### ***Why create a new Action List***

Although PitStop Pro provides a lot of default Action Lists, there are so many things you can do with a PDF, that you'll probably need other combinations and sequences of tasks than the ones that are predefined.

### ***Ways to create Action Lists***

You can create an Action List in different ways:

- "Manually", from scratch or based on an existing Action; either by adding/removing Actions (selections, changes and operators) to your Action List or by changing them one by one. See [Creating an Action List](#) on page 36.
- By Recording. This is a very intuitive way of creating an Action List. Just open a PDF document, perform a number of tasks and record these tasks. As soon as you stop recording, the Actions will be added to your Action List.
- By downloading examples from the Enfocus Action List Library on the Enfocus website ([www.enfocus.com](http://www.enfocus.com)) and importing them into your copy of PitStop Pro. You can then edit and change them, just like the Actions provided by default with PitStop Pro.
- By saving a Global Change as an Action List. For more information, refer to Global Changes Manual available on the [Enfocus website](#).

### ***The Action List Editor***

Action Lists can be created and edited via the **Action List Editor**. You can open this dialog in different ways:

- To open a **new** Action List, in the Action List dialog, click  > **New** > **New**.
- To open an **existing** Action List, just double-click it in the Action List dialog.

### 2.3.2.1. Editing an Action List

Often you can use an existing Action List and only make minor changes, for example change the predefined values.

To edit an existing Action List

1. Open the **Action Lists** dialog.  
Refer to [Where to find Actions and Action Lists](#) on page 27.

2. Double-click the Action List concerned.



**Note:** Alternatively, select the Action List you want to edit and click  > **Edit**.

If the Action List is fully locked, you will be asked to enter a password before you can see the content of the Action List.

If it is partially locked, you will be able to view the content of the Action List, but you'll have to click the Lock icon  and enter the password, before you can make any changes. Refer to [Locking an Action List](#) on page 58.

3. Fill in the **Properties** section as required:
  - Select **General Information** and set the Action List name, your name and company and a description of the Action List.
  - Select **Locking Information** and choose the appropriate options. Refer to [Locking an Action List](#) on page 58.
4. Design your Action List, i.e. add or remove Actions or change the attributes of an Action as required.  
Refer to [Designing an Action List](#) on page 37.
5. If you have made all required changes, click **OK**.



**Note:** If you want to change the attributes of *multiple* Actions, do not click **OK** until you have changed them all. Clicking **OK** will close the Action List Editor!

The Action List is saved in the location where you created it. If this is a read-only location, such as the Standard folder, a dialog pops up. You can save the Action List in the (sub)folder of your choice:

- A green icon refers to a local folder.
- A pink icon refers to a Cloud folder. See [Sharing resources through the Enfocus Cloud](#).

You can now run the Action List.

## 2.3.2.2. Creating an Action List

To create a new Action List

1. Open the **Action Lists** dialog.  
Refer to [Where to find Actions and Action Lists](#) on page 27.
2. Open the **Action List Editor**:
  - To create a new Action List based on an existing one, click  > **New** > **New From/New from File** and select the Action List you want to start from.  
  
The option **New from** allows you to select an existing Action List from the Standard database; **New from file** allows you to select a file (\*.eal) from your computer.
  - To create a new Action List from scratch, click  > **New** > **New**.



3. Fill in the **Properties** section as required:
  - Select **General Information** and set the Action List name, your name and company and a description of the Action List.
  - Select **Locking Information** and choose the appropriate options. Refer to [Locking an Action List](#) on page 58.
4. Design your Action List, i.e. add or remove Actions or change the attributes of an Action as required.  
Refer to [Designing an Action List](#) on page 37.
5. If you have made all required changes, click **OK**.



**Note:** If you want to change the attributes of *multiple* Actions, do not click **OK** until you have changed them all. Clicking **OK** will close the Action List Editor!

The Action List is saved in the location where you created it. If this is a read-only location, such as the Standard folder, a dialog pops up. You can save the Action List in the (sub)folder of your choice:

- A green icon refers to a local folder.
- A pink icon refers to a Cloud folder. See [Sharing resources through the Enfocus Cloud](#).

You can now run the Action List.

### 2.3.2.3. Designing an Action List

You can adjust an existing or a new, blank Action List to your needs:

- You can add or remove Actions as required.
- You can group them, change the order or use operators.
- You can change the attributes, i.e. using variables or regular expressions.

#### Adding Actions to an Action List

There are three ways to add Actions to an Action List:

- You can manually add them, by selecting them from the list of available Actions (left part of the Action List Editor).
- You can record them while performing them (once) one in a sample PDF document. In that case, you should have opened a (sample) PDF document in which you can do the Actions you wish to record.
- You can import an existing Action List that contains some of the Actions you want to perform with the new Action List.

This topic assumes you have opened an Action List in the Action List Editor.

1. To manually add Actions
  - a. To view all available Actions, click the **Expand** button  as required.
  - b. Search and select the appropriate Action.
  - c. Double-click the Action you want to add.

Alternatively, you can click  or drag the Action onto the Action List.

- d. Do this for all Actions you need.



**Note:**

- Remember that operators (AND, OR, NOT, available under Selections) must be entered *after* the selections. Refer to [Using operators in Action Lists](#) on page 40.
- You can use the buttons at the bottom of the pane to remove or duplicate Actions, or to change the order of the Actions in the Action List. Alternatively, you can drag the Actions to a new position. Be careful, because changing the order may produce a different result.

**2. To record the Actions for your Action List**

- a. Click the **Start Recording** button .

The **Start Recording** button is grayed out and the **Stop Recording** button  becomes available. From now on, all Actions you perform using the PitStop Pro tools will be recorded.



**Note:** Make sure that you only use PitStop Pro tools and commands to perform Actions. All operations you do using Adobe Acrobat tools or other plug-ins will not be recorded!

- b. Choose the commands, and perform the Actions you want to record.

- c. To stop recording, click the **Stop Recording** button .

The Actions you performed are now added to the section under **Actions**. You can still change the attributes of these Actions if necessary.

**3. To import an Action List, i.e. to add the Actions of this Action List to your Action List**

- a. Click .

- b. Select an Action List **From database** (i.e. from the Action List dialog) or **From file**, i.e. a file on your computer.

- c. Click **OK**.

When importing an Action List that is locked, you need to enter the password when importing it. This will unlock the Action List.

The Action List is imported *as a group* (using the name of the imported Action List)

preceded by an icon . Once imported, you can change these Actions as any other group or Action in the Action List.

## Removing Actions from an Action List

If you want to remove Actions that were added by accident, or Actions you don't need after all, you can simply remove them from the Action List.

To remove an Action

1. In the Action List Editor, select the Action(s) you want to remove.
2. Do one of the following
  - Right-click and select **Remove**.
  - Click .

The Action is removed from the Action List.



**Note:** Remember that you can put the Action back, by selecting it from the list of available Actions. However, if you had made any changes to the attributes, these haven't been saved, so you will have to set them again.

## Disabling Actions in an Action List

If you want to test if certain Actions are useful or do what you expect them to do, you can temporarily disable them. That means that the Action List is executed without taking into account the disabled Action(s). When the Action turns out to be wrong or useless, you can remove it. When the Action turns out to be useful, you can enable it again.



**Note:** This functionality is also available in the [Action List Visualizer](#).

To disable an Action

1. In the Action List Editor, select the Action(s) you want to disable.
2. To open the context menu, right-click the selected Action(s).
3. Do one of the following:
  - To disable only one selected Action, click **Disable Action**.
  - To disable all (enabled) Actions in a group of Actions, select the group and click **Disable Action**.
  - To disable a number of selected (enabled) Actions, click **Toggle enabling**.

The disabled Actions are grayed out and will be ignored when running the Action List.

4. To enable the disabled Actions again as required:
  - To enable only *one selected* grayed out (disabled) Action, from the context menu, select **Enable Action**.
  - To enable all (disabled) Actions in a group of Actions, select the group and click **Enable Action**.
  - To enable all *selected* disabled Actions, select them and, from the context menu, select **Toggle enabling**.
  - To enable *all disabled Actions in the Action List*, select one of them and, from the context menu, select **Enable all Actions**.
5. To disable one or more selected Actions and enable one or more disabled Actions in one go:
  - a. Select the Actions of which you want to change the enabled/disabled state.
  - b. From the context menu, select **Toggle enabling**.  
The disabled Actions will be enabled and the enabled Actions will be disabled.

## Organizing the Actions in an Action List

As the order of the Actions in an Action List is important, especially in elaborate Action Lists, we recommend proceeding as follows:

1. Add the Actions you need, preferably starting with the "select" Actions, e.g. Select All or Select Annotations, ...
2. Specify the logical operators (AND, NOT, OR, ...) if required. See [Using operators in Action Lists](#) on page 40.
3. Add the "change", "check", ... Actions that should apply to the selections.



**Note: Changes only apply to selections.** Therefore, make sure that you make the proper selections in your Action List first. If you have made no selections, some changes will be applied to everything in your PDF document (for example fonts) or changes will not be applied at all.

4. Move the Actions up or down as required.
5. Try to group the Actions (as explained below).



**Note:** Grouping does not have any influence on the result of the Action List.

1. To move Actions up and down, do one of the following
  - Right-click the Action concerned and select **Move Up** or **Move Down**.
  - Select the Action concerned and click  or .
  - Select the Action concerned and drag and drop it to the desired location.
2. To group Actions that belong together
  - a. Select the Actions concerned.
  - b. Right-click and select **Make Group**.  
The selected Actions are moved to a folder called **Group Actions**.
  - c. Select **Group Actions** and, in the right-hand pane, enter a name and a description for this Group.

Alternatively, you can add the **Group Actions** Action to your Action List and drag the appropriate Actions to that Group. For more information, refer to the description of this Action in the Action Manual.

## Using operators in Action Lists

### About operators in PitStop Pro

PitStop Pro provides a number of operators, allowing you to combine several Actions in a logical way.

These operators can be found in the Action List Editor, under  **Selections** (in the folder Operators).


Currently, following operators are available:

- **AND, OR, NOT** - explained below.

- **Select all** - is added automatically to new Action Lists, to avoid that you forget to select anything.
- **Select last added objects** - allows you to use the result of a previous "add" Action.
- **Duplicate/Remove top of selection stack** - are mainly used internally by PitStop Server and should not be used when manually creating Action Lists.


### Rules of thumb

- The operators (AND, NOT, OR) must not be entered **between** two or more selections, but **after** these selections (postfix notation)! These operators **apply to the preceding selections**.
- If an operator is selected in the Action List Editor, the Actions (or group of Actions) it affects, will be represented using a green and purple **indicator**.

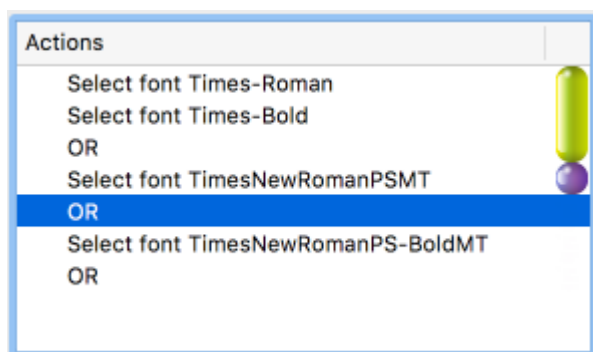


In the example above, the selected "OR" operator affects the "Select font Times New Roman" action (purple) and the combination of the first two lines and their "OR" operator (green).


- The operators AND, NOT, and OR are **logical** operators, which means that they have to be used in a strictly logical way. For example, if you want to select the fonts Times-Roman (Adobe Type 1) **and** Times New Roman (TrueType), you should not use the AND operator, but the OR operator (a font cannot be both Times-Roman and Times New Roman at the same time). You could use the AND operator, for example, to select all text in Times-Roman **and** the color of which is blue. Your Action List would then look as follows:

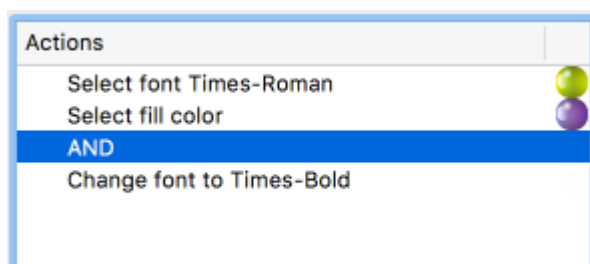

- The OR and AND operators **only apply to two preceding selections**. Therefore, if you want to make more than two selections, you have to insert multiple operators at the appropriate places in the "stack" of selections. For example, if you want to select the fonts Times-Roman (Adobe Type 1), Times New Roman (TrueType) and their bold variants, your Action List should look as follows:

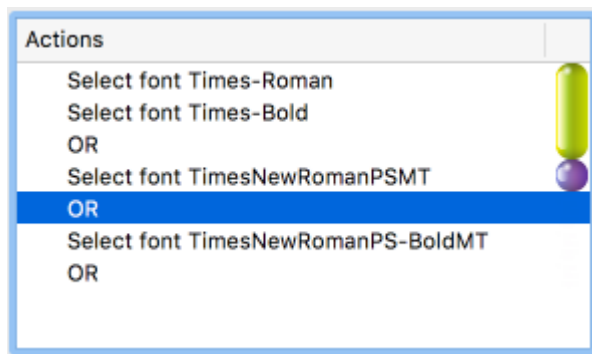

- The NOT operator **applies only to the preceding selection** and can be used to **exclude something from a selection**. Unlike the OR and AND operators, the NOT operator only requires one selection. For example, if you want to change all fonts but Times-Roman in a PDF document to Times-Bold, your Action List would look as follows:

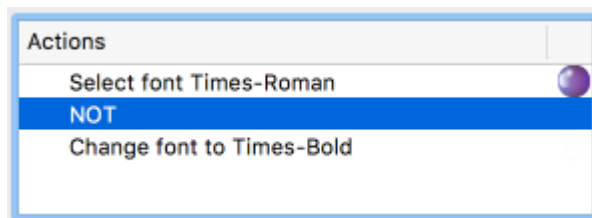

In the above example, the Action List will change all fonts in PDF document to Times-Bold, but leave Times-Roman (regular) unchanged.

## Setting the attributes of an Action

The attributes you can set depend on the selected Action. Some Actions do not require any attributes; for others you should enter the preferred values, for example a length or a version number, pick a color, select an option from a list, select a checkbox, ... Setting the attributes is in most cases quite obvious.



**Note:** If an attribute of an Action requires a unit, for example a length, the unit specified in the PitStop Pro Preferences (Units & Guides Category) is used. For example, if you're using the *Select size* Action, you have to determine minimum or maximum width or the height of the objects you want to select. If you have selected "cm" in the PitStop Pro Preferences, you will have to specify a value in "cm".

This topic explains the "special cases":

- How to use variables instead of fixed values.
  - How to use regular expressions
  - How to log "check" Actions
  - How to use the **Use page rotation (and scaling factor)** checkbox (which is available in a number of Actions)
1. To use *variables instead of fixed values*:
    - a. Click the **Actions** link and select **Enable Variable Names**.
    - b. Click .

- c. Select the variable you want to use.

In case of a dropdown list, you must also map the values of the selected variable to the Action values.

- d. Repeat steps b-c for each variable you want to use.
- e. Click **OK**.

You must have defined a Variable Set. For more information, refer to the chapter about Smart Preflight and the topic Creating a Variable set in the PitStop Pro Reference Guide.

## 2. To use *regular expressions instead of fixed strings*:

- a. Enable the **Use regular expressions** checkbox.
- b. Create rules using regular expressions. The most commonly used symbols can be used.

Regular expressions provide a way to find patterns within a text. This is useful in many contexts, for example to check whether a piece of text meets certain criteria, or to find and/or replace strings with a particular pattern. In PitStop Pro, regular expressions are used to configure the attributes of certain Actions (but only available in combination with *equal/not equal* operators). For an overview of the Actions concerned, refer to the Action manual on the Enfocus website.

PitStop supports Boost Regular Expressions. For more information, refer to [http://www.boost.org/doc/libs/1\\_47\\_0/libs/regex/doc/html/boost\\_regex/syntax/perl\\_syntax.html](http://www.boost.org/doc/libs/1_47_0/libs/regex/doc/html/boost_regex/syntax/perl_syntax.html).

### Examples:

**Rename spot color** is an Action that allows you to change the name of spot colors in a document.

- To rename variants of the same color, e.g. to rename "Varnish0", "Varnish1", "Varnish23" (i.e. "Varnish" followed by one or more digits) to "Varnish" (without any digits), you could create a rule that renames "Varnish([0-9])+" to "Varnish".
- To replace "Pantone" (regardless of the case) with "Separation" in all spot color names used in your document, create the following rule:

Attributes for Rename spot color:

| From                                               | To                 |
|----------------------------------------------------|--------------------|
| [Pp][Aa][Nn][Tt][Oo][Nn][Ee] ([0-9]+) ?([A-Za-z]?) | Separation \$1 \$2 |

Add Change Remove

☒ Use regular expressions

This rule will allow you to rename "Pantone 0123 U" to "Separation 0123 U", "PANTONE 9324 U" to "Separation 9324 U", ...

3. In case of Actions of the type "Check", you should determine if and how the result of the Action should be logged (in the Enfocus Navigator and in the Report).
  - **Don't Log:** Nothing will be logged.
  - **Log as information:** If the check is positive, it will be logged as information. For example, if you want to know if the document's binding is left, select 'Check binding' and choose 'Log if binding is left'. If positive, you'll get the following information message: 'document binding is left'. If negative, no info message is displayed.
  - **Log as warning:** If the check is positive, it will be logged as a warning (⚠️). This allows you distinguish between severe and less severe issues.
  - **Log as error and allow Sign-Off (❓):** If the check is positive, it will be logged as an error that can be "signed-off", i.e. can be "approved" or evaluated as a minor error which doesn't fail PDF certification. This is only relevant if you're running Actions in the context of Certified PDF.
  - **Log as error (❌):** If the check is positive, it will be logged as an error. If you're running Actions in the context of Certified PDF, this kind of problems will prevent the file from being certified OK. The problem must be fixed, before the file can be certified.
4. If the Action you're configuring has the **Use page rotation** or the **Use page rotation and scaling factor** checkbox:
  - To take into account page rotation and/or scaling factor, select this checkbox. The Action will be applied to the actual position of the page content.
  - To ignore page rotation and/or scaling factor, clear this checkbox. The Action will be applied to the original position of the page content (i.e. BEFORE applying page rotation and/or scaling factor).

## Customizing report messages


Messages resulting from "Check" or "Change" Actions and shown in the Preflight Report and the Enfocus Navigator can be customized in several ways. You can for example:

- Rephrase the default text to make it easier to understand for non-technical people
- Add extra information (e.g. what to do in case of problems)
- Add a link to a web page with more information

To do so, proceed as follows:

1. In the attributes of the Action concerned, click the **Actions** link.
2. From the menu, select **Customize report message**.  
The Customize Report Message dialog appears.



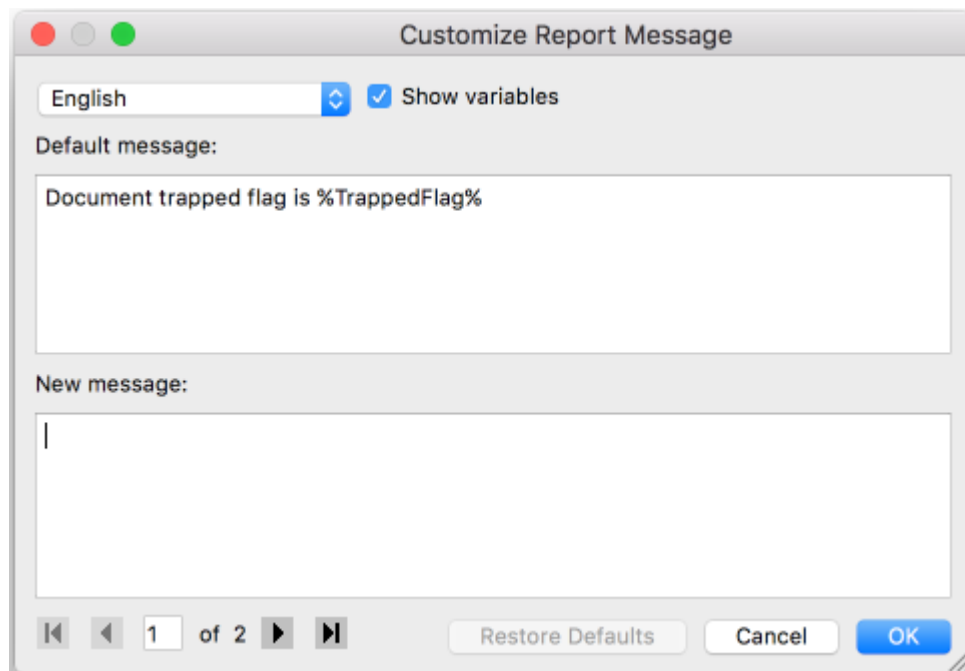


3. From the list at the top, select the language for which you want to change the message. Select **All** if you want to display a particular message regardless of the PitStop language. The default message is displayed in the first field. If the message contains variables, you can make them visible by selecting the **Show variables** checkbox: the variables are enclosed in % signs. To preview the end result (variables replaced with the actual values), you should clear the checkbox again.
4. Enter a new message in the second field.  
If you don't, the default message will be used.



**Tip:** We recommend copying the message from the first into the second field (making sure **Show variables** is selected). That way you're sure the variables are written correctly. If a variable contains a typo, it will not be recognized as such and it will be considered a fixed string.

#### Special cases

- **Built-in configuration variables** refer to the options in the attributes of the Action. If you clear the **Show variables** checkbox, you can see what they refer to. In the example below, %ColorSpace% refers to the value chosen from the first list (RGB color), whereas %ObjectType% refers to the value chosen from the second list.

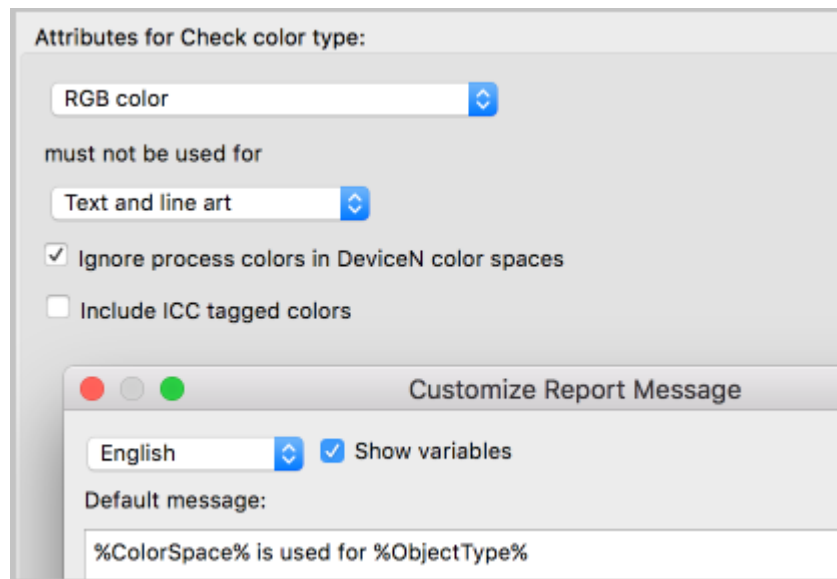

- **Square brackets such as "[]" inside a variable** indicate that the variable may be replaced with more than one value, depending on what's found in the PDF. For example, "%[fontName%]" means that more than one font name may be mentioned in the message. If written like this, the font names are listed, one after the other. If the square brackets are removed, you'll have a separate message on a separate line for each different font name. See the example below:

Font %[fontName%] is not embedded

Font Helvetica, Times-Roman is not embedded (3x on page 2)

Font %fontName% is not embedded

Font Helvetica is not embedded (1x on page 2)

Font Times-Roman is not embedded (2x on page 2)

- **Square brackets enclosing 3 dots such as "[...]" inside a variable** refer to a range, e.g. "[%ActualPointSize%]" means that the smallest and the largest point size found in the document will be mentioned in the message, separated by three dots. Values inbetween will not be mentioned. If you remove the three dots, all values found in the document will be mentioned (separated by a comma). Alternatively, you could remove the square brackets, resulting in one separate message per point size value. See the examples below:

Text of %[...]ActualPointSize% pt is %Comparator% %ReferencePointSize% pt

🔍 ⓘ ● Text of 2...15.96 pt is more than 1 pt (307x on page 1)

Text of %[]ActualPointSize% pt is %Comparator%

🔍 ⓘ ● Text of 2, 3, 10, 11.04, 12, 14.04, 15.96 pt is more than 1 pt (307x on page 1)

Text of %ActualPointSize% pt is %Comparator% %ReferencePointSize% pt

🔍 ⓘ ● Text of 10 pt is more than 1 pt (2x on page 1)

🔍 ⓘ ● Text of 11.04 pt is more than 1 pt (258x on page 1)

🔍 ⓘ ● Text of 12 pt is more than 1 pt (13x on page 1)

🔍 ⓘ ● Text of 14.04 pt is more than 1 pt (30x on page 1)

🔍 ⓘ ● Text of 15.96 pt is more than 1 pt (2x on page 1)

🔍 ⓘ ● Text of 2 pt is more than 1 pt (1x on page 1)

🔍 ⓘ ● Text of 3 pt is more than 1 pt (1x on page 1)



**Note:** Make sure to use the correct notation; if you omit one dot, or write 4 dots, this will not work!

- If you want to display **a link** in a report message, simply type the URL (e.g. <http://www.enfocus.com>). When users click this URL in the Preflight Report, the corresponding web page will be opened.
  - Note that a **small number of messages cannot be customized**, because they result from Actions that use another mechanism and are generated "on the fly". For these messages, you'll see a warning "This Action has no customizable messages".
  - There's one Action with a slightly different user interface: **Log Selection**. For this Action, no default report message is available. You should enter your custom report message directly in the Attributes section.
- 5.** Click the navigation button(s) at the bottom of the dialog, to navigate to other messages originating from the same Action and configure them in the same way.
- This is the case if the Action has several distinct options, e.g. Check for alternate images allows you to detect either all images with alternates, or images that have an alternate that is default for printing. For each of these options, a separate message is available. Note that **Restore Defaults** resets all these messages (not only the one that is shown).
- 6.** Click **OK**.

If you run the Action on a document, the new message instead of the default message will be displayed.



**Note:** If you ever want to return to the default message, in the attributes of the Action, click **Action > Clear customized report message**.

### 2.3.3. Running an Action List

This topic describes how to run an Action List. The procedure is identical, regardless of whether you have created the Action List yourself, or if you're using a standard Action List provided by PitStop Pro or an imported Action List.

To run an Action List

1. Open the **Action Lists** dialog.  
Refer to [Where to find Actions and Action Lists](#) on page 27.
2. Select the Action List you want to run.
3. Determine if you want to run the selected Action on the whole document, or on a page range:
  - **Complete document:** All pages in the document. You can further specify to run it on all pages, or only on even or odd pages.
  - **User selection:** The area or object(s) selected using the PitStop Select Object tool.
  - **Current page:** Only the page which is currently displayed.
  - **Pages:** All pages or a page range as specified.
4. Indicate if you want to view the results of the Action List in the Enfocus Navigator or in a Preflight Report, after you have run the Action List.

It depends on your PitStop Pro Preferences if the Enfocus Navigator or the Preflight Report will be shown (See **Edit (Windows) or Adobe (Mac) > PitStop Pro Preferences > General** ).

The Enfocus Navigator is a dialog that gives an overview of the changes performed by the selected Action List and enables you to generate a (Preflight) Report. This Preflight Report is a PDF document that displays general file information as well. See [Checking the results of an Action List](#) on page 49.

Select the appropriate option:

- **Always:** The Enfocus Navigator dialog or the Report will always appear.
- **Never:** The Enfocus Navigator dialog or the Report will never appear.
- **On Error:** The Enfocus Navigator or the Preflight Report will only appear if an Error is detected.

Errors can only be detected for Actions of the type "Check", if you have selected **Log as error** or **Log as error and allow Sign-off** (in the attributes of the "check" Action).

If you have chosen an "inform" Action, the requested information will be included in the Report, so make sure to select **Always**.

5.

Click  .

The Action List runs with the selected options. You can now check the results of the Action List in the Enfocus Navigator or the Preflight Report (if you have chosen to do so) or in the PDF itself.

## 2.3.4. Checking the results of an Action List

---

When you run an Action List, you may want to check what exactly has been changed or what the result of the Action is. This information is accessible via the Enfocus Navigator. You can also generate a Report with all this information.



**Note:** The Enfocus Navigator and the Report also show the results of Global Changes and Preflight Checks. For more information about Global Changes and preflighting of PDF documents, refer to the corresponding chapters in the PitStop Pro Reference Guide.

---


### 2.3.4.1. The Enfocus Navigator

The Enfocus Navigator allows you to check the results of the performed Action List, Global Change and/or Preflight check if applicable. Depending on your PitStop Pro preferences (under General), the Enfocus Navigator may pop up immediately after you have run an Action List, Global Change and/or Preflight Profile.



**Tip:** If it doesn't appear, you can open the Enfocus Navigator via **Tools > PitStop Process >  Navigator** or **(Plugins) > PitStop Pro > Navigator**.

---

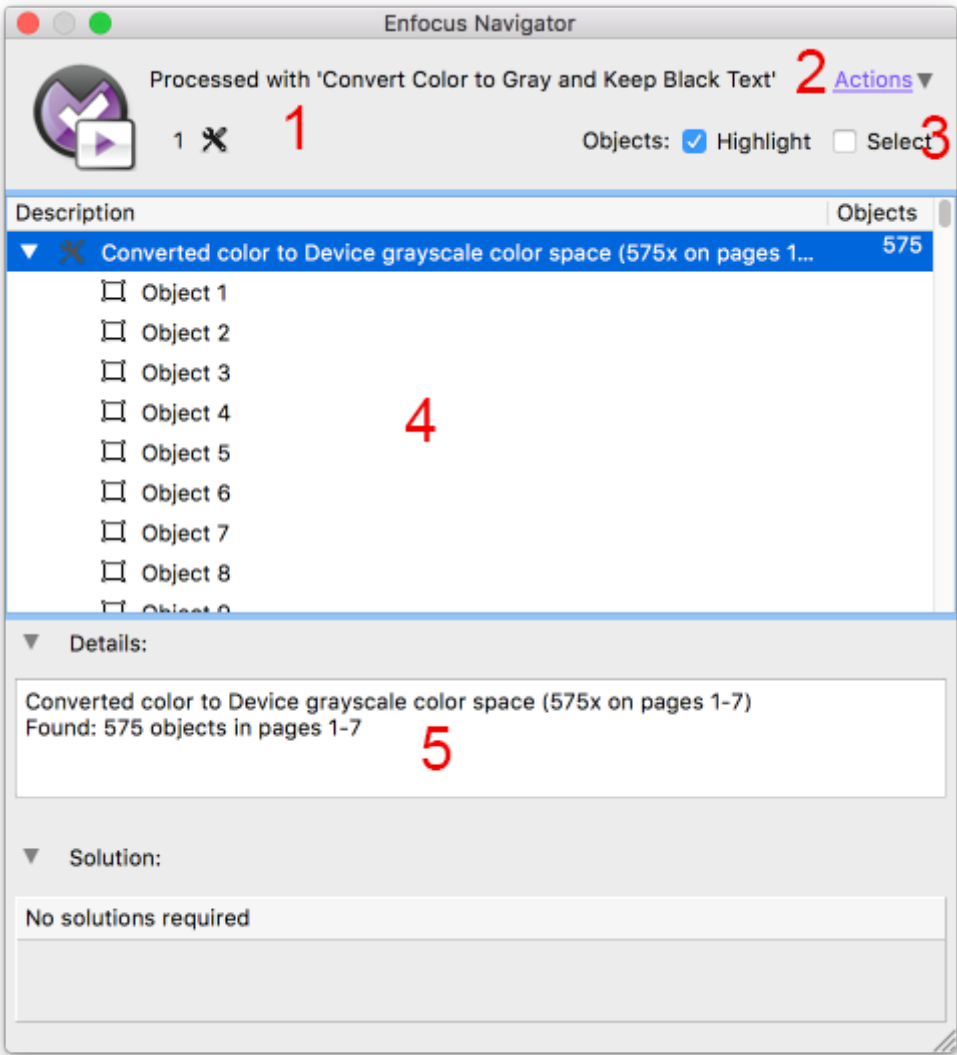

The Enfocus Navigator consists of the following screen parts:

| # | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | <p>Name of the Action List, Global Change or Preflight Profile and the number of changes. In the above example, only one change has been carried out.</p> <p>The icon  indicates that the change was successful. In case of problems, you may see  (Warning),  (Error which can be signed-off) or  (Error). If you see  (Information), the message is just informative and does not indicate that there is a problem.</p> |
| 2 | <p>Click the <b>Actions</b> link and select <b>Show Report</b> to view a Report with information about the PDF being processed (e.g. document properties, security information, the performed Actions,...).</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

| # | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|   |  <b>Note:</b> If you have used an Action of the type "informs", you should open the Report to find the information you wanted to collect with the Action List!                                                                                                                                                                                                                                                                                                                                        |
| 3 | Select the checkboxes if you want to highlight and/or select the objects that have been affected by the performed Actions, Global Change, or Preflight check.                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 4 | <p>The <b>Description</b> section indicates which objects have been changed. Select a line to see the corresponding details in the <b>Details</b> section below. This way you can browse through the results.</p>  <b>Note:</b> It may be handy to use this browser in combination with the Enfocus Inspector to see more details about a particular problem or to correct the problem immediately. For more information, refer to "Browsing through the results" in the PitStop Pro Reference Guide. |
| 5 | The <b>Details</b> section provides information about the items selected under <b>Description</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 6 | The Solution section allows you to fix problems, in case of warnings or errors. For example, if an Action of the type "Check" has detected a font problem, you will get the possibility to select an alternative font and change the font immediately.                                                                                                                                                                                                                                                                                                                                 |

### 2.3.4.2. The Report

If you have run an Action List, a Global Change or a Preflight Profile, you have the possibility to create a report (in PDF format) with information about what has or has not changed. In case of Actions of the type "Informs", you need to generate such a report in order to see the information you asked for.



**Note:** If you want to generate a report, choose "Always show results", when running the Action List, Global Change or Preflight Profile. See also [Generating a Report](#) on page 54.

#### Content of a Report

A Report usually contains the following sections:

| Section                                                                                                               | Content                                                                                                                                                                                                                                            |
|-----------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Preflight Report: <ul style="list-style-type: none"> <li>Information</li> <li>Errors, Warnings &amp; Fixes</li> </ul> | <ul style="list-style-type: none"> <li>Information messages</li> <li>(Potential) problems and changes. It depends on the log level of the "check" Actions in the Action List whether or not something is tagged as an Error or Warning.</li> </ul> |
| General File Information                                                                                              | Properties of the PDF document, such as PDF version, title, author, etc. and security information.                                                                                                                                                 |
| Font Information                                                                                                      | All fonts used in the PDF document, along with their attributes (type of font, embedded or subset, etc.).                                                                                                                                          |

| Section                     | Content                                                                                                                                                       |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Image Information           | All images in the PDF document, along with additional information (for example physical and effective resolution, page, angle, custom color functions, etc.). |
| OPI Information             | OPI usage in the PDF document.                                                                                                                                |
| Color Information           | All color spaces (RGB, CMYK, etc.) used in the PDF document, with additional information where required.                                                      |
| Page Color Type Information | Overview of the number of pages that are empty, colored, or black and white.                                                                                  |
| Ink Information             | CMYK ink coverage calculated for the whole document and for each page separately.                                                                             |
| Layer Information           | Properties of the layers that are present in the document. A clickable tree view shows the sequence of the layers.                                            |

### **Information, warnings, errors, and fixes**

The results of the Action List, Global Change or Preflight Check can be found in the Preflight Report section. Information messages, warnings, errors and fixes are grouped and preceded by a number of icons:

- A magnifying glass icon . Clicking this icon opens the Enfocus Navigator and allows you to browse through the list of affected objects.
- An info icon (in case of a warning or error) . Clicking this icon opens a Help topic with information about the problem concerned.
- A green, orange or red bullet, indicating the type of problem:
  -  Blue for information messages
  -  Green for a fix
  -  Yellow for a warning
  -  Red for an error





## PITSTOP PRO



Preflight Report

---



**Errors were found on page 1,14,60 and in general document properties**

-  PDF/X-6 : PDF/X-6 Output Intent is missing (415x on pages 1-415)
-  PDF/X-6 : Object uses device color space that does not map to a calibrated blending color space or effective Output Intent (88380x on pages 1-415)
-  PDF/X-6 : Font Helvetica, Times-Roman is not embedded (8x on pages 60,415)



**Non-critical failures**

-  PDF/X-6 : Could not embed Font Helvetica, Times-Roman: Could not find Type 1 version (8x on pages 60,415)



**Information**

-  PDF/X-3:2002 : Font Helvetica, Times-Roman is not embedded (8x on pages 60,415)
-  PDF/X-3:2002 : Transparent objects have been found (741x on pages 1...402)
-  PDF/X-3:2002 : PDF/X version is empty, should be PDF/X-3:2002



**Fixes**

-  PDF/X-6 : Fixed all corrupt font widths (including unused characters) (78245x on pages 1-415)
-  PDF/X-6 : Compressed objects using JPEG compression (4x)
-  PDF/X-6 : Modification date is set to D:20230116145342+01'00'

## Report styles

When generating a report, you can choose the report layout style that suits your needs.

There are four "annotated" reports (first four in the table below). An annotated report is a combination of the original document and the report. The report information is integrated in the original document as a number of notes and bookmarks, allowing to easily navigate to the errors and warnings, in Acrobat Reader or in a browser, without using any Enfocus software.

The three other report styles (Regular, Minimum, Continuous) do not include a copy of the original document.

| Report style                                    | Description                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Annotated Report                                | Report with annotations. The report is a copy of the processed PDF; checks and changes are annotated.                                                                                                                                                                                                                                                                                                                                                |
| Low Resolution Annotated Report                 | Report with annotations and with low resolution images, which reduces the file size of the report.                                                                                                                                                                                                                                                                                                                                                   |
| Secured Annotated Report                        | Report with annotations and protected with a password. Users are not allowed to edit the report. <div style="border: 1px solid #ccc; padding: 5px; margin-top: 10px;">  <p><b>Note:</b> When selecting this report style, you are asked to enter a password. With this password, you can still change the security settings of the report as required.</p> </div> |
| Scaled Low Resolution Annotated Report (max A4) | Report with annotations. The entire document is scaled and has a low resolution. The size of the pages in the report will not exceed the A4 size and the images are also compressed to a smaller size.                                                                                                                                                                                                                                               |

| Report style | Description                                                                                                                                                                                  |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|              |  <b>Note:</b> This may be useful if you want to send reports for large format documents through email.      |
| Regular      | Report which does NOT include the processed PDF. It contains general file information and an overview of the fixes, failures, warnings, and errors (if any).                                 |
| Minimum      | Regular report with minimal information.                                                                                                                                                     |
| Continuous   | Regular report, but without page breaks between the topics (information about the fixes and general file information, font information, ...) as in the Regular Report. Printed in grayscale. |

### 2.3.4.3. Generating a Report

This topic explains how to generate a Report using the Enfocus Navigator. If you have configured the PitStop Pro Preferences (under General) to always display the Preflight Report (with a chosen report style), you only must run the Action List, Global Change or Preflight Profile with the option **Show results: Always**.

To generate a Report which gives an overview of the results of your Action List, Global Change or Preflight Check

1. Run the Action List, Global Change or Preflight Check on your document.

Make sure to select **Always** from the **Show results** list. Otherwise the Enfocus Navigator won't pop up. If you have forgotten to do so, you can open the Enfocus Navigator via **Tools >**

**PitStop Process >**  **Navigator** or **(Plugins) > PitStop Pro > Navigator**.

The Enfocus Navigator appears. Here you can already see the result of the Action List, Global Change or Preflight Check you performed. Refer to [The Enfocus Navigator](#) on page 49.

2. Click the **Actions** link (in the top right corner of the Enfocus Navigator).
3. From the list, select **Show Report**.
4. Select a Report style and click **Show Report**.

For more information about the Report styles, refer to [The Report](#) on page 51.

The Report appears and the information messages, errors, warnings and fixes are listed on the first page.

5. Using the Adobe Acrobat **Hand Tool** , you can now:

- Click the magnifying glass  next to an error, warning or fix to select and highlight the corresponding object in the PDF document. Remember that you can browse through the affected objects in the Enfocus Navigator. It may be a good idea to open at the same time the Enfocus Inspector to see more details about a particular problem or to correct the problem immediately.

- Click the information icon  next to an error, warning or fix to see a Help topic. A dialog box may appear, asking you where you wish to view the Help topic (Open Weblink). If so, select **In Web Browser**.
6. Click **File** > **Save** and save the file.

## 2.3.5. Fixing problems

---

If problems (warnings, errors) are reported, you may want to solve them.

- In some cases, you will find a solution in the **Enfocus Navigator**. You can use this fix for all problem instances in the file, or you can browse to a particular object and only fix that one. Note that it may be handy to use the Enfocus Inspector to learn more about the problem concerned.
- If no solution is recommended, you can generate a **Report** (see [Generating a Report](#) on page 54) and click the information icon  to find a solution for the problem concerned. In many cases, you can just run another Action List to fix the problem. For example:
  - Layer problems found with the "Check layers" Action can be solved with the "Fix layers" Action.
  - Font problems found with "Check corrupt font widths" can be solved with "Change corrupt font width", ...

### 2.3.5.1. Fixing problems - use case

This is an example of how you can fix problems reported by the Enfocus Navigator.

**Problem:** You have run an Action List which includes the Check resolution Action. You get an error saying that the resolution of some images in your PDF document is too high.

**Solution:** Check and resample the images as required.

To simulate this use case, proceed as follows

1. Open a PDF (with images) and create an Action List which contains the Check resolution Action. Make sure to set a resolution lower than the one in your PDF and select Log as Error.
2. Run the Action List, with Show results set to **Always**.
3. Do one of the following, depending on what's shown after you have run the Action List (the Report or the Enfocus Navigator):
  - If the Report is displayed, click the icon  preceding the warning "Resolution of color or grayscale image is more than x ppi (3x on pages y-z)"
  - If the Enfocus Navigator is displayed, select the warning "Resolution of color or grayscale image is more than x ppi (3x on pages y-z)".
4. In the Enfocus Navigator, to view and highlight the images in question, click icon  preceding the message concerned.  
You now see a list of objects in question (in this example: images of which the resolution is too low).

5. Do one of the following:
  - To resample all images concerned in one go:
    1. In the Solution section, enter the appropriate values
    2. Click **Fix**.
  - To resample the images one by one:
    1. Click the object concerned.
    2. In the Solution section, enter the appropriate values.
    3. Click **Fix**.
  - To first check the resolution of the images concerned:
    1. Click the object concerned.
    2. See [Display the Enfocus Inspector](#).
    3. In the Enfocus Inspector, click the **Image > Properties** category to see the actual resolution of the selected image.
    4. Click the **Resample** tab and decrease the resolution of the image to the required value.
    5. Click **Apply**.
6. Run the Action List again.

If you have fixed all problems, the Enfocus Navigator and the Report will contain a message that no errors or warnings were found, and that no fixes are required.

## 2.4. Managing Action Lists


---

This chapter explains how to import, export, and lock Action Lists.



**Note:** Next to that, you can also duplicate and refresh the Action Lists in the Action Lists dialog, and add them to your favorites, using the context menu.

---

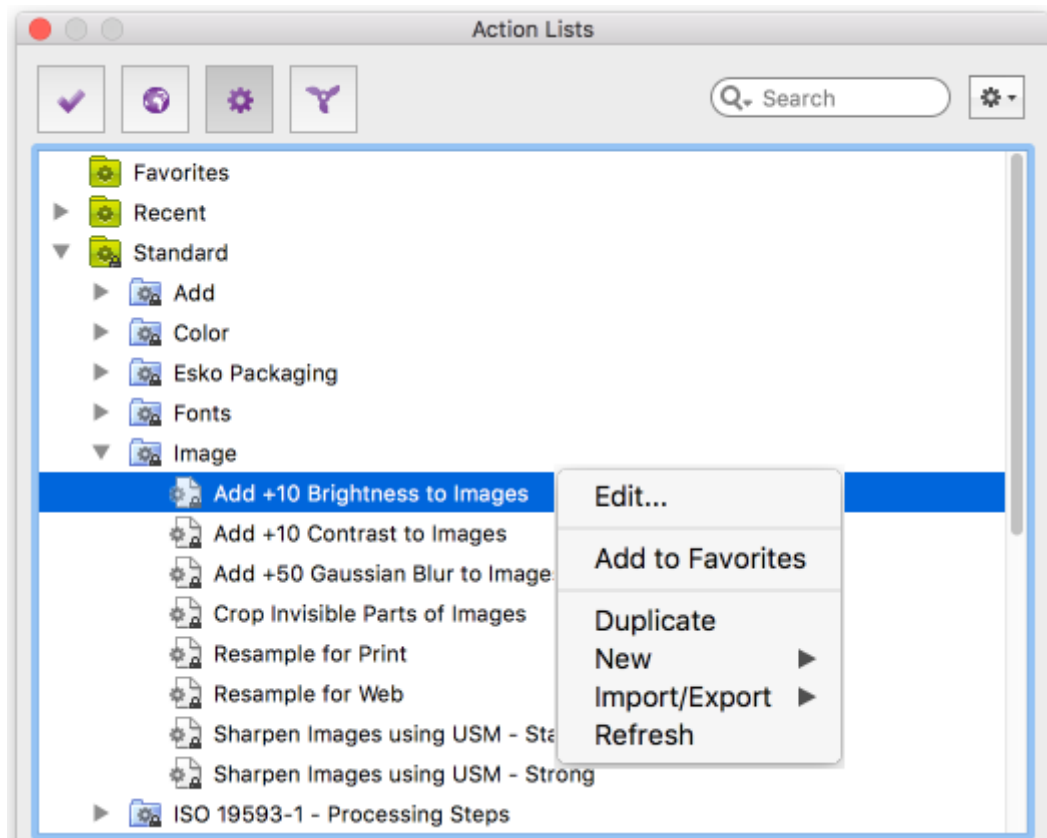

### 2.4.1. Exporting an Action List

You can export your Action Lists, for example to share them with other users, or to use them on another computer.

To export an Action List

1. Open the **Action Lists** dialog.  
Refer to [Where to find Actions and Action Lists](#) on page 27.

2. Click  > **Import/Export** > **Export**.

You may get a warning if the Action List is not protected with a password. If you would like to lock the Action List, refer to [Locking an Action List](#) on page 58.

3. Select a download location.
4. Click **Save**.

### 2.4.2. Importing an Action List

Action Lists have file extension .eal.

To import an Action List

1. Open the **Action Lists** dialog.  
Refer to [Where to find Actions and Action Lists](#) on page 27.
  2. Select the folder in which you want to import the Action List.  
It's not possible to import an Action List to the Standard database because that is a read-only location; if you try to do so, the Action List will be saved locally.
  3. Do one of the following:
    - Right-click in the Action List dialog.
    - Click the button  in the top right corner of the dialog.
  4. Click **Import/Export > Import**.  
If you want to import multiple Action Lists, you may want to group them into a folder and import this entire folder into the application. In that case, choose **Import Group** and select the appropriate folder on your system.
  5. Select the appropriate Action List.
  6. Click **Open**.
- The imported Action List appears in the Action Lists dialog. You can run and/or edit this Action List as required.

### 2.4.3. Locking an Action List

---

You can secure your Action List with a password to prevent others from changing it. This may be convenient when the Action List is shared among multiple users. You can lock an Action List with a password when you create the Action List or you can add a password afterwards.

To lock an Action List

1. Open the **Action Lists** dialog.  
Refer to [Where to find Actions and Action Lists](#) on page 27.
2. Select an Action List and double-click it.
3. Under Properties, select **Locking Information**.
4. Select the appropriate option:
  - To allow everyone to *run, view, and edit* this Action List, select **Not locked**.
  - To allow everyone to *run* the Action List and *view* the Actions in the Action List, select **Partially locked**.  
  
Users will not be able to change the individual Actions and their respective attributes in the Action List. This is useful to give the users a precise idea of what the Action List will do.
  - To allow users to *run* the Action List only, select **Locked**.  
  
Users will not be able to see or change the Actions in the Action List without filling in the password first.
5. If you haven't chosen to (partially) lock the Action List, fill in a password and confirm it.  
The password can include:

- Uppercase and lowercase letters
- Any character on the keyboard
- Spaces

6. Click **Apply**.

## 2.5. Troubleshooting Action Lists using the Action List Visualizer

---

The Action List Visualizer is a very powerful tool that shows you what the various Actions in an Action List are actually doing in a document. This is helpful when you're creating complex Action Lists, and it helps you find out whether or not an Action (or a sequence of Actions) is doing what you expect it to do.

### 2.5.1. Troubleshooting Action Lists - How it works

---

The Action List Visualizer allows you to see *what each Action in an Action List is doing as it processes*. This means that each of the Actions is executed, one after the other, while the impact of each Action is shown in the document on the page that is currently open. A pointer moves from the top to the bottom, to show you where the focus is.

The Action List must be started explicitly. See [Starting the Action List Visualizer](#) on page 62.

There are two ways to go through an Action List:

- **Run mode**: The Action List is executed at a set speed, from the beginning to the end, and it will not stop, unless you click the Pause button or set breakpoints where the Action List should be paused.
- **Step mode**: The Action List is executed step by step, one Action at a time. You must click to continue to the next Action.

You can combine both methods, for example check the first x Actions of the Action List step by step and then the last part in Run mode, or vice versa.

The Action List is executed page by page. You can visualize the Action List on one single page only (the page of your choice) or on the whole document (to debug Action Lists with Actions like 'Split pages', 'Add pages', 'Reorder pages', etc.).

You can also make changes to the attributes of the Action List with the Action List Visualizer active, and immediately check the effect of your changes. See [Changing the Action List during visualization](#) on page 64.


**Tips:**

- In case of complex Action Lists, it is convenient to group your Action Lists and debug the Actions group by group. Once a group of Actions is OK, you can collapse the group and the Action List Visualizer will show the impact of the group as one step/change.
- The Enfocus Inspector can be used in combination with the Action List Visualizer. For example, if you're interested to see what your Action List does to a particular object, you can

select this object using the PitStop selection tool and open the Enfocus Inspector to see the changing properties.



## 2.5.2. The Action List Visualizer User Interface

The **Action List Visualizer** is activated by clicking the **Start Action List Visualizer** button  in the [Action List Editor](#). Once activated, a new toolset becomes available, as shown below.

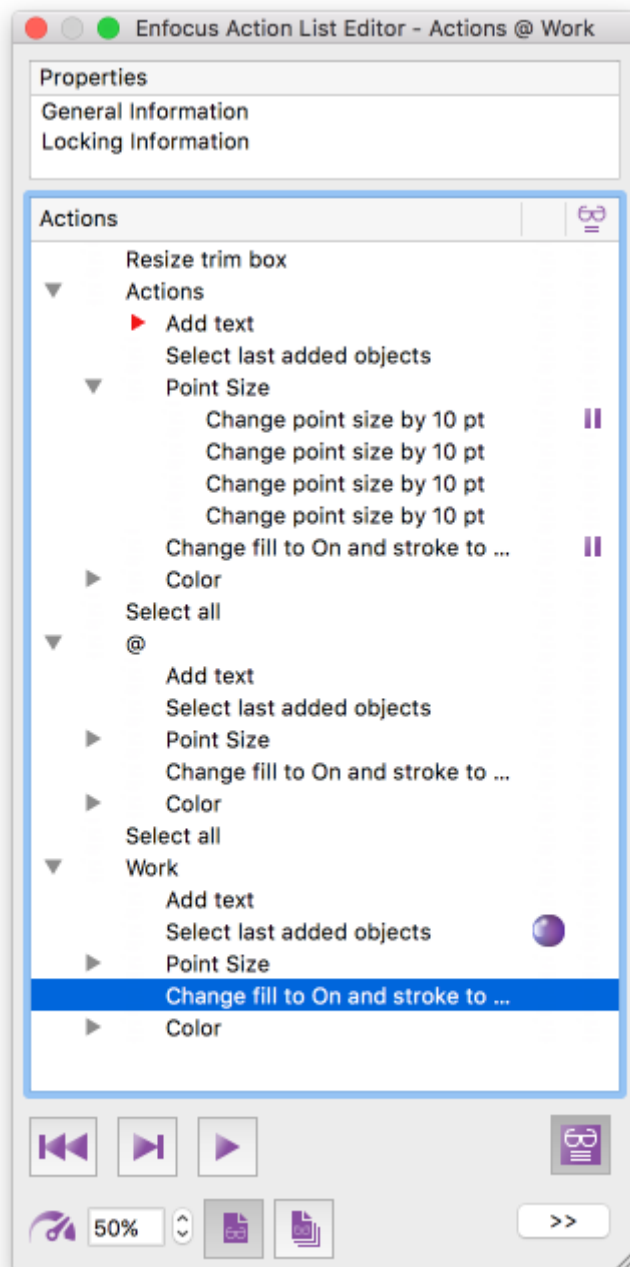



**Buttons**

| Button                                                                              | Click this button to...                                                                                                                                                                                                                                                                                 |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | Quit the tool and return to the regular Action List Editor. This will bring back the buttons to add, remove, move, ... the Actions in the Action List.                                                                                                                                                  |
|    | Restart the Action List Visualizer. This places the pointer ► again at the top of the Action List.                                                                                                                                                                                                      |
|    | Execute the current Action (=Action with the pointer) and move the pointer to the next Action.                                                                                                                                                                                                          |
|    | Run the Action List (starting from the Action with the pointer). The Action List will be executed and stop at a breakpoint (if there is any) or when you click the Pause button  , otherwise it will run till the end. |
|    | Pause the Action List (while it's running).                                                                                                                                                                                                                                                             |
|    | Change the processing speed. 10% is very slow, 100% is very fast.                                                                                                                                                                                                                                       |
|   | Run the Action List on the current page only. The current page is the page that is currently displayed in Acrobat.                                                                                                                                                                                      |
|  | Run the Action List on all pages of the document. All Actions will be executed one after the other, page after page, until the end of the document.                                                                                                                                                     |
|  | Expand the details pane, which shows the attributes of the selected Action.                                                                                                                                                                                                                             |

**Icons**

| Icon                                                                                | Meaning                                                                                              |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|
|  | Pointer, indicating which Action will be executed next.                                              |
|  | Breakpoint. This is where processing will stop when the Action List is executed <i>in Run mode</i> . |
|  | Column where you can click to add or remove a breakpoint.                                            |

**Color indicators**

Note that the green and purple indicators indicate which selection is involved in the selected Action, just like in normal working mode (see [Using operators in Action Lists](#) on page 40). In the above example, "Change fill to ON..." applies to "last added objects". During Action List

visualization, when "select last added objects" is executed, it will be highlighted in purple in the document; purple because of the purple indicator. Other selections are marked in blue.

### 2.5.3. Starting the Action List Visualizer

---

To start or activate the Action List Visualizer

1. Open a sample PDF in Adobe Acrobat.
2. Open the Action List you want to visualize in the Action List Editor.
3. Click the **Start Action List Visualizer** button .

The regular buttons to add, remove, move, ... Actions are replaced with new buttons. See [The Action List Visualizer User Interface](#) on page 60.

You can now start visualizing the Action List.

### 2.5.4. Visualizing an Action List at a particular speed (Run mode)

---

Have PitStop go through the Action List at a set speed. Meanwhile you can see what is happening in your document.

To run the Action List at a set speed

1. Make sure the Action List Visualizer is active.  
[Starting the Action List Visualizer](#) on page 62
2. Check the run speed and change it as required by clicking  at the bottom of the dialog.  
10% is very slow; 100% is very fast.
3. [Set one or more breakpoints as required.](#)
4. Determine the scope:
  - To process the current page only, click the **Run on current page** button .
  - To process the whole document, click the **Run on all pages** button .



**Note:** All Actions will be executed one after the other, page after page, until the end of the document.

---

5. To actually start visualizing, click the **Run** button .  
The Action List is executed from the beginning to the end, one Action after the other. Meanwhile, you can see what is happening. The pointer indicates which Action will be executed next. Processing will stop at a breakpoint, when you click the **Pause** button , or when the end is reached. Note that Actions in a collapsed group (hidden Actions) are executed in one go (so not one by one).
6. To restart processing after a breakpoint or a pause, click the **Run** button .  
Processing will go on until the next breakpoint, manual pause, or till the end.

Once all Actions have been executed, you can see the end result of the Action List in your sample document. You can now make changes if needed, and check the Action List again from the beginning. To do so, click the **Restart** button  to undo all changes and move the pointer to the beginning of the Action List.



**Note:** You can also undo the changes through the menu: **Edit > Enfocus Undo Visualize Action List**.

### 2.5.4.1. Adding and removing breakpoints

Breakpoints indicate where the Action List Visualizer should pause processing. This is only relevant when you're visualizing the Action List in Run mode.

Note that breakpoints only are taken into account when they are visible. If they are hidden because they are part of a collapsed group, they are not taken into account.



**Important:** Processing will stop just before the Action with a breakpoint.

There are several ways to proceed:

- To add a breakpoint, click in the breakpoint column (to the right of the Actions, below the icon ) next to the Action where you want a pause.  
This will add a breakpoint icon .
- To remove a breakpoint, click in the breakpoint column (to the right of the Actions, below the icon ) on the breakpoint  icon.  
The breakpoint is removed.
- To remove all breakpoints in one go, open the context menu and click **Remove all breakpoints**.
- To add a breakpoint where there is none, or to remove one where there is one:
  1. Select an Action in the Action List.
  2. Open the context menu.
  3. Click **Toggle breakpoint**.

### 2.5.5. Visualizing an Action List at your own speed (Step mode)

To go through an Action List, step by step, at your own speed, proceed as follows

1. Make sure the Action List Visualizer is active.  
[Starting the Action List Visualizer](#) on page 62
2. Determine the scope:
  - To process the current page only, click the **Run on current page** button .
  - To process the whole document, click the **Run on all pages** button .



**Note:** All Actions will be executed one after the other, page after page, until the end of the document.

3. To actually start visualizing, click the **Step** button .

Only the Action with the pointer  is executed. Immediately after the Action is executed, the pointer moves to the next Action.

4. To proceed to the next Action, click the **Step** button . Do this until you have reached the end of the Action List.

Actions in a collapsed group are executed but not shown, meaning that the pointer proceeds to the next visible Action in the Action List.

Breakpoints are ignored. They are only relevant in Run mode.

Once all Actions have been executed, you can see the end result of the Action List in your sample document. You can now make changes if needed, and check the Action List again from the beginning. To do so, click the **Restart** button  to undo all changes and move the pointer to the beginning of the Action List.




**Note:** You can also undo the changes through the menu: **Edit > Enfocus Undo Visualize Action List**.

## 2.5.6. Changing the Action List during visualization

With the Action List Visualizer active, you can make changes to the attributes of the Action List you're currently checking. They are applied immediately, so you can immediately see the impact of your changes.

It is not possible to add, remove or move Actions in the Action List; if you want to do that, you must stop the Action List Visualizer to make the buttons available again.

To make changes to the attributes of an Action

1. Make sure the Action List Visualizer is not running.
2. To display the attributes of the Action you want to change, do one of the following:
  - Click  and select the Action you want to change.
  - Double-click the Action you want to change. (If you double-click once more, the attributes will be hidden again).
3. Change the attributes.
4. Check the impact of the changed Action List:
  - If the pointer is currently above the changed Action, click the **Restart** button  to start from the beginning of the Action List.
  - If the pointer is currently below the changed Action, click the **Step**  or **Run** button  to continue.

## 2.6. Action Lists in practice - a use case


The following real life example is used to illustrate in detail how to create an Action List. It shows:

- Which selections to make.
- Which operators to use.
- Which changes to apply.

### 2.6.1. Given: PDF documents of booklets with creep

---

Suppose you have PDF documents of booklets that are almost press-ready. The pages are to be printed double-sided, folded and trimmed. You want to make sure that the page numbers, which are close to the edge of the page, do not get trimmed off. Indeed, when pages are folded for saddle-stitch binding, the printed area slightly moves outward. This is known as **creep** in the publishing world. The more pages in a booklet, the larger the shift of the area of the inner pages will be.

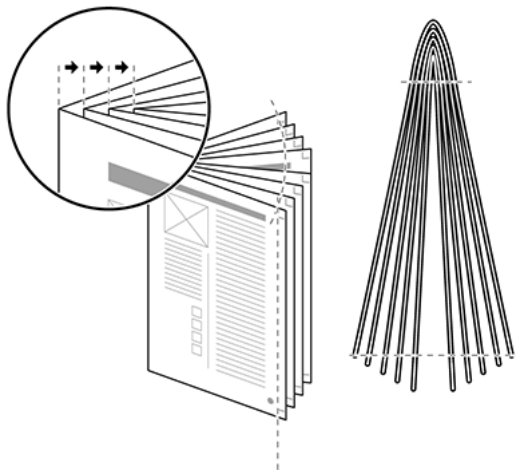


Creep moves the printed area of the inner pages outwards, which may cause page numbers near the outer edges of the pages to be trimmed off.

To compensate for this creep, you can create an Action List that does the following:

- Shift the printed area of the left-hand (even-numbered) pages 5 mm to the right.
- Shift the printed area of the right-hand (odd-numbered) pages 5 mm to the left (closer to the binding).
- Leave the first page unchanged (for example because this page is not numbered).

**Example:** Changing the page layout: move the printed area of the inner pages (**B** and **C**) towards the binding to compensate for creep, but leave the first page (**A**) unchanged.

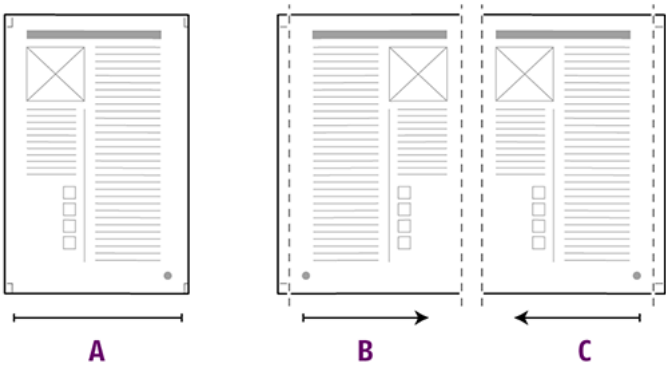

### 2.6.2. Creating an Action List that changes the page layout of a PDF document

1. Using the **Enfocus Action List Editor**, create an Action List that looks as follows:

```
Select all
Select odd pages
Select first page
NOT
AND
Move page content (horizontal: 5.0 mm, vertical: 0.0 mm)
Select all
Select even pages
Select first page
NOT
AND
Move page content (horizontal: - 5.0 mm, vertical: 0.0 mm)
```

2. Click **View > Zoom > Zoom to Page Level** to see the pages on the complete media size.
3. To open the Action Lists dialog, click **(Plugins) > PitStop Pro > Action Lists**.
4. Select the respective Action List and click **Run**.

PitStop Pro will apply the Action List in the following steps:

| Step | Action                                                                                                                                        |
|------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| 1    | Select all                                                                                                                                    |
|      | It's good practice to start Action Lists with a <i>Select all</i> Action, to reset previous selections if any.                                |
| 2    | Select odd pages                                                                                                                              |
|      | Content on odd pages should move to the left, whereas content on even pages should move to the right. First, the odd pages will be processed. |
| 3    | Select first page                                                                                                                             |
| 4    | NOT                                                                                                                                           |

| Step | Action                                                                                           |
|------|--------------------------------------------------------------------------------------------------|
|      | NOT excludes the first page from your selection, because it should remain unchanged.             |
| 5    | AND<br>AND at this point combines the selections of steps 1 and 2 with the exclusion of step 4.  |
| 6    | Move page content 5.0 mm horizontally.<br>This change moves the page content 5 mm to the left.   |
| 7    | Select all<br>Resets the previous selection.                                                     |
| 8    | Select even pages                                                                                |
| 9    | Select first page                                                                                |
| 10   | NOT<br>NOT excludes the first page from your selection, because it should remain unchanged.      |
| 11   | AND<br>AND at this point combines the selections of steps 7 and 8 with the exclusion of step 10. |
| 12   | Move page content –5.0 mm horizontally<br>This change moves the page content 5 mm to the right.  |

### 3. Actions sorted per Type

---

#### 3.1. Changes

---

The following Actions allow you to make changes to PDF documents, such as adding objects or page numbers, removing objects, rotating and scaling page content, ...

##### 3.1.1. Add

---

###### 3.1.1.1. Add background

***Belongs to***

- **Category:** Add
- **Type:** Changes

***What it does***

Adds a background to the selection that preceeds this Action in your Action List.

You can choose a color for the background and define a size (size of one of the page boxes or the same size as the bounding box of all objects).

###### 3.1.1.2. Add barcode

***Belongs to***

- **Category:** Add
- **Type:** Changes
- **Since version:** 2018

***What it does***

Adds the barcode of your choice. You can select the barcode you need from a list of common barcode types, choose the color of the back- and foreground and specify the position.

***Tabs***

| Tabs    |                                                                                                                                                                                                                                                          |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Barcode | <ul style="list-style-type: none"><li>• <b>Type:</b> Select the barcode you want to add. We support over 120 barcode types.</li><li>• <b>Value:</b> Enter the numeric value and/or a document variable by clicking the <b>Variable</b> button.</li></ul> |



| Tabs     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|          | <p>The <b>Variable</b> button gives access to a list of predefined variables, such as %Current Document Name%, %Document Title%, %Page Number%, ...(for the full list, see below). The current value is shown at the bottom of the dialog. Note that this list of variables is also available in the <a href="#">Add object</a> Action and the <a href="#">Change document info</a> Action.</p> <p>If a check digit is needed, you can either enter it yourself or leave it blank and let PitStop add it.</p> <hr/> <div data-bbox="486 555 555 622" data-label="Image"></div> <p><b>Note:</b> Values are verified when the Action List is executed, there is no check during the configuration of the Action.</p> <hr/> <ul style="list-style-type: none"> <li>• <b>Translate escape characters:</b> If selected, barcodes that support escape sequences can be used. For example, if this option is enabled, "\n" is considered an escape character instead of a plain string. For more information, refer to the documentation of your barcode library.</li> <li>• <b>Ignore check digit(s):</b> If selected, the check digit is not verified.</li> <li>• <b>Width reduction:</b> Width reduction compensates for 'dot gain': printed material looking darker than intended. In case of barcodes, it means that the bars are enlarged and the gaps reduced. To correct the barcode width, you can either enter an absolute value (e.g. 1 mm) or a relative value (e.g. 5%).</li> <li>• <b>Font name and size:</b> Select the font and the font size of your choice. The chosen font will be used for the numeric values below the bars. Note that the numeric values may not be readable if you select a bar code font.</li> <li>• <b>Group barcode objects:</b> If selected (default), the barcode and the numeric value are grouped, so they can be handled (e.g. moved, changed,...) as one object.</li> </ul> |
| Color    | <ul style="list-style-type: none"> <li>• Choose the <b>foreground</b> color. The default color is black.</li> <li>• Select a <b>background</b> as required and pick a background color.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Position | <ul style="list-style-type: none"> <li>• There are two options to specify the position and size of the barcode: <ul style="list-style-type: none"> <li>• <b>Use selection bounding box:</b> if selected, the barcode will be placed on the bounding box of an object in the PDF that is selected. The size of the selected object determines how big the barcode will be.</li> <li>• <b>Specify position and size:</b> Size and position can be defined independently from each other.</li> </ul> <p>The absolute position is set by entering the X and Y coordinates.</p> <p>The relative position is determined by the distance and position relative to one of the page boxes.</p> <p>The size is set by entering the width and the height. If the lock icon looks closed, any changes you make to one of the dimensions changes the other dimension proportionally.</p> </li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

| Tabs        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|             | <ul style="list-style-type: none"> <li>You can use the default <b>quiet zone</b> (= default for the chosen Action) or you can determine the dimensions. The lock icon can be used to make sure proportions are kept if changes are made afterwards.</li> <li>Barcodes can be <b>rotated</b> as required. Rotation angles are 90°, 270° and 360°.</li> </ul>                                                                                                                                                                                                                                                            |
| Data matrix | <p>Only available if the chosen barcode type is Data Matrix.</p> <p>Options:</p> <ul style="list-style-type: none"> <li><b>Square</b> or <b>Rectangle</b></li> <li><b>Size:</b> Choose one of the predefined sizes or 'Automatically Detect'.</li> </ul> <div data-bbox="486 689 555 763">  </div> <p><b>Note:</b> The list of predefined sizes depends on the length of the barcode (= the value on the Barcode tab). If 'Automatically Detect' is chosen, the barcode will get the size that best fits the length of the value.</p> |



**Note:** This Action supports variables in most fields.

## Document variables - Overview

This is the full list of the predefined variables that can be inserted via the **Variable** button on the Barcode tab:

- %Current Document Name%
- %Full Document Path%
- %Time%
- %UTC Time%
- %Date%
- %UTC Date%
- %User Company%
- %User Name%
- %Page Number%



**Note:** You can use the page number as it is, or increment or decrement it (so always add up or subtract a certain number). To decrement, you need to add a minus sign. For example, if the page number is '12' and you enter '-3', the value of the variable will be '9'. If you enter '3', the value of the variable will be '15'. You can also add leading zeros by defining the minimum number of digits. For example, if Total digits is set to '3', '9' will become '009' and '15' will become '015'.

- %Page Count% = total number of pages



**Note:** You can add leading zeros by defining the minimum number of digits. For example, if Total digits is set to '3', '9' will become '009' and '15' will become '015'.

- %Document Title%
- %Page Box Dimensions%



**Note:** You need to indicate which page box should be considered. For example, if you select Media Box from the Page Box list, the value of the variable will be the

dimensions of the media box, for example: 210 x 297 mm (the unit depends on the unit specified in the PitStop Pro preferences).

- %Page Box Width%




**Note:** You need to indicate which page box should be considered. For example, if you select Art Box from the Page Box list, the value of the variable will be the width of the art box, for example: 210 mm (the unit depends on the unit specified in the PitStop Pro preferences).

- %Page Box Height%



**Note:** You need to indicate which page box should be considered. For example, if you select Bleed Box from the Page Box list, the value of the variable will be the height of the bleed box, for example: 210 mm (the unit depends on the unit specified in the PitStop Pro preferences).

Below is an example of the Use Variable dialog.

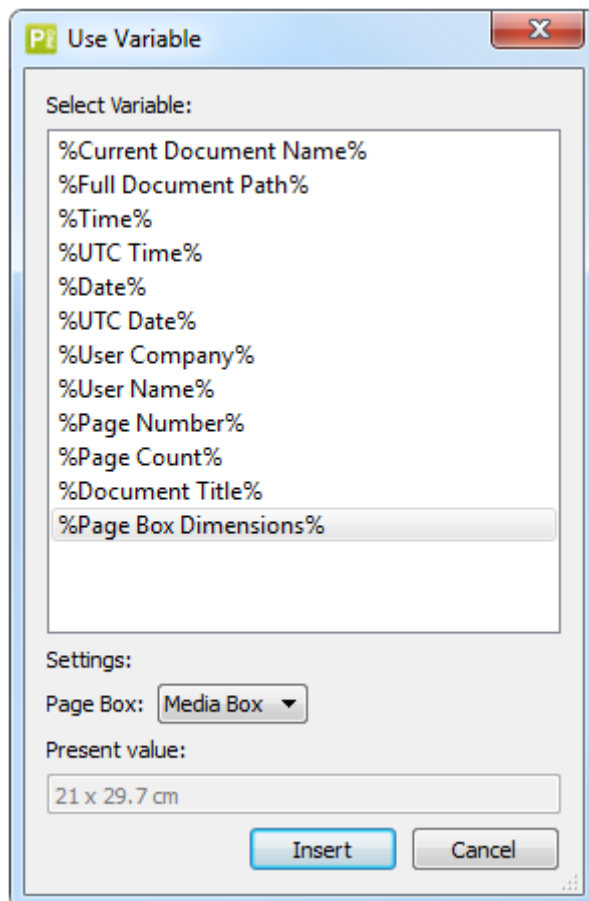

### Standard Action Lists

PitStop 2018 comes with a number of default Action Lists for generating barcodes.

Some of these Action Lists make use of smart variables; to that end a new Variable Set was added to PitStop 2018 (Smart Preflight Variable Set - PitStop Pro v1.3).

If you're not familiar with Smart Preflight, we recommend taking a short elearning course on Smart Preflight, available on the Enfocus website (<https://www.enfocus.com/learn>), or check out the [PitStop Reference Guide](#), which has a chapter on Smart Preflight too.

#### **Related Actions**

- [Check Esko barcode value](#) on page 368
- [Check Esko barcode type](#) on page 368
- [Select Esko barcode](#) on page 478
- [Select Esko barcode type](#) on page 478

### 3.1.1.3. Add bookmarks

#### **Belongs to**

- **Category:** Add
- **Type:** Changes
- **Since version:** 24.03

#### **What it does**

Adds a bookmark to every selected page in your document.

#### **How to proceed**

1. Make sure to add an Action to your Action List to select the pages that should get a bookmark.
2. In the Add bookmarks Action, enter the name of the bookmark in the Bookmark field. You can use text, document variables (by clicking the Variables button) or enable variables from a variable set through the Actions menu (Enable Variable Names).
3. If the document already contains bookmarks, and you want to use these as a parent, enter the name of the parent bookmark, so PitStop knows where to put the new bookmarks. Also here, you can use text, document variables or variables from a variable set.



**Note:** If multiple parent bookmarks are found, the new bookmarks will be added to the **first** parent bookmark.

4. If wanted, you can log the result of this Action, and in case of an error, distinguish between a critical and a non-critical failure.
5. Run the Action List and check the Bookmarks tab in Acrobat.

#### **Document variables - Overview**

This is the full list of the predefined variables that become available by clicking the Variables button:

- %Current Document Name%
- %Full Document Path%
- %Time%
- %UTC Time%
- %Date%

- %UTC Date%
- %User Company%
- %User Name%
- %Page Number%

**Note:**

- You can use the page number as it is, or increment or decrement it (so always add up or subtract a certain number). To decrement, you need to add a minus sign. For example, if the page number is '12' and you enter '-3', the value of the variable will be '9'. If you enter '3', the value of the variable will be '15'. You can also add leading zeros by defining the minimum number of digits. For example, if Total digits is set to '3', '9' will become '009' and '15' will become '015'.
- **Specifically for Add bookmarks:** If you add new bookmarks to a multi-page document, PitStop will start incrementing or decrementing from the first bookmark/page, preserving the order and numbering of subsequent pages.

- %Page Label%



**Note:** This document variable is **only available in the Add bookmarks Action!**

- %Page Count% = total number of pages



**Note:** You can add leading zeros by defining the minimum number of digits. For example, if Total digits is set to '3', '9' will become '009' and '15' will become '015'.

- %Document Title%
- %Page Box Dimensions%



**Note:** You need to indicate which page box should be considered. For example, if you select Media Box from the Page Box list, the value of the variable will be the dimensions of the media box, for example: 210 x 297 mm (the unit depends on the unit specified in the PitStop Pro preferences).

- %Page Box Width%



**Note:** You need to indicate which page box should be considered. For example, if you select Art Box from the Page Box list, the value of the variable will be the width of the art box, for example: 210 mm (the unit depends on the unit specified in the PitStop Pro preferences).


- %Page Box Height%



**Note:** You need to indicate which page box should be considered. For example, if you select Bleed Box from the Page Box list, the value of the variable will be the height of the bleed box, for example: 210 mm (the unit depends on the unit specified in the PitStop Pro preferences).

**Example**

In the example below, the document already had bookmarks, that were based on the page numbers (Page\_1, Page\_2, etc.). The Action List added new bookmarks below the existing ones, based on the page labels (PageLabel1, PageLabel2, etc.).

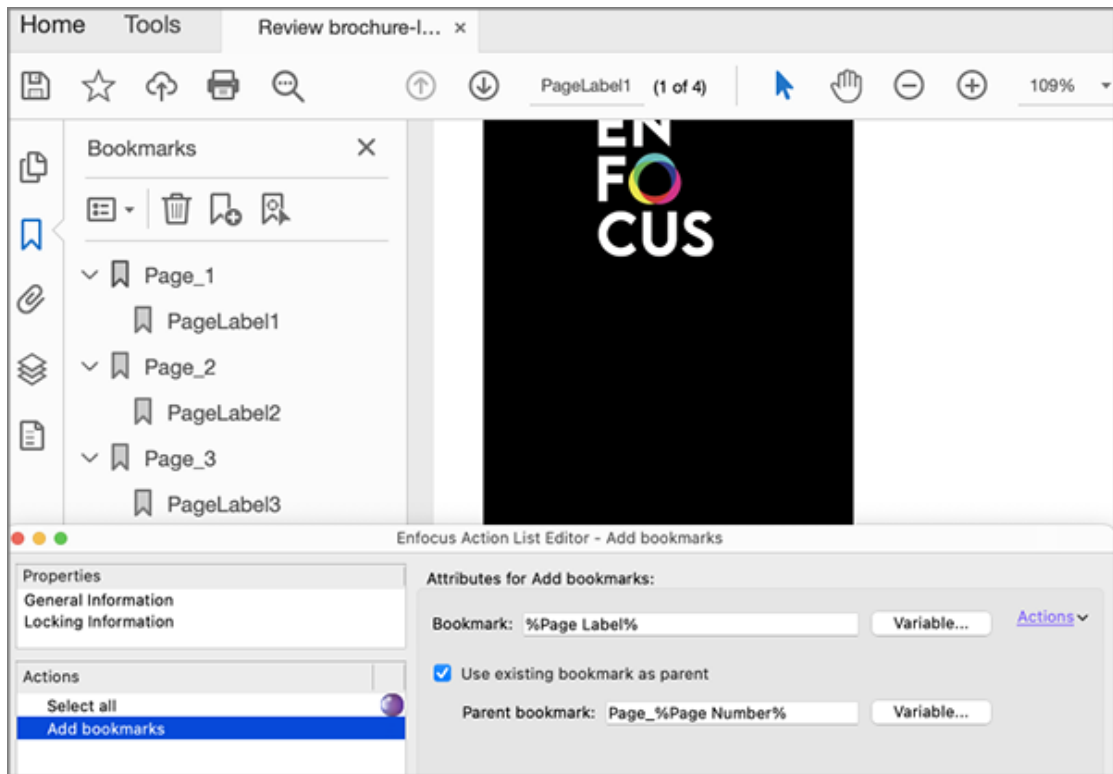

#### Related Actions

- [Check bookmarks](#)
- [Select pages with bookmarks](#)
- [Remove bookmarks](#)

### 3.1.1.4. Add color bar

#### Belongs to

- **Category:** Add
- **Type:** Changes
- **Since version:** 12 update 3

#### What it does

Adds color patches to your PDF document. The color patches are individually created for each page and show all separations including any spot colors.

#### How to proceed

1. On the **Color Patches** tab, indicate how many tint values per separation you want to add.  
By default, a 100% tint of the color is added.
  - To change a value, double-click it in the **Tint values (%)** box and type an alternative value.
  - To add another value, click  and enter the required value.

- To remove a value, select it and click .
- 2. Enter the required size of the color patches, i.e. the preferred height or width. This depends on the device you're using.
- 3. Select the preferred options:
  - **Repeat color patches:** The color patches are repeated till the end of the line (= right border of the page box). If this checkbox is cleared, each tint value of each color is added only once.
  - **Don't add process colors (C, M, Y, K):** For process colors no color patches are added.
  - **Don't add if tint is 0%:** If a color is defined but not used in the PDF, no color patch will be added.
- 4. Switch to the **Position** tab.
- 5. Determine the position of the color bar relative to one of the page boxes. You can specify the edge (top, bottom, left, right), the position on the edge (left, right, center) and the distance between the page box and the color bar.

### Examples

**Example 1:** This document contains two spot colors, which are each added once, in 2 tint values (100% + 50%). Chosen position: relative to the top of the trim box (blue line), in the center. Process colors are not added.



**Example 2:** Same options as in the first example, but with **Repeat color patches** enabled.



**Example 3:** This is an example where the tint value of the color patches is 100%. The position of the color bar is defined relative to the bleed box, and it's placed in the bottom right corner (Edge: right, Position on edge: bottom).



3.1.1.5. Add copied graphics

*Belongs to*

- **Category:** Add
- **Type:** Changes

*What it does*

Copies graphic elements and positions them on the page. The graphics can be rotated and scaled, and put in the foreground or background. You can place them at any position on the page and use the "repeat" feature to more precisely position the graphic.

*How to proceed*

1. Select the graphic(s) from a file or by making a selection. Do one of the following:
  - Select **Use file** and select the PDF file concerned. Next, enter the number of the page you want to use. The total number of pages is mentioned in brackets.
  - Select the graphic you want to copy in your PDF using the PitStop Select Objects tool  and select **Use grabbed graphics**. Click **Grab Selection**. The selected graphic is shown in the field below the button. If the graphic should be rotated, specify a rotation angle, e.g. 45. If the graphic should be made larger or smaller, change the scale value from 100% to e.g. 90%.



**Note:** For all options, variables can be used if needed.

2. Switch to the different tabs and select the appropriate options.

*Tabs*

| Tabs       | On this tab, do the following:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Graphics   | Select the graphics you want to copy (either elements you selected in the PDF or a page of a particular PDF).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Attributes | Determine if the graphic should be pasted in the foreground or in the background.<br><br>Select or clear the <b>Use page rotation</b> and <b>Use page scaling factor</b> checkbox: <ul style="list-style-type: none"><li>• To take into account page rotation and/or scaling factor, select this checkbox. The Action will be applied to the actual position of the page content.</li><li>• To ignore page rotation and/or scaling factor, clear this checkbox. The Action will be applied to the original position of the page content (i.e. BEFORE applying page rotation and/or scaling factor).</li></ul> |



| Tabs     | On this tab, do the following:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|          | <p>Enable <b>Share graphics between copies</b> to add the copied graphic as a shared form XObject. This means that the graphic is defined only once, but used several times, on several pages. This is an easy way to reduce the file size.</p> <hr/> <div data-bbox="571 443 635 517" data-label="Image"></div> <p><b>Note:</b> Only use this option if you're sure that all instances/ occurrences of the graphic will remain the same (as is the case with a logo), because changing one graphic will change them all.</p> <hr/>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Region   | <p>Determine the region where the copied graphics should (or should not) be placed, relative to the page box of your choice. Margins can easily be set by grabbing the offsets from a selected area (use the Grab Offsets button ).</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Repeat   | <p>If the graphics should be placed more than once on a page, change <b>No repeat</b> to:</p> <ul style="list-style-type: none"> <li>• <b>Distribute/Repeat fixed number of graphic elements</b> if you want to determine how often they should be pasted (e.g. 6 times horizontally, 4 times vertically)</li> <li>• <b>Distribute/Repeat graphic elements in region</b> if you want PitStop to fill the region (specified on the Region tab).</li> </ul> <p>If you want PitStop to divide the copied graphics evenly across the defined region, choose "distribute" rather than "repeat". In case of "Distribute graphic elements in region", you can choose the maximum or minimum distance between the copied graphics.</p> <p>If you choose "repeat", you should define the exact distance between the copied graphics yourself.</p> <p>The distance can be between the bounding boxes of the copied graphic (choose: <b>Between edges</b>) or from center to center (choose: <b>Between centers</b>).</p> <hr/> <div data-bbox="571 1391 635 1464" data-label="Image"></div> <p><b>Note:</b> Remember that you can use Smart Preflight variables to define the distances.</p> <hr/> |
| Position | <p>Indicate how the graphic elements should be positioned relative to the chosen region. Note that, when adding multiple copies, the same corner should be used to position the graphic elements in the region.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

### 3.1.1.6. Add object

#### *Belongs to*

- **Category:** Add
- **Type:** Changes

**What it does**

Inserts a chosen object (a line, a rectangle, an ellipse or a text) and positions it relative to one of the page boxes. This can be useful to add information to be trimmed off later.



**Note:** If you're inserting text, you can make use of predefined variables, such as the name of the document, the author, the page number, page count, the page box dimensions, ...See the list of document variables below. Note that you can also use EOL characters to insert a new line, and also variables that include an EOL character are supported.

The **Fill** and **Stroke** tabs allow you to define the color of the objects you are inserting.

**Add rectangle**

When adding a rectangle, you can choose different corner styles, e.g. rounded corners, chamfered corners or inverted corners. You can also determine the radius (only positive values are accepted).


This option is useful for customers who want to automatically generate cutter guides or dielines for labels based on a PDF page box such as the trim box. See also the Action Lists based on this Action, which make a dieline in an overprinting spot color based on the trim box.

**Example**

To add the width and height of the media box to your document, proceed as follows:


1. In the attributes for the Add object Action, on the **Object and position** tab, choose **Add text in foreground**.
2. Click the **Variable** button.
3. Select **%Page Box Dimensions%**.
4. Select the page box of which you want to insert the dimensions, in this example **Media Box**. The current value is shown.
5. Click **Insert**.
6. Select a font and a font size and determine where the text must be inserted in the document, for example in the center of the media box with a particular offset.
7. Specify whether or not to take into account page rotation and page scaling factor if applicable.

Below is an example of the dialog that allows you to insert predefined text variables.

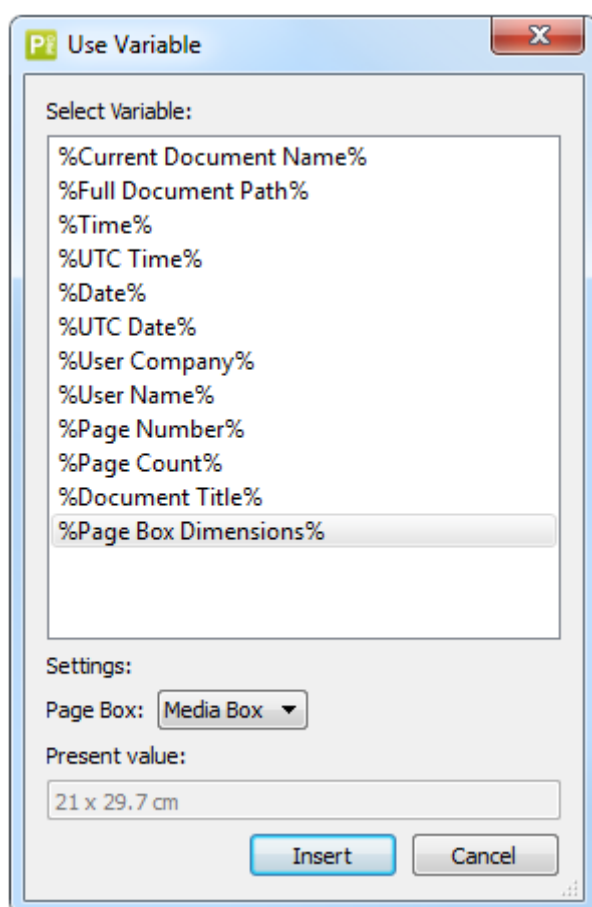

### Document variables - Overview

When you select 'text' on the Object and Position tab, the Variable button becomes available, which gives access to a list of predefined variables.

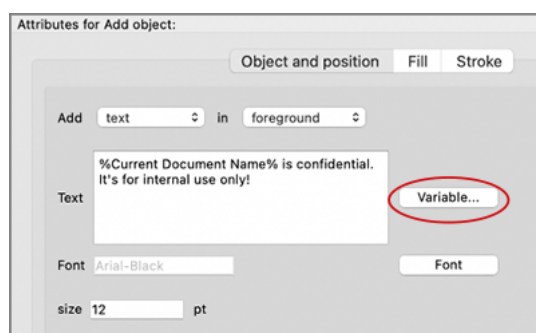

This is the full list of the predefined variables:

- %Current Document Name%
- %Full Document Path%
- %Time%
- %UTC Time%
- %Date%
- %UTC Date%

- %User Company%
- %User Name%
- %Page Number%



**Note:** You can use the page number as it is, or increment or decrement it (so always add up or subtract a certain number). To decrement, you need to add a minus sign. For example, if the page number is '12' and you enter '-3', the value of the variable will be '9'. If you enter '3', the value of the variable will be '15'. You can also add leading zeros by defining the minimum number of digits. For example, if Total digits is set to '3', '9' will become '009' and '15' will become '015'.

- %Page Count% = total number of pages



**Note:** You can add leading zeros by defining the minimum number of digits. For example, if Total digits is set to '3', '9' will become '009' and '15' will become '015'.

- %Document Title%
- %Page Box Dimensions%



**Note:** You need to indicate which page box should be considered. For example, if you select Media Box from the Page Box list, the value of the variable will be the dimensions of the media box, for example: 210 x 297 mm (the unit depends on the unit specified in the PitStop Pro preferences).

- %Page Box Width%



**Note:** You need to indicate which page box should be considered. For example, if you select Art Box from the Page Box list, the value of the variable will be the width of the art box, for example: 210 mm (the unit depends on the unit specified in the PitStop Pro preferences).

- %Page Box Height%



**Note:** You need to indicate which page box should be considered. For example, if you select Bleed Box from the Page Box list, the value of the variable will be the height of the bleed box, for example: 210 mm (the unit depends on the unit specified in the PitStop Pro preferences).

### 3.1.1.7. Add page box marks

***Belongs to***

- **Category:** Add
- **Type:** Changes

**What it does**

Allows you to add trim marks and/or bleed marks to your document in the style of your preference (InDesign or QuarkXPress).

### 3.1.1.8. Add page number

**Belongs to**

- **Category:** Add
- **Type:** Changes

**What it does**

Adds page numbers (including section and chapter numbers) to a PDF.



**Note:** The Global Change **Add Page Number** provides the same functionality.

**How it works**

You must first create a sample piece of text, which will be used to determine the format and style used for page numbering (font, color, size etc):

- If you want to add a page number only, the sample should only be a number, e.g. "3".
- If you want to add a page number with more information (for example: include the word "Page" and the total number of pages) add this to the sample, e.g. "Page 1 of 10".

The text strings (including spaces and punctuation) in this sample will be used as they are. For the numbers in this sample, you should indicate which one refers to the page number, hence should be considered a variable. For example, if your sample is "Page 1 of 10", "1" refers to the page number (Page %pagenr% of 10) and will be different on each page. "10" will not be changed, as it is not possible to use variables for other information than page numbers.

**How to proceed**

1. Create an example piece of text.
2. Select the sample by using the PitStop Select Objects tool .
3. In the attributes of the Action, click the **Grab Sample from Selection** button.

The sample text appears in the Sample field.

4. Specify the position of the page numbers relative to the text and one of the page boxes. You can use a default offset, manually enter offset values or grab the document's offset values.
5. To start numbering on a different page than the first page of the document, enter the page number. For example, if you want to start numbering after the table of contents, for example on the third page of the document, enter "3". Note that you can also use a variable for this (added in PitStop 2020).
6. By default, the pages are numbered consecutively based on all pages of the PDF. However, if you want to base the page numbering on a selection of pages, select **For generating page number sequence, use: Selected pages**.

**Example:**

```
Select pages <!-- page range 1-3, only odd pages -->
Add page number
```

Output in case of PDF pages (default):

- Page 1: numbered 1, page 2: not numbered, **page 3: numbered 3**

Output in case of Selected pages:

- Page 1: numbered 1, page 2: not numbered, **page 3 numbered 2**

7. If your sample text contains numbers, the **Variable number sequence** list is activated. This list allows you to indicate which number should be considered a variable (indicated by "%pagenr %").

For example, if your sample text is "Page 2, Section 1", you will have three options:

- "Page 2, Section 1" will insert "Page 2, Section 1" on every page.
- "Page %pagenr%, Section 1" will insert "Page 1, Section 1" on page 1, "Page 2, Section 1" ... (Section 1 will not change)
- "Page 2, Section %pagenr%" will insert "Page 2, Section 1" on page 1, "Page 2, Section 2" ... (Page 2 will not change)

8. Switch to the **Options** tab and select the appropriate checkbox:

- **Remove any overlapping text** will remove existing page numbers.
- **Only number pages that already have a number** will not add page numbers to pages that currently don't have any.
- **Add white background** ensures that the page numbers are visible, even if the PDF has a dark background.

### 3.1.1.9. Add pages

#### ***Belongs to***

- **Category:** Add; Page
- **Type:** Changes

#### ***What it does***

Allows you to insert either empty pages or pages from a particular PDF file (by embedding the file or by using the file path (optionally specified by a variable)).

You can choose the number of pages to add, the location of the new pages in the PDF ...

As of PitStop 2019, you can insert pages before or after a selection you made earlier in your Action List. You could for example select all pages with a certain string and insert empty pages based on this selection. See also the example Action List below.

#### ***"R[number]" notation***

If you want to add pages starting from the end of the PDF, you can use the "R[number]" notation in the **Before pages/After pages** text box. R1 refers to the last page (= 1 page from the end), R2 refers to the last but one (= 2 pages from the end), ... This allows you for example to add a backup interleaved page to every page in the PDF.

Attributes for Add pages:

☒ Insert empty pages  
☐ Insert pages from document

---

Insert Empty Pages:

☐ Exact number of pages: 1  
☒ Until  pages

---

Location: ☒ Before pages

☐ After pages

☐ Before last page

☐ After last page

☐ Before every  pages starting from page  to

☐ After every  pages starting from page  to

☐ Before selected pages

☐ After selected pages

#### Example Action List

Suppose you have a mixed landscape/portrait document and you want to insert an empty page after every landscape page. That's possible with the following Action List.

```
Select all
Select by page orientation <!-- select if page orientation = landscape -->
Add pages <!-- select "insert empty pages" and "after selected pages" -->
```

### 3.1.1.10. Add pages with extracted content to document

#### Belongs to

- **Category:** Add
- **Type:** Changes
- **Since version:** 24.11

#### What it does

Allows you to separate cut lines and embellishments (typically Scodix separations, such as foiling, embossing, debossing, varnishing, and spot UV coating) from other page objects. The selected objects are copied and moved to a separate page. This allows the printing device to handle each part separately, improving the efficiency and accuracy of the printing process.



**Note:**


- Line art is preserved as it is, it's not converted to an image.
- Clipping paths of selected objects are always copied, even if they are not selected.

**Example Action List**


To move a cut line with spot color 'CUTTER' to a new page, create the following Action List:

```
Select spot color by name ('CUTTER')
Add pages with extracted content to document (after source page + add a page label
(%Page label% _%Colorant Name%))
Remove selection
```

The following screenshot shows that the color of the cut line is 'CUTTER' in this example.

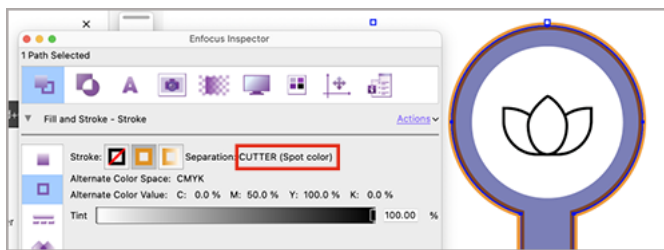

The resulting document has an extra page: the original page now contains all content without the cut line; the extra page contains the cut line only. Note the page label of the inserted page.

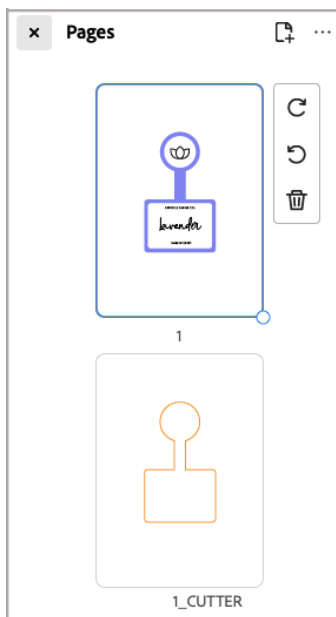

### 3.1.1.11. Add registration marks

**Belongs to**

- **Category:** Add
- **Type:** Changes



**What it does**

Allows you to add registration marks to your document in the style of your preference (InDesign or QuarkXPress).

Registration marks ensure that the different separations in a color document are properly aligned.

**Related Actions**

[Select registration marks](#) on page 487

### 3.1.1.12. Add separation names

**Belongs to**

- **Category:** Add
- **Type:** Changes
- **Since version:** 12 update 2

**What it does**

Allows the names of color separations to be generated and positioned within a PDF file. The separation names are individually created for each page and show all separations including any spot colors.

You have several options. You can specify:

- *How* the separation names should be displayed (stacked (i.e. one per line), inline (*reflow*) or all on top of each other (*on same location* - useful for color plates); in color or with color patches, rotated, ...). You can also determine the font and the font size.
- *Where* exactly they should be placed on the page (position of the color names relative to a page box).
- Whether or not *process colors* and *separations with 0% tint* should be displayed.
- If you have chosen to add color patches, whether or not they should have a border (*Add stroke on color patches*).

**Examples**

- Example 1: Layout: **Stack** and Color: **Separation names in black + color patches** are selected.

■ Cyan  
■ Magenta  
■ Yellow  
■ Black

- Example 2: Layout: **Overflow** and Color: **Separation names in black + color patches** are selected. The color patches have a border, because **Add stroke on color patches** is enabled.

■ Cyan ■ Magenta ■ Yellow ■ Black

- Example 3: Layout: **Overflow** and Color: **Separation names in color** are selected.

Cyan Magenta Yellow Black

### 3.1.1.13. Add separation pages to document

#### ***Belongs to***

- **Category:** Add
- **Type:** Changes
- **Since version:** 24.11

#### ***What it does***

Adds one page per for each separation. Each added separation page is actually a single image which is a render of the original input. You can choose the resolution of the generated images and the compression filter.

Separating colors in a PDF is useful to ensure that each color is printed accurately and consistently. By separating the colors, printers can create individual plates for each color, which helps in achieving precise color registration and alignment during the printing process. Another reason is to optimize the printing process itself. Some printing devices and finishing equipment struggle to process heavy files or complex color information. By separating the colors, the files become lighter and easier to handle, which can improve the efficiency and speed of the printing process



**Note:** This Action works on a selection. You can add separation pages for all pages of the document ("Select all") or only for some of it (e.g. only one particular page, only pages with spot colors). See the examples below.

Note that the source pages are always preserved. That is because the page may contain RGB or spot colors that you want to keep.

#### ***Attributes***

| Attribute                            | Description                                                                                                                                                                                                                                                           |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Insert generated separation pages    | <p>The generated pages are inserted at the position of your choice:</p> <ul style="list-style-type: none"> <li>• After the source page</li> <li>• Before the source page</li> <li>• At the beginning of the document</li> <li>• At the end of the document</li> </ul> |
| Resolution (ppi) of generated bitmap | Resolution in ppi of the generated image.                                                                                                                                                                                                                             |
| Compression                          | <p>Compression filter:</p> <ul style="list-style-type: none"> <li>• JPEG</li> <li>• JPEG 2000</li> <li>• ZIP</li> <li>• None</li> </ul>                                                                                                                               |

| Attribute                               | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                         | In case of JPEG or JPEG 2000, you should also select the quality.                                                                                                                                                                                                                                                                                                                                                                                                                |
| Use anti-aliasing                       | Enable anti-aliasing to reduce visual distortions when representing high-resolution images at a lower resolution.                                                                                                                                                                                                                                                                                                                                                                |
| Generate all separations in grayscale   | <p>When enabled, all separations (including spot colors) are converted to black and white. This makes it easier to inspect effects, such as knock-outs, especially with light colors.</p> <div>  <p><b>Note:</b> We recommend using the option to add page labels (e.g. with the colorant name), so you know which separation is displayed, as you cannot recognize it by its color.</p> </div> |
| Blend spot colors into CMYK separations | Enable this option to convert spot colorants to CMYK and then add them to each separation. That way, you can see what the document will look like on a CMYK press. Note that the original page is not changed.                                                                                                                                                                                                                                                                   |
| Add a page label                        | <p>Enable this option to add a page label to the new pages. This is useful to know where the new pages come from.</p> <p>You can enter any string and one or more of the following variables:</p> <ul style="list-style-type: none"> <li>• %Page Label%</li> <li>• %Page Number%</li> <li>• %Page Count%</li> </ul> <p>For example: <i>%Colorant Name% separation of page %Page Number%</i> may result in a page label like: <i>Pantone 360 C separation of page 3.</i></p>      |



**Note:** When you add separation pages to a document, the **Undo** stack in PitStop is cleared. That means that changes, including previous changes to the order of the pages, the numbering of pages, etc. cannot be undone anymore through the Enfocus Undo option; you can only use the revert option in Acrobat to restore the original document if needed.

## Example 1


### Action List:

```
Select all // so processing based on the complete document
Add separation pages to document // "Insert generated image" set to:
                                "At the end of the document"
```

### Result:

In this example, the original document had only 1 page. PitStop detected 4 separations on that page, so 4 separation pages (one per separation) were inserted at the end of the document,

resulting in a 5-page document. Note that you can browse the separation pages using the Enfocus Navigator as shown in the screenshot.

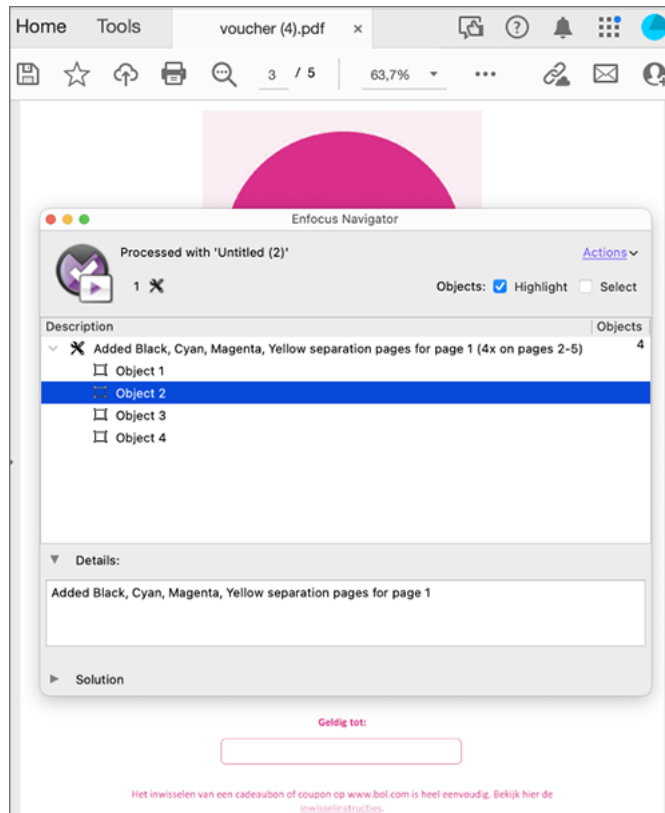

## Example 2


### Action List:

```
Select by page orientation // landscape
Add separation pages to document // "Insert generated image" set to:
    "After the selected page"
```

### Result:

In this example, the original file had 12 pages, but only one with landscape orientation: page 6.

On page 6, PitStop detected 5 separations (CMYK + 1 process color), so after the selected page, 5 extra pages were inserted (7-8-9-10-11), resulting in a 17-page document.

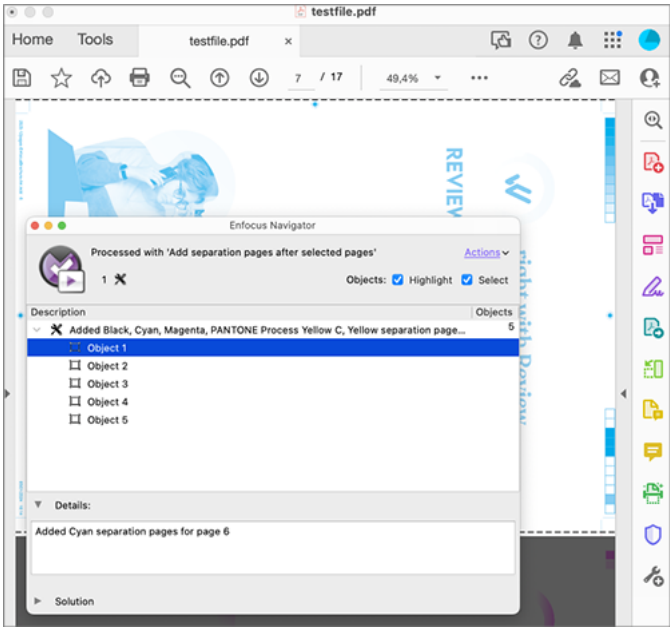

3.1.1.14. Add trace path

*Belongs to*

- **Category:** Add
- **Type:** Changes
- **Since version:** 2020

*What it does*

Generates a path or shape by tracing objects in a PDF.

This Action generates a path around everything that's not white, which enables creating vector elements to be used as cutter guides or shapes for embossing.



**Note:** This Action is also available as an option in the Inspector Line Art tab (with exception of the Use colorant selection option, which is not available through the Inspector).

*Attributes*

| Attribute             | Description                                                                                                                                                                                                     |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Scan resolution (ppi) | Default value is 300.<br><br>Increasing this value will slow down processing but improve accuracy (and vice versa).                                                                                             |
| White threshold       | Default value is 10%. This is the best value to filter out tiny pixels that are artefacts.<br><br>To change this threshold, drag the slider to right or to the left or enter the value of your choice manually. |

| Attribute                                       | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                 | Increasing the white threshold may result in light gray parts being included in the selection.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Curve optimization                              | <p>Default value is 20%.</p> <p>If you lower this value, more selection points will be taken into account to draw the curve, making the curve more accurate but less fluent.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Ignore white holes                              | <p>This option allows you to include or ignore white shapes (i.e. paths fully inside another path). If included, the white holes are cut out.</p> <p>This option is useful when making white underprints for printing on transparent substrates.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Invert trace path, use <page box> as outer edge | This option allows you to invert the created path, using the page box of your choice as an outer boundary.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Only add trace paths larger than ...            | This option allows you to remove paths that are smaller than a specified size, i.e. paths of which the width and height of the bounding box are smaller than the entered value.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Only add largest trace path                     | This option allows you to remove all smaller paths, to keep only the largest one.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Use colorant selection                          | <p>This option allows you to let the Action only trace the selected channels (e.g. only CMY), ignoring the others (e.g. K).</p> <p>This option requires two preceding "select" Actions; the first one to select the <i>channel</i>s that need to be traced, the second to select the <i>objects</i> that need to be traced.</p> <p><b>Example Action List 1</b> (path based on process colors, in this example: CMY):</p> <pre>select process colorants (CMY on) select all trace path (Use colorant selection on)</pre> <p><b>Example Action List 2</b> (path based on text segments in a particular spot color, in this example: PANTONE 3507 C):</p> <pre>select spot color PANTONE 3507 C select text segments trace path (Use colorant selection on)</pre> <p><b>Example Action List 3</b> (draws a path around magenta and PANTONE 3507 C + works on text and line art)</p> |

| Attribute | Description                                                                                                                                                                                                        |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|           | <div>Actions</div> <div>Select process colorant</div> <div>Select spot color PANTONE 3507 C</div> <div>OR</div> <div>Select line art</div> <div>Select text segments</div> <div>OR</div> <div>Add trace path</div> |

Examples

Suppose you're running this Action on the below image. The generated trace path depends on the chosen options.



| Attributes                               | Result                                                                                                                                                                                          |
|------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Default values, no extra options enabled | The same balloon illustration as before, but with black trace paths overlaid on the balloons. The paths follow the outlines of the balloons, showing the result of the 'Add trace path' action. |

| Attributes                                                                                                                                                      | Result                                                                               |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| Default values, ignore white holes                                                                                                                              |    |
| Default values, ignore white holes, only add largest trace path; as a result, the single balloon is not traced anymore.                                         |   |
| Default values, ignore white holes, resolution of 72 ppi (iso 300)                                                                                              |  |
| Default values, ignore white holes, resolution of 72 ppi (iso 300), no extra curve optimization (selected version, so you can clearly see the selection points) |  |



| Attributes                                                                                                                                                                                                        | Result                                                                             |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| Default values, ignore white holes, resolution of 72 ppi (iso 300), with increased curve optimization (selected version, so you can see that now there are fewer selection points, resulting in a smoother curve) |  |

3.1.1.15. Paste objects from clipboard

**Belongs to**

- **Category:** Add, General, Operators
- **Type:** Changes
- **Since Version:** 13 update 1

**What it does**

Allows you to paste objects from the clipboard to one or more selected pages. You can paste them multiple times (with fixed distances or distributed across a distance) as required and indicate where they should be placed.

This Action must be preceded by a "copy/cut "Action (that moves the objects to the clipboard) and a "select" Action (that indicates where the objects should be pasted) in the same Action List.

If there are several "copy/cut" Actions in the Action List, you may want to give each of the clipboards an appropriate name, to make sure the different objects are pasted on the correct pages.

**How to proceed?**

1. Create a new Action List.
2. Add a select Action that select the objects you want to cut/copy-and-paste.
3. Add a [Copy or cut objects to clipboard](#) on page 131 Action to your Action List and set the attributes (select Cut or Copy and type an appropriate name).
4. Add a [Select pages](#) on page 484 Action to indicate the pages on which the selection should be pasted (if not yet selected in step 2 -if you added "Select all" in step 2, step 4 is redundant).
5. Add a *Paste objects from clipboard* Action and select the name of the clipboard (as entered in step 2). Switch to the different tabs to define the region and the position of the copied objects (see table below).



**Note:** Action Lists are executed page after page. As a consequence, you can only paste objects to the following pages. For example, if you copy an object that is present on page 3, you can paste it on page 3, 4, 5, ... but not on page 1 or 2.

## Tabs

| Tabs       | On this tab, do the following:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Graphics   | <p>Select the clipboard that contains the objects to be pasted.</p> <p>Determine whether or not the clipboard should be cleared after the object was pasted. This option determines what happens if there are no objects to be copied (= if the select Action in step 2 of the above procedure results in an empty selection).</p> <ul style="list-style-type: none"> <li>• If checked, the clipboard will be empty, so nothing will be pasted.</li> <li>• If cleared, the clipboard will still contain content from the previous page and that content will be pasted.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Attributes | <p>Determine if the objects should be pasted in the foreground or in the background of the document.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Region     | <p>Determine the region where the objects should be moved to. The region is defined based on the page box of your choice and you can define margins within that page box, by grabbing the offsets from a selected area (using the <b>Grab position</b> button ).</p> <p>You can also specify a specific area the objects should not be placed in, also based on a page box and with the option to set margins.</p> <hr/> <p> <b>Note:</b> The settings on this tab are only used if <b>Move graphic elements</b> is selected on the Position tab. If this is not the case, the original location of the graphic elements is preserved.</p> <hr/>                                                                                                                                                                                                                                                                                                                                                                                                     |
| Repeat     | <p>If the objects should be pasted more than once on a page, change <b>No repeat</b> to:</p> <ul style="list-style-type: none"> <li>• <b>Distribute/Repeat fixed number of graphic elements</b> if you want to determine how often the copied objects should be pasted (e.g. 6 times horizontally, 4 times vertically)</li> <li>• <b>Distribute/Repeat graphic elements in region</b> if you want PitStop to fill the region (specified on the Region tab).</li> </ul> <p>If you want PitStop to divide the pasted objects evenly across the defined region, choose "distribute" rather than "repeat". In case of "Distribute graphic elements in region", you can choose the maximum or minimum distance between the pasted objects.</p> <p>If you choose "repeat", you should define the exact distance between the pasted objects yourself.</p> <p>The distance can be between the bounding boxes of the pasted objects (choose: <b>Between edges</b>) or from center to center (choose: <b>Between centers</b>).</p> <hr/> <p> <b>Note:</b> Remember that you can use Smart Preflight variables to define the distances.</p> <hr/> |
| Position   | <p>If the selected objects should be moved, select <b>Move graphic elements</b>. Indicate how the objects should be positioned relative to the chosen</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

| Tabs | On this tab, do the following:                                                                                                 |
|------|--------------------------------------------------------------------------------------------------------------------------------|
|      | region. Note that, when adding multiple copies, the same corner should be used to position the graphic elements in the region. |

**Related Action**

- [Copy or cut objects to clipboard](#) on page 131
- [Add copied graphics](#) on page 76

### 3.1.1.16. Put selection in form

**Belongs to**

- **Category:** Add
- **Type:** Changes

**What it does**

Allows you to gather all selected objects in a form (a so-called XObject form).

Forms are rectangular frames in a PDF document that contain objects. The way in which you edit these forms and the objects inside them is different from regular objects in a PDF document. For example, you can select a regular object and move it to a random position on the page in your PDF document. Objects in forms can only be moved inside the form and thus, you can use the form to crop the object.

Note that you can use PitStop's Edit Form tool in order to edit the form and the objects it contains.

## 3.1.2. Color

### 3.1.2.1. Add default color spaces for color spaces that are not compliant to the Output Intent

**Belongs to**

- **Category:** Color
- **Type:** Changes

**What it does**

If you are using an Output Intent that does not support a certain color space, you can use this Action to replace it with another color space that does comply.

You can select an alternative color space for Gray, RGB, and/or CMYK.

The following PDF/X and PDF/A standards are supported:

- PDF/X-1a:2001
- PDF/X-3:2002
- PDF/X-1a:2003

- PDF/X-3:2003
- PDF/X-4
- PDF/X-4p
- PDF/X-6
- PDF/X-6p
- PDF/A-1
- PDF/A-2

### 3.1.2.2. Apply CMYK curve

#### ***Belongs to***


- **Category:** Color
- **Type:** Changes
- **Since version:** 12 update 2

#### ***What it does***

This Action allows color curves to be applied to selected CMYK objects, either on all four channels, or on individual C, M, Y, or K channels.

Curves can be created by adding points, and dragging them to the preferred position, or by entering values in the **Input** and **Output** field below the curve.

#### ***Example***

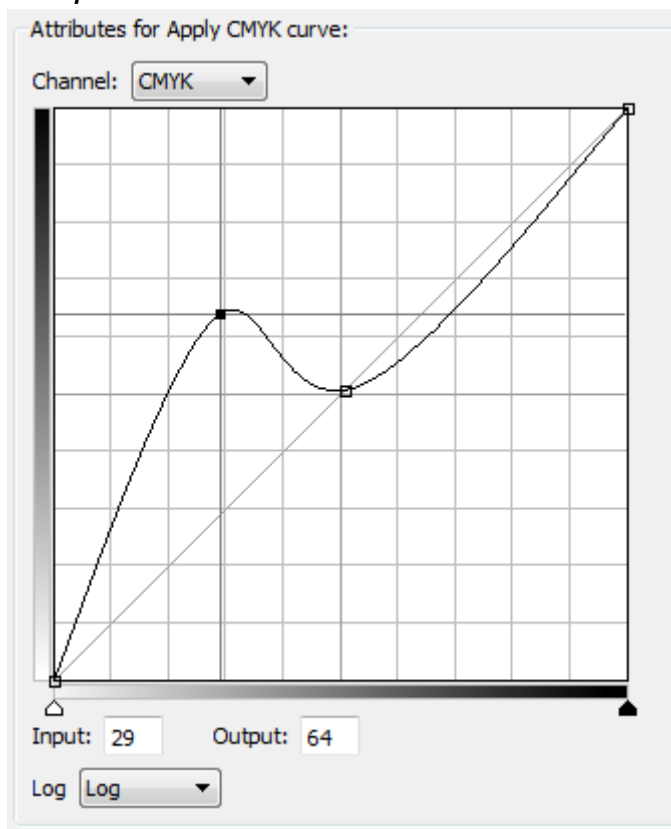

### 3.1.2.3. Apply color curve

#### *Belongs to*

- **Application:** PitStop Pro
- **Category:** Color
- **Type:** Changes
- **Since version:** 12 update 2

#### *What it does*

This Action allows color curves to be applied on separations of selected objects.

The default separations are C, M, Y, K, and Other (= all other separations in the file except for CMYK), but you can also add a curve for another spot color or varnish separation, which will be used if that color appears in the processed file.


Curves can be created by adding points, and dragging them to the preferred position, or by entering values in the **Input** and **Output** field below the curve.



**Note:** Apply color curve is also available as a Global Change!

#### *Example*

The + button allows you to add a curve for an additional color.

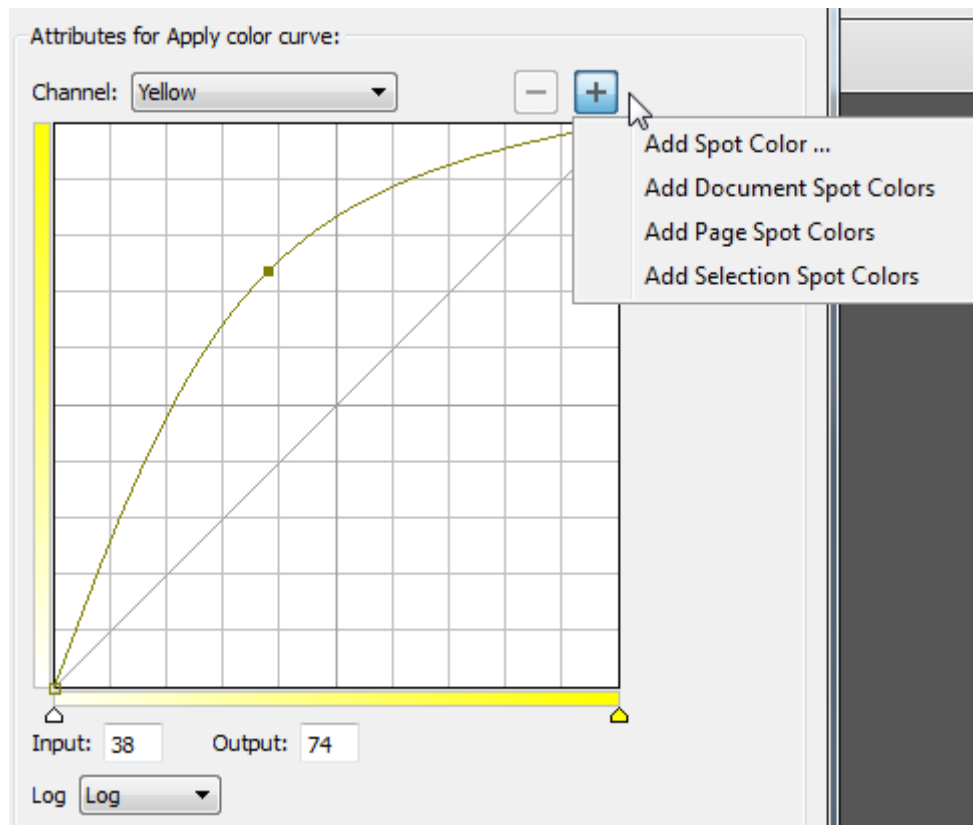

### 3.1.2.4. Apply DeviceLink

**Belongs to**

- **Category:** Color
- **Type:** Changes

**What it does**

Allows you to convert the color of the selected objects to Gray, CMYK or RGB using a device link profile (instead of an ICC profile).

DeviceLink profiles are device specific profiles, converting colors from one color space to another, without converting to LAB or any other device independent color space in between.

You can browse for a local DeviceLink profile or you can select one from the list; PitStop includes 40 DeviceLink profiles for CMYK-CMYK conversions and ink coverage reduction.

Note that you can convert only the stroke or fill of the objects, or both.



---

**Note:** If the objects concerned are tagged with an ICC profile, it must be removed first, before you can apply a DeviceLink profile. To do so, you can use [Tag object with an ICC profile](#), with the ICC profile set to **None**. Alternatively, you can use the PitStop Inspector (**Fill and Stroke** tab, ICC profile (at the bottom of the tab) set to None).

---

### 3.1.2.5. Apply Gray curve


**Belongs to**

- **Application:** PitStop Pro
- **Category:** Color
- **Type:** Changes
- **Since version:** 12 update 2

**What it does**

This Action allows a curve to be applied to selected Gray objects.

Curves can be created by adding points, and dragging them to the preferred position, or by entering values in the **Input** and **Output** field below the curve.

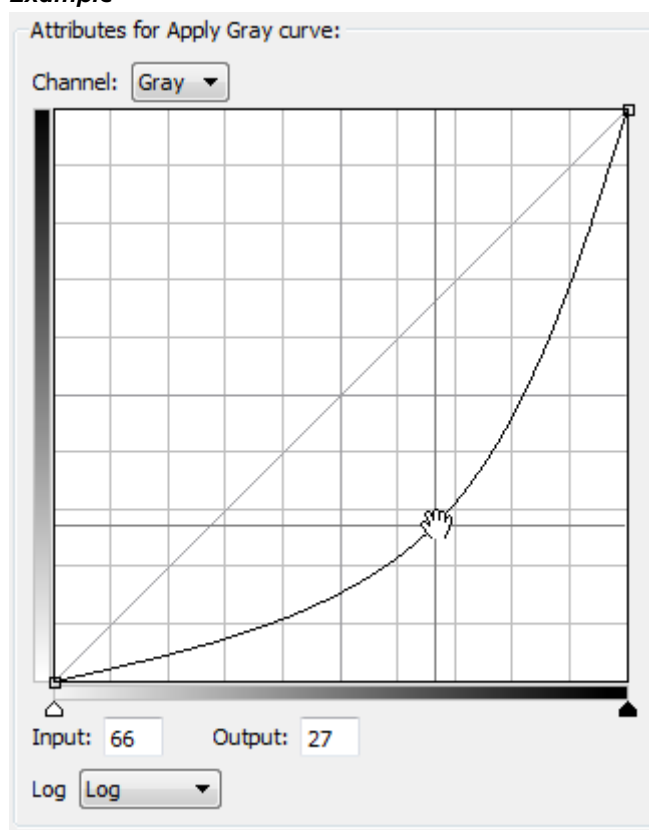**Example**

### 3.1.2.6. Apply Lab curve


**Belongs to**

- **Category:** Color
- **Type:** Changes
- **Since version:** 12 update 2

**What it does**

This Action allows color curves to be applied to selected Lab objects on individual lightness, a, or b channels.

Curves can be created by adding points, and dragging them to the preferred position, or by entering values in the **Input** and **Output** field below the curve.

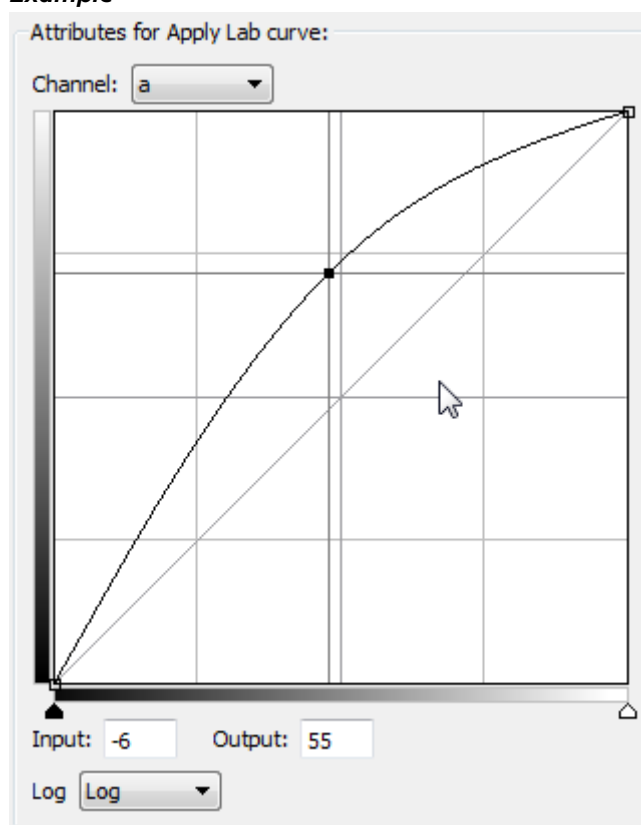**Example**

### 3.1.2.7. Apply RGB curve

**Belongs to**

- **Category:** Color
- **Type:** Changes
- **Since version:** 12 update 2


**What it does**

This Action allows color curves to be applied to selected RGB objects, either on all three channels, or on individual R, G, or B channels.

Curves can be created by adding points, and dragging them to the preferred position, or by entering values in the **Input** and **Output** field below the curve.

**Example**



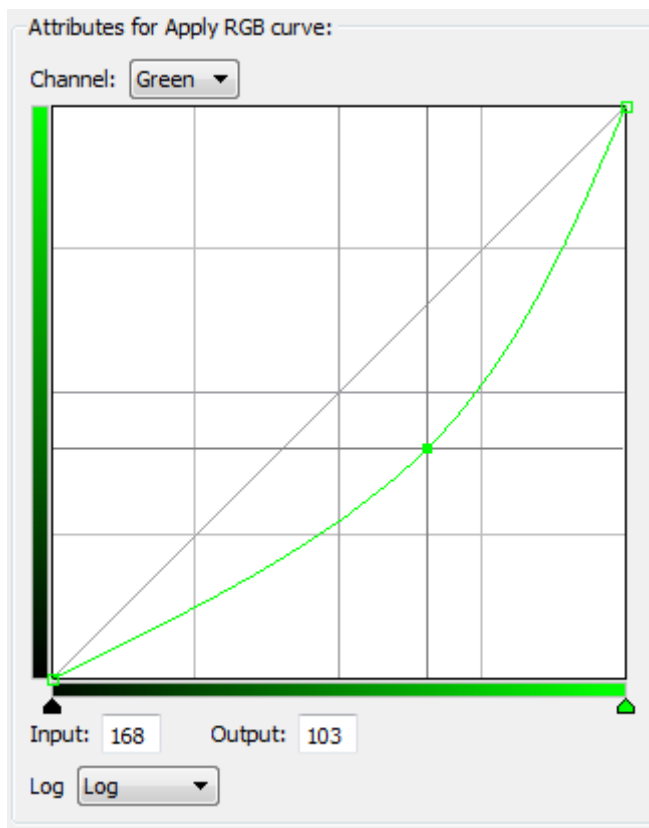

### 3.1.2.8. Apply transfer function

#### ***Belongs to***

- **Category:** Prepress;Text;LineArt;Color;Image
- **Type:** Changes

#### ***What it does***

Adds a transfer function to paths, text, images or all these types of objects. You can exclude spot colors or apply the transfer function on tint values or alternate values only.

Transfer functions are used for creative purposes, artistic effect and to correct the characteristics of a specific, maybe poorly calibrated, output device. For example, a file that is intended for output on a particular image setter may contain transfer functions that compensate for the dot gain inherent to that printer.



**Note:** Transfer functions are not allowed in PDF/X compliant documents.

#### ***Related Actions***

- [Check for custom transfer function](#) on page 402

- [Remove custom transfer function](#) on page 271

### 3.1.2.9. Change color

**Belongs to**

- **Category:** Color
- **Type:** Changes

**What it does**

Allows you to change the fill and/or stroke colors in a PDF.

**How to proceed**

Define the target colors as follows:

1. Select the appropriate checkbox, depending on what you want to change (Fill color or Stroke color).
2. Select the appropriate target color in one of the following ways:
  - a. Select an object with the PitStop Select Objects tool  and use the icon to grab the fill or stroke color  (depending on what you're defining).
  - b. Click the color picker icon  and select the appropriate color.
  - c. Select the required color space:
    - Device colors can be Gray, RGB or CMYK
    - Calibrated colors can be Gray or RGB
    - User Swatch (= user-defined colors)
3. Fine tune the color by moving the sliders.

**Related Actions**

[Match fill and stroke colors](#) on page 110

### 3.1.2.10. Change default color spaces

**Belongs to**

- **Category:** Color
- **Type:** Changes

**What it does**

Allows you to set the default color spaces for Gray, RGB and CMYK objects in a PDF. These spaces are chosen from the list of available profiles (or you can browse for profiles on your system) and can be applied to all objects or only to objects with absent color spaces.

### 3.1.2.11. Change Gray to CMYK Black

**Belongs to**

- **Application:** PitStop Pro
- **Category:** Color
- **Type:** Changes

**What it does**

Remaps the device grayscale color space to the device CMYK color space, keeping overprint.

### 3.1.2.12. Change blending color space

**Belongs to**

- **Category:** Color; Page
- **Type:** Changes

**What it does**

Allows to change the blending color space and/or the luminosity softmask blending color space (if defined in the PDF document).

You can:

- Change the color to CMYK, gray or RGB, or
- Remove the blending color space, by selecting "none" from the first list, or
- Leave one of the color spaces unchanged, by selecting **Do not change**.

**About blending color spaces**

When Adobe Acrobat interprets transparent objects and attempts to create a preview of the flattened artwork, it needs to do so using a single color space for all the items involved in the transparency group. This color space is called the **blending color space**.

The blending color space for soft masks (masks with soft transitions) is called the **luminosity softmask blending color space**. It is usually gray.

**Related Actions**

- [Check if blending color space is defined](#) on page 308

- [Select by blending color space](#) on page 424

### 3.1.2.13. Change Output Intent

**Belongs to**

- **Category:** Color; Metadata
- **Type:** Changes

**What it does**

Changes a PDF's Output Intent to comply with a particular PDF/X or PDF/A version, using a particular ICC profile and/or ICC characterization.

Note that you can change the document Output Intent or the page level Output Intent.

**Related Actions**

[Check Output Intent](#) on page 312

### 3.1.2.14. Change rendering intent

**Belongs to**

- **Category:** Prepress;Color
- **Type:** Changes

**What it does**

Modifies the rendering intent of an object to one of the following:

- Absolute Colorimetric
- Relative Colorimetric
- Perceptual
- Saturation

**About rendering intents**

A rendering intent is a remapping method, allowing to remap colors so that they best match the intended use. 'Remapping' means that colors from one output device's color space are mapped to the color space of another device.

For more information and examples, refer to [the PitStop Pro Reference Guide on the Enfocus website](#) (See Chapter "Rendering intents to remap colors").

For more information and examples, refer to the PitStop Pro Reference Guide (See Chapter "Rendering intents to remap colors").

**Related Actions**

- [Select by rendering intent](#) on page 427
- [Check rendering intent](#) on page 312
- [Remove rendering intent](#) on page 117

### 3.1.2.15. Change spot color suffix

**Belongs to**

- **Category:** Color
- **Type:** Changes

**What it does**

Either modifies a selected spot color's suffix to one of the suffixes in the table below or removes any known spot color suffix.

This allows you to use the latest Pantone naming conventions when checking and correcting Pantone suffixes.

**About spot color suffixes**

Suffixes represent the **apparent** color of the color when printed on different types of paper. For example, PANTONE 3258 **C** and PANTONE 3258 **U** refer to the same color, but when printed on coated, respectively uncoated paper, they will look different, although the same ink formula was used.

Besides C (coated), U (uncoated) and M (matte), in software color palettes, you can find suffixes that refer to on-screen simulations of how colors will look when printed on different paper types. For example, PANTONE 3258 CVU is an on-screen indication of how PANTONE 3258 will look like when printed on uncoated paper.

**Suffix overview**

| Suffix | Meaning                                                                                           |
|--------|---------------------------------------------------------------------------------------------------|
| CV     | Computer video (electronic simulation)                                                            |
| CVC    | Computer video - coated                                                                           |
| CVU    | Computer video - uncoated                                                                         |
| CVS    | Process coated (old; now C)                                                                       |
| CVP    | Solid to process (old; now PC)                                                                    |
| C      | Coated paper                                                                                      |
| M      | Matte paper                                                                                       |
| U      | Uncoated paper                                                                                    |
| EC     | Euro process simulation, coated paper                                                             |
| PC     | Process simulation, coated paper                                                                  |
| CP     | Coated paper, process simulation (e.g. PANTONE 185 CP (used in PANTONE+ COLOR BRIDGE COATED))     |
| UP     | Uncoated paper, process simulation (e.g. PANTONE 185 UP (used in PANTONE+ COLOR BRIDGE UNCOATED)) |
| HC     | Hexachrome coated                                                                                 |
| TC     | TC Textile Cotton                                                                                 |

| Suffix | Meaning                    |
|--------|----------------------------|
| TCX    | Textile Cotton eXtended    |
| TP     | Textile Paper              |
| TPX    | TPX Textile Paper eXtended |
| XGC    | eXtended Gamut Coated      |

**Related Actions**

- [Select by spot color suffix](#) on page 428
- [Check spot color suffix](#) on page 315

### 3.1.2.16. Convert alternate color space to CMYK

**Belongs to**

- **Category:** Color
- **Type:** Changes

**What it does**

Changes the alternate color space for a spot to CMYK.

If you want to change all alternate color spaces except for gray, select the **Do not convert if alternate color space is gray** checkbox.

**About alternate color spaces**

The alternate color space is used as a 'backup' color space when the original spot color is not available on a specific output device, and when converting the spot color into CMYK. If this alternate color space is defined as anything other than CMYK or plain gray, the output results may not be up to standards.

### 3.1.2.17. Convert color

**Belongs to**

- **Category:** Color
- **Type:** Changes

**What it does**

Changes the color space of an object to gray, RGB, CMYK or a given spot color.

You can convert the fill and/or stroke color as required.

### 3.1.2.18. Convert color to shading color space

***Belongs to***

- **Category:** Color
- **Type:** Changes

***What it does***

Converts the colors in a PDF to their shading counterparts.

### 3.1.2.19. Convert images to indexed color space

***Belongs to***

- **Category:** Color;Image
- **Type:** Changes

***What it does***

Changes the color of images to the indexed color space.

***About the indexed color space***

The indexed color space uses no more than 256 colors, and is as such particularly suited for use in Web applications. Images are typically converted to indexed color mode in order to **decrease their file sizes**. When an image is converted to indexed color, a color lookup table is created, in which the colors that were used in the image are stored and indexed. Using an indexed color table lets you reduce the file size of an image while maintaining the visual quality that you need.

### 3.1.2.20. Convert indexed color space to base color space

***Belongs to***

- **Category:** Color
- **Type:** Changes

***What it does***

Changes the indexed color space back to the original colors.

***About the indexed color space***

The indexed color space uses no more than 256 colors, and is as such particularly suited for use in Web applications. Images are typically converted to indexed color mode in order to **decrease their file sizes**. When an image is converted to indexed color, a color lookup table is created, in which the colors that were used in the image are stored and indexed. Using an indexed color table lets you reduce the file size of an image while maintaining the visual quality that you need.

### 3.1.2.21. Convert process to DeviceN

**Belongs to**

- **Category:** Color
- **Type:** Changes

**What it does**

Converts all instances of device CMYK to DeviceN.

You must indicate what is most important to you:

- Reducing the number of color plates to a minimum, or
- Keeping the overprint settings

### 3.1.2.22. Convert shading color space to solid color

**Belongs to**

- **Category:** Color
- **Type:** Changes

**What it does**

Converts shading colors ("gradients") in the corresponding solid colors. You can convert the fill, the stroke or both as required.

Shadings represent complex mathematical functions. That's why certain output devices may not be able to correctly interpret them. Shadings can also cause problems during color conversions.

**Related Actions**

[Select shading objects](#) on page 437

### 3.1.2.23. Convert spot color to equivalent CMYK color

**Belongs to**

- **Category:** Color
- **Type:** Changes

**What it does**

Changes the color of a spot color object to its CMYK equivalents (for example to save on ink).



You can do this for all spot colors, or only for spot colors of which the alternate color is CMYK or Gray (less risk of getting small color variations).

### 3.1.2.24. Create varnish

***Belongs to***

- **Category:** Color
- **Type:** Changes

***What it does***

Creates a varnish on top of the selected object.

This varnish is a user-defined spot color with the same shape of the selected object.

***How to proceed?***

Enter a name to recognize this spot color by, and indicate whether or not you wish to set it to overprint.

### 3.1.2.25. Fix missing DeviceN colorants

***Belongs to***

- **Category:** Color
- **Type:** Changes
- **Since version:** 13

***What it does***

Adds missing DeviceN colorants to the colorants dictionary.

PitStop searches in the processed document for a real separation space that matches the missing colorant space by name. If such a color space is not found in the document, PitStop can derive the missing colorant space from the DeviceN tint function. If you want this, select **If the colorant cannot be found in the processed document, generate colorant from DeviceN alternate and tint transform**.

You may use this Action to make your file PDF/X-4 compliant.

***Related Actions***

[Check DeviceN colorants](#) on page 302

### 3.1.2.26. Make DeviceN without NChannel information

***Belongs to***

- **Category:** Color
- **Type:** Changes

**What it does**

Converts the color space to DeviceN without NChannel information.

**About NChannel**

NChannel is an extension of the DeviceN color space, a multi-component, device-dependent color space. NChannel color spaces give applications greater flexibility when representing colors that are not available on a target device.

NChannel is supported from PDF 1.6 (Acrobat 7.x) onwards. If you are opening a PDF in an earlier version of Adobe Acrobat, colors can print or display incorrectly.

**About converting NChannel to DeviceN**

This Action will convert NChannel to DeviceN, so the object looks as it will be printed when using devices not supporting PDF 1.6 features.

Note that there are three options. You can convert the color space to:

- **DeviceN**
- **NChannel with regular DeviceN color information only**
- **NChannel with color information additional to regular DeviceN**



---

**Note:** This Action will have no visual effect if all colors are available on the target device.

---

PitStop provides an Action List with the same functionality: Convert NChannel Color Space to DeviceN

**Related Actions**

- [Check for NChannel colors with non-trivial process dictionary](#) on page 303
- [Select DeviceN with attributes](#) on page 432

## 3.1.2.27. Match fill and stroke colors

**Belongs to**

- **Category:** Color; LineArt
- **Type:** Changes
- **Since version:** 12 update 3

**What it does**

Changes the stroke color to match the fill color or vice versa.

**Use case**

Suppose you want to print very small text. To improve the readability, you convert the text to outlines and add a stroke. However, the stroke color is black by default. This may not be desired, e.g. if your text is in color. In that case, you can run this Action with the option **Change the stroke color to match the fill color**.

**Related Actions**

[Change color](#) on page 102

### 3.1.2.28. Normalize PANTONE library names

**Belongs to**

- **Category:** Color
- **Type:** Changes
- **Since version:** 2018

**What it does**

Allows you to rename old or faulty PANTONE spot color names to match the new, correct naming conventions.

You can choose one or more of the following methods:

- **Replace PMS with PANTONE:** PMS stands for *Pantone Matching System* and was used in the past. Using this method, the old color name *PMS Yellow C* will become *PANTONE Yellow C*.
- **Fix upper/lower case mismatches:**
  - **Only make PANTONE name upper case:** "PANTONE" is not always spelled correctly. Using this method, you can fix this part of the color names. For example, *Pantone Yellow C* will be changed to *PANTONE Yellow C*.
  - **Fix all mismatches:** If selected, all mismatches will be fixed, for example *Pantone yellow C* will be changed to *PANTONE Yellow C*.
- **Add suffix if not present: <suffix of your choice>:** If suffixes are missing, you can tell PitStop which suffix to add. Note that only the current suffixes can be selected; old suffixes are not in the list.
- **Remove extra spaces:** Removes redundant spaces in PANTONE library names.



**Note:** This option does not remove spaces in incorrect names, unless they have been corrected by one of the other normalization methods. For example, "Pantone Yellow C" will only be changed into "PANTONE Yellow C" if both "Make PANTONE uppercase" and "Remove extra spaces" are selected.

- **Add missing spaces:** Adds a space after the name PANTONE (if it's missing), and/or before the suffix (C, U, CP, UP) (if it's missing).

PitStop checks if the normalization method results in an existing PANTONE color. If that is the case, the color name is changed.

If no replacement is found, for example because the spot color name in the document is unknown/incorrect or no PANTONE Spot color, you will get a warning. This is also the case if renaming a colorant in the DeviceN space would result in a duplicate (as it's not possible to have twice the same name in a DeviceN space).

**Related Actions**

- [Check spot color by PANTONE library](#) on page 314
- [Select spot color](#) on page 437

- [Change spot color suffix](#) on page 105

### 3.1.2.29. Remap all PANTONE library colors

#### ***Belongs to***

- **Category:** Color
- **Type:** Changes
- **Since version:** 2018

#### ***What it does***

Remaps all colors to the PANTONE library of your choice, changing not only the suffix, but also the alternate color space to a different PANTONE definition (CMYK to Lab).

Choices are for example PANTONE+CMYK coated, PANTONE+CMYK uncoated, PANTONE+Color Bridge Coated, ...

This Action is useful to resolve issues with naming conventions.

#### ***Related Actions***

- [Check spot color by PANTONE library](#) on page 314
- [Remap PANTONE library colors](#) on page 115
- [Normalize PANTONE library names](#) on page 111

### 3.1.2.30. Remap alternate color space to CMYK

#### ***Belongs to***

- **Category:** Color
- **Type:** Changes

#### ***What it does***

Remaps the alternate color spaces of the chosen spot colors to the preferred CMYK values.

#### ***How to proceed***

- To add the spot colors of which you want to remap the alternate color space, do one of the following:
  - To select the desired spot color from the list of spot colors (Spot color picker)
    - Click .
    - Select the preferred spot color and click **OK**. The selected color is shown in the table, with the corresponding CMYK values.
  - To define a new spot color
    - Click the **Add New Color** button.
    - In the table, in the first column (Name), replace "Color name" with the name of the new spot color.

- To select the desired spot color from the Spot library picker
  1. Click the **Add Colors** button.
  2. Select the preferred spot color and click **OK**. The selected color is shown in the table, with the corresponding CMYK values.
- 2. Add or change the CMYK values as required.
- 3. To remove colors from the table
  - Use the **Remove All** button, or
  - Select a color and click  to remove only the selected color.

### 3.1.2.31. Remap color

#### ***Belongs to***

- **Category:** Color
- **Type:** Changes

#### ***What it does***

Remap color is a complex but powerful Action that allows the remapping of colors from one color space to another.

For each color in the document you can specify whether or not you want to map it to another color (by means of "remapping rules"), and whether or not the overprint settings should change.



#### **Note:**

- Use the **Analyze page** or **Analyze document** buttons to get an overview of the colors in the document being processed.
- To change a remapping rule, click **Change** and make the required changes; to add a new one, click **Add**.
- Keep in mind that the order of the rules is important. You can change the order by selecting a rule and clicking **Up** or **Down**. The rules are evaluated from top to bottom. Every matching rule is executed, until a matching rule is found that is set to Keep for both To and Overprint. In that case, no further rules are evaluated (see also example 2 below).
- You can remap colors, color spaces, color ranges and channels.
- This Action works on text, line art, shadings, and stencil masks. It also works on images if you remap a color *space*, but not if you remap a color or a color range (as an image typically consists of a variety of colors).

#### ***New as of PitStop 2022***

When mapping Device Gray to Device CMYK, you can now disable color management by selecting the **Force gray to keep same intensity** checkbox. That way, the gray value will only be mapped to the black component of the CMYK color space. In other words, the Gray brightness becomes equivalent K screen value.

Example: 30% gray will be remapped to 70% K, instead of a mix of C, M, Y and K.

### Example 1

Suppose you have a CMYK PDF that you want to print in a single spot color, MySpot.cv.

#### To remap all the colors to this spot:

1. Under Attributes for Remap color, select the row that mentions **All other** and click **Change**.
2. In the **Color Remap Rule** popup, under **To:**, select **Color**.
3. Select the repository color MySpot.cv. You should have specified this color earlier in PitStop.
4. Select the desired overprint setting:
  - **Keep** the overprint settings as they are, do not change.
  - Enable overprint: **On**
  - Disable overprint: **Off**
5. Click **OK**.

To remap everything except, for example, 100% black text and objects to the selected target color MySpot.cv, you need a slightly more elaborated action:

1. Click **Add**.
2. Under **Remap**, select **Color** and **Device CMYK**.
3. Set the values to: C 0% M 0% Y 0% K 100%.
4. Under **To:**, select **Keep**.
5. Select the desired overprint setting.
6. Click **OK**.
7. Select **Add**.
8. In the **Color Remap Rule** popup, under **Remap**, select **Device CMYK**.
9. Under **To:**, select **Color**.
10. Select the repository color MySpot.cv. You should have specified this color earlier in PitStop.
11. Click **OK**.

The above Actions must be performed in the correct order. Under **Attributes for Remap color**, you should have three lines:

- The rule for "keep 100% Black" at the top
- Then the rule for "remap to MySpot.cv"
- "All other" at the bottom

### Example 2

Suppose your document contains a rectangle in CMYK (100K).

When running the below Action, the rectangle won't be remapped: it will remain 100K, because of the first rule (= keep the color space). As a consequence, the other rules won't be checked anymore.

If the first rule would be removed (or placed at the bottom), the color of the rectangle would be remapped from 100K to 100C.

Attributes for Remap color:

| From       | To         | Overprint |
|------------|------------|-----------|
| CMYK space | Keep       | Keep      |
| CMYK color | CMYK color | Keep      |
| All other  | Keep       | Keep      |

3.1.2.32. Remap PANTONE library colors

*Belongs to*

- **Category:** Color
- **Type:** Changes
- **Since version:** 2018

*What it does*

Remaps colors in a PANTONE Library, switching from coated to uncoated, or from CMYK to Lab, and vice versa.

Attributes for Remap PANTONE library colors:

Remap library

✓ PANTONE+ CMYK (Coated to Uncoated)

PANTONE+ CMYK (Uncoated to Coated)

PANTONE+ Color Bridge (Coated to Uncoated)

PANTONE+ Color Bridge (Uncoated to Coated)

PANTONE+ Pastels & Neons (Coated to Uncoated)

PANTONE+ Pastels & Neons (Uncoated to Coated)

PANTONE+ Solid-V3 (Coated CMYK to Uncoated CMYK)

PANTONE+ Solid-V3 (Uncoated CMYK to Coated CMYK)

PANTONE+ Solid-V3 (Coated Lab to Uncoated Lab)

PANTONE+ Solid-V3 (Uncoated Lab to Coated Lab)

PANTONE+ Solid-V3 (Coated CMYK to Uncoated Lab)

PANTONE+ Solid-V3 (Uncoated CMYK to Coated Lab)

PANTONE+ Solid-V3 (Coated Lab to Uncoated CMYK)

PANTONE+ Solid-V3 (Uncoated Lab to Coated CMYK)

PANTONE+ Solid-V3 (Coated CMYK to Coated Lab)

PANTONE+ Solid-V3 (Coated Lab to Coated CMYK)

PANTONE+ Solid-V3 (Uncoated CMYK to Uncoated Lab)

PANTONE+ Solid-V3 (Uncoated Lab to Uncoated CMYK)

*Related Actions*

- [Check spot color by PANTONE library](#) on page 314
- [Remap all PANTONE library colors](#) on page 112
- [Normalize PANTONE library names](#) on page 111

### 3.1.2.33. Remap spot color

**Belongs to**

- **Category:** Color
- **Type:** Changes

**What it does**

Allows you to remap all spot colors in a document, or one particular spot color to:

- Gray
- The color's CMYK equivalent
- A custom CMYK equivalent
- Another spot color

You can apply the Action to either the fill or stroke color, or to both.

**Note:**

- From version 12 update 2 onwards, you can use regular expressions to define the color that should be remapped.
- From version 2021 onwards, you can use variables to define the CMYK values.

### 3.1.2.34. Remove ICC tag

**Belongs to**

- **Category:** Color
- **Type:** Changes

**What it does**

Removes the ICC tags either from the selected objects or from the whole document (if no selection is defined). You can remove the ICC tags from fill and/or stroke colors as required.

**About ICC tagging**

Every input and output device reproduces color and grayscales in a slightly different way. As a result, the colors you see in a PDF file on your screen may not match the colors produced when you print the PDF to an output device.

ICC color profiles are used to avoid this. An ICC color profile is a mathematical description of the color space used by a specific device. In other words, the color profile describes how the colors produced by the device relate to the reference CIE LAB color space (a device-independent color space). As such, they allow you to set up a workflow in which all devices use color management to compensate for their individual color reproduction characteristics, based on the information in the ICC profiles.

In some workflows, e.g. without color management, ICC profiles are unwanted and may cause inconsistent color reproduction. In that case, you can use this Action to remove the ICC tags.



**Related Actions**

- [Check ICC tagging](#) on page 305
- [Select by tagged ICC Profile](#) on page 429
- [Tag object with an ICC profile](#) on page 119
- [Check if ICC profile differs from ICC profile in PDF/X Output Intent](#) on page 307
- [Select objects of which ICC profile is equal to ICC profile in PDF/X output](#) on page 433
- [Check ICC profile version](#) on page 306

### 3.1.2.35. Remove rendering intent

**Belongs to**

- **Category:** Color; Prepress
- **Type:** Changes

**What it does**

Strips rendering intents from color managed objects in a PDF.

**About rendering intents**

A rendering intent is a remapping method, allowing to remap colors so that they best match the intended use. 'Remapping' means that colors from one output device's color space are mapped to the color space of another device.

For more information and examples, refer to [the PitStop Pro Reference Guide on the Enfocus website](#) (See Chapter "Rendering intents to remap colors").

For more information and examples, refer to the PitStop Pro Reference Guide(See Chapter "Rendering intents to remap colors").

**Related Actions**

- [Select by rendering intent](#) on page 427
- [Check rendering intent](#) on page 312
- [Change rendering intent](#) on page 104

### 3.1.2.36. Rename spot color

**Belongs to**

- **Category:** Color
- **Type:** Changes

**What it does**

Allows you to change the name of spot colors in a document.



**Note:** You can use regular expressions to define the source and target color. This is useful to rename variants of the same color, e.g. to rename "Varnish0", "Varnish1",

"Varnish23" (i.e. "Varnish" followed by one or more digits) to "Varnish" (without any digits). To do so, build a rule that renames "Varnish([0-9])+" to "Varnish".

### How to proceed

In the attributes of the Rename spot color Action, do the following:

1. In the left part (under **From**), enter the name of the spot color that should be renamed.



#### Note:

- You can type the name (and optionally use regular expressions), select the color through the spot color database, or you can grab the color from a selection (using the PitStop selection tool). You can also use variables.
- If applicable, select the **Use regular expressions** checkbox.

2. In the right part (under **To**), enter a new new name for the selected spot color.
3. To create another rule (i.e. to rename another spot color), click the + button and repeat steps 2 and 3.

### Important:

- The rules are executed one after the other.
- A blank From field means that all colors that are not renamed by previous rules in this Action will be renamed by this rule. For example, if there is only one rule and the From field is empty, all selected spot colors will be renamed according to that rule. In the example below, it means that all spot colors will get the name 'SPOT'. Be careful when using this!

### Example

The first rule will rename *Pantone* to *Separation* in spot color names like Pantone 101 UP (which will then become Separation 101 UP).

The second rule will rename all other spot colors to *OtherSpotColor*.

## 3.1.2.37. Snap color to color set

### Belongs to

- **Category:** Color
- **Type:** Changes

**What it does**

Allows you to remap any colors that vary a little from your desired colors back to the desired color. This Action can also remap images to Black or CMYK.

Snap color to color set can be useful to keep tight control over the range of colors in a document.

**How to proceed**

Define the color set to which the colors in the PDF must be changed as follows:

1. To remap variants of black to 100% black, select **Black**.



**Note:** If you want to remap **all colors** in your document to black, **only** select the **Black** checkbox. Do not add any other color.

2. To add another color the colors in the document should be remapped to if they are close to it:
  - a. Click **New**. A new entry appears in the text box.
  - b. If you want to use a spot color (optionally), select the **Spot color** checkbox and type the name of the spot color in the text field. You should define a CMYK equivalent too (see next step). The name of the spot color is shown in the text box.
  - c. Enter the required values for CMYK (expressed in %) in the fields below the New/Remove button. Your changes are shown in the text box.
3. If slight color deviations are allowed, enter a value in **Maximum ... % of color deviation of each channel**. The default value is 0.01%.
4. From the **Map images to** list, select the preferred color space for images. You can choose between black, CMYK, and (if applicable) the spot color(s) defined in the previous step.

### 3.1.2.38. Tag object with an ICC profile

**Belongs to**

- **Category:** Color
- **Type:** Changes

**What it does**

Tags objects with a Gray, RGB, CMYK or Lab color space with a chosen ICC profile.

You can only tag the stroke or fill color or both. If an object is tagged already, the ICC tag will not be modified, unless you select the **Change ICC profile if object is already tagged** checkbox.

**About ICC tagging**

Every input and output device reproduces color and grayscales in a slightly different way. As a result, the colors you see in a PDF file on your screen may not match the colors produced when you print the PDF to an output device.

ICC color profiles are used to avoid this. An ICC color profile is a mathematical description of the color space used by a specific device. In other words, the color profile describes how the colors produced by the device relate to the reference CIE LAB color space (a device-independent color space). As such, they allow you to set up a workflow in which all devices use color management to compensate for their individual color reproduction characteristics, based on the information in the ICC profiles.

**Related Actions**

- [Remove ICC tag](#) on page 116
- [Select by tagged ICC Profile](#) on page 429
- [Check ICC tagging](#) on page 305
- [Check if ICC profile differs from ICC profile in PDF/X Output Intent](#) on page 307
- [Select objects of which ICC profile is equal to ICC profile in PDF/X output](#) on page 433
- [Check ICC profile version](#) on page 306

### 3.1.3. Document

---

#### 3.1.3.1. Add unique document IDs

**Belongs to**

- **Category:** Document
- **Type:** Changes

**What it does**

Adds a unique document ID (generated at random) to your document.

**Related Actions**

[Check document unique IDs](#) on page 322

#### 3.1.3.2. Change document encoding

**Belongs to**

- **Category:** Document
- **Type:** Changes

**What it does**

Changes the PDF encoding to binary or ASCII.

**About document encoding**

ASCII encoding was formerly required to ensure that PDF files could be safely transported via e-mail or the Internet. However, most e-mail software in use today handles non-ASCII documents normally, eliminating the need to ASCII-encode your document.

**ASCII versus Binary encoding**

ASCII encoding may increase the file size, but allows you to edit the file manually.

Binary encoding makes the file smaller, but does not allow you to edit the file manually.

**Related Actions**

- [Check data format](#) on page 321

- [Select by document encoding](#) on page 443

### 3.1.3.3. Change initial view

#### **Belongs to**

- **Category:** Document
- **Type:** Changes
- **Since version:** 12 update 2

#### **What it does**

Allows the initial view settings of a PDF to be set or adjusted. The initial view is the way the PDF appears when it is opened in Adobe Acrobat or Adobe Reader (also when it is opened within a browser).

You can make a lot of changes, for example choose a particular page layout or magnification level, turn on or off certain window options, hide application toolbars or window controls ...



**Note:** The attributes for this Action, correspond to the Initial View options in Adobe Acrobat (See **File > Properties**, select the **Initial View** tab). If you do not change the attributes, these settings will be used. For a detailed overview of the meaning of each option, refer to the [Adobe help files](#).

Attributes for Change initial view:

[Actions](#) ▼

**Layout and Magnification**

Navigation tab: Don't change ▼

Page layout: Don't change ▼

Magnification: Don't change ▼

Open to page: Don't change

**Window Options**

Resize window to initial page: Don't change ▼

Center window on screen: Don't change ▼

Open in Full Screen mode: Don't change ▼

Show: Don't change ▼

**User Interface Options**

Menu bar: Don't change ▼

Tool bars: Don't change ▼

Window controls: Don't change ▼

Log Log ▼

### 3.1.3.4. Change PDF text string encoding

**Belongs to**

- **Category:** Document, PDF 2.0
- **Type:** Changes
- **Since version:** 2020

**What it does**

Allows you to change the text encoding of a PDF to comply with a particular PDF version.

Choices are compatibility with the current document version, with PDF 1.7 (PDFDocEncoding or UTF-16BE) or with PDF 2.0 (ASCII or UTF-8).



**Note:** The changes you make using this Action will only affect newly saved content: earlier saved content is not touched.

**Related Actions**

- [Change inline image syntax](#) on page 144

### 3.1.3.5. Impose document

**Belongs to**

- **Category:** Document
- **Type:** Changes
- **Since version:** 2021

**What it does**

Allows you to arrange the pages of the document so that once the printed signature sheets are folded and trimmed, the pages appear in the correct order.

**Note:**

- This Action expects that the number of pages of the input document is a multiple of 4. If that is not the case, empty pages will be added. For example, if the input PDF has 18 pages, 2 empty pages will be added. The imposed file will have 20 sheets in total (of which two are empty).
- If there are pages of different size, the sheet size is based on the largest page size.

**Important remark**

If you want to make changes to the resulting imposed document (for example add bleed), you can do so in the same Action List on condition that the additional Actions are preceded by a [Split Action List](#) Action.

### Attributes

| Attribute                      | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Layout tab</b>              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Clip source page to <page box> | Determines what part of the source page should be visible on the imposed result. By default, this is the bleed box.                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Spread type                    | <p>Determines the order in which the pages will be arranged.</p> <p>Options:</p> <ul style="list-style-type: none"> <li>• <b>Printer:</b> Pages are arranged in such a way that when the document is <i>printed</i>, trimmed and assembled, the pages appear consecutively.</li> <li>• <b>Reader:</b> Pages are arranged in consecutive order, like when you <i>read</i> a book.</li> </ul>                                                                                                                                                                 |
| Binding edge                   | <p>Options:</p> <ul style="list-style-type: none"> <li>• <b>Get from document</b> (default)</li> <li>• <b>Left</b></li> <li>• <b>Right</b></li> </ul> <p>This option allows handling documents that have content in right-to-left script (like Arabic).</p>                                                                                                                                                                                                                                                                                                 |
| <b>Finishing tab</b>           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Gutter width ...               | Width of the space or margin between the pages on the resulting sheets. This value applies to all pages of the document.                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Limit bleed into gutter to ... | <p>Maximum amount of bleed allowed in the margin between the pages on the resulting sheets. If no limit is set, the entire gutter is used.</p> <p>This option can be useful to avoid issues with milling and gluing.</p> <hr/> <div>  <b>Note:</b> <ul style="list-style-type: none"> <li>• The maximum amount of bleed in the gutter area is limited to 1/2 of the gutter size.</li> <li>• If the gutter width is 0, this option is grayed out.</li> </ul> </div> <hr/> |
| Define sheet size manually     | <p>Allows you to determine the size of (the media box of) the imposed document. This can be useful if you want to add space for the printing marks, colorbars, gripper edge, etc.</p> <hr/> <div>  <b>Note:</b> The source pages are not automatically scaled to make them fit nicely on the new sheet size. If needed, you can run the <a href="#">Scale to fit page size</a> Action to do that (before imposing the document).         </div> <hr/>                    |

| Attribute                                   | Description                                                                                                                                                                                                                                        |
|---------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Marks tab</b>                            |                                                                                                                                                                                                                                                    |
| Insert print marks (trim, gutter, and fold) | <p>Puts print marks on the sheets.</p> <hr/> <p> <b>Note:</b> If there were print marks on the original sheets, they are removed (regardless of this option).</p> |

**Example**

- Input file: A PDF file with 6 pages (1-6).
- Resulting printer spread (4 sheets):



- Resulting reader spread (4 sheets):



### 3.1.3.6. Make viewer preferences PDF/X compliant

**Belongs to**

- **Category:** Document
- **Type:** Changes

**What it does**

Allows you to change the viewer preferences of the PDF document, to make them PDF/X compliant.

PDF/X-1a:2003 and PDF/X-3:2003 require the view area, view clip, print area and print clip to be set to the media (or bleed) box.

As of PitStop 2022 it's also possible to remove the viewer preferences (all or only the one(s) of your choice).



**Related Actions**

[Check PDF/X viewer preferences](#) on page 327

### 3.1.3.7. Optimize document structure

**Belongs to**

- **Category:** Document
- **Type:** Changes

**What it does**

Guarantees that the underlying document structure of your PDF is efficient, for example by improving the compression of the document as required.

### 3.1.3.8. Optimize stream compression

**Belongs to**

- **Category:** Document
- **Type:** Changes
- **Since:** 25.07

**What it does**

Ensures that all content streams are efficiently compressed. This may reduce the file size of a document.

### 3.1.3.9. Overlay PDF

**Belongs to**

- **Category:** Document
- **Type:** Changes
- **Since:** 2020

**What it does**

Enables you to use a PDF as overlay or underlay in another document.

**Note:**

- This Action provides the same functionality as the Place PDF tool (part of the PitStop Edit toolset) in PitStop Pro.
- There's also an Overlay PDF app that can be used in a Switch workflow. It's available for download on the [Enfocus Appstore](#).

## Tabs

| Tabs   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source | <p>The <b>Source File</b> is the file that will be added to the currently opened PDF. It will be placed on top of the current PDF, unless you have selected the <b>Put source page content behind target page content</b> checkbox on the Misc tab.</p> <p>You should specify the source file via the <b>PDF file path</b>, which refers to the location of the PDF. You can browse to the PDF file or you can enter the file path, optionally using variables.</p> <p><b>Use page box</b> allows you to set the page box that you want to use.</p> <p>Finally, you should choose the preferred behavior (<b>Repetition Policy</b>) in case the added PDF file has fewer pages than the target PDF file. There are three options:</p> <ul style="list-style-type: none"> <li>• <b>Stop overlaying after last source page is used</b> (default option): if selected, the last page(s) of the target document won't have an overlay.</li> <li>• <b>Repeat last page</b>: the last page of the source file will be used as overlay for the last page(s) of the target document (until all pages have an overlay).</li> <li>• <b>Repeat all pages</b>: PitStop will add overlay pages, starting again from the beginning of the source file until all pages have an overlay.</li> </ul> |
| Target | <p>The <b>Target Area</b> indicates where the overlay should be placed. You can enter the coordinates of the area (manually, or grab from a selection), or you can specify the target page box.</p> <p>The <b>Scaling options</b> allow you to specify how the page should be scaled, if the added PDF file has a different page size than the target file. Options are:</p> <ul style="list-style-type: none"> <li>• Do not scale</li> <li>• Scale to fit, preserving aspect ratio</li> <li>• Fit width / fit height, preserving aspect ratio</li> <li>• Scale to fill, preserving aspect ratio (scales the source page enough to fit the larger dimension of the target page while preserving the source page's aspect ratio)</li> </ul> <p>You can also determine how the source content should be <b>aligned</b> to the target area (center, top, bottom, upper left, right, ...)</p>                                                                                                                                                                                                                                                                                                                                                                                           |
| Misc   | <p>On this tab, you have three options:</p> <ul style="list-style-type: none"> <li>• <b>Change the opacity</b> of the source by moving the slider to the left. The default is 100% opacity.</li> <li>• <b>Put source page content behind target page content</b> to have an underlay instead of an overlay.</li> <li>• <b>Place as isolated transparency group</b> to avoid that objects in the transparency group are affected by objects underneath.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

| Tabs |                                                                                                                                                                                                                                                                                                                           |
|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|      | The content of the source page is put in a form. By default this form is a non-isolated transparency group, meaning that overprint, knock-out, ... will have an affect. If you don't want this, so if you want to preserve the initial view of the added PDF, you should enable this checkbox. For an example, see below. |

Remark




**Note:** The target page content for both overlays and underlays includes the content generated by previous runs of the Action. This is important in the case of underlays where, for an Action list with multiple underlays, the drawing order of the content generated by the instances of this Action is the reverse of the order in which the Actions themselves appear in the Action List.

Example:

The following Action List is run on a cover page which only contains a title in white. Both Actions have **Put source page content behind target page content** enabled.


```
Overlay PDF      (source file: PDF with an image of green clover, 80% opaque)
Overlay PDF      (source file: PDF with an image of roses, 100% opaque)
```

The result is a PDF with an image of roses in the background and the green clover on top of it.

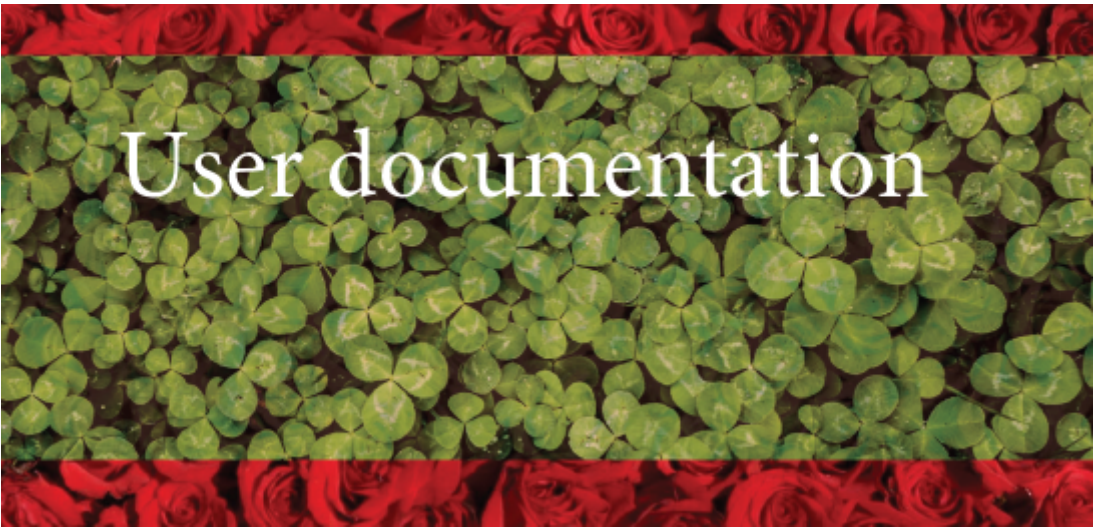


Example of the "Place as isolated transparency group" option


In this example, the added PDF contains the following CMYK objects:

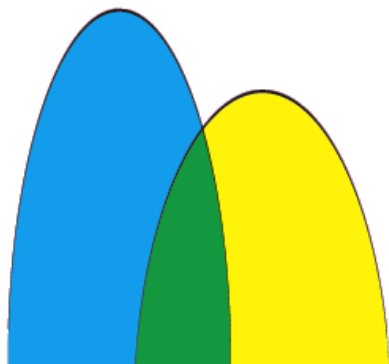

Below you can see how the result will look when the added PDF is placed on a magenta background. This is the default situation, so with **Place as isolated transparency group** unchecked. There is interaction with the magenta background, so the objects in the added PDF now look different than in the original PDF.

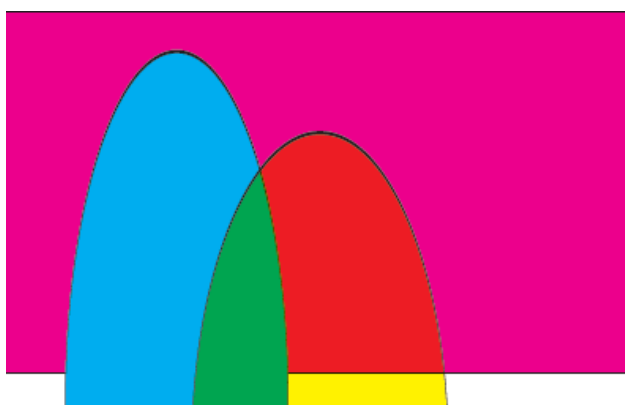

However, if the same PDF is added, but with **Place as isolated transparency group** selected in the Overlay PDF Action, there is no interaction with the magenta background, and the objects look the same as in the original PDF.

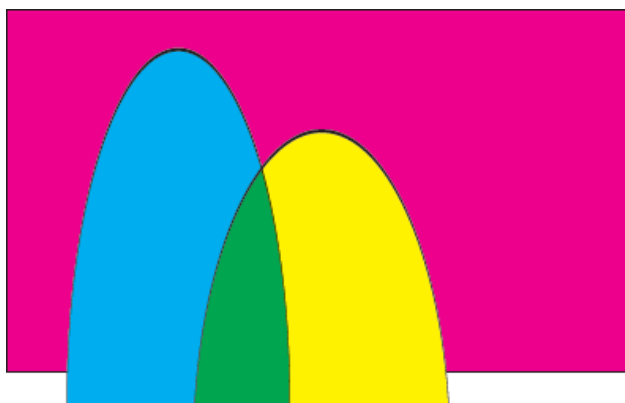

### 3.1.3.10. Remove alternate presentations

*Belongs to*

- **Category:** Document

- **Type:** Changes
- **Since:** 2022

***What it does***

Removes the AlternatePresentations entry from the name dictionary of the selected document.

This is a fix for PDF/X-6, as PDF/X-6 does not allow alternate presentations.

## 3.1.4. General

---

### 3.1.4.1. Change object order

***Belongs to***

- **Category:** General
- **Type:** Changes

***What it does***

Changes the layer position of an object in a PDF.

You can choose to move the object forwards, backwards, to the front, or to the back depending on where you want your object to appear in the layer stack.

### 3.1.4.2. Copy attributes of selected objects

***Belongs to***

- **Category:** General
- **Type:** Changes
- **Since Version:** 25.07

***What it does***

Allows you to copy the attributes of the selected objects to a clipboard. You should give the clipboard a name (by default: Untitled 1), to avoid confusion when copy-and-pasting different selections in one Action List. You can use up to 1,000 clipboards if you wish, however it is important to realize that these clipboards are not saved; they are only used while the Action List in which they are used is run.

This Action should be preceded by a selection (i.e. to select the object you want to copy the attributes from) and followed by [Paste attributes to selected objects](#) in the same Action List. You cannot copy attributes to a clipboard in one Action List and then paste them within another Action List.

***How to proceed?***

1. Create a new Action List.
2. Add a select Action that select the objects of which you want to copy the attributes.

3. Add a *Copy attributes of selected objects* Action to your Action List and enter a name for the clipboard to which the attributes will be copied.
4. Add an Action to select the objects that should get the attributes that are copied to the clipboard.
5. Add a *Paste attributes to selected objects* Action and determine which attributes should be pasted to the selected objects.

**Example Action List**

The following Action List copies the attributes of the purple colored line art to a clipboard (CLIP1) and pastes the fill color attribute to all other line art and to all text.

```
Select fill color -- purple
Select line art
AND
copy attributes of selected objects to clipboard CLIP1
Select line art
Paste attributes from CLIP1 -- select Fill - Fill color
Select text segments
Paste attributes from CLIP1 -- select Fill - Fill color
```

**Before:****After:**



### 3.1.4.3. Copy or cut objects to clipboard

#### ***Belongs to***

- **Category:** General, Operators
- **Type:** Changes
- **Since Version:** 13 update 1

#### ***What it does***

Allows you to cut or copy the selected objects to a clipboard. You should give the clipboard a name (by default: Untitled 1), to avoid confusion when copy-and-pasting different selections in one Action List. You can use up to 1,000 clipboards if you wish, however it is important to realize that these clipboards are not saved; they are only used while the Action List in which they are used is run.

This Action should be preceded by a selection (i.e. to select the object you want to cut or copy) and followed by [Paste objects from clipboard](#) on page 93 in the same Action List. You cannot cut or copy something to a clipboard in one Action List and then paste it within another Action List.

#### ***How to proceed?***

1. Create a new Action List.
2. Add a select Action that select the objects you want to cut or copy.
3. Add a *Cut or copy objects to clipboard* Action to your Action List and set the attributes (select Cut or Copy and type an appropriate name).
4. Add a [Select pages](#) on page 484 Action to indicate the pages on which the selection should be pasted (if not yet selected in step 1, e.g. if you added "Select all" in step 1).
5. Add a [Paste objects from clipboard](#) on page 93 Action and set the attributes on the different tabs (e.g. to define the position of the pasted objects).



#### **Note:**

- Action Lists are executed page after page. As a consequence, you can only paste objects to the following pages. For example, if you copy an object that is present on page 3, you can paste it on page 3, 4, 5, ... but not on page 1 or 2.

- If there is nothing to select to cut or copy (i.e. the select Action of step 2 in the above procedure result in an empty selection), the content of the clipboard is not overwritten with an "empty" set of objects! The previous content (if any) is preserved and will be pasted once more. If you do not want this, you can select the **Clear clipboard after paste** checkbox in the attributes of [Paste objects from clipboard](#) on page 93 Action.
- 

**Related Action**

- [Paste objects from clipboard](#) on page 93

### 3.1.4.4. Flatten forms

**Belongs to**

- **Category:** General
- **Type:** Changes
- **Since Version:** 2023 update 1

**What it does**

Flattens forms into the page or parent content.



**Note:** Forms will not be flattened when there are transparency side effects, like overprint or knockout, because that would change how the file looks. See the example below.

---

Note that using forms, you can reference objects instead of storing them multiple times in a document. Hence, flattening forms may increase file size and memory consumption, especially when this Action is run on complex files.

**About forms**


Forms are rectangular frames in a PDF which contain objects, for example an image or a placed PDF. Forms do not have a fill or stroke, but they can have transparency settings that determine how the objects inside the form look (e.g. a knockout setting).

For more information, refer to [the PitStop Pro Reference Guide on the Enfocus website](#) (See Chapter "Editing forms").

**Example**

The example below is an example of a form that is a transparency group. The Flatten forms Action does not work on this type of forms.



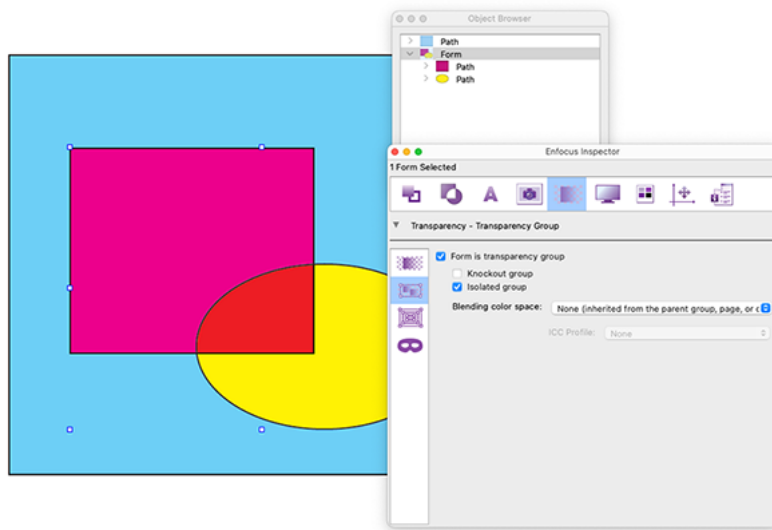

### 3.1.4.5. Normalize line weight

#### ***Belongs to***

- **Category:** General; LineArt; Position and size
- **Type:** Changes

#### ***What it does***

Normalizes paths where a transformation matrix caused distortions, by removing the distortion, giving the path a uniform line weight equal to the average reported in the Inspector. The Action also works on sheared paths.

#### ***Related Actions***

- [Change line weight](#) on page 161
- [Select by line weight](#) on page 457
- [Check line weight](#) on page 346

### 3.1.4.6. Paste attributes to selected objects

#### ***Belongs to***

- **Category:** General
- **Type:** Changes
- **Since Version:** 25.07

#### ***What it does***

Allows you to paste attributes from the clipboard to the selected objects. You should specify which attributes should be pasted.

This Action must be preceded by a *Copy pasted attributes to selected objects* Action (that copies the attributes to the clipboard) and a "select" Action (that indicates to which objects the attributes should be pasted) in the same Action List.

If there are several "copy attributes" Actions in the Action List, you may want to give each of the clipboards an appropriate name, to make sure the different attributes are pasted to the correct objects.

### Attributes

By default, all checkboxes in all categories are selected. There are 6 categories: Line Art, Text, Stroke, Fill, Prepress and Transparency.


To collapse or expand a category, single-click the category concerned.

To select/clear all checkboxes inside a category in one go, double-click the category concerned. As a result, if ...

- All checkboxes are selected, they will all be cleared.
- All checkboxes are cleared, they will all be selected.
- Some checkboxes are cleared and some are selected, they will all be selected.



**Note:** If a variable is associated with an item in a category, the checkbox changes into a blue box with a white dash and it cannot be selected or cleared anymore, hence double-clicking the category has no effect on such items.



### How to proceed?

1. Create a new Action List.
2. Add a select Action that select the objects of which you want to copy the attributes.
3. Add a *Copy attributes of selected objects* Action to your Action List and enter a name for the clipboard to which the attributes will be copied.
4. Add an Action to select the objects that should get the attributes that are copied to the clipboard.
5. Add a *Paste attributes to selected objects* Action and determine which attributes should be pasted to the selected objects.

### Example Action List

The following Action List copies the attributes of the purple colored line art to a clipboard (CLIP1) and pastes the fill color attribute to all other line art and to all text.

```
Select fill color -- purple
Select line art
AND
copy attributes of selected objects to clipboard CLIP1
Select line art
Paste attributes from CLIP1 -- select Fill - Fill color
Select text segments
Paste attributes from CLIP1 -- select Fill - Fill color
```

**Before:**



**After:**



### 3.1.4.7. Paste objects from clipboard

***Belongs to***

- **Category:** Add, General, Operators
- **Type:** Changes
- **Since Version:** 13 update 1

***What it does***

Allows you to paste objects from the clipboard to one or more selected pages. You can paste them multiple times (with fixed distances or distributed across a distance) as required and indicate where they should be placed.

This Action must be preceded by a "copy/cut" Action (that moves the objects to the clipboard) and a "select" Action (that indicates where the objects should be pasted) in the same Action List.

If there are several "copy/cut" Actions in the Action List, you may want to give each of the clipboards an appropriate name, to make sure the different objects are pasted on the correct pages.

#### How to proceed?

1. Create a new Action List.
2. Add a select Action that select the objects you want to cut/copy-and-paste.
3. Add a *Copy or cut objects to clipboard* on page 131 Action to your Action List and set the attributes (select Cut or Copy and type an appropriate name).
4. Add a *Select pages* on page 484 Action to indicate the pages on which the selection should be pasted (if not yet selected in step 2 -if you added "Select all" in step 2, step 4 is redundant).
5. Add a *Paste objects from clipboard* Action and select the name of the clipboard (as entered in step 2). Switch to the different tabs to define the region and the position of the copied objects (see table below).



**Note:** Action Lists are executed page after page. As a consequence, you can only paste objects to the following pages. For example, if you copy an object that is present on page 3, you can paste it on page 3, 4, 5, ... but not on page 1 or 2.

#### Tabs

| Tabs       | On this tab, do the following:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Graphics   | <p>Select the clipboard that contains the objects to be pasted.</p> <p>Determine whether or not the clipboard should be cleared after the object was pasted. This option determines what happens if there are no objects to be copied (= if the select Action in step 2 of the above procedure results in an empty selection).</p> <ul style="list-style-type: none"> <li>• If checked, the clipboard will be empty, so nothing will be pasted.</li> <li>• If cleared, the clipboard will still contain content from the previous page and that content will be pasted.</li> </ul>                                                                                                                                                                                                                         |
| Attributes | Determine if the objects should be pasted in the foreground or in the background of the document.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Region     | <p>Determine the region where the objects should be moved to. The region is defined based on the page box of your choice and you can define margins within that page box, by grabbing the offsets from a selected area (using the <b>Grab position</b> button .</p> <p>You can also specify a specific area the objects should not be placed in, also based on a page box and with the option to set margins.</p> <p> <b>Note:</b> The settings on this tab are only used if <b>Move graphic elements</b> is selected on the Position tab. If this is not the case, the original location of the graphic elements is preserved.</p> |
| Repeat     | If the objects should be pasted more than once on a page, change <b>No repeat</b> to:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

| Tabs     | On this tab, do the following:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|          | <ul style="list-style-type: none"> <li>• <b>Distribute/Repeat fixed number of graphic elements</b> if you want to determine how often the copied objects should be pasted (e.g. 6 times horizontally, 4 times vertically)</li> <li>• <b>Distribute/Repeat graphic elements in region</b> if you want PitStop to fill the region (specified on the Region tab).</li> </ul> <p>If you want PitStop to divide the pasted objects evenly across the defined region, choose "distribute" rather than "repeat". In case of "Distribute graphic elements in region", you can choose the maximum or minimum distance between the pasted objects.</p> <p>If you choose "repeat", you should define the exact distance between the pasted objects yourself.</p> <p>The distance can be between the bounding boxes of the pasted objects (choose: <b>Between edges</b>) or from center to center (choose: <b>Between centers</b>).</p> <hr/> <div data-bbox="571 846 639 913">  </div> <p><b>Note:</b> Remember that you can use Smart Preflight variables to define the distances.</p> <hr/> |
| Position | <p>If the selected objects should be moved, select <b>Move graphic elements</b>. Indicate how the objects should be positioned relative to the chosen region. Note that, when adding multiple copies, the same corner should be used to position the graphic elements in the region.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

**Related Action**

- [Copy or cut objects to clipboard](#) on page 131
- [Add copied graphics](#) on page 76

### 3.1.4.8. Rasterize page content, keeping text

**Belongs to**

- **Category:** General
- **Type:** Changes

**What it does**

Allows you to rasterize complex graphics in PDF, for example to reduce the rendering complexity for a file for viewing on the iPad.

You can set the resolution of the generated bitmap (ppi), the preferred compression (JPEG, JPEG 2000, ZIP, None), the required quality (maximum, high...), and decide whether or not to keep line art unchanged.

New since PitStop 13 update 2 is the option to turn off anti-aliasing. This is useful to avoid thin white lines that may appear when rasterizing images.

### 3.1.4.9. Rasterize selection

#### ***Belongs to***

- **Category:** General
- **Type:** Changes
- **Since Version:** 2019

#### ***What it does***

Allows you to rasterize selected content.

Rasterizing objects means converting them to an image. This is typically done to reduce the complexity of a file to speed up processing.

Note that it may not be possible to convert multiple objects to one image: PitStop tries to create as few images as possible without changing how the file looks. To achieve this, it takes into account layers, color space, position of the objects etc. For example, rasterizing two objects with two different color spaces, will result in two images; objects on different layers will result in different images, and objects that do not overlap will only become one image if no other objects are inbetween (because this would change how the file looks).

Note that this functionality is also integrated in PitStop Pro (accessible through the menu bar (**PitStop Pro > Object > Rasterize selection**) or the context menu of a selection).

#### ***Options***

By default, rasterizing does not affect the way the objects look. However, in some cases it may be acceptable to have a slightly different look; in that case you may enable (some of) the advanced options (for example: conversion to a different color space). These options are marked with a warning icon to indicate that using them may change the appearance of the file.

| Option                                   | Choices                                                                                                                                                                                                                                                                                                                                  |
|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Resolution (ppi) of the generated bitmap | <p>Enter the value of your choice.</p> <div>  <p><b>Note:</b> Do not misuse this Action to change the resolution of an image; the result will be far better when using a dedicated Action like <a href="#">Resample image</a> on page 147.</p> </div> |
| Compression                              | <p>Choices are:</p> <ul style="list-style-type: none"> <li>• JPEG</li> <li>• JPEG 2000</li> <li>• ZIP</li> <li>• None</li> </ul>                                                                                                                                                                                                         |
| Quality                                  | <p>Choices are:</p> <ul style="list-style-type: none"> <li>• Minimum</li> <li>• Low</li> <li>• Medium</li> </ul>                                                                                                                                                                                                                         |

| Option                                                | Choices                                                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                       | <ul style="list-style-type: none"> <li>• High</li> <li>• Maximum</li> </ul>                                                                                                                                                                                                                                                                                                                                            |
| Use anti-aliasing                                     | <p>Select or clear the checkbox.</p> <p>Turning off anti-aliasing may be useful to avoid thin white lines that may appear when rasterizing images.</p>                                                                                                                                                                                                                                                                 |
| Convert new resulting image(s) to indexed color space | Select or clear the checkbox.                                                                                                                                                                                                                                                                                                                                                                                          |
| Blend to                                              | <p>This option allows specifying a color space conversion on the selected objects, which may slightly change the appearance of the document. Choices are:</p> <ul style="list-style-type: none"> <li>• Page blending space</li> <li>• Gray</li> <li>• RGB</li> <li>• CMYK</li> </ul>                                                                                                                                   |
| Ignore blend and overprint restrictions               | <p>Select or clear the checkbox.</p> <p>Normally, overprint and blend spaces are respected when creating a single, merged image. However, if this is not possible (because it might change the appearance), an error will be reported. In that case, you may decide to ignore the blend and overprint restrictions, especially if they do not offer much added value.</p>                                              |
| Ignore original layer structure                       | <p>Select or clear the checkbox.</p> <p>Normally, the layer structure is preserved and images remain on the same layer as the original object. If you enable this option, the layer structure and the layer properties are ignored, meaning that hidden layers and layers that do not print are also included in the new image. The new image will not be on any layer. The layers themselves will not be removed.</p> |
| Force into single image                               | <p>Select or clear the checkbox.</p> <p>If selected, all the above options are enabled in order to force the selected objects into one single image.</p>                                                                                                                                                                                                                                                               |
| Force into separate images                            | <p>Select or clear the checkbox.</p> <p>If selected, the selected objects will be rasterized and saved as separate images. This option is compatible with the <b>Blend to (color space)</b> option.</p>                                                                                                                                                                                                                |

| Option                                                         | Choices                                                                                                                                                                                                    |
|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Keep the original content and place the new resulting image(s) | Choices are: <ul style="list-style-type: none"><li>• at the front of the page</li><li>• at the back of the page</li><li>• in front of the original content</li><li>• behind the original content</li></ul> |

### 3.1.4.10. Remove associated files

**Belongs to**

- **Category:** General, PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Removes associated files.

This fix can be used to make PDF files compliant with PDF 2.0.

**Related Actions**

- [Check for associated files](#) on page 329

### 3.1.4.11. Remove file specification from streams

**Belongs to**

- **Category:** General
- **Type:** Changes

**What it does**

Removes links to embedded or external files from PDF streams.

PDF streams are holders of large amounts of data, such as image pixels, page contents, embedded fonts, etc. In some instances, the streams do not contain the data inside the PDF but point to embedded or even external files. This Action will remove the link to these files.

**Related Actions**

- [Check file specification keys](#) on page 328
- [Check for file specifications](#) on page 330

### 3.1.4.12. Remove PostScript

**Belongs to**

- **Category:** General



- **Type:** Changes

**What it does**

Removes all fragments of embedded PostScript in a PDF document.

Embedded PostScript fragments do not show up in the screen preview, but could change the appearance of the printed document. They are generally undesirable in a print production environment.

**Related Actions**

See also

- [Check for embedded PostScript fragments](#) on page 329
- [Select embedded PostScript fragments](#) on page 444

### 3.1.4.13. Replace page content by bitmap

**Belongs to**

- **Category:** General
- **Type:** Changes

**What it does**

Converts the page content to a bitmap. You can choose the resolution of the generated bitmap (ppi), the compression method (JPEG, JPEG 2000, ZIP, none) and the quality level.

New since PitStop 13 update 2 is the option to turn off anti-aliasing. This is useful to avoid white lines in flattened PDF files.

Other options are:

- **Apply overprint** to take into account the overprint settings
- **Blend to ...** to specify a color space conversion, which may slightly change the appearance of the document. Choices are: the page blending space, Gray, RGB and CMYK.

## 3.1.5. Image

---

### 3.1.5.1. Add alternate images

**Belongs to**

- **Category:** Image
- **Type:** Changes

**What it does**

If you are working with PDFs that contain very high resolution images and render slowly on screen, you can speed up rendering by adding alternate images and then clicking the PitStop

**Speed Up Image Display** button (available in the Enfocus View Modes toolbar (Acrobat 8 and 9) or the PitStop View Panel (Acrobat X and XI)).

You can use this Action to add low resolution alternate images.

***How to proceed***

1. Select the preferred downsampling.  
Bicubic looks best but is slowest; subsampling looks worst but is fastest.
2. Specify the preferred resolution.  
72dpi is good for screen viewing.
3. Set **Resample above** to a higher value than the dpi chosen above.  
PitStop suggests a value, but you can change it as required.
4. Select **Convert to RGB** for even faster on screen rendering, but in RGB color values.

***Related Actions***

- [Select by alternate images](#) on page 448
- [Check for alternate images](#) on page 336
- [Remove alternate images](#) on page 146

### 3.1.5.2. Apply a gaussian blur to an image

***Belongs to***

- **Category:** Image
- **Type:** Changes

***What it does***

Allows you to apply a Gaussian blur to the selected images.

You can define the radius of the blur, by moving the slider. A higher radius will result in a higher amount of blur.

Applying a Gaussian blur is useful to reduce image noise and detail.

### 3.1.5.3. Apply transfer function

***Belongs to***

- **Category:** Prepress;Text;LineArt;Color;Image
- **Type:** Changes

***What it does***

Adds a transfer function to paths, text, images or all these types of objects. You can exclude spot colors or apply the transfer function on tint values or alternate values only.

Transfer functions are used for creative purposes, artistic effect and to correct the characteristics of a specific, maybe poorly calibrated, output device. For example, a file that is intended for

output on a particular image setter may contain transfer functions that compensate for the dot gain inherent to that printer.



**Note:** Transfer functions are not allowed in PDF/X compliant documents.

#### **Related Actions**

- [Check for custom transfer function](#) on page 402
- [Remove custom transfer function](#) on page 271

### 3.1.5.4. Change image brightness and contrast

#### **Belongs to**

- **Application:** PitStop Pro
- **Category:** Image
- **Type:** Changes

#### **What it does**

Allows you to make brightness and contrast adjustments to pixel images of all color spaces (e.g. RGB) and image types (e.g. JPEG).



**Note:** This option is also available in the PitStop Inspector (by selecting



>



).

### 3.1.5.5. Change image compression

#### **Belongs to**

- **Category:** Image
- **Type:** Changes

#### **What it does**

This Action changes the compression of the selected images.

- Color, grayscale and soft-mask images can be compressed with JPEG, JPEG 2000, ZIP or LZW compression (ZIP and LZW are lossless, JPEG lossy).
- Monochrome images can be compressed with CCIT Group 3 & 4, ZIP, LZW or RunLength compression.

In addition:

- An ASCII Hex or 85 filter can be applied. From the list, select the appropriate filter or choose **None**.
- An extra Flate compression filter can be applied to JPEG and JPEG 2000 images. Flate, also known as Deflate, is a lossless data compression method that can drastically reduce the file

size. To enable this filter, select the **Add ZIP compression on top of JPEG or JPEG 2000** checkbox.



**Note:** Whereas the ASCII filter does not apply to soft-mask image, the Flate compression does.

### 3.1.5.6. Change inline image syntax

#### ***Belongs to***

- **Category:** Image, PDF 2.0
- **Type:** Changes
- **Since version:** 2020

#### ***What it does***

Allows you to change the L key (or Length key) of a PDF to comply with a particular PDF version.

The L key specifies the length of the image data and allows users to skip inline images if required.

Choices are:

- Compatibility with the current document version
- Compatibility with PDF 1.7 (no Length key)
- Compatibility with PDF 2.0 (write Length key)
- Keep presence of the Length key
- Fix the Length key (so it matches the actual inline image data length)



**Note:** The changes you make using this Action will only affect newly saved content: earlier saved content is not touched.

#### ***Related Actions***

- [Change PDF text string encoding](#) on page 122
- [Check inline image syntax](#)
- [Select inline image syntax](#) on page 451

### 3.1.5.7. Change OPI info

#### ***Belongs to***

- **Category:** Image
- **Type:** Changes

#### ***What it does***

Updates the OPI information of the document, for example if you have changed an OPI path with the PitStop Inspector in PitStop.



**Note:** This Action is mainly meant for OEMs, who can change OPI dictionaries through the PitStop Library. If an image with OPI information is encountered during processing, PitStop Library will call the OEM's code to replace it with the OEM's values.

#### **About OPI**

OPI (Open Prepress Interfaces) replaces high resolution images with "preview" images; low resolution substitutes which are stored in the PDF, together with the path to the high resolution images. This facilitates data storage and data transfer of PDFs with a large number of images.

#### **Related Actions**

- [Check OPI path](#) on page 340
- [Check OPI type](#) on page 340
- [Gather OPI information](#) on page 418
- [Remove OPI](#) on page 146
- [Select images with OPI info](#) on page 450

### 3.1.5.8. Convert images to indexed color space

#### **Belongs to**

- **Category:** Color;Image
- **Type:** Changes

#### **What it does**

Changes the color of images to the indexed color space.

#### **About the indexed color space**

The indexed color space uses no more than 256 colors, and is as such particularly suited for use in Web applications. Images are typically converted to indexed color mode in order to **decrease their file sizes**. When an image is converted to indexed color, a color lookup table is created, in which the colors that were used in the image are stored and indexed. Using an indexed color table lets you reduce the file size of an image while maintaining the visual quality that you need.

### 3.1.5.9. Crop images

#### **Belongs to**

- **Category:** Image
- **Type:** Changes

#### **What it does**

Allows you to crop images to match a clip mask and/or a particular page box.

**New in 13 update 1:** You can now remove the unwanted white borders (e.g. of scanned images), by selecting the **Crop white borders of image** checkbox. This option also works on stencil marks and is particularly useful as it enables subsequent Actions to work on the size of visible objects.

### 3.1.5.10. Remove alternate images

***Belongs to***

- **Category:** Image
- **Type:** Changes

***What it does***

Removes alternate images from a PDF.

If you are working with PDFs that contain very high resolution images and render slowly on screen, you can speed up rendering by adding alternate images and then clicking the PitStop **Speed Up Image Display** button (available in the Enfocus View Modes toolbar (Acrobat 8 and 9) or the PitStop View Panel (Acrobat X and XI)).

As these alternate images are not necessary for print, you may use this Action to remove them and only keep one version. You have three options:

- **Default for printing** only preserves the images that are marked "default for printing" (recommended if you know that the alternate images have been correctly marked for printing)
- **Lowest resolution** only preserves the version with the lowest resolution, regardless of the printing setting (best for print production)
- **Highest resolution** only preserves the version with the highest resolution, regardless of the printing setting (best for on-screen viewing)

***Related Actions***

- [Check for alternate images](#) on page 336
- [Select by alternate images](#) on page 448
- [Add alternate images](#) on page 141

### 3.1.5.11. Remove OPI

***Belongs to***

- **Category:** Image
- **Type:** Changes

***What it does***

Removes OPI (Open Prepress Interface) information from a PDF.

OPI images are treated special as they are assumed to be preview images. They will for example not be preflighted as other images would be. If you don't use OPI in your workflow, run this Action to remove irrelevant OPI information and get correct editing and preflighting of documents.

***About OPI***

OPI (Open Prepress Interfaces) replaces high resolution images with "preview" images; low resolution substitutes which are stored in the PDF, together with the path to the high resolution images. This facilitates data storage and data transfer of PDFs with a large number of images.

**Related Actions**

- [Check OPI path](#) on page 340
- [Check OPI type](#) on page 340
- [Gather OPI information](#) on page 418
- [Change OPI info](#) on page 144
- [Select images with OPI info](#) on page 450

### 3.1.5.12. Resample image

**Belongs to**

- **Category:** Image
- **Type:** Changes

**What it does**

Resamples, i.e. changes the resolution of the selected image(s).

**How to proceed**

1. Select the preferred resampling or interpolation method:
  - **Average Resampling:** computes the average pixel color of the pixels in the sample area, and replaces the entire area with this average.
  - **Bicubic resampling:** calculates the values of the new dots on the basis of a weighted average of the pixels in the same area.
  - **Bicubic B-Spline resampling:** is a modified bicubic interpolation with more sharpening effects and is recommended for upsampling.
  - **Bilinear resampling:** uses weighted interpolation between 4 pixels in the original image.



**Note:** Bicubic gives the best result for photographs (but takes the longest to compute).

2. Enter the preferred resolution, for example 72 ppi for screen viewing.
3. To only resample images with a resolution below a particular threshold, select the **Resample above ... ppi** checkbox and enter a value.

For example, if you enter 150 ppi, only images with a resolution above 150 ppi will be resampled.

### 3.1.5.13. Sharpen an image with unsharp mask

**Belongs to**

- **Category:** Image
- **Type:** Changes

**What it does**

Allows you to sharpen edges in pixel images by applying the unsharp mask filter.

This filter:

- Compares adjacent pixels (specified by **Radius** and **Threshold**) to determine which pixels to correct.
- Increases the contrast of these pixels (specified by **Amount**).

You can modify the amount of contrast to be applied when correcting pixels (Amount), the distance (Radius) and the brightness difference (Threshold) between adjacent pixels.

The effects of the unsharp mask filter are far more pronounced on-screen than in high-resolution output. For print, experiment to determine which options work best for your image.



**Note:** This option is also available in the PitStop Inspector (by selecting  >  ).

## 3.1.6. Layers

### 3.1.6.1. Add objects to layer with name

**Belongs to**

- **Category:** Layers
- **Type:** Changes
- **Since version:** 12 update 3

**What it does**

Allows you to add any selected objects to a specific layer. You can identify the layer concerned by entering a string (e.g. Layer1). Optionally, you can at the same time remove the added objects from the other layers.

**How to proceed**

1. Add a "select" Action to the Action List, to select the objects you want to add, for example [Select all](#) on page 477.
2. Add **Add objects to layers** to the Action List.
3. Enter the name of the layer.
4. Optionally, select **Remove from other layers**.

**Example**

To add all annotations to a particular layer and remove them from another layer, use the following Actions:

```
Select annotations <!-- Select annotations on page 463 -->
```



```
Add objects to layers <!-- Enter a name, e.g. AnnotationLayer and select Remove from other layers-->
```

#### Related Actions

- [Add objects to layer](#) on page 149
- [Remove objects from layers](#) on page 155

### 3.1.6.2. Add objects to layer

#### Belongs to

- **Category:** Layers
- **Type:** Changes

#### What it does

Allows you to add any selected objects to a specific layer. You can identify the layer concerned by selecting it using another Action in the same Action List.

Optionally, you can at the same time remove the added objects from the other layers.

#### How to proceed

1. Add a first "select" Action to the Action List, to select the **layer** to which you want to assign the objects.
2. Add a second "select" Action to the Action List, to select the **objects** to be added.



**Note:** You don't have to specify operators in between the two "select" Actions. However, you can also use **combined** "Select" Actions to specify the layer or the objects concerned (see example 2).

3. Add **Add objects to layers** and select the **Add to selected layers** radio button.

#### Examples

**Example 1:** The following Action List will add all annotations to Layer1 and remove them from the other layers:

```
Select layers by name <!-- Select layers by name on page 454 and set the layer name to Layer1 -->
Select annotations <!-- Select annotations on page 463 -->
Add objects to layers <!-- Select Remove from other layers -->
```

**Example 2:** The following Action List will add XObjects and annotations to LayerA and LayerB:

```
Select layers by name <!-- Select layers by name on page 454 and set the layer name to "equals [AB]"; enable Use regular expressions -->
Select XObjects <!-- Select XObjects on page 448 -->
Select annotations <!-- Select annotations on page 463 -->
OR
Add objects to layers
```

#### Related Actions

- [Add objects to layer with name](#) on page 148
- [Add objects to layer](#) on page 149

### 3.1.6.3. Change layer print state

**Belongs to**

- **Category:** Layers
- **Type:** Changes
- **Since Version:** 2018

**What it does**

Allows you to change the print state of a layer, which determines whether or not objects on the layer are printed. Thanks to this Action, you can avoid that invisible content on a layer is printed accidentally (or the other way around).

Print state options are:

- Always prints
- Prints when visible
- Never prints

**Example**

To make sure only visible content is printed, you could use the following Action List:

```
Select layers <!-- Select layers on page 453 -->
Change layer print state <!-- with the option Print State must be: Prints when visible
-->
```

**Related Actions**

- [Check layer properties](#) on page 343
- [Check layer print state](#) on page 342
- [Select layers by print state](#) on page 454

### 3.1.6.4. Change layer properties

**Belongs to**

- **Category:** Layers
- **Type:** Changes

**What it does**

Allows you to change certain properties, i.e. default visibility and presence in the Layers panel ("layer configuration") of the layers selected by another Action in the same Action List.

**Example**

To change the properties of **all** layers in the PDF, create the following Action List:

```
Select layers <!-- Select layers on page 453 -->
```

Change layer properties

#### **Related Actions**

- [Check layer properties](#) on page 343
- [Select objects in layers by layer properties](#) on page 455

### 3.1.6.5. Fix layers

#### **Belongs to**

- **Category:** Layers
- **Type:** Changes

#### **What it does**

Allows you to perform a number of fixes to the layers in a PDF.

#### **Options:**

- Remove alternate layer configurations, only keep default configuration
- Add missing layer configuration names (e.g. "config\_1", "config\_2", ...)
- Make layer configuration names unique
- Remove order from layer configuration if layers are missing
- Remove AS (AutoState) entry from layer configurations. (AutoState entries are application specific usage entries).



---

**Note:** Layer configuration refers to the Layers panel.

---

#### **About PDF layers**

Layered content usually comes from applications such as InDesign, AutoCAD or Visio. When converted to PDF, the layers are retained and can be viewed and navigated in Adobe Acrobat. However, if you print a PDF file that contains layers, only the content that is visible on-screen is printed. This may or may not be desired.

#### **"Conventional" layers versus PDF layers**

**Layers in digital image editing** ("conventional" layers) are used to separate the different elements of an image. Each element is drawn on exactly one layer. The different layers are stacked on top of each other, and the order of the layers defines how the image looks like.

**Layers in PDF** have a different meaning. They are used to hide or show page content:

- Turning *on* a layer, all objects on this layer are shown on-screen.
- Turning *off* a layer, all objects on this layer are hidden, i.e. they become invisible.

As such, layers are also called "optional content groups": groups of objects that can be selectively viewed or hidden by the author of the document. Objects can belong to different layers, and the order of the layers is of no importance.

To work with layers in a PDF document in Adobe Acrobat, select **View > Show/Hide > Navigation Panes > Layers**.

For more information, refer to the Adobe Acrobat help.

**Related Actions**

[Check layers](#) on page 344

### 3.1.6.6. Flatten layers

**Belongs to**

- **Category:** Layers
- **Type:** Changes

**What it does**

Removes the selected layers. You can choose whether or not to remove the objects on these layers as well:

- To keep all objects, regardless of their visibility, select **Make all elements visible**. All objects (including hidden objects) will become visible after the layers have been removed.
- To keep all objects **based on their default visibility**, select **Preserve the initial view of the PDF**. Objects on layers with **default** visibility turned on are preserved (and remain visible). All other objects (i.e. by default hidden objects) are removed.
- To keep all objects **based on their current visibility**, select **Preserve the current view of the PDF**. Objects on visible layers are preserved, regardless of their default visibility state. All other objects (i.e. currently hidden objects) are removed.

**About PDF layers**

Layered content usually comes from applications such as InDesign, AutoCAD or Visio. When converted to PDF, the layers are retained and can be viewed and navigated in Adobe Acrobat. However, if you print a PDF file that contains layers, only the content that is visible on-screen is printed. This may or may not be desired.

**"Conventional" layers versus PDF layers**

**Layers in digital image editing** ("conventional" layers) are used to separate the different elements of an image. Each element is drawn on exactly one layer. The different layers are stacked on top of each other, and the order of the layers defines how the image looks like.

**Layers in PDF** have a different meaning. They are used to hide or show page content:

- Turning *on* a layer, all objects on this layer are shown on-screen.
- Turning *off* a layer, all objects on this layer are hidden, i.e. they become invisible.

As such, layers are also called "optional content groups": groups of objects that can be selectively viewed or hidden by the author of the document. Objects can belong to different layers, and the order of the layers is of no importance.

To work with layers in a PDF document in Adobe Acrobat, select **View > Show/Hide > Navigation Panes > Layers**.

For more information, refer to the Adobe Acrobat help.

**Related Actions**

[Flatten objects in layer](#) on page 153

### 3.1.6.7. Flatten objects in layer

#### ***Belongs to***

- **Category:** Layers
- **Type:** Changes
- **Since version:** 12 update 3

#### ***What it does***

Removes the selected objects from ALL layers and at the same time removes all empty layers.

You can choose whether or not to remove hidden objects:

- To keep all objects, regardless of their visibility, select **Make all elements visible**. All objects (including hidden objects) will become visible after the layers have been removed.
- To keep all objects **based on their default visibility**, select **Preserve the initial view of the PDF**. Objects on layers with **default** visibility turned on are preserved (and remain visible). All other objects (i.e. by default hidden objects) are removed.
- To keep all objects **based on their current visibility**, select **Preserve the current view of the PDF**. Objects on visible layers are preserved, regardless of their default visibility state. All other objects (i.e. currently hidden objects) are removed.

#### ***About PDF layers***

Layered content usually comes from applications such as InDesign, AutoCAD or Visio. When converted to PDF, the layers are retained and can be viewed and navigated in Adobe Acrobat. However, if you print a PDF file that contains layers, only the content that is visible on-screen is printed. This may or may not be desired.

#### ***"Conventional" layers versus PDF layers***

**Layers in digital image editing** ("conventional" layers) are used to separate the different elements of an image. Each element is drawn on exactly one layer. The different layers are stacked on top of each other, and the order of the layers defines how the image looks like.

**Layers in PDF** have a different meaning. They are used to hide or show page content:

- Turning *on* a layer, all objects on this layer are shown on-screen.
- Turning *off* a layer, all objects on this layer are hidden, i.e. they become invisible.

As such, layers are also called "optional content groups": groups of objects that can be selectively viewed or hidden by the author of the document. Objects can belong to different layers, and the order of the layers is of no importance.

To work with layers in a PDF document in Adobe Acrobat, select **View > Show/Hide > Navigation Panes > Layers**.

For more information, refer to the Adobe Acrobat help.

#### ***Related Actions***

[Flatten layers](#) on page 152

### 3.1.6.8. Remove empty layers

**Belongs to**

- **Category:** Remove; Layers
- **Type:** Changes

**What it does**

Removes empty layers selected by another Action in the same Action List.

**Example**

The following Action List will remove **all** empty layers in the PDF:

```
Select layers <!-- Select layers on page 453 -->
Remove empty layers
```

To remove Layer1 and 2, if they are empty:

```
Select layers by name <!-- Select layers by name on page 454 - Choose "equals Layer
[12]" and "Use regular expressions" -->
Remove empty layers
```

**About PDF layers**

Layered content usually comes from applications such as InDesign, AutoCAD or Visio. When converted to PDF, the layers are retained and can be viewed and navigated in Adobe Acrobat. However, if you print a PDF file that contains layers, only the content that is visible on-screen is printed. This may or may not be desired.

**"Conventional" layers versus PDF layers**

**Layers in digital image editing** ("conventional" layers) are used to separate the different elements of an image. Each element is drawn on exactly one layer. The different layers are stacked on top of each other, and the order of the layers defines how the image looks like.

**Layers in PDF** have a different meaning. They are used to hide or show page content:

- Turning *on* a layer, all objects on this layer are shown on-screen.
- Turning *off* a layer, all objects on this layer are hidden, i.e. they become invisible.

As such, layers are also called "optional content groups": groups of objects that can be selectively viewed or hidden by the author of the document. Objects can belong to different layers, and the order of the layers is of no importance.

To work with layers in a PDF document in Adobe Acrobat, select **View > Show/Hide > Navigation Panes > Layers**.

For more information, refer to the Adobe Acrobat help.

**Related Actions**

[Remove objects from layers](#) on page 155

### 3.1.6.9. Remove objects from layers

**Belongs to**

- **Category:** Layers
- **Type:** Changes

**What it does**

Allows you to remove objects from the selected layers in a PDF document.

**About PDF layers**

Layered content usually comes from applications such as InDesign, AutoCAD or Visio. When converted to PDF, the layers are retained and can be viewed and navigated in Adobe Acrobat. However, if you print a PDF file that contains layers, only the content that is visible on-screen is printed. This may or may not be desired.

**"Conventional" layers versus PDF layers**

**Layers in digital image editing** ("conventional" layers) are used to separate the different elements of an image. Each element is drawn on exactly one layer. The different layers are stacked on top of each other, and the order of the layers defines how the image looks like.

**Layers in PDF** have a different meaning. They are used to hide or show page content:

- Turning *on* a layer, all objects on this layer are shown on-screen.
- Turning *off* a layer, all objects on this layer are hidden, i.e. they become invisible.

As such, layers are also called "optional content groups": groups of objects that can be selectively viewed or hidden by the author of the document. Objects can belong to different layers, and the order of the layers is of no importance.

To work with layers in a PDF document in Adobe Acrobat, select **View > Show/Hide > Navigation Panes > Layers**.

For more information, refer to the Adobe Acrobat help.

**How to proceed**

1. Add a first "select" Action to the Action List, to select the **layer** from which you want to remove objects.
2. Add a second "select" Action to the Action List, to select the **objects** to be removed.



**Note:** You don't have to specify operators in between the two "select" Actions. However, you can also use **combined** "select" Actions to specify the layer or the objects concerned (see example 2).

3. Add **Remove objects from layers**.

**Examples**

**Example 1:** The following Action List will remove all objects from Layer1:

```
Select layers by name <!-- Select layers by name on page 454 and set the layer name to
Layer1 -->
Select all <!-- Select all on page 477 -->
Remove objects from layers
```

**Example 2:** The following Action List will remove XObjects and annotations from LayerA and LayerB:

```
Select layers by name <!-- Select layers by name on page 454 and set the layer name to
equals [AB]; enable "Use regular expressions" -->
Select XObjects <!-- Select XObjects on page 448 -->
Select annotations <!-- Select annotations on page 463 -->
OR
Remove objects from layers
```

**Related Actions**

- [Add objects to layer with name](#) on page 148
- [Add objects to layer](#) on page 149

### 3.1.6.10. Rename layer

**Belongs to**

- **Category:** Layers
- **Type:** Changes
- **Since version:** 12 update 3

**What it does**

Allows you to change the name of the layers in a document.




**Note:** You can also use regular expressions to define the source and target layer name.

**Example**

Suppose you want to rename the layers that are visible in your document, in this example Layer1 and Layer3 (but not Layer2, Layer12 or any other layer).




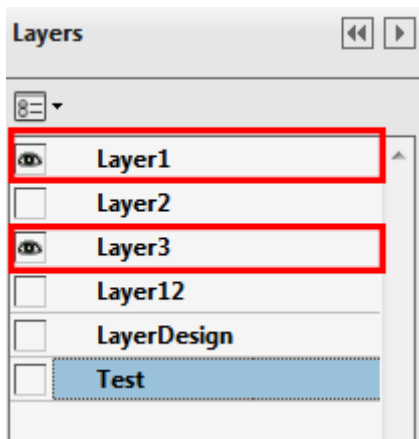

Proceed as follows:

1. Select the **Rename Layer** Action.
2. Under Attributes for Rename layer, configure the source and target layer as follows:
  - **From:** Layer([13])
  - **To:** VisibleLayer\$1
3. Select the **Use regular expessions** checkbox.
4. Click **OK**.
5. Run the Action List.

**Result:**

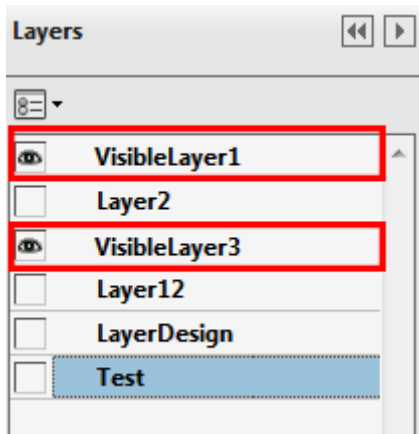

## 3.1.7. Line Art

---

### 3.1.7.1. Apply transfer function

*Belongs to*

- **Category:** Prepress;Text;LineArt;Color;Image

- **Type:** Changes

**What it does**

Adds a transfer function to paths, text, images or all these types of objects. You can exclude spot colors or apply the transfer function on tint values or alternate values only.

Transfer functions are used for creative purposes, artistic effect and to correct the characteristics of a specific, maybe poorly calibrated, output device. For example, a file that is intended for output on a particular image setter may contain transfer functions that compensate for the dot gain inherent to that printer.



**Note:** Transfer functions are not allowed in PDF/X compliant documents.

**Related Actions**

- [Check for custom transfer function](#) on page 402
- [Remove custom transfer function](#) on page 271

### 3.1.7.2. Change dash pattern

**Belongs to**

- **Category:** Line Art
- **Type:** Changes

**What it does**

Changes the pattern of dashed lines or converts them to continuous lines.

**How to proceed**

To use continuous lines, click .

To create a dashed pattern, click  and configure the following fields:

- In the **On** fields, enter the desired length of the dashes.
- In the **Off** fields, enter the desired size of the spaces between the dashes.
- In the **Phase** field, enter a value to indicate where the dash pattern should begin. For example, if you have chosen dashes of 5 cm each, if you have specified a phase of 2 cm, the first dash will have a length of 3 cm (5 cm - 2 cm).

### 3.1.7.3. Change fill and/or stroke

**Belongs to**

- **Category:** LineArt;Text
- **Type:** Changes

**What it does**

Allows you to turn on or off the fill and/or stroke for the selected objects.

### 3.1.7.4. Change fill type

**Belongs to**

- **Category:** LineArt;Text
- **Type:** Changes

**What it does**

Allows you to change the fill type of the selected objects to either Non-Zero Winding (Fill) or Even-odd (Eofill).

**About the fill type**

The fill type is an attribute of polygons and loops: compound paths with intersecting lines. To determine whether a point is part of the shape, two different rules can be applied:

- The **Non-Zero Winding** rule (or standard rule). This rule supposes that you draw a line from a point inside the shape to the outside of the shape, without passing through a vertex. You must now count the number of times edges wind around the point inside the shape, in a counter-clockwise direction:
  - For every edge that crosses the line from the point inside the shape in one direction, add 1 to the winding number.
  - For every edge that crosses the line in the opposite direction, subtract 1.

If the winding number is not equal to zero, the shape area to which the point belongs, is filled. For more information, refer to <http://www.wikipedia.org/wiki/nonzero-rule>.

- The **Even-odd rule**: This rule also supposes that you draw a line between a point inside the shape outline and a point outside its outline.
  - If that line crosses the line of the shape an odd number of times, the shape area to which the point belongs, is filled.
  - If the number of crossings is even, the area is not filled.

**Checking the fill type of line art**

To see which rule is applied, check the object's fill attributes:

1. Select the object, using the Enfocus Select tool .
2. Click  to display the Enfocus Inspector and select  >  .
3. At the bottom, check which button is selected:
  - If  **Fill** is selected, the **Non-zero Winding rule** applies.
  - If  **Eofill** is selected, the **Even-odd** rule applies.

**Related Actions**

- [Select paths by fill type](#) on page 460

### 3.1.7.5. Change flatness

**Belongs to**

- **Category:** LineArt;Text
- **Type:** Changes

**What it does**

Allows you to set the flatness of a PostScript curve.

The flatness determines how the objects in a document are printed on a PostScript printer.

The default setting for flatness is 1. Increasing this value will speed up printing, but can reduce the print quality (resulting in visible segments in the curve). Decreasing this value will slow down printing, but will improve the print quality.

**Related Actions**

- [Check flatness](#) on page 399
- [Select flatness](#) on page 503

### 3.1.7.6. Change line cap

**Belongs to**

- **Category:** LineArt;Text
- **Type:** Changes

**What it does**

Changes how the end of a vector line looks like.

**How to proceed**

- To have the line end exactly, click  **butt**.
- To put a round end on the line, click  **round**.
- To have corners projected beyond the length of the line, click  **projecting square**.

### 3.1.7.7. Change line join

**Belongs to**

- **Category:** LineArt; Text

- **Type:** Changes

**What it does**

Changes how a corner on a vector line looks like.

**How to proceed**

- To have a sharp corner, click  **miter**.
- To put a round corner on the line, click  **round**.
- To flatten the corners, click  **bevel**.

### 3.1.7.8. Change line weight

**Belongs to**

- **Category:** LineArt;Text
- **Type:** Changes

**What it does**

Changes the thickness of a selected line to the desired line weight.

**Related Actions**

- [Normalize line weight](#) on page 133
- [Select by line weight](#) on page 457
- [Check line weight](#) on page 346

### 3.1.7.9. Change miter limit

**Belongs to**

- **Category:** LineArt; Text
- **Type:** Changes

**What it does**

Changes the length of the extension of a corner on a vector line.

The miter limit is the limit when a join switches from mitered (pointed) to beveled (squared-off). To allow “pointier” angles, you can increase the miter limit.

For more information on how to calculate the miter limit, refer to the topic “Stroke attributes: Miter limit” in [the PitStop Pro Reference Guide on the Enfocus website](#).

For more information on how to calculate the miter limit, refer to the topic “Stroke attributes: Miter limit” in the PitStop Pro Reference Guide.

### 3.1.7.10. Change stroke adjustment

***Belongs to***

- **Category:** LineArt; Text
- **Type:** Changes

***What it does***

Allows you to enable or disable stroke adjustment.

Stroke adjustment takes care of the rendering of paths on a raster device (printing device, computer monitor, etc.).

***Example***

If stroke adjustment is **turned off**, the device will draw the pixel only if it covers the path for more than 50%.

This means that a 1 pixel wide line can be drawn in different ways:

- If the line is drawn nicely on top of a pixel of the screen, the line will look fine.
- If the line is spread over 2 pixels of the screen, the width will be 2 pixels on some places and 1 pixel on other places, turning the line into an ugly, jaggy line.

If stroke adjustment is **turned on**, a correction will be made in such a way that the line looks nice and has the same width (1 pixel) everywhere.

### 3.1.7.11. Close path

***Belongs to***

- **Category:** Line Art
- **Type:** Changes

***What it does***

Joins the connection between the first and the last anchor point of a path (as required).

### 3.1.7.12. Combine subpaths

***Belongs to***

- **Category:** Line Art
- **Type:** Changes

***What it does***

Combines two selected paths.

**About subpaths**

A path is considered the combination of the path itself which represents most graphic state properties such as color, line-weight, etc. and the subpaths which represent the lines. For example, a doughnut is a single path with a single fill and stroke color, which consists of two subpaths (=two circles).

**Related Actions**

- [Select subpaths](#) on page 462
- [Split in subpaths](#) on page 176

### 3.1.7.13. Combine and divide shapes

**Belongs to**

- **Category:** Line Art
- **Type:** Changes
- **Since version:** 2018

**What it does**

Allows you to combine the selected objects into one shape or vice versa, divide a shape in multiple parts.

In case of combining shapes, you should indicate how the overlapping parts should be handled:

- **Unite:** Combines the selected objects into a single shape.
- **Intersect:** Keeps the areas where objects are stacked on top of each other.
- **Exclude:** Keeps the areas where an odd number of objects are stacked on top of each other.
- **Minus front:** Keeps the areas of the bottom shape which are not overlapping with the overlying shapes.
- **Minus back:** Keeps the areas of the top shape which are not overlapping with the underlying shapes.

If you want to keep the original shapes, select **Create copy**. The changes will be made on the copy and the original shapes will be kept as they are.

**Combine/Divide Shapes** is also an option in the PitStop Pro > Object menu and in the context menu when you make a selection, and a tab in the PitStop Inspector.



**Note:** If used on 'open' paths, the paths are closed before the operation is executed. The result may be unexpected.


**Examples**

```
Select line art
Combine and divide shapes <!-- Choose an option -->
```

Suppose you're running this Action List on a file with the following 3 partly overlapping objects:



The table below shows the result of each of the options.

| Chosen option | Result                                                                                                                                                       |
|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Unite         |  <p>Note that the new shape gets the color of the front/top shape.</p>      |
| Intersect     | As there is no part where all three objects are stacked on each other, the intersection is empty and all shapes are removed.                                 |
| Exclude       |                                                                             |
| Minus front   |                                                                             |
| Minus back    |                                                                           |
| Divide        |  <p>Once divided, you can for example move the different parts apart.</p> |

**Related Actions**

[Select line art](#) on page 457

3.1.7.14. Convert fill to stroke

**Belongs to**

- **Category:** Line Art
- **Type:** Changes
- **Since version:** 24.03



**What it does**

Converts a filled path to a stroke.



**Note:** This option is also available in the Enfocus Inspector (Line Art Editing > Convert Fill To Stroke).

Sometimes it is not possible to convert a filled path, without having a small visual deviation. In that case you should enable the **Maximum visual deviation** option and choose a value. 0.01% (of the surface area of the original filled path) is the default value.

**Use cases**

Sometimes strokes get converted to fills during processing of the file, with unwanted consequences.

For example if the stroke was to be used as guide for a cutting table, this is not possible anymore, because the shape of the original center line is lost. The convert fill to stroke Action can fix this.


The same goes for stroked registration marks; if they are converted to fills, they are no longer recognized by the software.




**Note:** Often this Action results in a path with a lot of nodes. Note that PitStop provides an Action and an option in the Inspector to simplify such paths! The name of the Action is [Simplify line art](#) and the option in the Inspector can be found in the Line art editing tools.

**Example**

**Before:** The selected line art has no stroke, only a fill.

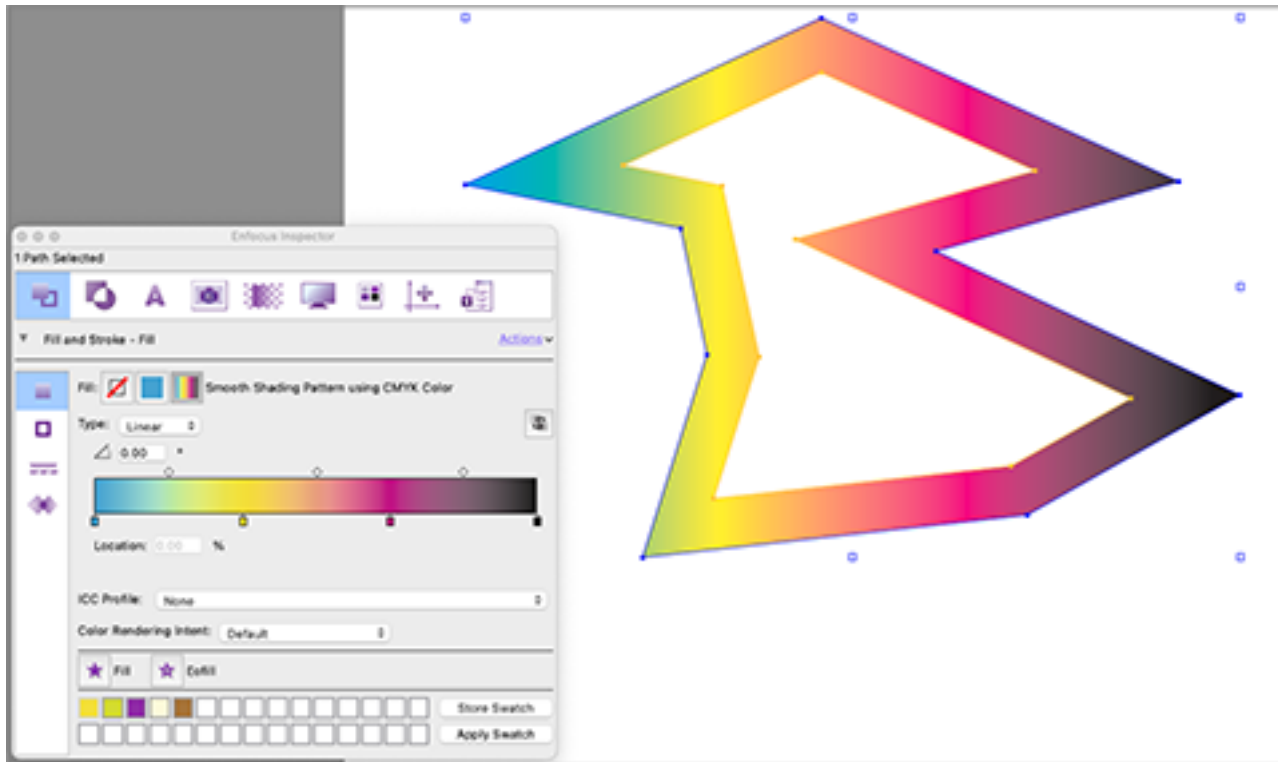

**After:** The selected line art has been converted into a stroke.

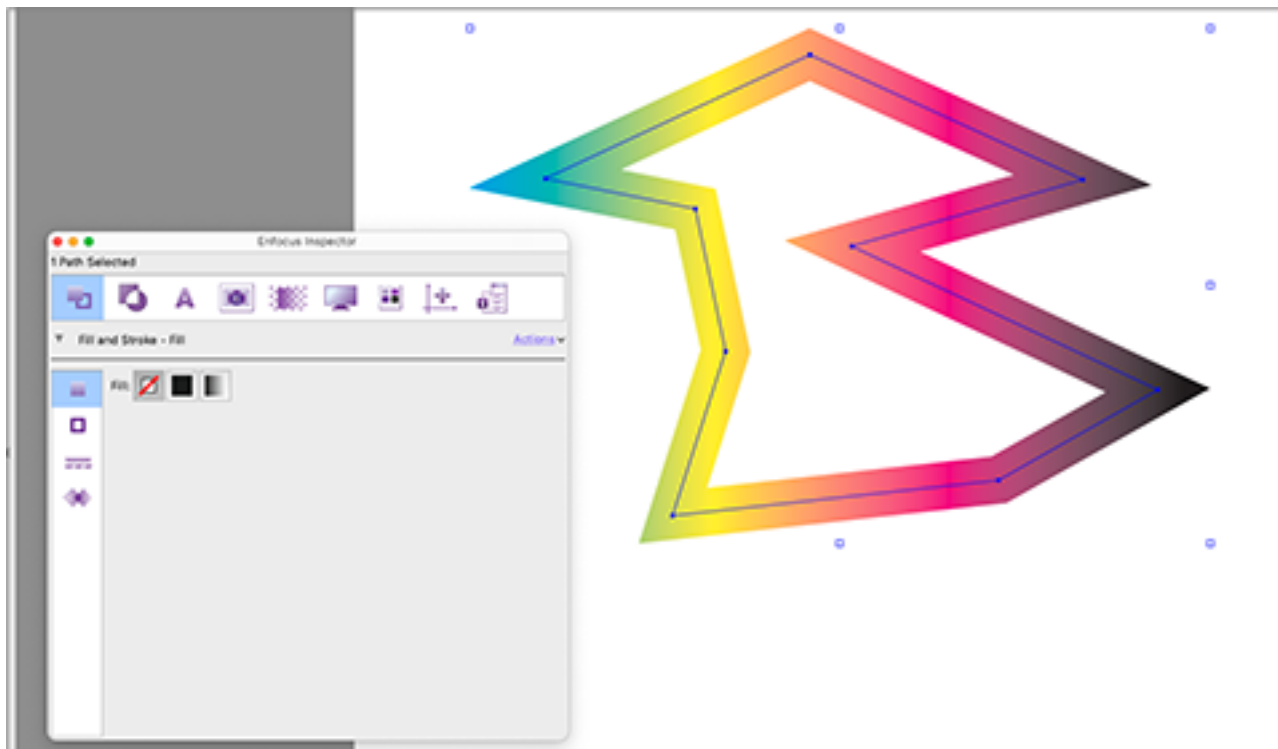

#### **Related Actions**

- [Convert stroke to fill](#) on page 166

### 3.1.7.15. Convert stroke to fill

#### **Belongs to**

- **Category:** Line Art
- **Type:** Changes
- **Since version:** 2018

#### **What it does**

Converts a stroked path to a filled path.

The stroke properties become the fill properties of the newly created object.

There are two methods to make the conversion:

- **Placing the objects with stroke or fill in a knockout group** This method puts everything in a form. This may be undesirable; if so, you can select the second option.  
**Clipping the object with fill by the object with stroke** This method works in a different way, without knockout groups, it simply cuts away the stroked object. Note that exceptionally small hairlines may be visible (depending on the renderer used).

In most cases, there will be no visual difference between both methods.



**Note:** This option is also available in the Enfocus Inspector (Line Art Editing > Convert Stroke To Fill).

### Examples

Some examples where this Action can be useful:

- You want to combine shapes ([Combine and divide shapes](#) on page 163). This is not possible with objects that have no fill.
- You want to remove one dash of a dashed line. This is only possible after you have converted the stroke to a filled path.

### Related Actions

- [Convert fill to stroke](#) on page 164

## 3.1.7.16. Crop line art

### Belongs to

- **Category:** Line Art
- **Type:** Changes
- **Since version:** 2018

### What it does

Performs a hard crop on line art.

This is useful to remove redundant data, for example content that is masked away. This reduces the complexity and makes the file faster to process and easier to edit. Note that PitStop 2018 comes with a standard Action List "Clean Up Content" that makes use of this Action.

There are three ways to crop line art:


- **Crop line art to clip mask** Allows you to "execute" clipping masks on line art: the objects are cropped to their clipping mask, while the clipping path itself and anything that was clipped away is removed, without causing any visual difference. During this process, strokes are contourized (converted to fill paths). As a consequence, 'redundant' (because invisible) line art is removed, which reduces the file size and speeds up the rendering and processing of your artwork files.
- **Crop line art to the page box of your choice:** Removes all line art outside the specified page box.
- **Crop line art to forms:** Removes all line art outside the form (if applicable).

In case of knockout behavior, there are two methods to crop the line art:




- **Placing the stroke and fill objects in a knockout group** This method puts everything in a form. This may be undesirable; if so, you can select the second option.
- **Clipping the fill object by the stroke object** This method works in a different way, by cutting away the stroked object. No forms/knockout groups are created. Note that exceptionally small hairlines may be visible (depending on the renderer used).

In most cases, there will be no visual difference between both methods.

Example 1
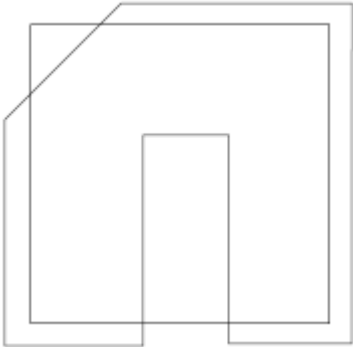
|                                                                                     |                                                                                            |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|
|    | Clipped image. There is no visual difference before and after cropping/running the Action. |
|   | Clipped image in wireframe mode BEFORE cropping/running the Action.                        |
|  | Clipped image in wireframe mode AFTER cropping/running the Action.                         |

Example 2
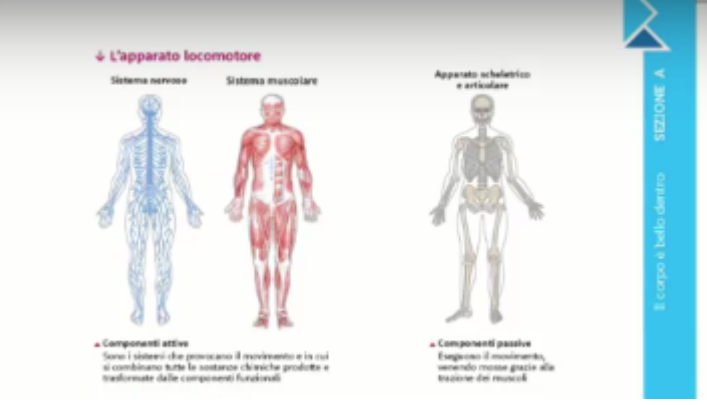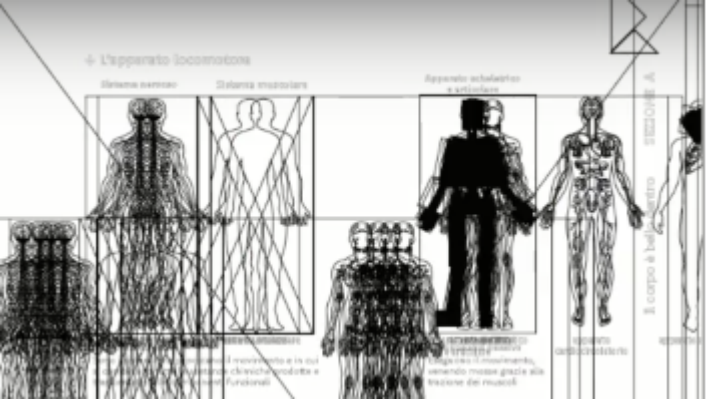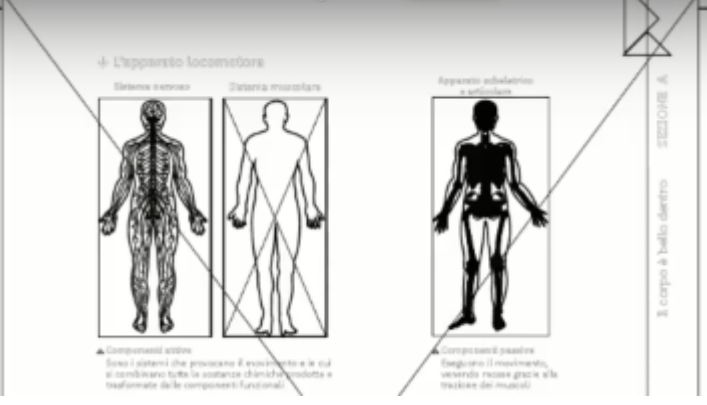
|                                                                                      |                                                                                                        |
|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
|    | <p>How the page looks. There is no visual difference before and after cropping/running the Action.</p> |
|   | <p>Page in wireframe mode BEFORE cropping/running the Action.</p>                                      |
|  | <p>Page in wireframe mode AFTER cropping/running the Action.</p>                                       |

Want to know more?

There is a nice movie explaining this Action. Check it out on our learning platform ([www.enfocus.com/learn](http://www.enfocus.com/learn)): [PitStop 2018 features](#).

### 3.1.7.17. Fix negative dash pattern phase

Belongs to


- **Category:** LineArt
- **Type:** Changes

- **Since version:** 13

**What it does**

Converts a negative dash pattern phase into a positive phase without any visual change.

The dash pattern phase specifies the distance into the dash pattern to start the dash. Negative values may not be supported by the RIP.

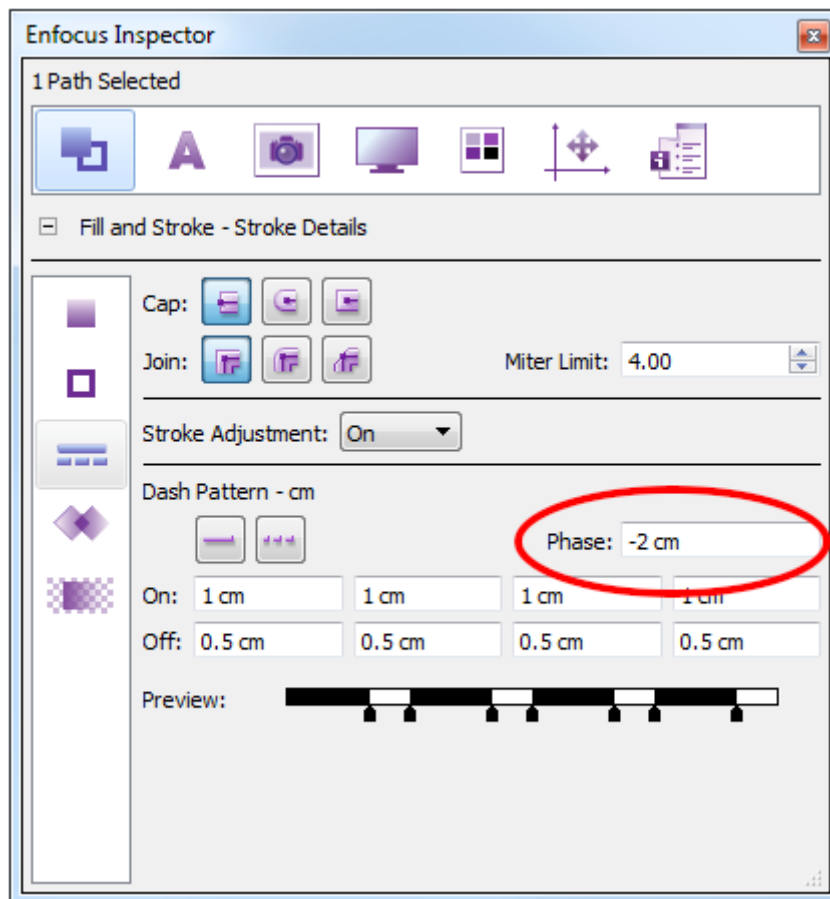**Example:**

Applying this Action to the dashed pattern in the above example (phase = - 2 cm) will result in a new phase of 4 cm. This positive value is calculated by adding the total length of the dash pattern (6 cm) to the negative phase (-2 cm).

**Related Actions**

- [Select objects with negative dash pattern phase](#) on page 458

- [Fix negative dash pattern phase](#) on page 169

### 3.1.7.18. Match fill and stroke colors

#### ***Belongs to***

- **Category:** Color; LineArt
- **Type:** Changes
- **Since version:** 12 update 3

#### ***What it does***

Changes the stroke color to match the fill color or vice versa.

#### ***Use case***

Suppose you want to print very small text. To improve the readability, you convert the text to outlines and add a stroke. However, the stroke color is black by default. This may not be desired, e.g. if your text is in color. In that case, you can run this Action with the option **Change the stroke color to match the fill color**.

#### ***Related Actions***

[Change color](#) on page 102

### 3.1.7.19. Normalize line weight

#### ***Belongs to***

- **Category:** General; LineArt; Position and size
- **Type:** Changes

#### ***What it does***

Normalizes paths where a transformation matrix caused distortions, by removing the distortion, giving the path a uniform line weight equal to the average reported in the Inspector. The Action also works on sheared paths.

#### ***Related Actions***

- [Change line weight](#) on page 161
- [Select by line weight](#) on page 457
- [Check line weight](#) on page 346

### 3.1.7.20. Offset path

#### ***Belongs to***

- **Category:** Line Art
- **Type:** Changes
- **Since version:** 2018

**What it does**

Grows or shrinks a path by the value defined in the attributes of this Action. This way you can make larger or smaller versions of an object.

Attributes are:


- **Offset:** Determines how much the path will grow or shrink; this value denotes the distance between the original and the new path. Use negative values to make the path smaller, positive values to make it larger.
- **Join:** Determines the path's angles. Choices are:
  - miter (pointed corner) - in that case you can also determine a miter limit, to make the corners sharper (high value) or less sharp (low value)
  - round (rounded corner)
  - bevel (flat corner).
- **Create copy:** Makes sure the original path is kept, in addition to the offset path.

This Action also works on clipping paths and curved paths.

Open paths are automatically closed before growing or shrinking.

**Examples**

**Original object**



| Chosen options                             | Result                                                                              |
|--------------------------------------------|-------------------------------------------------------------------------------------|
| Offset: 5 mm<br>Join: Miter<br>Create copy |  |
| Offset: 5 mm<br>Join: Round<br>Create copy |  |



| Chosen options                             | Result                                                                            |
|--------------------------------------------|-----------------------------------------------------------------------------------|
| Offset: 5 mm<br>Join: Bevel<br>Create copy |  |
| Offset: 5 mm<br>Join: Bevel<br>No copy     |  |

### 3.1.7.21. Open path

**Belongs to**

- **Category:** Line Art
- **Type:** Changes

**What it does**

Removes the connection between the first and the last anchor point of a path.

### 3.1.7.22. Reverse path

**Belongs to**

- **Category:** Line Art
- **Type:** Changes
- **New Since:** PitStop 2022

**What it does**

Changes the direction of the starting and ending point of the selected path.

### 3.1.7.23. Separate stroke and fill

**Belongs to**

- **Category:** Line Art
- **Type:** Changes


**What it does**

Splits stroke and fill of line art that has both a stroke and a fill.


This is for example useful if you want [to add bleed around a contour](#), which is able to extend line art, but only if it's not both stroked and filled.

### Example

**Before:**

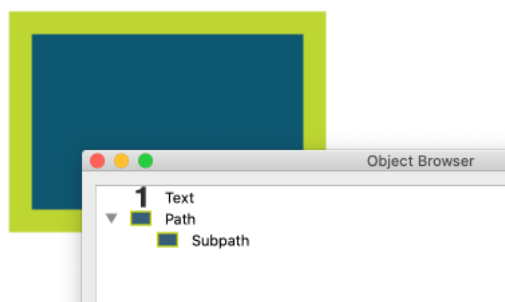

**After:**

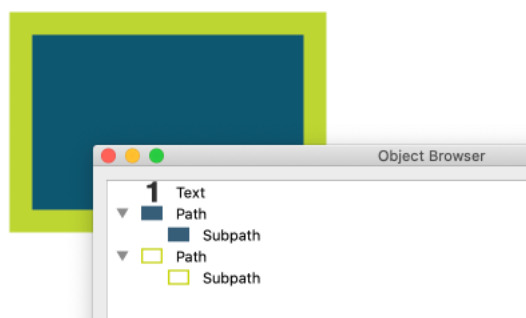

### Related Actions

- [Add bleed around contour](#) on page 258

## 3.1.7.24. Simplify line art

### Belongs to

- **Category:** Line Art
- **Type:** Changes
- **Since:** 24.03

### What it does

Simplifies a path by reducing the number of nodes.



**Note:** This option is also available in the Enfocus Inspector (Line Art Editing > Simplify Line Art).

**Attributes****Note:** Settings are remembered.

| Attribute                                                                       | Description                                                                                                                                                          |
|---------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Keep all original curves                                                        | Keep the curves that are already present, regardless of the curve fitting settings below. PitStop will only modify the straight lines in the original path.          |
| Target segment length                                                           | Increase the segment length to increase the space between the nodes and further reduce the number of nodes.<br><br>Default value is 20 pt.                           |
| Keep corners with angle greater than...                                         | Make sure to keep the segments that clearly form an angle, to avoid mistakes.                                                                                        |
| Curve fitting                                                                   | Combine as many curves as possible into one long curve. Use this option in combination with the target segment length.                                               |
| Straight line fitting <ul style="list-style-type: none"><li>Tolerance</li></ul> | Combine as many straight lines a possible into one long straight line, taking into account the tolerance, i.e. the maximum deviation allowed from the original path. |


**Use cases**

Cut paths with many nodes slow down cutting, because the cutting machine needs to stop and start again at every node; by reducing the number of nodes (approximating the original path), the speed will increase.

Line art with many nodes can also be challenging for RIPs.

**Tip**

This Action is also useful if you've [converted a fill to stroke](#), typically resulting in a path with a lot of nodes.

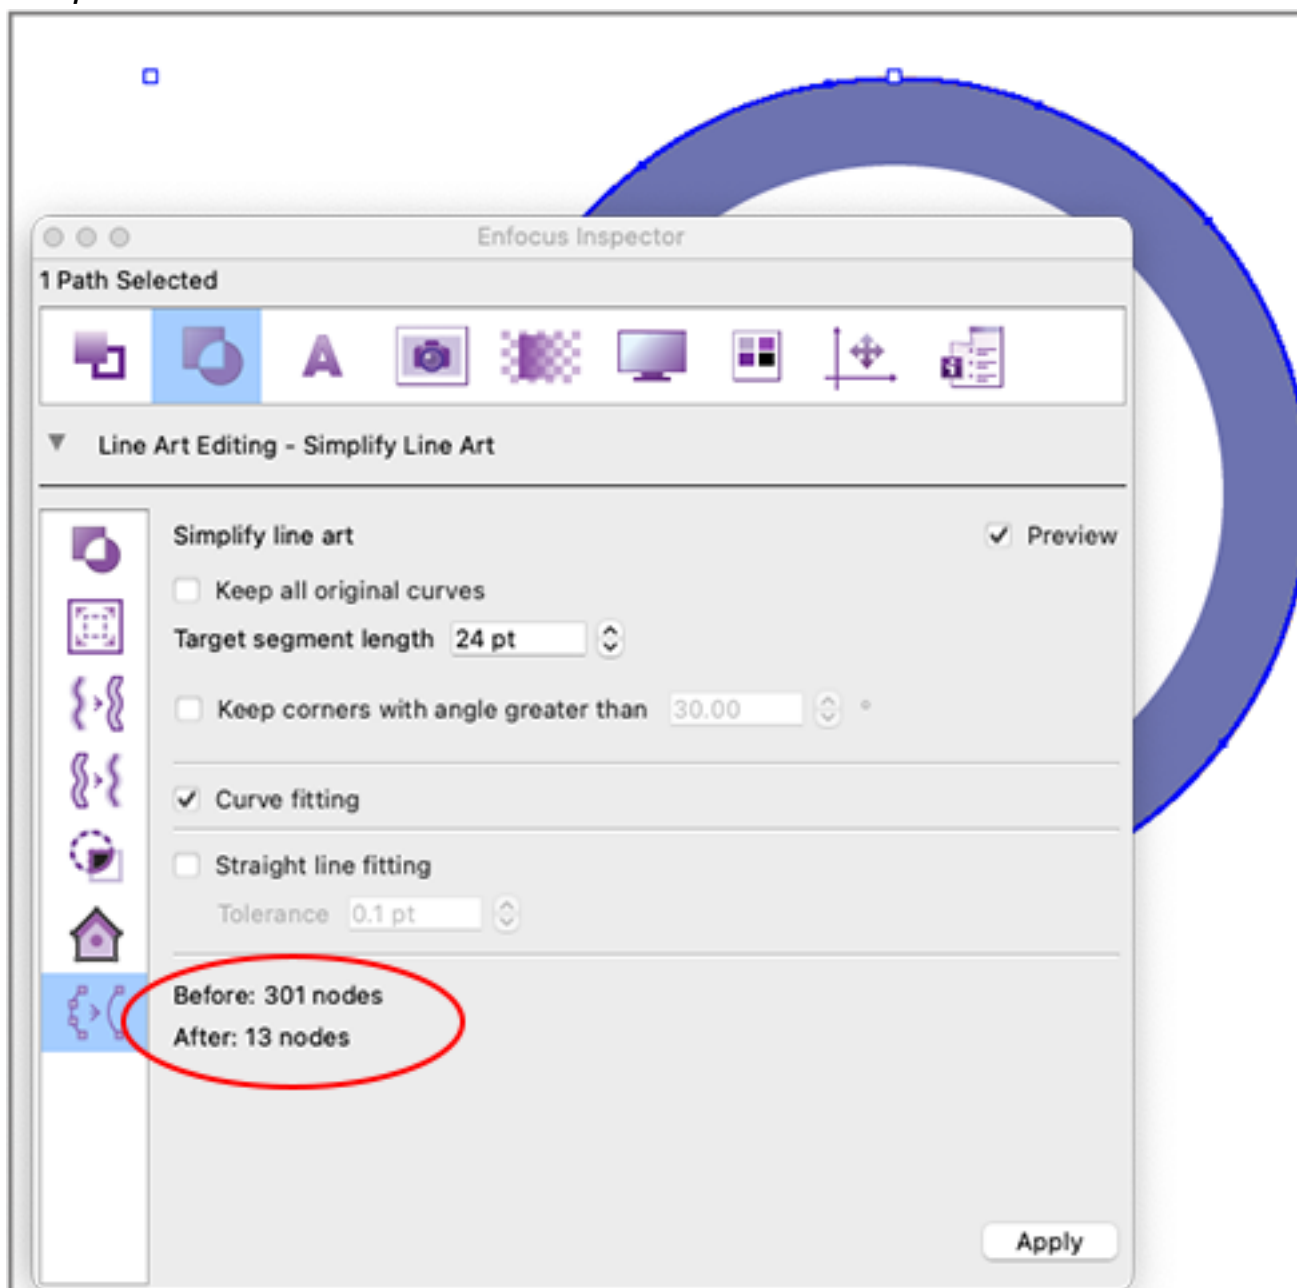*Example*

### 3.1.7.25. Split in subpaths

***Belongs to***

- **Category:** Line Art
- **Type:** Changes

***What it does***

Allows you to split any compound path into separate paths, for example to give them a different color.

**Splitting compound paths in PitStop Pro**

In PitStop Pro, you can as well split compound paths. Proceed as follows:

1. Select the compound path (by using the PitStop Select Objects tool ).
2. Right-click it.
3. Click **Path > Compound Path > Release Compound Path**.

**Related Actions**

- [Combine subpaths](#) on page 162
- [Select subpaths](#) on page 462

### 3.1.7.26. Split line art in segments

**Belongs to**

- **Category:** Line Art
- **Type:** Changes

**What it does**

Allows you to split a path in multiple individual segments.

**Only split at corners where the angle is at least <value>°** avoids that sequences of continuous lines get split.

**Use cases**

This Action can be useful for optimizing cut lines, because detecting and deleting duplicate lines is a critical process. It can help you break lines apart, remove hidden objects, and close gaps in contours.

**Related Actions**

- [Combine subpaths](#) on page 162
- [Select subpaths](#) on page 462
- [Split in subpaths](#) on page 176

## 3.1.8. Metadata

---

### 3.1.8.1. Add missing creation and modification date

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Inserts the creation and modification date.

In some legacy PDF applications it was possible to create a PDF file without a creation or modification date. This Action fixes this issue.

**Related Actions**

[Check creation and modification date](#) on page 351

### 3.1.8.2. Change annotation flags

**Belongs to**

- **Category:** Metadata
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Allows you to enable or disable the annotation flags of your choice.

Following flags can be changed:

- Invisible
- Print
- NoRotate
- ReadOnly
- ToggleNoView
- Hidden
- NoZoom
- NoView
- Locked
- LockedContents

**Related Actions**

- [Check annotation flags settings](#) on page 348
- [Check annotations print setting](#) on page 349
- [Use flags to select annotation](#) on page 469

### 3.1.8.3. Change annotations print setting

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Change annotations' print setting allows you to set the selected annotations to **Printing** or **Non-Printing**.

### 3.1.8.4. Change binding

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Allows you to redefine a document's binding; you can set binding to the right or to the left.

Most European language documents are bound on the left.



**Note:** To check a document's binding, in Adobe Acrobat, go to **File > Properties** and switch to the **Advanced** tab. The document's binding property (Left Edge or Right Edge) is displayed under Reading Options.

**Related Actions**

- [Check binding](#) on page 350
- [Select by binding](#) on page 465

### 3.1.8.5. Change document info

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Changes the document information as found in the document properties in Acrobat.

You can change, remove or replace the following details:

- Producer
- Title
- Subject
- Author
- Creator
- Keywords

If you want to replace document info, you can make use of fixed strings and/or document variables, such as the user name, company, date ... see the overview of document variables below.

**Document variables - Overview**

This is the full list of the predefined variables that can be inserted via the **Variable** button:

- %Current Document Name%
- %Full Document Path%
- %Time%

- %UTC Time%
- %Date%
- %UTC Date%
- %User Company%
- %User Name%
- %Page Number%



**Note:** You can use the page number as it is, or increment or decrement it (so always add up or subtract a certain number). To decrement, you need to add a minus sign. For example, if the page number is '12' and you enter '-3', the value of the variable will be '9'. If you enter '3', the value of the variable will be '15'. You can also add leading zeros by defining the minimum number of digits. For example, if Total digits is set to '3', '9' will become '009' and '15' will become '015'.

- %Page Count% = total number of pages



**Note:** You can add leading zeros by defining the minimum number of digits. For example, if Total digits is set to '3', '9' will become '009' and '15' will become '015'.

- %Document Title%
- %Page Box Dimensions%



**Note:** You need to indicate which page box should be considered. For example, if you select Media Box from the Page Box list, the value of the variable will be the dimensions of the media box, for example: 210 x 297 mm (the unit depends on the unit specified in the PitStop Pro preferences).

- %Page Box Width%



**Note:** You need to indicate which page box should be considered. For example, if you select Art Box from the Page Box list, the value of the variable will be the width of the art box, for example: 210 mm (the unit depends on the unit specified in the PitStop Pro preferences).


- %Page Box Height%



**Note:** You need to indicate which page box should be considered. For example, if you select Bleed Box from the Page Box list, the value of the variable will be the height of the bleed box, for example: 210 mm (the unit depends on the unit specified in the PitStop Pro preferences).

This is an example of the dialog that allows you to insert predefined text variables.



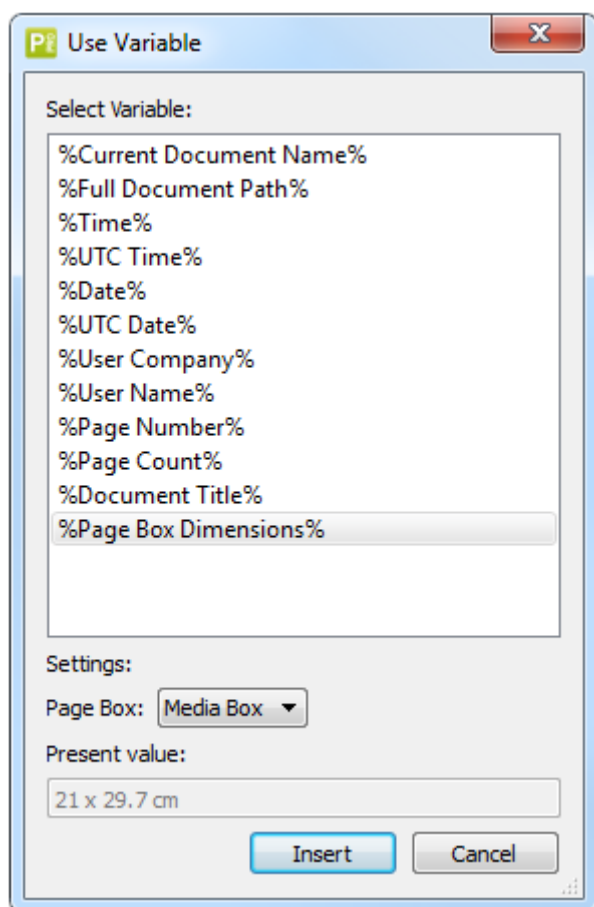

### Example Action List

To replace the current keywords in your document with the document title and the word "PDF", proceed as follows:

1. Run the Change document info Action to remove the current keywords:

```
Change document keywords <!-- select Remove -->
```

2. Run the Change document info Action to insert the new keywords:

```
Change document keywords <!-- select: Set to PDF, %Document Title% -->
```

### Related Actions

- [Check document info](#) on page 352
- [Select by document info](#) on page 465

## 3.1.8.6. Change document information dictionary compliance

- **Category:** Metadata, PDF 2.0
- **Type:** Changes

- **New since:** PitStop 2021

#### **What it does**

Makes the information dictionary compliant with the chosen PDF version.

#### **About the info dictionary**

The info dictionary contains information about the file, such as the title, the author, the creation date ... and is visible through the file's Document Properties.

The specifications for the info dictionary depend on the PDF version:

- **PDF 1.7:** The info dictionary is optional. If it's present, it may contain the following entries: Title, Author, Subject, Keywords, Creator, Producer, CreationDate, ModDate and Trapped.
- **PDF 2.0:** The info dictionary is optional. If it's present, it may be empty, or contain CreationDate and/or ModDate. The other entries are deprecated.
- **PDF/X-6:** There should be no info dictionary, or if there is one, it should be empty.



**Note:** There is one exception to the above: if there is a PieceInfo dictionary in the document catalog dictionary, the info dictionary is required and must contain the ModDate entry.

Note that as of PDF 2.0, the *info* dictionary is officially called *information* dictionary.

#### **Options**

- **PDF 1.7:** PitStop only adds an info dictionary (including ModDate) if document level PieceInfo is present.
- **PDF 2.0:** PitStop removes deprecated entries from the info dictionary (if necessary). If document level PieceInfo is present, it makes sure there is an info dictionary that contains ModDate.
- **PDF/X-6:** PitStop removes the info dictionary if there is one, except if document level PieceInfo is present; then it makes sure there is an info dictionary that contains ModDate.
- **Current document version:** PitStop detects the current PDF version and makes sure the info dictionary is compliant with the current PDF version.
- **None (leave it unchanged):** This option prevents PitStop from interfering with the info dictionary at the time of saving the file.

### 3.1.8.7. Change Output Intent

#### **Belongs to**

- **Category:** Color; Metadata
- **Type:** Changes

#### **What it does**

Changes a PDF's Output Intent to comply with a particular PDF/X or PDF/A version, using a particular ICC profile and/or ICC characterization.

Note that you can change the document Output Intent or the page level Output Intent.

**Related Actions**

[Check Output Intent](#) on page 312

### 3.1.8.8. Change PDF version

**Belongs to**

- **Category:** Metadata, PDF 2.0
- **Type:** Changes

**What it does**

Changes the Acrobat and PDF version of a PDF.

The Acrobat version is the sum of the two numbers that make up the PDF version, for example: PDF 1.4 = Acrobat 5. This is not true anymore for PDF 2.0, as from this version onwards there is no link anymore between the Acrobat and the PDF version.



**Note:** Changing the PDF version will not change the attributes of a higher version PDF to those of a lower one - it only changes the version **number**. As higher versions of Acrobat always save the PDF version number up to their version, even if nothing has changed, this Action can be useful to reset the PDF version to the one used to create the PDF.

**Example**

If you configure this Action to change the PDF version to PDF 1.5, both the PDF version and the Acrobat version will be changed. The new PDF version will be PDF 1.5; the new Acrobat version will be 6.0.

If you change the PDF version to PDF 2.0, the Acrobat version will remain unchanged.

**Related Actions**

- [Select by PDF version](#) on page 466
- [Check PDF/Acrobat compatibility](#) on page 362

### 3.1.8.9. Change PDF/A version key

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Changes the version key tag in a PDF/A document to another version key.

The following version keys are supported:

- PDF/A-1a
- PDF/A-1b
- PDF/A-2a
- PDF/A-2b

- PDF/A-2u

**About PDF/A version keys**

PDF/A is a specialized subset of the PDF specification, also known as "PDF for **A**rchive".

The PDF/A version key identifies the version of the PDF/A standard the document complies with. If the version key is not set correctly, the document is not PDF/A compliant. Note that changing the **key** does not change the compliance of the document! It will only allow you to continue with your workflow.

**Related Actions**

- [Remove PDF/A version key](#) on page 193
- [Check PDF/A version key](#) on page 363

### 3.1.8.10. Change PDF/X version key

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Changes the version key tag in a PDF/X document to another version key.

The following version keys are supported:

- PDF/X-1a:2001
- PDF/X-3:2002
- PDF/X-1a:2003
- PDF/X-3:2003
- PDF/X-4
- PDF/X-4p

**About PDF/X version keys**

PDF/X is a specialized subset of the PDF specification, also known as "PDF for Exchange".

The PDF/X version key identifies the version of the PDF/X standard the document complies with. If the version key is not set correctly, the document is not PDF/X compliant. Note that changing the **key** does not change the compliance of the document! It will only allow you to continue with your workflow.

**Related Actions**

- [Check PDF/X version key](#) on page 363
- [Remove PDF/X version key](#) on page 193

### 3.1.8.11. Change ProcSet resources

- **Category:** Metadata, PDF 2.0

- **Type:** Changes
- **New since:** PitStop 2021

**What it does**

Adds, removes or does not change the ProcSet entry as specified in the attributes of this Action.

You can as well have PitStop make the appropriate change based on the document's PDF version (see Options).

This Action is useful to make a PDF compliant with a particular PDF version.

**About ProcSet resources**

Procedure sets are categories of related PDF operators used in content streams. The ProcSet entry in a content stream's resource dictionary holds an array that consists of the procedure sets used in that content stream, for example: /ProcSet [/PDF /Text] . Procedure sets are used only when the content stream is printed to a PostScript output device.

ProcSet resources were used in older PDF versions, but as of PDF 1.4 this feature is considered obsolete. As of PDF 2.0, this feature is deprecated.

For more details, refer to [the PDF Reference](#) (See 14.2 Procedure Sets).

**Options**

- **Add ProcSet (default)**
- **Remove ProcSet**
- **Do not change the ProcSet presence** (so if the ProcSet entry is defined, just keep it; if it's not, do not add it)
- **Add, remove or don't change ProcSet, dependent on the document's PDF version**, PitStop behaves as follows:
  - PDF 1.3 and earlier: Add ProcSet resources
  - PDF 1.4 - PDF 1.7: Do not change the ProcSet presence
  - PDF 2.0: Remove the ProcSet resources

### 3.1.8.12. Change trapped flag

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Modifies the trapped flag.

**About trapping**

The trapped flag indicates whether or not a file has been "trapped", i.e. has been corrected for slight color misregistrations. The trapped flag must be defined in PDF/X documents.

The flag can be set to:

- **True:** the document has been trapped, or the creator of the document has decided that it should not be trapped.
- **False:** the document has not been trapped
- **Unknown:** it's not known whether or not the document has been trapped. Note that this status should be avoided.

**Related Actions**

- [Check document trapped flag](#) on page 354
- [Select by trapped flag](#) on page 466
- [Check Trapnets for PDF/X](#) on page 365

### 3.1.8.13. Fix PDF/A extension schema definitions in document XMP metadata

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Fixes issues with the PDF/A extension schema definitions in document XMP metadata.

**About XMP metadata**

XMP metadata is descriptive information about the file embedded in the PDF, for example the name of the author, keywords, copyright information... XMP refers to labeling technology that is used, i.e. Adobe's Extensible Metadata Platform. You can view the XMP metadata in a file's Document Properties in Acrobat (Click the **Additional Metadata** button, then select **Advanced**).

**About XMP schema definitions**

PDF/A supports the predefined schema definitions of the XMP 2004 specification. However, as these only cover general metadata requirements, custom XMP schemas ("extension schemas") are also supported to meet company- or industry-specific requirements, on condition that a description of these extension schemas is embedded in the XMP.

### 3.1.8.14. Fix version compatibility with PDF/A-2

**Belongs to**

- **Category:** Metadata
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Fixes the header and catalog version of the PDF to make it compliant with PDF/A-2.

**Related Actions**

- [Check version compatibility with PDF/A-2](#)

## 3.1.8.15. Fix version compatibility with PDF/X-6

**Belongs to**

- **Category:** Metadata
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Fixes the header and catalog version of the PDF to make it compliant with PDF/X-6 or PDF/X-6p.

**Related Actions**

- [Check version compatibility with PDF/X-6](#)

## 3.1.8.16. Flatten annotations

**Belongs to**


- **Category:** Metadata
- **Type:** Changes
- **Since version:** 12 update 3

**What it does**


Allows you to flatten the annotations in a PDF document. The annotations (often interactive elements such as sound clips, callouts, stamps,...) are converted to simple graphics that can be selected, changed, removed, ...

**Example**

**Before:** The PDF contains five annotations: a stamp, a sticky note, a sound clip, a text note and an attachment.

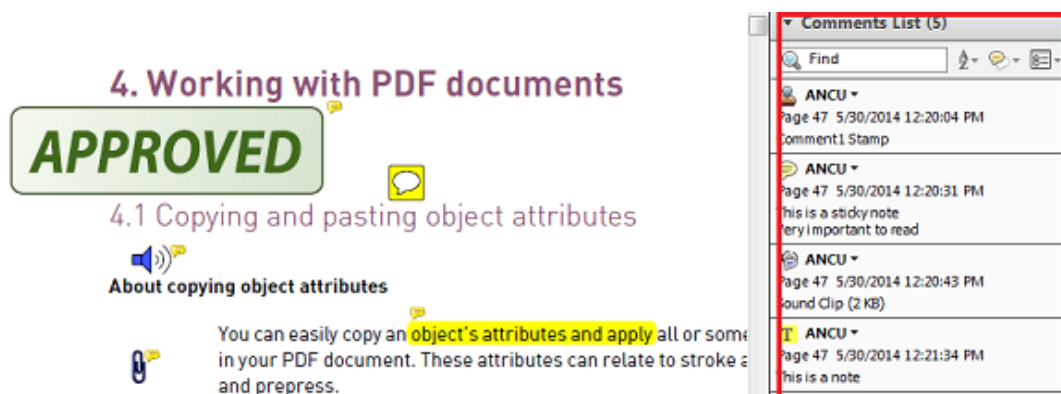

**After:** The PDF does not contain any annotations anymore; the Comments List is empty. The graphics in the PDF can be selected and removed or modified (e.g. the color, size,...) as required. Note that the callouts are removed.

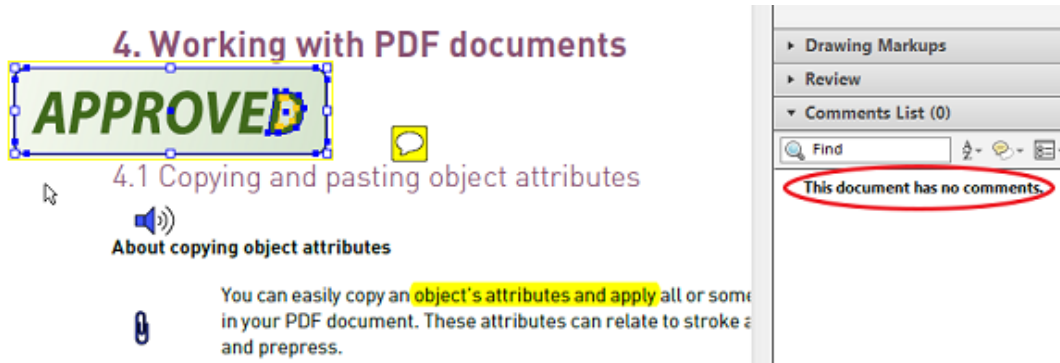

### 3.1.8.17. Flatten form fields

#### **Belongs to**

- **Category:** Metadata
- **Type:** Changes

#### **What it does**

Allows you to convert form fields to normal objects in a document.

This Action is useful if you have output issues with form fields as content, for example because the output device or the PDF renderer does not support form fields.

#### **Related Actions**

- [Check form fields](#) on page 355
- [Remove form fields](#) on page 191

### 3.1.8.18. Make document metadata consistent

#### **Belongs to**

- **Category:** Metadata
- **Type:** Changes

#### **What it does**

Makes sure that the metadata in the different metadata locations has the same values. In case of inconsistencies, the most recent value is used.

If multiple creators are not considered an inconsistency, select the **Allow multiple creators** checkbox. In that case, the "Creator" property will not be changed, even if it is not the same in the different metadata locations.



**How it works**

There are two metadata locations in a PDF file:

- The **info dictionary** contains information about the file, such as the title, the author, the creation date ... and is visible through the file's Document properties. It's not in XML format.
- The **XMP metadata stream** also contains information about the file, but this information is represented as XMP metadata - XMP referring to Adobe's labeling technology **E**xtensible **M**etadata **P**latform. All information in the info dictionary is also represented in the XMP metadata stream dictionary, in the form of XMP properties.

Inconsistencies may occur when only one of the metadata locations has been updated.

**Related Actions**

- [Check if document metadata is consistent](#) on page 359
- [Select if document metadata is inconsistent](#) on page 469

### 3.1.8.19. Remove action dictionaries

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Removes action dictionaries ("actions") from a PDF.

**About action dictionaries**

Action dictionaries are actions that are executed when you click a bookmark or a link, hover over an annotation, open a file ... There are several types of actions, e.g. a music track can be played, a specific page or website can be opened ...

You may want to remove these actions, as they are not allowed in a PDF/X file. The Remove action dictionaries Action will only remove the **action**; the object (the bookmark, annotation) the actions are linked to will not be removed. For example, if you remove the action from a bookmark, the bookmark is still visible, but not clickable anymore.

**Related Actions**

[Check for action dictionaries](#) on page 356

### 3.1.8.20. Remove additional actions

**Belongs to**

- **Category:** Metadata
- **Type:** Changes
- **Since:** 2022

**What it does**

Removes additional action entries from Root, Page, Widget and Field dictionaries.

This is a fix for PDF/X-6, as PDF/X-6 does not support additional actions.

### 3.1.8.21. Remove attachments

**Belongs to**

- **Category:** Metadata
- **Type:** Changes
- **Since Version:** 13 update 2

**What it does**

Removes attachments and attachment annotations from a PDF. This may be useful to reduce the file size.



**Note:** After running the Action, the attachment reference may still be visible in the Attachments pane. After saving and closing the file, it will be gone.

This Action does not work on PDF Portfolios, as this would result in empty PDF files.

### 3.1.8.22. Remove bookmarks

**Belongs to**

- **Category:** Metadata
- **Type:** Changes
- **Since version:** 24.03

**What it does**

Removes bookmarks from the PDF. You can remove:

- All bookmarks, or
- The bookmarks below a certain level, or
- Bookmarks that link to another document, or
- Bookmarks that link to to a removed page (= invalid bookmarks), or
- Bookmarks that contain neither a link nor an action (for example the title of a group of bookmarks). This last option was added in 24.07.

You can see in the Bookmarks panel in Acrobat that the bookmarks have been removed.



**Note:** Sometimes, empty dictionaries are present in the PDF structure (as metadata), without a visible bookmark in Acrobat's Bookmarks panel. Note that these empty dictionaries are also deleted by the Remove bookmarks Action.

**Important remark**

Note that clicking **Edit > Enfocus Undo Execute Action List** does NOT restore the bookmarks that were removed using this Action.

**Related Actions**

- [Check bookmarks](#)
- [Select pages with bookmarks](#)
- [Add bookmarks](#)

### 3.1.8.23. Remove form fields

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Removes any PDF form fields from a document.

You may lose data if you do this.

**Related Actions**

- [Check form fields](#) on page 355
- [Flatten form fields](#) on page 188

### 3.1.8.24. Remove Javascript

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Removes JavaScript code (which might perform unwanted actions) from a PDF.

This language is often used to add interactive functionality to PDF files. However, in a print production environment, these scripts serve no purpose and may result in increased file sizes.

**Related Actions**

- [Check for Javascript](#) on page 357

### 3.1.8.25. Remove marked content

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Strips PDF generator defined content from a PDF.

Marked content is content tagged with special messages so that the application that opens it can read it in a particular way.

**Related Actions**

[Check marked content](#) on page 362

### 3.1.8.26. Remove metadata

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Removes the selected metadata from a PDF. This is typically done to reduce the file size.

You can remove the following types of metadata:

- Annotations
- Thumbnails
- Article threads
- Page labels
- Acrobat capture info
- Bookmarks
- Structural information (= removes all tags, including Tagged PDF tags)
- PieceInfo
- Job ticket
- Named destinations (includes annotations and bookmarks)
- Metadata streams (to reduce the size of the file) - new option since PitStop 13 update 2



**Note:** In PitStop 2019, the 'Remove structural information' checkbox has been split up into two separate checkboxes: 'Structural information' and 'PieceInfo'. Action Lists from earlier versions with 'Remove structural information' enabled, will have both checkboxes selected.

### 3.1.8.27. Remove name from XObjects

**Belongs to**

- **Category:** Metadata, PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Removes Name from form XObject and image XObject stream dictionaries. This is typically done to fix deprecated PDF 1.x features.

### 3.1.8.28. Remove PDF/A version key

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

This Action removes the PDF/A version key from the PDF file.

**Related Actions**

- [Change PDF/A version key](#) on page 183
- [Remove PDF/A version key](#) on page 193

### 3.1.8.29. Remove PDF/X version key

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

This Action removes the PDF/X version key from the PDF file.

**Related Actions**

- [Change PDF/X version key](#) on page 184
- [Check PDF/X version key](#) on page 363

### 3.1.8.30. Remove unused destinations

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Destinations identify locations or views in a PDF you can point to using bookmarks or links. As destinations increase the file size, you may want to remove the destinations that are not used, to reduce the file size.

See also: [Check unused destinations](#) on page 366

### 3.1.8.31. Set correct document XMP name spaces

***Belongs to***

- **Category:** Metadata
- **Type:** Changes

***What it does***

The XMP metadata standard (used for labeling metadata in PDFs) defines namespaces for defined sets of core properties. This Action checks if the correct document XMP namespaces are used, and fixes issues as required.

***Related Actions***

[Check if document XMP name space uses correct prefix](#) on page 360

### 3.1.8.32. Set XMP file identifiers

***Belongs to***

- **Category:** Metadata
- **Type:** Changes

***What it does***

Adds missing file identifiers to the PDF's XMP metadata stream, for example: the Version ID, the DocumentID, the RenditionClass.

***Related Actions***

[Check file identifiers in document XMP metadata](#) on page 322

## 3.1.9. Operators

---

### 3.1.9.1. Copy or cut objects to clipboard

***Belongs to***

- **Category:** General, Operators
- **Type:** Changes
- **Since Version:** 13 update 1

***What it does***

Allows you to cut or copy the selected objects to a clipboard. You should give the clipboard a name (by default: Untitled 1), to avoid confusion when copy-and-pasting different selections in one Action List. You can use up to 1,000 clipboards if you wish, however it is important to realize

that these clipboards are not saved; they are only used while the Action List in which they are used is run.

This Action should be preceded by a selection (i.e. to select the object you want to cut or copy) and followed by [Paste objects from clipboard](#) on page 93 in the same Action List. You cannot cut or copy something to a clipboard in one Action List and then paste it within another Action List.

#### **How to proceed?**

1. Create a new Action List.
2. Add a select Action that select the objects you want to cut or copy.
3. Add a *Cut or copy objects to clipboard* Action to your Action List and set the attributes (select Cut or Copy and type an appropriate name).
4. Add a [Select pages](#) on page 484 Action to indicate the pages on which the selection should be pasted (if not yet selected in step 1, e.g. if you added "Select all" in step 1).
5. Add a [Paste objects from clipboard](#) on page 93 Action and set the attributes on the different tabs (e.g. to define the position of the pasted objects).



#### **Note:**

- Action Lists are executed page after page. As a consequence, you can only paste objects to the following pages. For example, if you copy an object that is present on page 3, you can paste it on page 3, 4, 5, ... but not on page 1 or 2.
- If there is nothing to select to cut or copy (i.e. the select Action of step 2 in the above procedure result in an empty selection), the content of the clipboard is not overwritten with an "empty" set of objects! The previous content (if any) is preserved and will be pasted once more. If you do not want this, you can select the **Clear clipboard after paste** checkbox in the attributes of [Paste objects from clipboard](#) on page 93 Action.

#### **Related Action**

- [Paste objects from clipboard](#) on page 93

## 3.1.9.2. Paste objects from clipboard

#### **Belongs to**

- **Category:** Add, General, Operators
- **Type:** Changes
- **Since Version:** 13 update 1

#### **What it does**

Allows you to paste objects from the clipboard to one or more selected pages. You can paste them multiple times (with fixed distances or distributed across a distance) as required and indicate where they should be placed.

This Action must be preceded by a "copy/cut" Action (that moves the objects to the clipboard) and a "select" Action (that indicates where the objects should be pasted) in the same Action List.

If there are several "copy/cut" Actions in the Action List, you may want to give each of the clipboards an appropriate name, to make sure the different objects are pasted on the correct pages.

## How to proceed?

1. Create a new Action List.
2. Add a select Action that select the objects you want to cut/copy-and-paste.
3. Add a [Copy or cut objects to clipboard](#) on page 131 Action to your Action List and set the attributes (select Cut or Copy and type an appropriate name).
4. Add a [Select pages](#) on page 484 Action to indicate the pages on which the selection should be pasted (if not yet selected in step 2 -if you added "Select all" in step 2, step 4 is redundant).
5. Add a *Paste objects from clipboard* Action and select the name of the clipboard (as entered in step 2). Switch to the different tabs to define the region and the position of the copied objects (see table below).



**Note:** Action Lists are executed page after page. As a consequence, you can only paste objects to the following pages. For example, if you copy an object that is present on page 3, you can paste it on page 3, 4, 5, ... but not on page 1 or 2.

## Tabs

| Tabs       | On this tab, do the following:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Graphics   | <p>Select the clipboard that contains the objects to be pasted.</p> <p>Determine whether or not the clipboard should be cleared after the object was pasted. This option determines what happens if there are no objects to be copied (= if the select Action in step 2 of the above procedure results in an empty selection).</p> <ul style="list-style-type: none"> <li>• If checked, the clipboard will be empty, so nothing will be pasted.</li> <li>• If cleared, the clipboard will still contain content from the previous page and that content will be pasted.</li> </ul>                                                               |
| Attributes | <p>Determine if the objects should be pasted in the foreground or in the background of the document.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Region     | <p>Determine the region where the objects should be moved to. The region is defined based on the page box of your choice and you can define margins within that page box, by grabbing the offsets from a selected area (using the <b>Grab position</b> button ).</p> <p>You can also specify a specific area the objects should not be placed in, also based on a page box and with the option to set margins.</p> <div> <p><b>Note:</b> The settings on this tab are only used if <b>Move graphic elements</b> is selected on the Position tab. If this is not the case, the original location of the graphic elements is preserved.</p> </div> |
| Repeat     | <p>If the objects should be pasted more than once on a page, change <b>No repeat</b> to:</p> <ul style="list-style-type: none"> <li>• <b>Distribute/Repeat fixed number of graphic elements</b> if you want to determine how often the copied objects should be pasted (e.g. 6 times horizontally, 4 times vertically)</li> </ul>                                                                                                                                                                                                                                                                                                                |



| Tabs     | On this tab, do the following:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|          | <ul style="list-style-type: none"> <li>• <b>Distribute/Repeat graphic elements in region</b> if you want PitStop to fill the region (specified on the Region tab).</li> </ul> <p>If you want PitStop to divide the pasted objects evenly across the defined region, choose "distribute" rather than "repeat". In case of "Distribute graphic elements in region", you can choose the maximum or minimum distance between the pasted objects.</p> <p>If you choose "repeat", you should define the exact distance between the pasted objects yourself.</p> <p>The distance can be between the bounding boxes of the pasted objects (choose: <b>Between edges</b>) or from center to center (choose: <b>Between centers</b>).</p> <hr/> <div data-bbox="563 712 638 786">  </div> <div data-bbox="655 723 1390 786"> <p><b>Note:</b> Remember that you can use Smart Preflight variables to define the distances.</p> </div> <hr/> |
| Position | <p>If the selected objects should be moved, select <b>Move graphic elements</b>. Indicate how the objects should be positioned relative to the chosen region. Note that, when adding multiple copies, the same corner should be used to position the graphic elements in the region.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

**Related Action**

- [Copy or cut objects to clipboard](#) on page 131
- [Add copied graphics](#) on page 76

## 3.1.10. Packaging

### 3.1.10.1. Change layer processing steps - ISO 19593-1

**Belongs to**

- **Application:** PitStop Pro
- **Category:** Packaging
- **Type:** Changes
- **Since Version:** 13 update 2

**What it does**

Allows you to change processing steps metadata of the layers of a PDF. You can either choose a different group or a different type. Processing steps metadata is defined by ISO standard 19593-1. For more information, refer to [the website of ISO \(International Organization for Standardization\)](#).

Supported groups:

- Structural
- Dimensions
- Braille
- Legend

- Positions
- White
- Varnish

You can as well define a custom group and custom step types. To do so, enter the appropriate name in the text box.

**Related Actions**

- [Select layers by processing steps - ISO 19593-1](#) on page 479
- [Check processing steps - ISO 19593-1](#) on page 369
- [Remove processing steps - ISO 19593-1](#) on page 277

### 3.1.10.2. Close gaps in contours

**Belongs to**

- **Category:** Packaging
- **Type:** Changes
- **Since Version:** 13 update 2

**What it does**

Allows you to close gaps in contours. You can set the threshold, e.g. only close gaps that are smaller than 0,10 cm.

If gaps should only be closed if the result is a closed contour, select the corresponding checkbox.

**Remark**

We recommend using this Action in combination with [Override rounding rules](#) on page 517 because of precision issues.

**Related Action**

- [Select inside or outside contour](#) on page 493

## 3.1.11. Page

---

### 3.1.11.1. Add hems or pockets

**Belongs to**

- **Category:** Page
- **Type:** Changes


**What it does**

Generates mirrored content for banners, i.e. hems or pockets between the trim and bleed box. You can choose to add them to particular sides and/or to the corners.

You can also add a margin inside the trim box. This value determines where the bleed starts from the inside of the trim box. This can be useful to avoid hairlines if the artwork is positioned close to the trim box.

**Example**

Bleed is added between the trim box (in blue) and the bleed box (in red). The line art is mirrored, not extended.

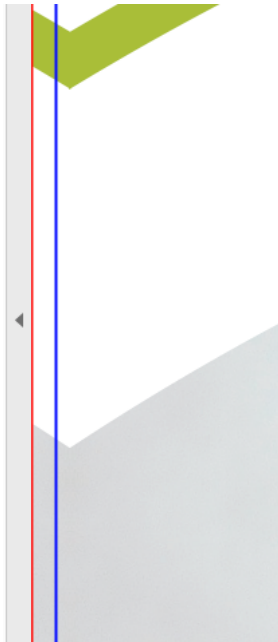

### 3.1.11.2. Add pages

**Belongs to**

- **Category:** Add; Page
- **Type:** Changes

**What it does**

Allows you to insert either empty pages or pages from a particular PDF file (by embedding the file or by using the file path (optionally specified by a variable)).

You can choose the number of pages to add, the location of the new pages in the PDF ...

As of PitStop 2019, you can insert pages before or after a selection you made earlier in your Action List. You could for example select all pages with a certain string and insert empty pages based on this selection. See also the example Action List below.

**"R[number]" notation**

If you want to add pages starting from the end of the PDF, you can use the "R[number]" notation in the **Before pages/After pages** text box. R1 refers to the last page (= 1 page from the end), R2

refers to the last but one (= 2 pages from the end), ... This allows you for example to add a backup interleave page to every page in the PDF.

**Attributes for Add pages:**

☒ Insert empty pages  
☐ Insert pages from document

---

**Insert Empty Pages:**

☐ Exact number of pages:   
☒ Until  pages

---

**Location:**

☒ Before pages   
☐ After pages   
☐ Before last page  
☐ After last page  
☐ Before every  pages starting from page  to   
☐ After every  pages starting from page  to   
☐ Before selected pages  
☐ After selected pages

#### **Example Action List**

Suppose you have a mixed landscape/portrait document and you want to insert an empty page after every landscape page. That's possible with the following Action List.

```
Select all
Select by page orientation <!-- select if page orientation = landscape -->
Add pages <!-- select "insert empty pages" and "after selected pages" -->
```

### 3.1.11.3. Apply page rotation

#### **Belongs to**

- **Category:** Position/Size;Page
- **Type:** Changes

#### **What it does**

Sets the page rotate key defined in the PDF to 0°. This may have a visual effect.

**Related Actions**

- [Check page rotation angle](#) on page 379
- [Select by page rotation angle](#) on page 481
- [Normalize Page Rotate Key](#) on page 214

### 3.1.11.4. Apply page scaling factor

**Belongs to**

- **Category:** Position/Size;Page
- **Type:** Changes

**What it does**

Apply page scaling factor removes the page scaling factor and scales the page to compensate.

A page of 10 by 10 inches and a page scaling factor 2 will be displayed and printed as a page of 20 by 20 inches. By applying the page scaling factor, the actual page size will become 20 by 20 inches.

Page scaling has been introduced in PDF 1.6. If the page scaling factor is not removed or applied, the page size can only be displayed correctly in Acrobat 7 or higher.



---

**Note:** When the result of applying the scaling factor exceeds the size of 200x200 inches, the page may not be displayed well. This is a limitation of Adobe Acrobat.

---

**Related Actions**

- [Check if page scaling factor is used](#) on page 374
- [Remove page scaling factor](#) on page 216

### 3.1.11.5. Center page content

**Belongs to**

- **Category:** Page;Position/Size
- **Type:** Changes

**What it does**

Places all objects in the center of the page.

You can:

- Center the objects horizontally, vertically or both.
- Center the content relative to a page box and set margins (left, right, top and bottom).
- Use page rotation and scaling factor as required.

- Only center the visible part of the content.

### 3.1.11.6. Change art box

#### ***Belongs to***

- **Category:** Page
- **Type:** Changes

#### ***What it does***

Allows you to create or resize an art box.

You must choose one of the following options:

- To create a new art box, select **Define new rectangle** and enter the required values, or grab them from a selected area using the **Grab Offsets** button . Note that boxes are defined from lower left to upper right.
- To resize the art box relative to the axes of the existing art box, select **Resize** and enter the required values.
- To re-use the dimensions from another box, select **Use box size** and select the appropriate page box.
- To determine the size of the art box based on a selection, select **Resize page box to fit the selection** and enter the offset values.

There are some additional options available:

- **Only apply if not all pages have the same size**
- **Ignore page rotation and scaling factor**
- **Always require page box to be defined**

### 3.1.11.7. Change bleed box

#### ***Belongs to***

- **Category:** Page
- **Type:** Changes

#### ***What it does***

Allows you to create or resize a bleed box.

You must choose one of the following options:

- To create a new bleed box, select **Define new rectangle** and enter the required values, or grab them from a selected area using the **Grab Offsets** button . Note that boxes are defined from lower left to upper right.

- To resize a bleed box relative to the axes of the existing bleed box, select **Resize** and enter the required values.
- To re-use the dimensions from another box, select **Use box size** and select the appropriate page box.
- To determine the size of a bleed box based on a selection, select **Resize page box to fit the selection** and enter the offset values.

There are some additional options available:

- **Only apply if not all pages have the same size**
- **Ignore page rotation and scaling factor**
- **Always require page box to be defined**

### 3.1.11.8. Change blending color space

#### ***Belongs to***

- **Category:** Color; Page
- **Type:** Changes

#### ***What it does***

Allows to change the blending color space and/or the luminosity softmask blending color space (if defined in the PDF document).

You can:

- Change the color to CMYK, gray or RGB, or
- Remove the blending color space, by selecting "none" from the first list, or
- Leave one of the color spaces unchanged, by selecting **Do not change**.

#### ***About blending color spaces***

When Adobe Acrobat interprets transparent objects and attempts to create a preview of the flattened artwork, it needs to do so using a single color space for all the items involved in the transparency group. This color space is called the **blending color space**.

The blending color space for soft masks (masks with soft transitions) is called the **luminosity softmask blending color space**. It is usually gray.

#### ***Related Actions***

- [Check if blending color space is defined](#) on page 308
- [Select by blending color space](#) on page 424

### 3.1.11.9. Change crop box

#### ***Belongs to***

- **Category:** Page

- **Type:** Changes

**What it does**

Allows you to create or resize a crop box.

You must choose one of the following options:

- To create a new crop box, select **Define new rectangle** and enter the required values, or grab them from a selected area using the **Grab Offsets** button . Note that boxes are defined from lower left to upper right.
- To resize a crop box relative to the axes of the existing crop box, select **Resize** and enter the required values.
- To re-use the dimensions from another box, select **Use box size** and select the appropriate page box.
- To determine the size of a crop box based on a selection, select **Resize page box to fit the selection** and enter the offset values.

There are some additional options available:

- **Only apply if not all pages have the same size**
- **Ignore page rotation and scaling factor**
- **Always require page box to be defined**

### 3.1.11.10. Change media box

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Allows you to create or resize a media box.

Choose one of the following options:

- To create a new media box, select **Define new rectangle** and enter the required values, or grab them from a selected area using the **Grab Offsets** button . Note that boxes are defined from lower left to upper right.
- To resize a media box relative to the axes of the existing media box, select **Resize** and enter the required values.
- To re-use the dimensions from another box, select **Use box size** and select the appropriate page box.
- To determine the size of a media box based on a selection, select **Resize page box to fit the selection** and enter the offset values.

There are some additional options available:

- **Only apply if not all pages have the same size**



- **Ignore page rotation and scaling factor**

- **Position the page content**

The last option allows you to determine the position of the content on the page. Note that the dropdown only controls *the distance between the new page box and the content*. Options are:

- **No move:** The content stays where it was (the coordinates do not change), regardless of the new size or position of the media box. It is possible that the content does no longer fit in the media box!
- **Center:** The content will keep its position relative to the center of the mediabox. For example, if the content is placed in the bottom left corner of the media box, that will also be the case after resizing, but again: it is possible that the content does no longer fall inside the media box (e.g. if the new box is too narrow).
- **Lower left/lower right:** The content will keep its position relative to the lower left or lower right of the media box; the distance to the lower left or lower right of the media box will be kept the same. For example, if the content is placed in the rightmost corner of the media box, that will also be the case after resizing.
- **Upper left/upper right:** The content will keep its position relative to the upper left or upper right of the media box; the distance to the upper left or upper right of the media box will be kept the same. For example, if the content is placed in the rightmost corner of the media box, that will also be the case after resizing.
- **Shrink to fit:** This option makes sure that the content fits the new page box; the content may be resized as well if needed.

#### **Remark**

Be aware that this Action does not change the crop box; only the media box and the content (if moved along with the media box) are affected. As Acrobat uses the crop box definition for display, when opening the file in Acrobat, the content may not be visible/no longer centered due to the media box being resized and content being moved along. You can fix this by removing the crop box or by changing the crop box in the same way as the media box (see [Remove crop box](#) on page 215 or [Change crop box](#) on page 203).

If no crop box was defined, Acrobat uses the media box for display.

### 3.1.11.11. Change objects that are close to the page edge

#### **Belongs to**

- **Category:** Page
- **Type:** Changes

#### **What it does**

Changes objects that are close to the page edge, but do not bleed enough.

You must specify the required distance to the trim box and the distance into the bleed.

Optionally, you can choose to treat subpaths of compound paths individually. In that case, each of the subpaths will be changed separately.

See also:

- [Check if object is close to the page edge](#) on page 373
- [Select objects close to the page edge](#) on page 483

### 3.1.11.12. Change page box layout

#### **Belongs to**

- **Category:** Page
- **Type:** Changes

#### **What it does**

Changes the page box layout in a PDF to Press, Screen viewing or PDF/X Layout.

The attributes depend on the chosen layout:

- **Press layout** (typically used for print)

If you select this layout, the trim box will be derived from the first page box (out of the list below) that is present on the page. Use the **Up** and **Down** button to move the preferred page box to the top of the list. For example, if *bleed box* is the first item in the list, and *art box* is the second, the trim box will be derived from the bleed box, if found; if there is no bleed box found, the trim box will be derived from the art box; if there is no art box, the Action will search for the third page box in the list, and so on.

You must also define the minimum distance between the media and bleed boxes and between the bleed and trim boxes.

To get the PDF to display at the size of the media it will be printed on, select the appropriate option:

- **Crop box must equal trim box**, or
- **No crop box must be defined or the crop box equals the media box.** This means that, if the crop box is not defined yet, it will not be added by this Action; if the crop box is defined, it will get the same size and position as the media box.
- **Screen viewing**

If you select this layout, the page is defined solely by the crop box, which should have the same size as the media box. No other page boxes are allowed. The crop box/media box is derived from the first page box (out of the list below) that is present on the page. Use the **Up** and **Down** button to move the preferred page box to the top of the list. For example, if *bleed box* is the first item in the list, the crop box/media box will be derived from the bleed box if found in the PDF; if the bleed box is not found, the second page box in the list will be searched for, ...

- **PDF/X layout**

If you select this layout, the exact page box layout depends on the chosen PDF/X version.

- If you have chosen PDF/X-1a:2003 or PDF/X-3:2003, the art box or trim box shall not extend beyond the boundaries of the bleed box and the crop box.
- PDF/X-4 allows either a trim or an art box but forbids having both.
- PDF/X-6 allows an art box, next to the mandatory trim box.

To define the trim box relative to the media box, define the desired margins.

**Related Actions**

[Check page box layout](#) on page 377

### 3.1.11.13. Change page format

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Snaps the page box of your choice to a multiple of either columns or rows.

This Action is useful for newspapers or magazines with content displayed in columns and rows.

**How to proceed**

To configure the Change page format Action

1. Select the page box you wish to define.
2. Select **A multiple of columns** and/or **A multiple of rows** as required.
3. Set the preferred column or row width.
4. Add column/row spacing as required.

See also [Check page format](#) on page 378

### 3.1.11.14. Change page labels

**Belongs to**

- **Category:** Page
- **Type:** Changes
- **Since Version:** 2019

**What it does**

Changes the label of a page. You can select a different number style, a different prefix and/or change the number to start with.

If you leave any of the options unselected, then the corresponding label property remains untouched (or receives the default property value, if the document did not have page labels).

**Example**

Suppose you have a document with 10 pages and inconsistent page labels (e.g. inconsistent numbering, some with and some without prefix, etc.). You could use the following Action List to make the labels consistent ( mydoc\_1, mydoc\_2, mydoc\_3 etc).

```
Select pages with page label    <!-- choose "range: 1-10" and select both odd and even  
-->  
Change page labels             <!-- choose "number style: decimal", "prefix: mydoc_",  
start: 1" -->
```

**Related Actions**

- [Select pages with page label](#) on page 486
- [Remove page labels](#) on page 216

### 3.1.11.15. Change page orientation

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Changes the page layout to either portrait, landscape or the orientation that is used most in the PDF.

The page orientation is based on the selected page box. If you don't want to change the page orientation in case all pages have already the same orientation, enable the **Only apply if not all pages have the same orientation** checkbox.

**Related Actions**

- [Select by page orientation](#) on page 481
- [Check page orientation](#) on page 379

### 3.1.11.16. Change page scaling factor

**Belongs to**

- **Category:** Position/Size; Page
- **Type:** Changes
- **Since Version:** 2018

**What it does**

Allows you to scale the print size of a page. There are three ways to rescale:

- **Set Optimal Value Automatically:** Rescales the page based on the media box of the document and within the 200x200 inch limit - the maximum Acrobat size. If a document is larger, PitStop applies the appropriate page scaling factor to bring the size down within the limit.
- **Set Scaling Factor to:** Rescales by setting the page scaling factor to a certain value.
- **Multiply Scaling Factor by:** Rescales by multiplying the existing page scaling factor.


For example, if no page scaling factor was defined (meaning that the page scaling factor = 1):


- To print a page to half its size, set the page scaling factor to 0.5
- To print a page to twice its size, set the page scaling factor to 2.

If a page has a scaling factor of 2, to print it to twice its size, multiply the existing page scaling factor by 2 (resulting in page scaling factor 4).

Note that it is also possible to change the defined values while keeping the effective values; to do so, select the **Keep Effective Values Constant** checkbox.

Remember that the page scaling factor (and the defined values) as well as the effective values can be viewed with the Enfocus Inspector as shown below.

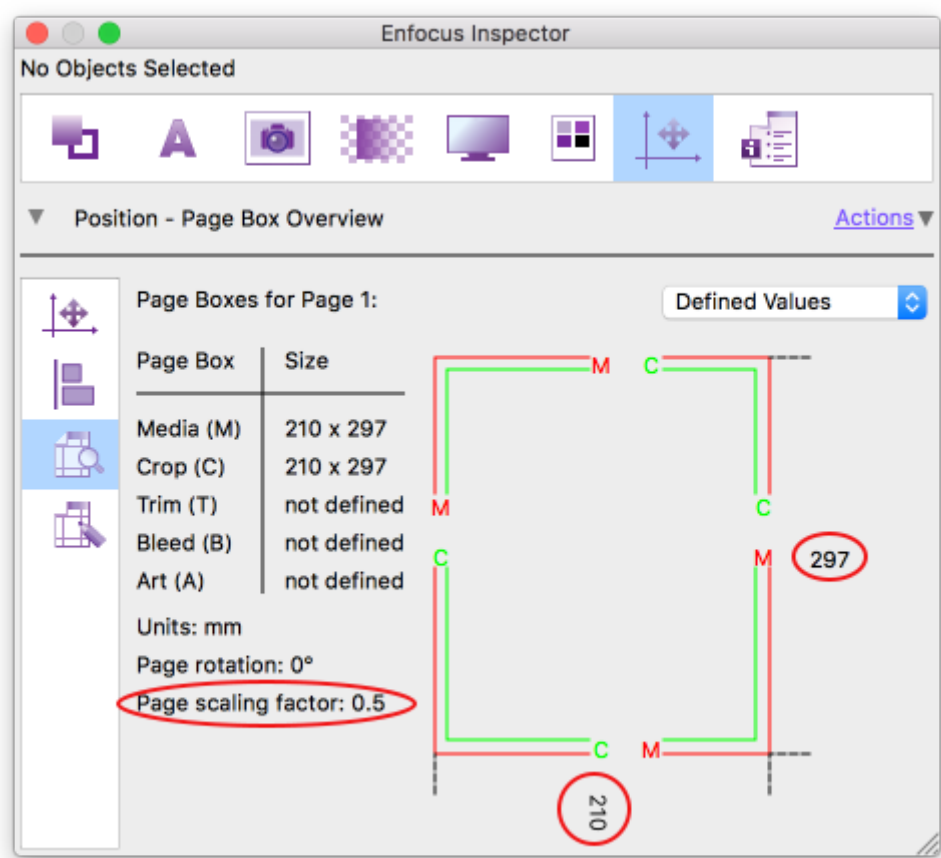

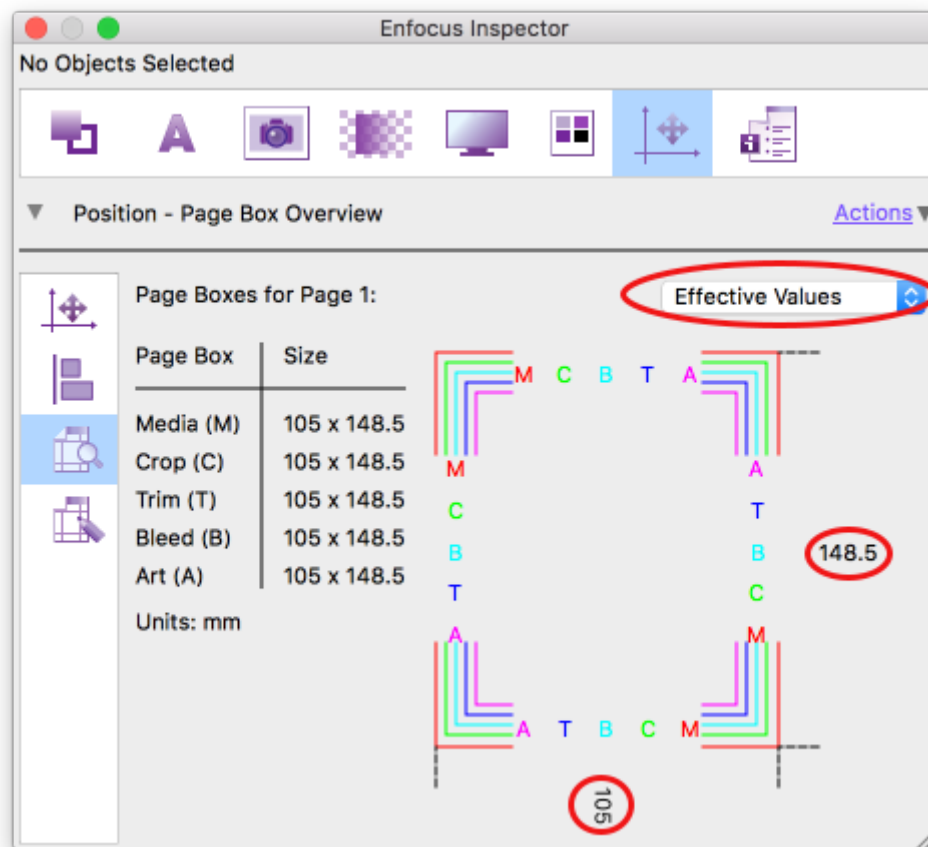

#### Related Actions

- [Check if page scaling factor is used](#) on page 374
- [Remove page scaling factor](#) on page 216
- [Apply page scaling factor](#) on page 201

### 3.1.11.17. Change trim box

#### Belongs to

- **Category:** Page
- **Type:** Changes

#### What it does

Allows you to create or resize a trim box.

You must choose one of the following options:

- To create a new trim box, select **Define new rectangle** and enter the required values, or grab them from a selected area using the **Grab Offsets** button . Note that boxes are defined from lower left to upper right.

- To resize a trim box relative to the axes of the existing trim box, select **Resize** and enter the required values.
- To re-use the dimensions from another box, select **Use box size** and select the appropriate page box.
- To determine the size of a trim box based on a selection, select **Resize page box to fit the selection** and enter the offset values.

There are some additional options available:

- **Only apply if not all pages have the same size**
- **Ignore page rotation and scaling factor**
- **Always require page box to be defined**

### 3.1.11.18. Flip content

#### ***Belongs to***

- **Category:** Page;Position/Size
- **Type:** Changes

#### ***What it does***

Flips the contents of a selected object horizontally or vertically.

You can flip the content relative to the center of one of the page boxes. Note that you can take page rotation into account as required.

#### ***Related Actions***

- [Check for flipped objects](#) on page 389
- [Flip selection](#) on page 242

### 3.1.11.19. Move media box to 0.0

#### ***Belongs to***

- **Category:** Page
- **Type:** Changes

#### ***What it does***

Changes the coordinates of the media box, so that the lower left corner of the media box is located at coordinates 0,0. This won't change the way the file looks.

The media box is the largest page box and defines the size of the physical medium on which the page will be printed or displayed. Some applications don't give the lower left 0,0 coordinates, but for example 100,100, which will cause problems when preflighting the file.

#### ***Related Actions***

- [Check media box origin](#) on page 376

- [Select by media box origin](#) on page 480

### 3.1.11.20. Move objects into the page box

**Belongs to**

- **Category:** Page;Position/Size
- **Type:** Changes

**What it does**

Moves the selected objects into a particular page box.  
You can include annotations as required.

**Related Actions**

- [Move objects to corner](#) on page 243
- [Move objects out of the page box](#) on page 212

### 3.1.11.21. Move objects out of the page box

**Belongs to**

- **Category:** Page; Position/Size
- **Type:** Changes

**What it does**

Moves the selected objects out of a particular page box.  
You can can include annotations as required.

**Related Actions**

- [Move objects to corner](#) on page 243
- [Move objects into the page box](#) on page 212

### 3.1.11.22. Move page box

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Allows you to move one of the page boxes to the desired position.

You can choose which page you want to move, and define the target position in one of the following ways:

- By specifying the position relative to one of the other page boxes, based on the anchor point.



- By specifying the target X and Y coordinates.
- By specifying the values by which the X and Y axis should be moved.

You can take into account page rotation and scaling factor as required.

### 3.1.11.23. Move page content

#### *Belongs to*

- **Category:** Page; Position/Size
- **Type:** Changes

#### *What it does*

Moves the contents of a page in the preferred direction (horizontally or vertically) by the specified distance:

- A positive value, e.g. "1 cm" will move the content to the right (horizontally) or to the top of the page (vertically).
- A negative value, e.g. "-1 cm" will move the content to the left (horizontally) or to the bottom of the page (vertically).



---

**Note:** Remember that the unit used in Actions (in this example "cm") is defined in the PitStop Pro Preferences (Units & Guides Category).

---

You can choose whether or not to take into account page rotation and scaling factor (if applicable).

### 3.1.11.24. Move page content to corner

#### *Belongs to*

- **Category:** Page; Position/Size
- **Type:** Changes

#### *What it does*

Moves the contents of a page to a chosen corner.

This Action does not center the object on the corner but moves the closest objects to that corner and moves the other objects by the same distance towards the corner (horizontally or vertically).

#### *Example*

To move the page content to the lower left

1. Select Move page content horizontally to **Left Side**.
2. Select Move page content vertically to **Bottom Side**.
3. Select the page box to be used as a reference, for example the **media box**.
4. Optionally, set **margins** to be added to the media box.
5. Select the **Use page rotation and scaling factor** checkbox, if page rotation and scaling factor should be taken into account.

### 3.1.11.25. Normalize page boxes

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Normalizes page boxes, i.e. makes sure they are all positioned correctly and are placed in the right order, e.g. the media box should be the largest box, the bleed box should be inside the bleed marks, ...

### 3.1.11.26. Normalize Page Rotate Key

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Allows you to manipulate page rotate keys in a PDF.

You can do one of the following:

- Flatten a rotate key into the page content (no visual effect)
- Introduce a rotate key for landscape pages and flatten it for portrait pages.

You can indicate which page box determines the page orientation. For example, if you select "trim box" and the trim box is 4 units wide and 3 units tall, the page is considered to have a landscape orientation.

- Remove a rotate key without flattening it into the page content. This may have a visual effect.

**Related Actions**

- [Check page rotation angle](#) on page 379
- [Select by page rotation angle](#) on page 481
- [Apply page rotation](#) on page 200

### 3.1.11.27. Remove art box

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Removes the art box from a PDF.

The art box delimits the size a PDF will display in a page layout application like QuarkXPress. An art box is not essential to a PDF's structure and may be removed.

### 3.1.11.28. Remove bleed box

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Removes the bleed box from a PDF.

The bleed box delimits the size the area beyond the final cut size of a document onto which ink may be printed in order to provide a bleed effect (which is where ink goes right to the edge of the page). A bleed box is not essential to a PDF's structure and may be removed.

### 3.1.11.29. Remove crop box

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Removes the crop box from a PDF.

The crop box is the PDF page box that defines the frame of a PDF as it is displayed on screen. If you remove this box, the PDF will display at Media Box size.

### 3.1.11.30. Remove empty page

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Deletes any pages in a PDF document that contain no objects.

You can specify that elements outside of a specific page box should be ignored. This way you can make sure that pages containing only registration marks (which are graphic elements outside the visible or printable page area, i.e. the trim box) are considered empty.

You can also ignore visually empty pages (i.e. paper-white and invisible (fully transparent) objects).



**Tip:** When you've removed the empty pages, check whether the page numbering is still consistent. If necessary, you can correct the page numbering using [Add page number](#) on page 81. Also check other references to page numbers such as the table of contents, the index or cross-references. If these page numbers are incorrect, you will need to update your source files and create a new PDF document.

#### **Related Actions**

- [Check for empty pages](#) on page 370
- [Select empty pages](#) on page 482

### 3.1.11.31. Remove page scaling factor

#### **Belongs to**

- **Category:** Page; Position and size
- **Type:** Changes

#### **What it does**

Removes the page scaling factor and reverts the page to its original size.

A page of 10 by 10 inches and a page scaling factor 2 will be displayed and printed as a page of 20 by 20 inches. By removing the page scaling factor, the page size will be at 10 by 10 inches again.

Page scaling has been introduced in PDF 1.6. If the page scaling factor is not removed or applied, the page size can only be displayed correctly in Acrobat 7 or higher.

#### **Related Actions**

- [Check if page scaling factor is used](#) on page 374
- [Apply page scaling factor](#) on page 201

### 3.1.11.32. Remove page labels

#### **Belongs to**

- **Category:** Page
- **Type:** Changes
- **Since Version:** 2019

#### **What it does**

Removes the selected page labels. This Action has no attributes. It's typically used with [Select pages with page label](#) on page 486.

#### **Related Actions**

- [Change page labels](#) on page 207

- [Select pages with page label](#) on page 486

### 3.1.11.33. Remove sub-page navigation support

**Belongs to**

- **Category:** Page
- **Type:** Changes
- **Since Version:** 2022

**What it does**

Removes the PresSteps entry from a selected page's dictionary.

This is a fix for PDF/X-6, as PDF/X-6 does not support sub-page navigation.

### 3.1.11.34. Remove trim box

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Removes the trim box from a PDF document. The trim box defines the final cut size of a printed PDF document.

### 3.1.11.35. Reorder pages

**Belongs to**

- **Category:** Page; Document
- **Type:** Changes
- **Since Version:** 2017

**What it does**

Allows you to change the order of the pages in a document.

There are three preconfigured options:

- Reverse pages (first page becomes last etc)
- Swap first and last page
- Swap even and odd pages

When you select one of these options, you can immediately see the new page order in the Preview section at the bottom of the pane.

Apart from that, you can configure for each individual page what the new page number should be. To do so, you should select 'Custom' from the list of options and enter the page numbers in the preferred order (one by one, or using the notation explained in the GUI).


**Note:**

- Any 'forgotten' pages (not listed in the custom order), will be added at the end.
- If a page is by accident listed twice, the first occurrence counts.

By default, page labels are re-ordered together with the pages, unless you clear the **Move page labels** checkbox.

**Examples**

In the table below you can find some examples. Remember that you can enter any combination you want; you're warned about syntax errors and you can preview the page order for a document of up to 1000 pages.

| Notation                                                             | Meaning                                                                                                                                                                                                                             |
|----------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| One single page number<br>5                                          | Put this page first, then add the other pages without changing the order.<br><b>5, 1, 2, 3, 4, 6, 7, 8, 9, 10</b>                                                                                                                   |
| R followed by one page number<br>R5                                  | Put this page counting from the back first, then add the other pages without changing the page order.<br><b>6, 1, 2, 3, 4, 5, 7, 8, 9, 10</b>                                                                                       |
| One single page number followed by three dots<br>5...                | Put this page first, add the following pages till the end of the document, finally add the missing pages (all without changing the page order).<br><b>5, 6, 7, 8, 9, 10, 1, 2, 3, 4</b>                                             |
| R number followed by three dots<br>R5...<br>R1...                    | Put this page counting from the back first, then put the following pages counting from the back of the document, finally add the other pages (7-10)<br><b>6, 5, 4, 3, 2, 1, 7, 8, 9, 10</b><br><b>10, 9, 8, 7, 6, 5, 4, 3, 2, 1</b> |
| (number, number) ...<br>(2,1)...<br>(6,5)...                         | Swap the pages in between the brackets and do the same for the rest of the document. Other pages are added at the end.<br><b>2, 1, 4, 3, 6, 5, 8, 7, 10, 9</b><br><b>6, 5, 8, 7, 10, 9, 1, 2, 3, 4</b>                              |
| R number (number-number) number (number, number)<br>R1 (3-6) 2 (8,7) | Put the last page first (10), then a page range (pages 3 to 6), then a particular page (2), then swap even and odd pages (swap 8 and 7), add leftover pages (1, 9).<br><b>10, 3, 4, 5, 6, 2, 8, 7, 1, 9</b>                         |

**Use case**

When receiving PDFs in spreads, after having split the pages and added marks and bleeds, page 1 (which is actually the back cover) should be moved to the last page. Using this Action, that's very easy.

**Remark**

Due to a refresh issue in Adobe Acrobat, sometimes the page order seems not to be changed after successfully running the Action. Saving and reopening the document may solve the issue.

### 3.1.11.36. Rotate content

**Belongs to**

- **Category:** Page; Position/Size
- **Type:** Changes

**What it does**

Rotates the page content at a particular angle around a particular point.

You could for example rotate the page content at an angle of 90° relative to the center of the media box.

You can choose whether or not to take into account page rotation.

**Related Actions**

- [Check for rotated objects](#) on page 389
- [Rotate object](#) on page 247
- [Rotate objects as group](#) on page 247

### 3.1.11.37. Rotate page

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Allows you to set page rotation to -90, 0, 90 or 180 degrees (clockwise).

**Related Actions**

[Rotate content](#) on page 219

### 3.1.11.38. Scale page boxes

**Belongs to**

- **Category:** Page; Position and size
- **Type:** Changes

**What it does**

Allows you to scale all page boxes simultaneously.

Specify X and Y scaling percentages. You can anchor the page boxes at a certain corner in the PDF, for instance at the lower left corner of the media box. You can also choose whether or not to use the page rotation.



**Note:** If you want to scale the page boxes proportionally, you need to specify the same values for X and Y.

#### **Related Actions**

- [Scale page content to fit](#) on page 221
- [Scale to fit page size](#) on page 222
- [Scale page content](#) on page 220
- [Shrink page content to fit](#) on page 223

## 3.1.11.39. Scale page content

#### **Belongs to**

- **Category:** Page;Position/Size
- **Type:** Changes

#### **What it does**


Scales page content along the X and/or Y axis by a certain percentage.



**Note:** If you want to scale the page content proportionally, you need to specify the same values for X and Y.

#### **Example**

Suppose you have an A4-size PDF document (210 x 297 mm). You want to keep the page size “as is”, but need to make the page content narrower. You also wish to move the page content to the upper right corner of the crop box.

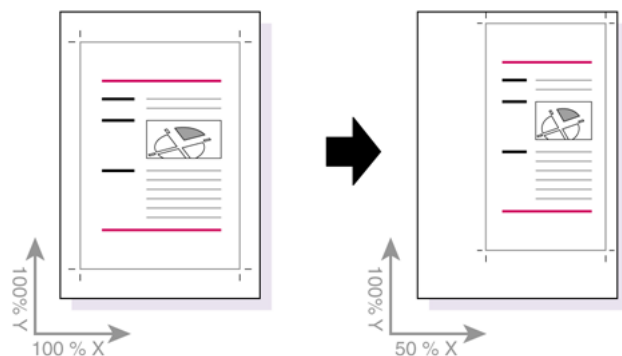

#### **How to proceed**

1. Enter the preferred scaling percentage for the X and Y axis.
2. Do one of the following:



- To define an anchor point, select **Anchored at**.
  - To define the target position of the page contents, select **Moving page content to**.
3. Define the anchor point or target position, for example (anchored at/moving to) the upper right of the crop box.

**Related Actions**

- [Scale page content to fit](#) on page 221
- [Scale to fit page size](#) on page 222
- [Scale page boxes](#) on page 219
- [Shrink page content to fit](#) on page 223

### 3.1.11.40. Scale page content to fit

**Belongs to**

- **Category:** Page; Position/Size
- **Type:** Changes

**What it does**

Scales the page content to fit the size of a particular page box. You can add extra margins, if necessary.


You should also define the target position of the page content inside the page box, e.g. "page content should move to the upper right".

You can choose whether or not to take into account the page rotation and scaling factor.

Scaling is by default restricted to the visible elements of the page (unless you clear the **Use only visible part of content** checkbox), to avoid that hidden content leads to incorrect results.

**Example**

In the example below, the page content is scaled to fit the size of the trim box (A).

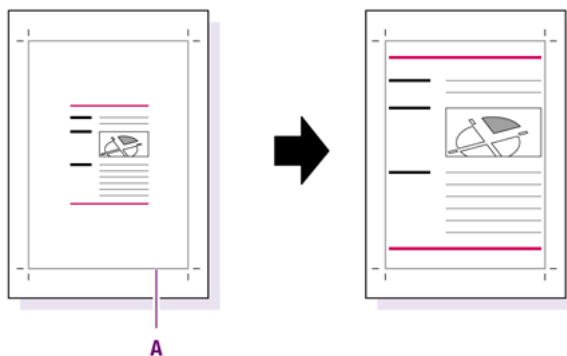**Related Actions**

- [Scale page content](#) on page 220

- [Scale to fit page size](#) on page 222
- [Scale page boxes](#) on page 219
- [Shrink page content to fit](#) on page 223

### 3.1.11.41. Scale to fit page size

#### **Belongs to**

- **Category:** Position/Size; Page
- **Type:** Changes

#### **What it does**

Scales all page boxes (and optionally all page content as well) until the specified page box fits the target size.


The target size should be specified by defining the target width and height either as a value, a percentage of the original value or proportionally relative to the other dimension.

Note that for both the page content and the page boxes you can separately decide whether or not to scale proportionally to match the target page size.

#### **Remark**

In case of proportional scaling (=default, **Allow non-proportional scaling** checkbox NOT selected), it may happen that the requested target width and height cannot be achieved without changing the aspect ratio; in that case, the target size serves as a frame in which the resized page box should fit.

For example, if the original page box is a rectangle and the requested width and height result in a square, the page box will be scaled to fit in the square (and vice versa). See the image below; the blue object represents the requested target dimensions.

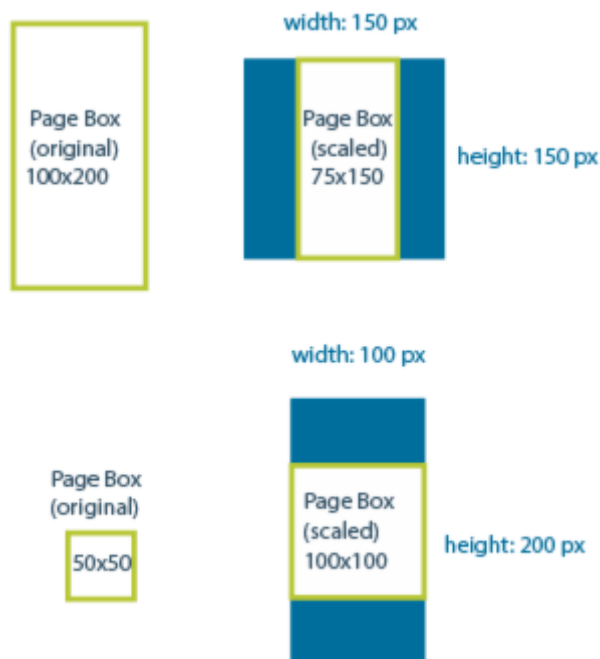

**Related Actions**

- [Scale page content to fit](#) on page 221
- [Scale page content](#) on page 220
- [Scale page boxes](#) on page 219
- [Shrink page content to fit](#) on page 223

### 3.1.11.42. Set page size to the largest in document

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Increases the size of smaller pages in a PDF document, so they are all equal to the size of the largest page.

If a PDF contains pages of different sizes, this may cause problems during the printing process. You can use this Action to fix this problem.

**Related Actions**

[Set page size to the smallest in document](#) on page 223

### 3.1.11.43. Set page size to the smallest in document

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Decreases the size of larger pages in a PDF document, so that they are all equal to the size of the smallest page.

If a PDF contains pages of different sizes, this may cause problems during the printing process. You can use this Action to fix this problem.

**Related Actions**

[Set page size to the largest in document](#) on page 223

### 3.1.11.44. Shrink page content to fit

**Belongs to**

- **Category:** Page; Position/Size

- **Type:** Changes

**What it does**

Shrinks page content to fit the size of a particular page box. You can add extra margins, if necessary. You should also define the anchor point, for example "anchored at the lower left of the media box".

You can choose whether or not to take into account page rotation and scaling factor.

**Related Actions**

- [Scale page content to fit](#) on page 221
- [Scale to fit page size](#) on page 222
- [Scale page content](#) on page 220
- [Scale page boxes](#) on page 219

### 3.1.11.45. Split pages in half

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Splits pages in half in a certain direction (horizontally, vertically, or orientation dependent), based on the desired page box.

Orientation depending means that the landscape pages are split vertically and portrait pages are split horizontally.



---

**Note:** PitStop provides three Actions Lists, allowing you split A4, A5 and US Letter documents in half.

---

This Action can be useful if you scanned two pages of a book as a single page, but want to have them as separate pages (e.g. for better readability); or if you have an image spread over two pages which has to be split in two for printing purposes.

### 3.1.11.46. Use trim marks to set page box

**Belongs to**

- **Category:** Page; Position and size
- **Type:** Changes

**What it does**

Allows you to set the trim box and/or the bleed box based on the trim or bleed marks found in the PDF.

**Note:**

- Crop marks with a **dash pattern** cannot be used to set the page box.
- Crop marks generated with Illustrator, InDesign and QuarkXpress are supported.

**How to proceed**

1. Indicate which page box you want to set: the trim box, the bleed box or both.
2. Specify the color of the trim marks by choosing one or more of the following:
  - 400% CMYK
  - Separation All (registration)
  - 100% black
  - A specific color.
3. If desired, specify how much the marks are allowed to deviate from the expected position:
  - The unit is the unit set in the PitStop Pro Preferences (Units & Guides category), for example: cm or pt
  - The maximum value is 2.7 pt; if you enter a higher value, it is automatically reset to 2.7 pt or an equivalent value (if you're using a different unit).

**Example**

In the image below, the red marks are detected as trim marks and used to set the trim box (blue box). The position of the vertical marks in the top and bottom left corner is not as expected (they are not exactly on one vertical line), but the deviation (= difference between the position of both marks) is less than the specified threshold.

**Related Actions**

- [Select trim marks](#) on page 488
- [Check if trim marks match page box](#) on page 374

## 3.1.12. PDF 2.0

### 3.1.12.1. Change document information dictionary compliance

- **Category:** Metadata, PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2021

#### **What it does**

Makes the information dictionary compliant with the chosen PDF version.

#### **About the info dictionary**

The info dictionary contains information about the file, such as the title, the author, the creation date ... and is visible through the file's Document Properties.

The specifications for the info dictionary depend on the PDF version:

- **PDF 1.7:** The info dictionary is optional. If it's present, it may contain the following entries: Title, Author, Subject, Keywords, Creator, Producer, CreationDate, ModDate and Trapped.
- **PDF 2.0:** The info dictionary is optional. If it's present, it may be empty, or contain CreationDate and/or ModDate. The other entries are deprecated.
- **PDF/X-6:** There should be no info dictionary, or if there is one, it should be empty.



---

**Note:** There is one exception to the above: if there is a PieceInfo dictionary in the document catalog dictionary, the info dictionary is required and must contain the ModDate entry.

---

Note that as of PDF 2.0, the *info* dictionary is officially called *information* dictionary.

#### **Options**

- **PDF 1.7:** PitStop only adds an info dictionary (including ModDate) if document level PieceInfo is present.
- **PDF 2.0:** PitStop removes deprecated entries from the info dictionary (if necessary). If document level PieceInfo is present, it makes sure there is an info dictionary that contains ModDate.
- **PDF/X-6:** PitStop removes the info dictionary if there is one, except if document level PieceInfo is present; then it makes sure there is an info dictionary that contains ModDate.
- **Current document version:** PitStop detects the current PDF version and makes sure the info dictionary is compliant with the current PDF version.
- **None (leave it unchanged):** This option prevents PitStop from interfering with the info dictionary at the time of saving the file.

### 3.1.12.2. Change halftone origin

#### **Belongs to**

- **Category:** PDF 2.0
- **Type:** Changes

- **New since:** PitStop 2022

#### **What it does**


Changes the halftone origin by the entered values.

You can change the halftone origin on page or form level as required:

- The X and Y values relative to the lower-left corner of the Media Box.
- The X and Y values in the form space of the outer selected Form XObject.

This Action is typically used for packaging and labels (step and repeat), to make sure that all images have the same halftone origin, hence look identical when printed.

Note that you can view (and also manually change) the halftone origin of a selected object in the Inspector, on the Prepress - Halftone tab.

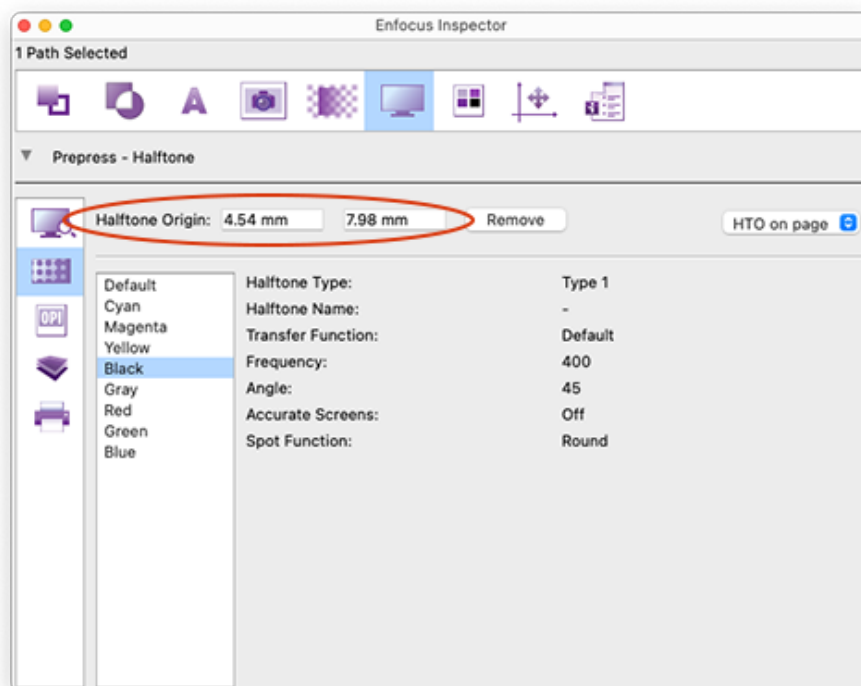

#### **Related Actions**

- [Check halftone origin](#) on page 385
- [Select by halftone origin](#) on page 490
- [Set default halftone origin](#) on page 236

### 3.1.12.3. Change inline image syntax

#### **Belongs to**

- **Category:** Image, PDF 2.0
- **Type:** Changes
- **Since version:** 2020

**What it does**

Allows you to change the L key (or Length key) of a PDF to comply with a particular PDF version.

The L key specifies the length of the image data and allows users to skip inline images if required.

Choices are:

- Compatibility with the current document version
- Compatibility with PDF 1.7 (no Length key)
- Compatibility with PDF 2.0 (write Length key)
- Keep presence of the Length key
- Fix the Length key (so it matches the actual inline image data length)



**Note:** The changes you make using this Action will only affect newly saved content: earlier saved content is not touched.

**Related Actions**

- [Change PDF text string encoding](#) on page 122
- [Check inline image syntax](#)
- [Select inline image syntax](#) on page 451

### 3.1.12.4. Change PDF text string encoding

**Belongs to**

- **Category:** Document, PDF 2.0
- **Type:** Changes
- **Since version:** 2020

**What it does**

Allows you to change the text encoding of a PDF to comply with a particular PDF version.

Choices are compatibility with the current document version, with PDF 1.7 (PDFDocEncoding or UTF-16BE) or with PDF 2.0 (ASCII or UTF-8).



**Note:** The changes you make using this Action will only affect newly saved content: earlier saved content is not touched.

**Related Actions**

- [Change inline image syntax](#) on page 144

### 3.1.12.5. Change PDF version

**Belongs to**

- **Category:** Metadata, PDF 2.0
- **Type:** Changes



**What it does**

Changes the Acrobat and PDF version of a PDF.

The Acrobat version is the sum of the two numbers that make up the PDF version, for example: PDF 1.4 = Acrobat 5. This is not true anymore for PDF 2.0, as from this version onwards there is no link anymore between the Acrobat and the PDF version.



**Note:** Changing the PDF version will not change the attributes of a higher version PDF to those of a lower one - it only changes the version **number**. As higher versions of Acrobat always save the PDF version number up to their version, even if nothing has changed, this Action can be useful to reset the PDF version to the one used to create the PDF.

**Example**

If you configure this Action to change the PDF version to PDF 1.5, both the PDF version and the Acrobat version will be changed. The new PDF version will be PDF 1.5; the new Acrobat version will be 6.0.

If you change the PDF version to PDF 2.0, the Acrobat version will remain unchanged.

**Related Actions**

- [Select by PDF version](#) on page 466
- [Check PDF/Acrobat compatibility](#) on page 362

### 3.1.12.6. Change ProcSet resources

- **Category:** Metadata, PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2021

**What it does**

Adds, removes or does not change the ProcSet entry as specified in the attributes of this Action.

You can as well have PitStop make the appropriate change based on the document's PDF version (see Options).

This Action is useful to make a PDF compliant with a particular PDF version.

**About ProcSet resources**

Procedure sets are categories of related PDF operators used in content streams. The ProcSet entry in a content stream's resource dictionary holds an array that consists of the procedure sets used in that content stream, for example: `/ProcSet [/PDF /Text]`. Procedure sets are used only when the content stream is printed to a PostScript output device.

ProcSet resources were used in older PDF versions, but as of PDF 1.4 this feature is considered obsolete. As of PDF 2.0, this feature is deprecated.

For more details, refer to [the PDF Reference](#) (See 14.2 Procedure Sets).

**Options**

- **Add ProcSet (default)**

- **Remove ProcSet**
- **Do not change the ProcSet presence** (so if the ProcSet entry is defined, just keep it; if it's not, do not add it)
- **Add, remove or don't change ProcSet, dependent on the document's PDF version**, PitStop behaves as follows:
  - PDF 1.3 and earlier: Add ProcSet resources
  - PDF 1.4 - PDF 1.7: Do not change the ProcSet presence
  - PDF 2.0: Remove the ProcSet resources

### 3.1.12.7. Change Requirements

#### ***Belongs to***

- **Category:** PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2022

#### ***What it does***

Removes or adds either all document Requirements or one or more specific Requirement types (in that case you can specify which types to add or to remove).

The Requirements dictionary specifies the requirements the PDF file has. Until PDF 2.0, the only possible requirement was 'EnableJavaScripts'. As of PDF 2.0, a number of new types are allowed, such as 3D Markup, Attachment, Encryption etc.

#### ***Related Actions***

- [Check if Requirements are used](#) on page 386

### 3.1.12.8. Remove alternative blend modes

#### ***Belongs to***

- **Category:** PDF 2.0, Prepress, Remove
- **Type:** Changes
- **New since:** PitStop 2022

#### ***What it does***

Removes alternative blend modes in case of multiple blend modes, because using multiple blend modes is deprecated in PDF 2.0. Only the first blend mode is kept.


Note that you can check the blend modes using the PitStop Inspector (Transparency - General).

Blend modes determine how colors on different layers blend with each other. For more information about blend modes, visit the Adobe website (<http://www.adobe.com>) or refer to the Help or documentation of your design application (Adobe InDesign, QuarkXPress, ...)

**Example**

In this example, three blend modes are selected: Multiply, Saturation and Colorburn.

Running this Action will remove Saturation and Colorburn and only keep the first blend mode in the list: Multiply.

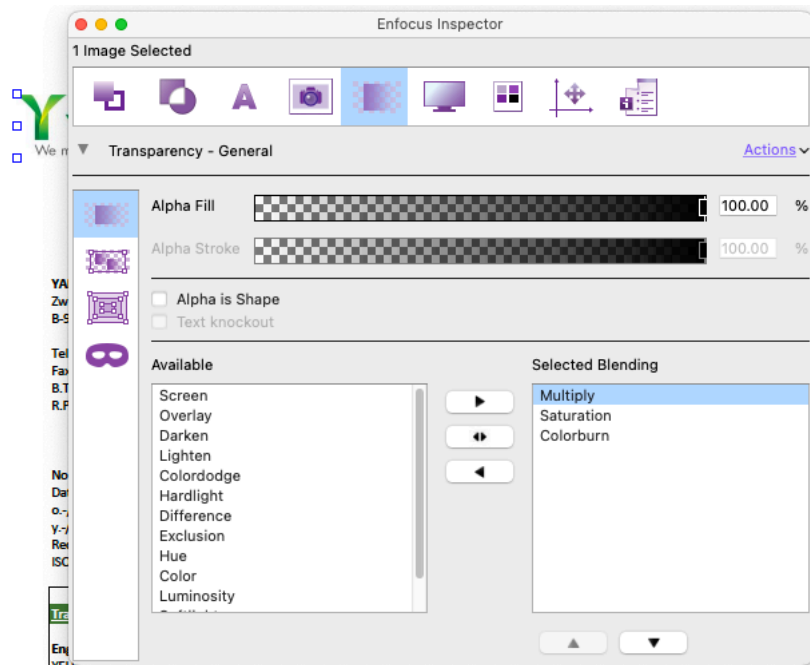

**Note:** As of PitStop 2022, it will no longer be possible to add multiple blend modes to a selected object using the Enfocus Inspector. However, if an object already has multiple blend modes, they will still be shown.

**Related Actions**

- [Select by blend modes](#) on page 500
- [Check for non-standard blend modes](#) on page 403

### 3.1.12.9. Remove associated files

**Belongs to**

- **Category:** General, PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Removes associated files.

This fix can be used to make PDF files compliant with PDF 2.0.

**Related Actions**

- [Check for associated files](#) on page 329

### 3.1.12.10. Remove black point compensation

**Belongs to**

- **Category:** PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Removes objects that have a black point compensation attribute (regardless of its value).

The black point compensation option is a feature of Adobe Photoshop to address color conversion problems caused by differences between the darkest level of black achievable on one device and the darkest level of black achievable on another.

**Related Actions**

- [Check black point compensation](#) on page 381
- [Select black point compensation](#) on page 489
- [Set black point compensation](#) on page 235

### 3.1.12.11. Remove CharSet or CIDSet

**Belongs to**

- **Category:** PDF 2.0, Text
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Removes the CharSet or CIDSet if present in the PDF.

If a font is subset, only the characters of the font that are actually used are embedded in the document. They are held in a CharSet (simple fonts) or a CIDSet (composite fonts).

CharSets and CIDSets are deprecated in PDF 2.0. That means that they are allowed, but not needed, so they can as well be removed.

**Related Actions**

- [Check if a subset font contains a complete CharSet or CIDSet](#) on page 412

### 3.1.12.12. Remove DPart metadata

**Belongs to**

- **Category:** PDF 2.0, Text

- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Removes DPart metadata from a PDF if present.

DPart (Document Part) metadata provides information about pages or parts of a PDF, allowing PDF processors to easily identify pages or page ranges that have particular properties.

This is a PDF 2.0 feature, hence this Action is typically used to check for PDF 2.0 features.

**Related Actions**

[Check DPart metadata](#) on page 383

### 3.1.12.13. Remove enforcements on viewer preferences

**Belongs to**

- **Category:** PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Removes the Enforced key if it is used in the Viewer preferences.

Enforcing the viewer preferences is a PDF 2.0 feature, hence this Action is typically used to remove PDF 2.0 features.

**Related Actions**

- [Check enforced viewer preferences](#) on page 384

### 3.1.12.14. Remove file specification keys

**Belongs to**

- **Category:** PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Removes PDF 2.0 specific file specification keys.

PDF streams are holders of large amounts of data, such as image pixels, page contents, embedded fonts, etc. In some instances, the streams do not contain the data inside the PDF but point to embedded or even external files. This Action will remove the PDF 2.0 specific file specification keys, such as Thumb, AFRelationship and EP.

**Related Actions**

[Check file specification keys](#) on page 328

### 3.1.12.15. Remove name from XObjects

**Belongs to**

- **Category:** Metadata, PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Removes Name from form XObject and image XObject stream dictionaries. This is typically done to fix deprecated PDF 1.x features.

### 3.1.12.16. Remove Output Intents

**Belongs to**

- **Category:** PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Removes the Output Intents from the document and/or the individual pages.

An Output Intent describes the color characteristics of the output devices on which the PDF document might be rendered. The Output Intent may be defined on document and/or page level.

**Related Actions**

- [Check if Output Intents are used](#) on page 385

### 3.1.12.17. Remove specific Output Intent keys

**Belongs to**

- **Category:** PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Removes either the Mixing Hints or Spectral Data key, or both if they are available in the Output Intents (on page or document level) of the PDF.

These keys are PDF 2.0 specific, hence this Action is typically used to removed PDF 2.0 features.

**Related Actions**

- [Check Missing Hints in Output Intent](#)
- [Check Spectral Data in Output Intent](#)

### 3.1.12.18. Set black point compensation

**Belongs to**


- **Category:** PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Allows you to set the black point compensation to a particular value (On, Off, or Default).

The black point compensation option is a feature of Adobe Photoshop to address color conversion problems caused by differences between the darkest level of black achievable on one device and the darkest level of black achievable on another.

Note that the black point compensation attribute of a selected object can be found and changed in the Enfocus Inspector, on the **Prepress - General** tab.

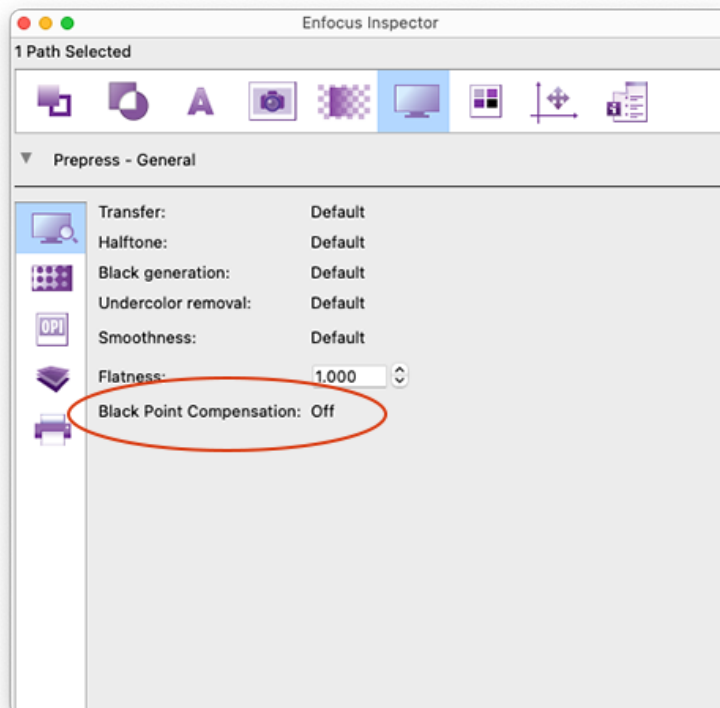**Related Actions**

- [Check black point compensation](#) on page 381
- [Select black point compensation](#) on page 489

- [Remove black point compensation](#) on page 232

### 3.1.12.19. Set default halftone origin

#### **Belongs to**


- **Category:** PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2022

#### **What it does**

Changes the halftone origin to 'Default'.

'Default' means that the halftone origin (HTO) is not specified, so setting the HTO to 'Default' removes the HTO from any object it uses. This is useful if you want to remove PDF 2.0 features from your document.

Note that you can view (and also manually change) the halftone origin of a selected object in the Inspector, on the Prepress - Halftone tab.

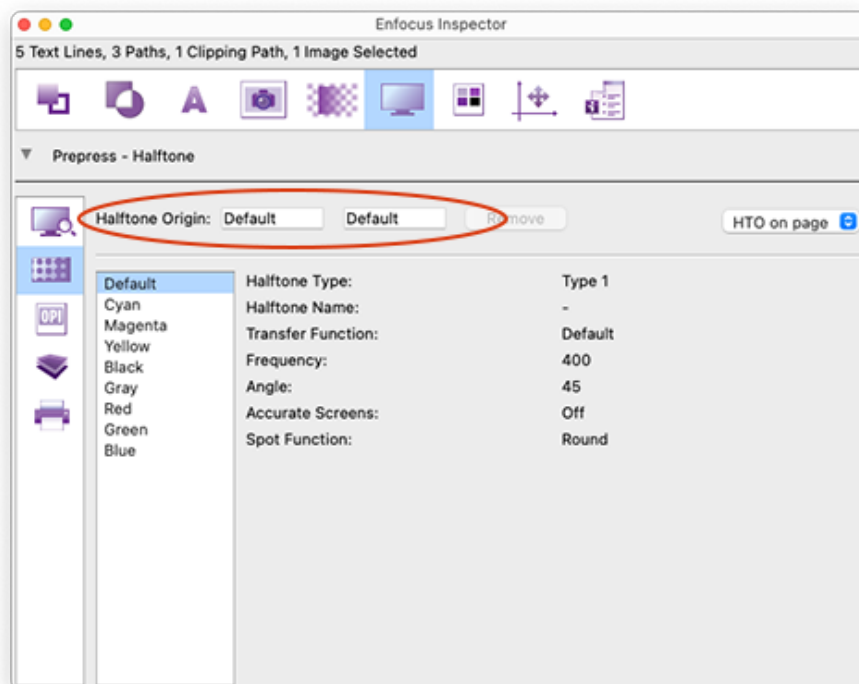

#### **Related Actions**

- [Check halftone origin](#) on page 385
- [Select by halftone origin](#) on page 490
- [Change halftone origin](#) on page 226

### 3.1.13. Position and size



3.1.13.1. Align or distribute objects

**Belongs to**

- **Category:** Position/Size;Page
- **Type:** Changes
- **New since:** PitStop 2021

**What it does**

Aligns or distributes the selected objects and/or distributes spacing between them.  
You can align objects relative to your selection ("Selection bounding box") or to one of the page boxes.



**Note:** This functionality is also available in the Enfocus Inspector (on the Position tab).

**Remarks**

The 'Select all' Action, which is added automatically to a new Action List, should be removed in most cases. You can either add your own 'select' Actions or run the Action List on a user selection.  
Note that you could also create your Action List by recording your actions while aligning and/or distributing objects using the Enfocus Inspector.

**Examples**

| Example | Description                     |
|---------|---------------------------------|
|         | Aligned top edges.              |
|         | Distributed left edges.         |
|         | Distributed horizontal spacing. |

### 3.1.13.2. Apply page scaling factor

**Belongs to**

- **Category:** Position/Size;Page
- **Type:** Changes

**What it does**

Apply page scaling factor removes the page scaling factor and scales the page to compensate.

A page of 10 by 10 inches and a page scaling factor 2 will be displayed and printed as a page of 20 by 20 inches. By applying the page scaling factor, the actual page size will become 20 by 20 inches.

Page scaling has been introduced in PDF 1.6. If the page scaling factor is not removed or applied, the page size can only be displayed correctly in Acrobat 7 or higher.



**Note:** When the result of applying the scaling factor exceeds the size of 200x200 inches, the page may not be displayed well. This is a limitation of Adobe Acrobat.

**Related Actions**

- [Check if page scaling factor is used](#) on page 374
- [Remove page scaling factor](#) on page 216

### 3.1.13.3. Apply page rotation

**Belongs to**

- **Category:** Position/Size;Page
- **Type:** Changes

**What it does**

Sets the page rotate key defined in the PDF to 0°. This may have a visual effect.

**Related Actions**

- [Check page rotation angle](#) on page 379
- [Select by page rotation angle](#) on page 481
- [Normalize Page Rotate Key](#) on page 214

### 3.1.13.4. Center page content

**Belongs to**

- **Category:** Page;Position/Size
- **Type:** Changes

**What it does**

Places all objects in the center of the page.

You can:

- Center the objects horizontally, vertically or both.
- Center the content relative to a page box and set margins (left, right, top and bottom).
- Use page rotation and scaling factor as required.
- Only center the visible part of the content.

### 3.1.13.5. Change page scaling factor

**Belongs to**

- **Category:** Position/Size; Page
- **Type:** Changes
- **Since Version:** 2018

**What it does**

Allows you to scale the print size of a page. There are three ways to rescale:

- **Set Optimal Value Automatically:** Rescales the page based on the media box of the document and within the 200x200 inch limit - the maximum Acrobat size. If a document is larger, PitStop applies the appropriate page scaling factor to bring the size down within the limit.
- **Set Scaling Factor to:** Rescales by setting the page scaling factor to a certain value.
- **Multiply Scaling Factor by:** Rescales by multiplying the existing page scaling factor.


For example, if no page scaling factor was defined (meaning that the page scaling factor = 1):


- To print a page to half its size, set the page scaling factor to 0.5
- To print a page to twice its size, set the page scaling factor to 2.

If a page has a scaling factor of 2, to print it to twice its size, multiply the existing page scaling factor by 2 (resulting in page scaling factor 4).

Note that it is also possible to change the defined values while keeping the effective values; to do so, select the **Keep Effective Values Constant** checkbox.

Remember that the page scaling factor (and the defined values) as well as the effective values can be viewed with the Enfocus Inspector as shown below.

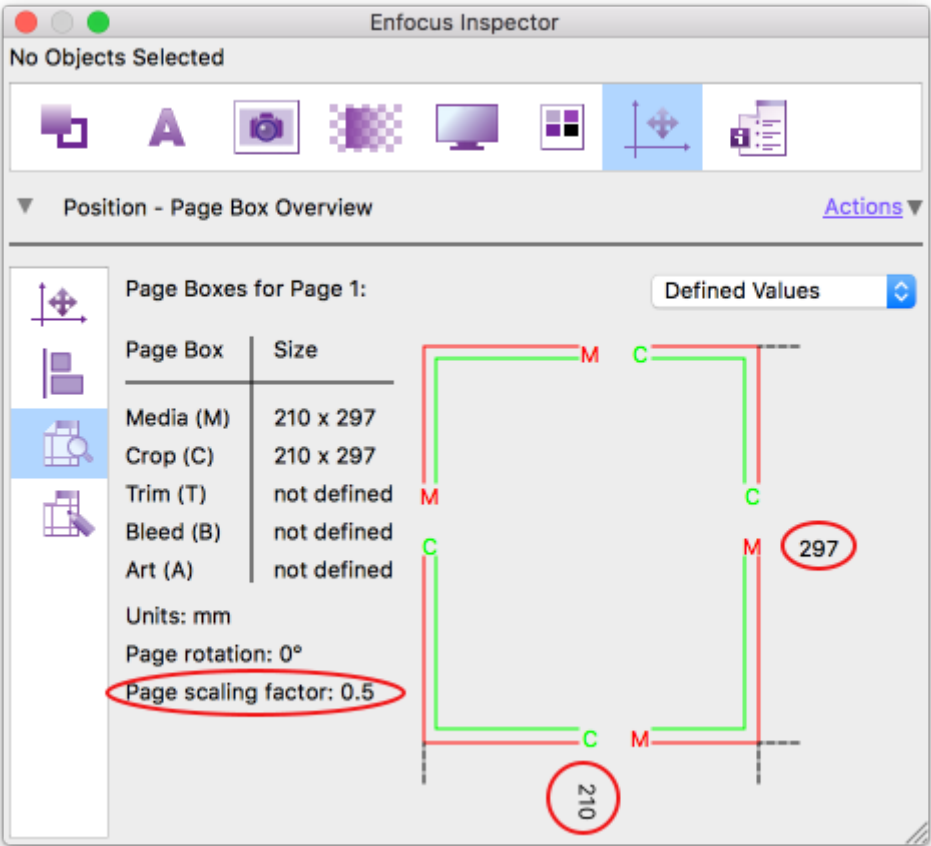

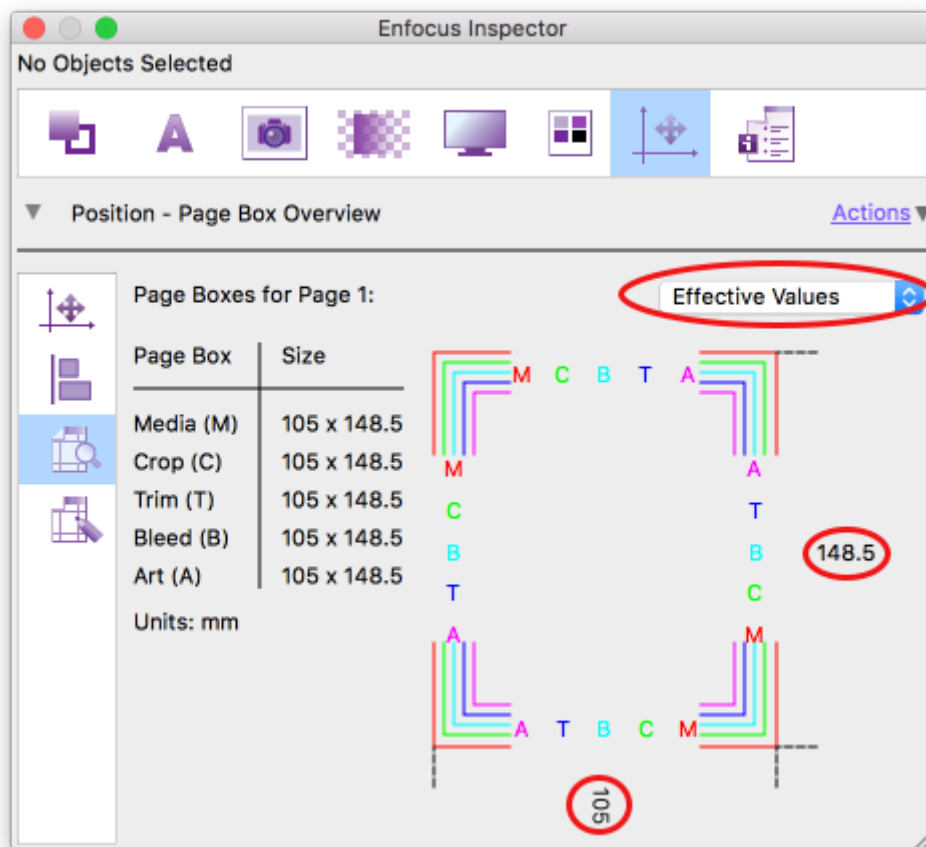

#### Related Actions

- [Check if page scaling factor is used](#) on page 374
- [Remove page scaling factor](#) on page 216
- [Apply page scaling factor](#) on page 201

### 3.1.13.6. Change position

#### Belongs to

- **Category:** Position/Size
- **Type:** Changes

#### What it does

Moves selected objects to a new position.

You can define an absolute or a relative target position:

- **Move absolute to** moves either all selected objects in one go or each of the selected objects individually to a new position relative to the page they are on.
- **Move relative by** moves an object in relation to itself.

Indicate whether page rotation and/or the page scaling factor (if applicable) should be taken into account when moving the selection.

### 3.1.13.7. Flip content

**Belongs to**

- **Category:** Page;Position/Size
- **Type:** Changes

**What it does**

Flips the contents of a selected object horizontally or vertically.

You can flip the content relative to the center of one of the page boxes. Note that you can take page rotation into account as required.

**Related Actions**

- [Check for flipped objects](#) on page 389
- [Flip selection](#) on page 242

### 3.1.13.8. Flip selection

**Belongs to**

- **Category:** Position/Size
- **Type:** Changes
- **Since version:** 2020

**What it does**

Flips a selected object horizontally or vertically.

You can flip the content relative to the center of the selection bounding box or to the visible area of selection. This last option is relevant if part of a selected image has been clipped away.

Note that you can take page rotation into account as required.

**Example**

This Action is useful to flip images while keeping text untouched.

```
select image  
flip selection
```

**Related Actions**

- [Check for flipped objects](#) on page 389
- [Flip content](#) on page 211

### 3.1.13.9. Move objects into the page box

***Belongs to***

- **Category:** Page;Position/Size
- **Type:** Changes

***What it does***

Moves the selected objects into a particular page box.

You can include annotations as required.

***Related Actions***

- [Move objects to corner](#) on page 243
- [Move objects out of the page box](#) on page 212

### 3.1.13.10. Move objects out of the page box

***Belongs to***

- **Category:** Page; Position/Size
- **Type:** Changes

***What it does***

Moves the selected objects out of a particular page box.

You can include annotations as required.

***Related Actions***

- [Move objects to corner](#) on page 243
- [Move objects into the page box](#) on page 212

### 3.1.13.11. Move objects to corner

***Belongs to***

- **Category:** Position/Size
- **Type:** Changes

***What it does***

Moves the selected graphic elements to the defined corner of the selected page box.

***How to proceed***

Proceed as follows:

1. Select the anchor point of the object you want to use for positioning the object, for example "upper left".
2. Select the anchor point of the specified page box you want to use for positioning, for example "center".
3. Select the page box itself, for example "crop box".
4. Select the **Use page rotation** checkbox as required.

### Example

To move the images in your document to the lower right corner of the page, without cutting off the images, use:

```
Select images
Move objects to corner
  <!-- settings (example): Place the lower right corner of the graphic elements
relative to the lower right corner of the trim box -->
```

If you have chosen to place the center of the graphic elements relative to the lower right corner of the trim box, the center point of the image will be positioned on the lower right corner point of the trim box, meaning that the right hand side and lower half of the image will lie outside of the trim box.

### Related Actions

- [Move objects out of the page box](#) on page 212
- [Move objects into the page box](#) on page 212

## 3.1.13.12. Move page content

### Belongs to

- **Category:** Page; Position/Size
- **Type:** Changes

### What it does

Moves the contents of a page in the preferred direction (horizontally or vertically) by the specified distance:

- A positive value, e.g. "1 cm" will move the content to the right (horizontally) or to the top of the page (vertically).
- A negative value, e.g. "-1 cm" will move the content to the left (horizontally) or to the bottom of the page (vertically).



**Note:** Remember that the unit used in Actions (in this example "cm") is defined in the PitStop Pro Preferences (Units & Guides Category).



You can choose whether or not to take into account page rotation and scaling factor (if applicable).

### 3.1.13.13. Move page content to corner

***Belongs to***

- **Category:** Page; Position/Size
- **Type:** Changes

***What it does***

Moves the contents of a page to a chosen corner.

This Action does not center the object on the corner but moves the closest objects to that corner and moves the other objects by the same distance towards the corner (horizontally or vertically).

***Example***

To move the page content to the lower left

1. Select Move page content horizontally to **Left Side**.
2. Select Move page content vertically to **Bottom Side**.
3. Select the page box to be used as a reference, for example the **media box**.
4. Optionally, set **margins** to be added to the media box.
5. Select the **Use page rotation and scaling factor** checkbox, if page rotation and scaling factor should be taken into account.

### 3.1.13.14. Normalize line weight

***Belongs to***

- **Category:** General; LineArt; Position and size
- **Type:** Changes

***What it does***

Normalizes paths where a transformation matrix caused distortions, by removing the distortion, giving the path a uniform line weight equal to the average reported in the Inspector. The Action also works on sheared paths.

***Related Actions***

- [Change line weight](#) on page 161
- [Select by line weight](#) on page 457
- [Check line weight](#) on page 346

### 3.1.13.15. Remove page scaling factor

***Belongs to***

- **Category:** Page; Position and size

- **Type:** Changes

**What it does**

Removes the page scaling factor and reverts the page to its original size.

A page of 10 by 10 inches and a page scaling factor 2 will be displayed and printed as a page of 20 by 20 inches. By removing the page scaling factor, the page size will be at 10 by 10 inches again.

Page scaling has been introduced in PDF 1.6. If the page scaling factor is not removed or applied, the page size can only be displayed correctly in Acrobat 7 or higher.

**Related Actions**

- [Check if page scaling factor is used](#) on page 374
- [Apply page scaling factor](#) on page 201

### 3.1.13.16. Rotate content

**Belongs to**

- **Category:** Page; Position/Size
- **Type:** Changes

**What it does**

Rotates the page content at a particular angle around a particular point.

You could for example rotate the page content at an angle of 90° relative to the center of the media box.

You can choose whether or not to take into account page rotation.

**Related Actions**

- [Check for rotated objects](#) on page 389
- [Rotate object](#) on page 247
- [Rotate objects as group](#) on page 247

### 3.1.13.17. Rotate page

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Allows you to set page rotation to -90, 0, 90 or 180 degrees (clockwise).

**Related Actions**

- [Rotate content](#) on page 219

### 3.1.13.18. Rotate object

**Belongs to**

- **Category:** Position/Size
- **Type:** Changes

**What it does**

Rotates an object at a certain amount of degrees around a particular point.

**Related Actions**

- [Check for rotated objects](#) on page 389
- [Rotate content](#) on page 219
- [Rotate objects as group](#) on page 247

### 3.1.13.19. Rotate objects as group

**Belongs to**

- **Category:** Position/Size
- **Type:** Changes

**What it does**

Rotates a selection of objects at a particular angle around a particular point.

You could for example rotate the selection around the center of the media box at an angle of 90 degrees.



---

**Note:** Rotating objects as a group means that all of the selected objects act as one large object during the rotation.

---

**How to proceed**

1. Select what specific place in the page box you want to use as the rotation point (center, lower left ...).
2. Specify the page box of your choice or choose "selection bounding box" or "visible area of selection". This last option is relevant if part of a selected image has been clipped away.
3. Define the rotation angle.
4. Select the **Use page rotation** checkbox as required.

**Related Actions**

- [Check for rotated objects](#) on page 389
- [Rotate content](#) on page 219
- [Rotate object](#) on page 247

### 3.1.13.20. Scale page boxes

**Belongs to**

- **Category:** Page; Position and size
- **Type:** Changes

**What it does**

Allows you to scale all page boxes simultaneously.

Specify X and Y scaling percentages. You can anchor the page boxes at a certain corner in the PDF, for instance at the lower left corner of the media box. You can also choose whether or not to use the page rotation.



---

**Note:** If you want to scale the page boxes proportionally, you need to specify the same values for X and Y.

---

**Related Actions**

- [Scale page content to fit](#) on page 221
- [Scale to fit page size](#) on page 222
- [Scale page content](#) on page 220
- [Shrink page content to fit](#) on page 223

### 3.1.13.21. Scale page content

**Belongs to**

- **Category:** Page;Position/Size
- **Type:** Changes

**What it does**

Scales page content along the X and/or Y axis by a certain percentage.




---

**Note:** If you want to scale the page content proportionally, you need to specify the same values for X and Y.

---

**Example**

Suppose you have an A4-size PDF document (210 x 297 mm). You want to keep the page size “as is”, but need to make the page content narrower. You also wish to move the page content to the upper right corner of the crop box.

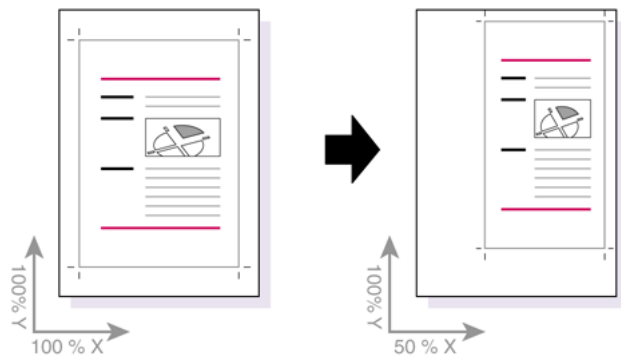**How to proceed**

1. Enter the preferred scaling percentage for the X and Y axis.
2. Do one of the following:
  - To define an anchor point, select **Anchored at**.
  - To define the target position of the page contents, select **Moving page content to**.
3. Define the anchor point or target position, for example (anchored at/moving to) the upper right of the crop box.

**Related Actions**

- [Scale page content to fit](#) on page 221
- [Scale to fit page size](#) on page 222
- [Scale page boxes](#) on page 219
- [Shrink page content to fit](#) on page 223

### 3.1.13.22. Scale page content to fit

**Belongs to**

- **Category:** Page; Position/Size
- **Type:** Changes

**What it does**

Scales the page content to fit the size of a particular page box. You can add extra margins, if necessary.


You should also define the target position of the page content inside the page box, e.g. "page content should move to the upper right".

You can choose whether or not to take into account the page rotation and scaling factor.

Scaling is by default restricted to the visible elements of the page (unless you clear the **Use only visible part of content** checkbox), to avoid that hidden content leads to incorrect results.

**Example**

In the example below, the page content is scaled to fit the size of the trim box (A).

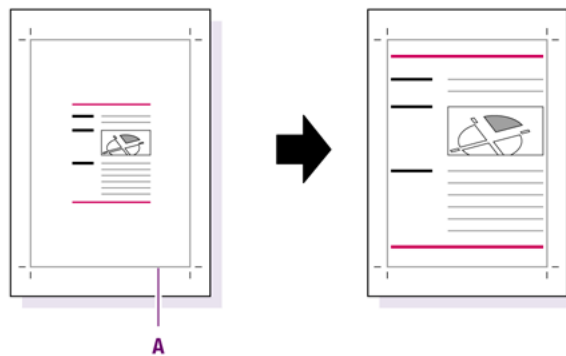

#### **Related Actions**

- [Scale page content](#) on page 220
- [Scale to fit page size](#) on page 222
- [Scale page boxes](#) on page 219
- [Shrink page content to fit](#) on page 223

### 3.1.13.23. Scale selection

#### **Belongs to**

- **Category:** Position/Size
- **Type:** Changes
- **Since Version:** 2017

#### **What it does**


Resizes one or more selected objects.

You can set the width and height using fixed values, variables, percentages or page boxes, proportional or not. You can also determine the anchor point of the object being scaled and the direction in which the object will resize.









Note that the reference for the anchor point is the bounding box of the selection.

#### **Example 1: One object selected**

**Object before scaling:**




**Result of the Action depending on the chosen options:**

| Chosen options                                                                                                                                                                                                                    | Result                                                                                           |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
| <div><div>Width</div><div>Scale by percentage50%</div><div>Height</div><div>Keep proportional to width</div><div>Anchor</div><div></div></div>   | <div></div>   |
| <div><div>Width</div><div>Scale by percentage50%</div><div>Height</div><div>Keep proportional to width</div><div>Anchor</div><div></div></div>  | <div></div>   |
| <div><div>Width</div><div>Scale by percentage50%</div><div>Height</div><div>Keep proportional to width</div><div>Anchor</div><div></div></div> | <div></div> |
| <div><div>Width</div><div>Adjust by value-10 mm</div><div>Height</div><div>Don't change</div><div>Anchor</div><div></div></div>                | <div></div> |

Example 2: Two objects selected

Objects before scaling:



Result of the Action depending on the chosen options:

| Chosen options                                                                                              | Result |
|-------------------------------------------------------------------------------------------------------------|--------|
| <div><div>WidthScale by percentage120%</div><div>HeightScale by percentage120%</div><div>Anchor</div></div> |        |
| <div><div>WidthScale by percentage120%</div><div>HeightScale by percentage120%</div><div>Anchor</div></div> |        |

3.1.13.24. Scale to fit page size

**Belongs to**

- **Category:** Position/Size; Page
- **Type:** Changes

**What it does**

Scales all page boxes (and optionally all page content as well) until the specified page box fits the target size.

The target size should be specified by defining the target width and height either as a value, a percentage of the original value or proportionally relative to the other dimension.




Note that for both the page content and the page boxes you can separately decide whether or not to scale proportionally to match the target page size.

**Remark**

In case of proportional scaling (=default, **Allow non-proportional scaling** checkbox NOT selected), it may happen that the requested target width and height cannot be achieved without changing the aspect ratio; in that case, the target size serves as a frame in which the resized page box should fit.

For example, if the original page box is a rectangle and the requested width and height result in a square, the page box will be scaled to fit in the square (and vice versa). See the image below; the blue object represents the requested target dimensions.

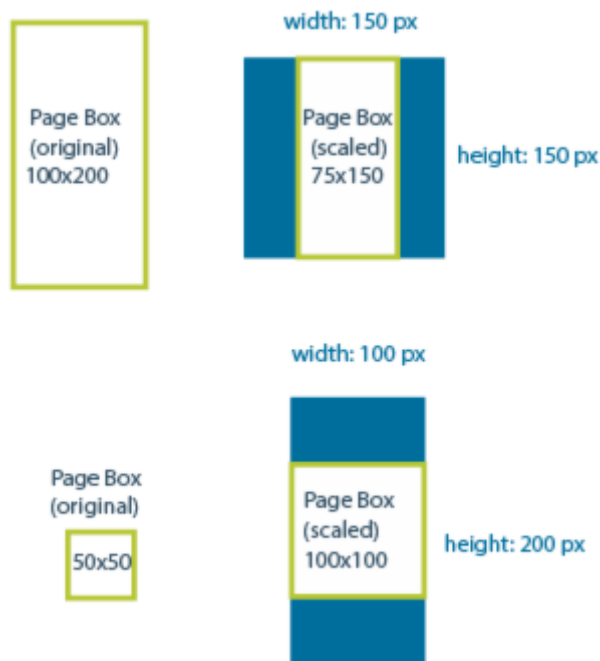**Related Actions**

- [Scale page content to fit](#) on page 221
- [Scale page content](#) on page 220
- [Scale page boxes](#) on page 219
- [Shrink page content to fit](#) on page 223

### 3.1.13.25. Shrink page content to fit

**Belongs to**

- **Category:** Page; Position/Size
- **Type:** Changes

**What it does**

Shrinks page content to fit the size of a particular page box. You can add extra margins, if necessary. You should also define the anchor point, for example "anchored at the lower left of the media box".

You can choose whether or not to take into account page rotation and scaling factor.

**Related Actions**

- [Scale page content to fit](#) on page 221
- [Scale to fit page size](#) on page 222
- [Scale page content](#) on page 220
- [Scale page boxes](#) on page 219

### 3.1.13.26. Use trim marks to set page box

**Belongs to**

- **Category:** Page; Position and size
- **Type:** Changes

**What it does**

Allows you to set the trim box and/or the bleed box based on the trim or bleed marks found in the PDF.

**Note:**

- Crop marks with a **dash pattern** cannot be used to set the page box.
- Crop marks generated with Illustrator, InDesign and QuarkXpress are supported.


**How to proceed**

1. Indicate which page box you want to set: the trim box, the bleed box or both.
2. Specify the color of the trim marks by choosing one or more of the following:
  - 400% CMYK
  - Separation All (registration)
  - 100% black
  - A specific color.
3. If desired, specify how much the marks are allowed to deviate from the expected position:
  - The unit is the unit set in the PitStop Pro Preferences (Units & Guides category), for example: cm or pt
  - The maximum value is 2.7 pt; if you enter a higher value, it is automatically reset to 2.7 pt or an equivalent value (if you're using a different unit).

**Example**

In the image below, the red marks are detected as trim marks and used to set the trim box (blue box). The position of the vertical marks in the top and bottom left corner is not as expected (they

are not exactly on one vertical line), but the deviation (= difference between the position of both marks) is less than the specified threshold.

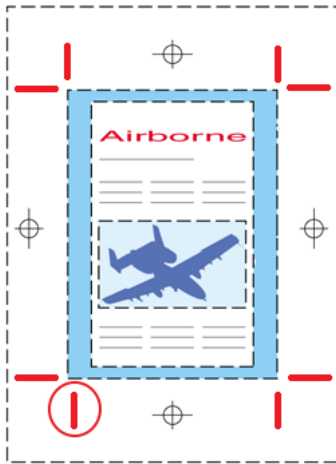

#### **Related Actions**

- [Select trim marks](#) on page 488
- [Check if trim marks match page box](#) on page 374

## 3.1.14. Prepress

---

### 3.1.14.1. Add bleed

#### **Belongs to**

- **Category:** Prepress
- **Type:** Changes
- **Since version:** 13

#### **What it does**

Allows you to add bleed all around the page, e.g. on all 4 edges if needed.



**Note:** This Action applies bleed based on the bleed box; if you don't have a bleed box yet, you can use the 'Change bleed box' Action to create one.

You may use this Action to make your file PDF/X-4 compliant.

#### **How to proceed**

1. Select the edge(s) you want to add bleed to. Bleed is added from the trim box edges to the bleed box.
2. Select **Add bleed in corners** as required.
3. Indicate where the bleed should start (inside the bleed box).



**Note:** By default, the same values are used on all edges; if you change one value, all other values are automatically changed as well. If you don't want this, click the Lock icon  , so it changes to  . You can now use different values as required.

- 4. Select **Mirror margins according to page binding** as required. When selected, the inner and outer instead of the left and right margins have to be set, so the amount of bleed may be different for even and odd pages.
- 5. By default, to add bleed, PitStop uses several techniques, such as extending clips and mirroring existing content. In some cases, it may be preferable to only use the mirroring technique. If that is the case, select **Only add bleed by mirroring content**. Note that this also helps to keep the file size down.
- 6. Select one of the following options as required:

| Option                                            | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Only add bleed by mirroring content               | <p>By default, to add bleed, PitStop uses several techniques, such as extending clips and mirroring existing content. In some cases, it may be preferable to only use the mirroring technique. If that is the case, select this option. Note that this also helps to keep the file size down.</p> <div><b>Note:</b> We advise clearing this checkbox if line art needs to be extended. See example 3 below.</div> |
| Allow mirroring of text                           | Mirroring of text can be useful to generate fold-over flaps for banners with text near the trim edge.                                                                                                                                                                                                                                                                                                                                                                                               |
| Use all objects to fill bleed area when mirroring | By default, objects that do not touch the trim box are not used to create bleed, unless you select this option. In that case, objects near the trim box are also mirrored.                                                                                                                                                                                                                                                                                                                          |
| Retain objects in bleed area                      | By default, existing objects in the bleed area are removed, unless you select this option.                                                                                                                                                                                                                                                                                                                                                                                                          |


**Example 1**

Bleed is added in the bleed area.



### Example 2


With this kind of image, enabling **Only add bleed by mirroring content** is not recommended.

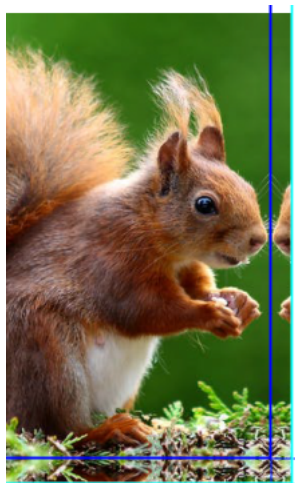

### Example 3

Line art should be extended instead of mirrored.

Running the Action with **Only add bleed by mirroring content** checkbox selected, resulted in line art not extended correctly (= the image on the left). When the **Only add bleed by mirroring content** checkbox was cleared, the result was OK (= the image on the right).

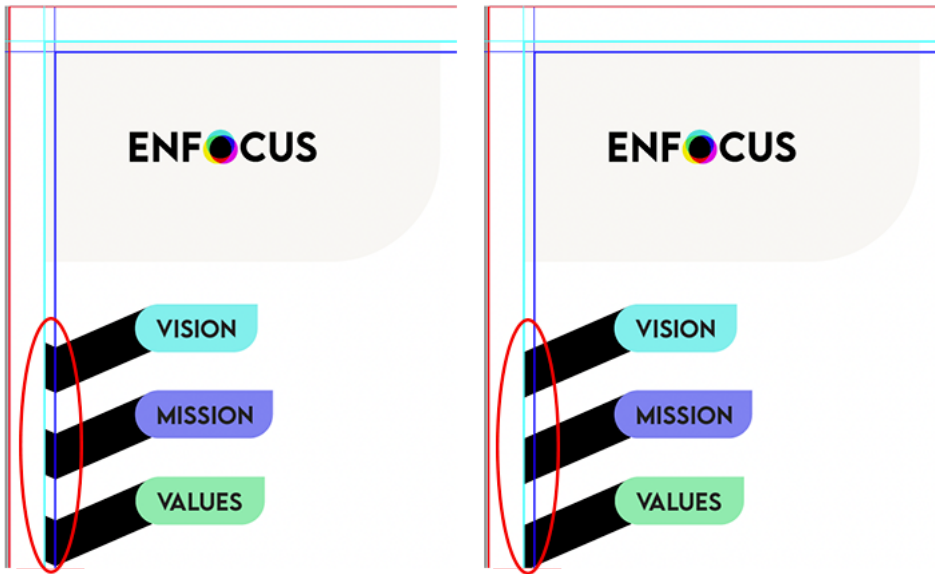

**Related Actions**

- [Check bleed](#) on page 294
- [Change bleed box](#) on page 202

3.1.14.2. Add bleed around contour

**Belongs to**

- **Category:** Prepress
- **Type:** Changes
- **Since version:** 2021

**What it does**

Allows you to add missing bleed around the contour (typically the dieline or cut line) of an object.

Note that this Action only works on selected line art that is not filled. The contour must be closed and it must be a compound path of at least 3 nodes.



**Note:** You can *detect* missing bleed around contours through the [Check bleed around contour](#) Action.


**Attributes**

| Attribute                                 | Description                                                                                                                                                  |
|-------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Use trim box as contour                   | If selected, bleed is added based on the trim box. The amount of bleed is based on the value set in the <b>Bleed offset</b> option, so not on the bleed box. |
| Use inner/outer according to page binding | If the trim box is used as contour, you can add bleed to the inner and/or outer contour based on the page binding. If selected, left and right               |

| Attribute                                                                                                                                                             | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                                                                       | are replaced with inner and outer in the <b>Add bleed for edges</b> option.<br><br>Example: In case of magazines, typically "inner" will be cleared.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Add bleed for edges                                                                                                                                                   | If the trim box is used as contour, this option determines the edges where bleed is added.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Add bleed in corners                                                                                                                                                  | If the trim box is used as contour, you can add bleed in the corners.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Bleed offset                                                                                                                                                          | The desired amount of bleed (starting from the contour).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Trim area margin                                                                                                                                                      | Indicates how close/far from the trim area the bleed should start. This is useful for objects near but not crossing the trim box.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Extend line art                                                                                                                                                       | <p>Extends line art. See example 2 below.</p> <div>  <p><b>Note:</b> This only works for line art that is not in a form. The line art must also not have both a stroke and a fill. If so, first <i>separate the stroke and the fill</i>.</p> </div> <p>This option is also useful for <i>clipped images (clip masks)</i>. See example 3 below. If this option is selected, the clip path is extended. The parts for which there is not enough image data can be filled using pixel cloning, if the <b>Repeat last pixel</b> option is enabled.</p> |
| Repeat last pixel                                                                                                                                                     | Repeats the last pixel of images if any.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| White threshold                                                                                                                                                       | The threshold for white makes sure that a color that is "almost white" (and looks white when printed) is considered white. The default value is 10%.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Image output:                                                                                                                                                         | Desired output properties                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <ul style="list-style-type: none"> <li>Resolution (ppi)</li> <li>Color space</li> <li>Compression</li> <li>Quality</li> <li>Convert to indexed color space</li> </ul> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

#### Remark

Bleed cannot be added to overlapping or intersecting contours. In the example below, the two rectangles are separate paths. In this case, PitStop cannot determine where bleed should be added. Should bleed be added to the internal line or the external line? To solve this issue and help PitStop, you should first convert the two paths into one compound path.

**Example 1**

Missing bleed is added based on the cutter guide (in orange), both to the inner contour (the white space between the leaves that has to be cut out) and the outer contour.

**Example 2**

Example where the trim box is used as contour, with the **Extend line art** checkbox cleared:






Example where the trim box is used as contour, with the **Extend line art** checkbox selected:



### **Example 3**

Clip mask example. The bleed area is filled with clipped away image data. This is obtained by selecting the **Extend line art** checkbox.

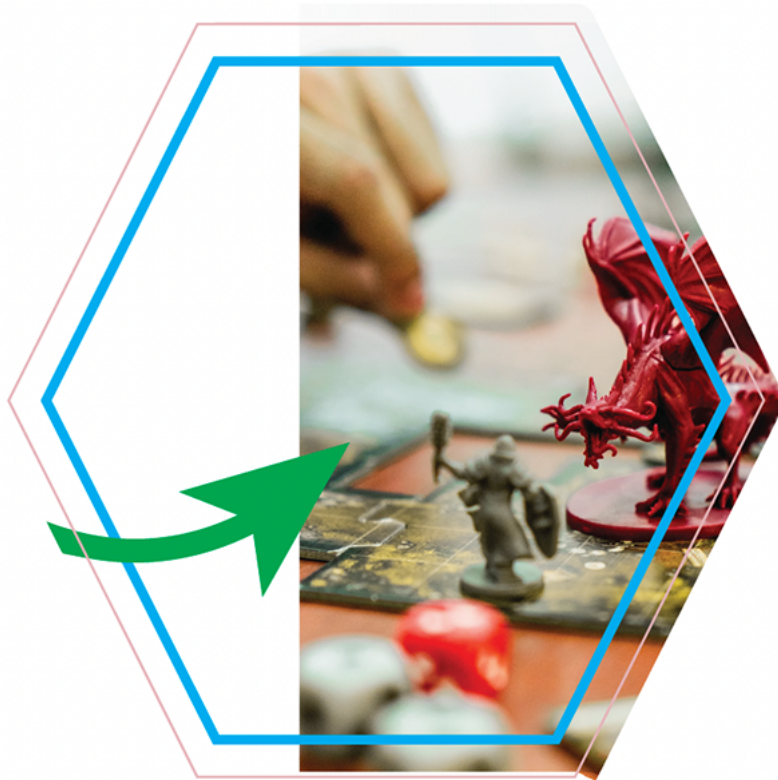**Related Actions**

- [Check bleed](#) on page 294
- [Check bleed around contour](#) on page 297

### 3.1.14.3. Apply transfer function

**Belongs to**

- **Category:** Prepress;Text;LineArt;Color;Image
- **Type:** Changes

**What it does**

Adds a transfer function to paths, text, images or all these types of objects. You can exclude spot colors or apply the transfer function on tint values or alternate values only.

Transfer functions are used for creative purposes, artistic effect and to correct the characteristics of a specific, maybe poorly calibrated, output device. For example, a file that is intended for output on a particular image setter may contain transfer functions that compensate for the dot gain inherent to that printer.



**Note:** Transfer functions are not allowed in PDF/X compliant documents.

**Related Actions**

- [Check for custom transfer function](#) on page 402
- [Remove custom transfer function](#) on page 271

### 3.1.14.4. Change overprint

**Belongs to**

- **Category:** Prepress
- **Type:** Changes

**What it does**

Changes the overprint for a selected object's fill and/or stroke.

**How to proceed**

Proceed as follows:

1. To change the Fill/Stroke overprint, select the Fill/Stroke overprint checkbox.



**Note:** The checkbox only indicates **what** you want to change, **not how** you want it to change. If none of the checkboxes has been selected, the name of the Action will change into "Do not change overprint".

2. To enable or disable Fill/Stroke overprint, click the buttons:



Overprint is off.



Overprint is on.



**Tip:** Check the Actions field, to see if the Action is configured appropriately. For example, if you selected the Fill overprint checkbox and clicked the button next to it, the name of the Action should change into "Set fill overprint to off."

**Related Actions**

- [Check if object is set to overprint](#) on page 401
- [Select by overprint](#) on page 501

### 3.1.14.5. Change overprint mode

**Belongs to**

- **Category:** Prepress
- **Type:** Changes

**What it does**

Allows you to change the overprint mode of a selection to Standard overprint (OPM 0) or Illustrator overprint mode (OPM 1).

**About overprint modes**

- In **Standard overprint mode** (OPM 0), the tint value 0 of one of the CMYK inks in the foreground object has a knockout effect on the color rendering of the underlying object. In other words, a foreground ink with a C, M, Y or K value of 0 % erases the corresponding background ink. Here, the “foreground inks win” principle applies.
- In **Illustrator overprint mode** (OPM 1), the tint value 0 is neutral: it is ignored (as if it were “not specified”) and has therefore no effect on the color rendering of the underlying object.

For more information and examples, refer to [the PitStop Pro Reference Guide on the Enfocus website](#).

For more information and examples, refer to the PitStop Pro Reference Guide.

**Related Actions**

- [Check overprint mode](#) on page 404
- [Select by overprint mode](#) on page 502

### 3.1.14.6. Change rendering intent

**Belongs to**

- **Category:** Prepress;Color
- **Type:** Changes

**What it does**

Modifies the rendering intent of an object to one of the following:

- Absolute Colorimetric
- Relative Colorimetric
- Perceptual
- Saturation

**About rendering intents**

A rendering intent is a remapping method, allowing to remap colors so that they best match the intended use. ‘Remapping’ means that colors from one output device’s color space are mapped to the color space of another device.

For more information and examples, refer to [the PitStop Pro Reference Guide on the Enfocus website](#) (See Chapter “Rendering intents to remap colors”).

For more information and examples, refer to the PitStop Pro Reference Guide (See Chapter “Rendering intents to remap colors”).

**Related Actions**

- [Select by rendering intent](#) on page 427
- [Check rendering intent](#) on page 312
- [Remove rendering intent](#) on page 117

### 3.1.14.7. Change rendering parameter

***Belongs to***

- **Category:** Prepress
- **Type:** Changes

***What it does***

Changes the rendering parameter of your choice to the corresponding rendering parameter of the grabbed object.

***Example***

To apply a transfer curve from an object to the objects of your selection in the Action List

1. Select an object in your PDF document, by using the PitStop Select Objects tool .
2. In the attributes of the Change rendering parameter Action, select Change **transfer**.
3. Click **Grab Transfer From Selection**.

### 3.1.14.8. Change smoothness

***Belongs to***

- **Category:** Prepress
- **Type:** Changes

***What it does***

Changes the value of smoothness of a selected PostScript curve.

A value of 1 is a good default.

### 3.1.14.9. Change transparency

***Belongs to***

- **Category:** Prepress
- **Type:** Changes

***What it does***

Allows you to modify the transparency of the objects in a PDF file.

You can:

- Modify the alpha channel of a fill and/or stroke, by moving the sliders to the desired percentage. Note that, to gain full opacity, you should move the slider to 100%.
- Change the blending modes.

This will change the way in which the colors of a transparent object on top blend with the colors of underlying objects.

To select the blending modes you want to apply, proceed as follows:

1. Select a blending mode under **Available**.
2. Click **Add** to move it to the **Selected** list.
3. Repeat steps 1-2 as required.

The blending modes will be applied in the order as they appear in the Selected list.

- Turn on or off **Alpha is Shape** as required. This may affect anti-aliasing. (Do not turn it on, unless you really need it.)
- Turn on or off **Text Knockout**.

If Text Knockout is enabled, the inks of underlying objects, if any, will be cut out on the other separations. This option may be useful in case of overlapping characters.



**Note:** As of PitStop 2022, this Action also works on transparent annotations.

#### **Related Actions**

- [Check for transparent objects](#) on page 399
- [Select pages with transparent objects](#) on page 486
- [Select transparent objects](#) on page 504
- [Remove transparency](#) on page 274

## 3.1.14.10. Change transparency group settings

#### **Belongs to**

- **Category:** Prepress
- **Type:** Changes
- **Since:** 2020

#### **What it does**

Allows you to to modify the transparency group settings, on form or page level.

Remember that you can also change (and view) the transparency group settings in PitStop Pro using the Enfocus Inspector.

#### **About transparency groups**

A transparency group is a group of objects that belong together; the group can be defined on form level (a so-called XObject form) or on page level. Checking the transparency group properties may be useful to know whether an object's visual appearance has changed because it's part of a group.

#### **About the transparency group settings that can be changed using this Action**

| Setting                                      | Meaning                                                                                                                                                                                                                       |
|----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Change forms or pages to transparency groups | <ul style="list-style-type: none"> <li>• <b>On:</b> The page or form is converted to a transparency group. If it is already a transparency group, nothing changes. The other transparency settings (knockout flag,</li> </ul> |

| Setting                                                 | Meaning                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                         | <p>isolated flag, blending color space) are used to render the transparency group.</p> <ul style="list-style-type: none"> <li>• <b>Off:</b> The page or form will not/no longer be a transparency group. The objects will be rendered as if they were placed directly on the page. The other settings in this Action are grayed out (as they are not relevant if there is no transparency group).</li> </ul> |
| Change the knockout flag to                             | <ul style="list-style-type: none"> <li>• <b>On:</b> If the knockout flag is on, the objects in the transparency group are rendered as one object. Overlapping parts cannot interact with each other: the objects on top fully overwrite the objects underneath.</li> <li>• <b>Off:</b> The objects are not rendered as one object.</li> </ul>                                                                |
| Change the isolated flag to                             | <ul style="list-style-type: none"> <li>• <b>On:</b> If the isolated flag is on, the objects in the transparency group are not affected by the objects underneath.</li> <li>• <b>Off:</b> If the isolated flag is off, the objects in the transparency group can be affected by other objects.</li> </ul>                                                                                                     |
| Change the blending color space to <select from a list> | <p>This is the blending color space that will be used to render the transparency group. Note that this option is only active in case of an isolated group (isolated flag set to On).</p>                                                                                                                                                                                                                     |
| ICC Profile                                             | <p>If the blending color space is Gray, RGB or CMYK, you should select the appropriate ICC Profile.</p>                                                                                                                                                                                                                                                                                                      |

### 3.1.14.11. Clean up unused resources

***Belongs to***

- **Category:** Prepress
- **Type:** Changes

**What it does**

Removes resources that are not used, for example embedded images or fonts, to reduce the file size.

### 3.1.14.12. Convert PDF/X-4p Output Intent to PDF/X-4

**Belongs to**

- **Category:** Prepress
- **Type:** Changes

**What it does**

Converts PDF/X-4p Output Intent to PDF/X-4.

PDF/X-4p is used when the ICC profile in the Output Intent is supplied externally.

In PDF/X-4, the ICC profile in the Output Intent must be supplied internally, so this Action embeds the external ICC profile.

### 3.1.14.13. Convert shading to images

**Belongs to**

- **Category:** Prepress
- **Type:** Changes
- **Since Version:** 13 update 2

**What it does**

Converts shadings and shading color spaces to images, in order to improve the performance of RIPs that have difficulties handling shadings.

This Action is able to handle *objects, text and masks* with shadings, as well as *shaded color spaces in the fill and stroke* of paths, text, and image masks. In case of image masks, the *combined visible area* of all selected objects that use shading is converted to an image which is used as a coloured tiling pattern.

If the shading is tagged with an ICC profile, the resulting image will be tagged with the same ICC profile; if the shading does not have an ICC profile attached, the resulting image won't have one either.



---

**Tip:** As only the *visible content* of the shading is replaced, we recommend performing all conversions that change the bounding box (e.g. changes to the font size or the width of the stroke) **BEFORE** running this Action.

---

Note that due to this conversion, the file size will increase.

**Options**

In the attributes of this Action, you can determine:

- The preferred **resolution** of the resulting images (by default: 300 ppi)
- The **compression type** (JPEG, JPEG 2000, ZIP or none)



- The **quality** of the images.

### 3.1.14.14. Convert shading to path

#### ***Belongs to***

- **Category:** Prepress
- **Type:** Changes
- **Since Version:** 25.03

#### ***What it does***


Converts selected shading *objects* (so not shading pattern color spaces) into paths filled with the same shading (as a shading pattern color space). This means that you can keep the line art and change its graphic properties.

#### ***Example***


In this example, after the conversion to path, the shading color space is converted to a solid color.

```
Select all  
Convert shading to path  
Select last added objects  
Convert shading color space to solid color
```

#### **Before:**

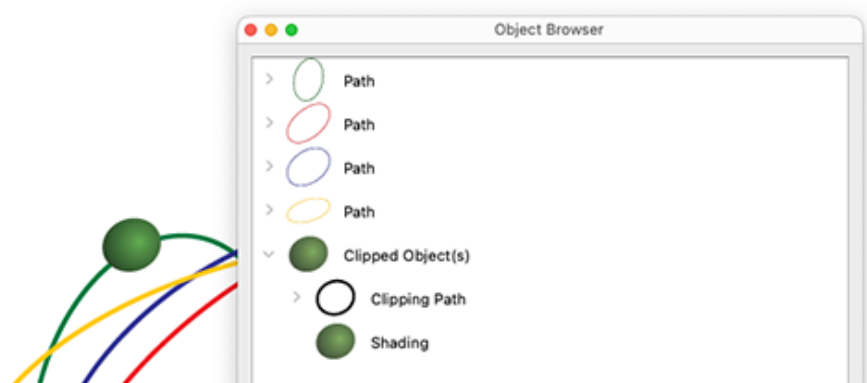

#### **After:**

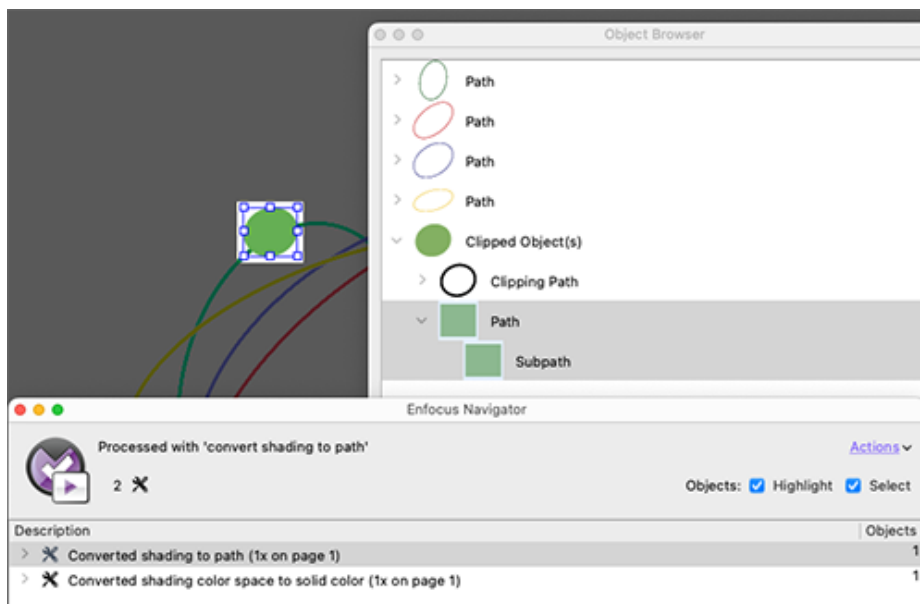

### 3.1.14.15. Make mask

#### ***Belongs to***

- **Category:** Prepress
- **Type:** Changes

#### ***What it does***

Creates a mask from at least two selected objects (line art or text).

#### ***Related Actions***

[Release mask](#) on page 271

### 3.1.14.16. Overprint on all separations

#### ***Belongs to***

- **Category:** Prepress
- **Type:** Changes

#### ***What it does***

Ensures that if an object is set to overprint, it overprints on all separations. You can apply the overprint to the fill color and/or the stroke color.

The overprint rules in PDF are clearly defined but sometimes very surprising. For example, a gray object that is set to overprint will overprint on underlying Pantone colors, but it will not overprint

on Cyan, Magenta and Yellow. This Action will ensure that the document will still print as Black, but with overprint on CMY.

### 3.1.14.17. Release mask

***Belongs to***

- **Category:** Prepress
- **Type:** Changes

***What it does***

Removes a selected mask.

In PitStop masks refer to clipping paths, i.e. objects (line art or text) of which the shape (partly) masks other artwork. Only areas inside the clipping objects are visible. This Action allows you to remove the mask, so that the different objects become visible again.

***Related Actions***

[Make mask](#) on page 270

### 3.1.14.18. Remove black generation

***Belongs to***

- **Category:** Prepress
- **Type:** Changes

***What it does***

Allows you to remove black generation settings.

Black generation is a custom setting that tries to replace CMYK-mixed blacks and grays with a greater percentage of black to save on colored ink and give a clearer black. As many printers prefer to set these settings themselves, they can use this Action to remove them from a PDF.

***Related Actions***

[Check for custom black generation](#) on page 401

### 3.1.14.19. Remove custom transfer function

***Belongs to***

- **Category:** Prepress
- **Type:** Changes

***What it does***

Remove a custom transfer function applied to an object in a PDF.

Transfer functions are used for creative purposes, artistic effect and to correct the characteristics of a specific, maybe poorly calibrated, output device. For example, a file that is intended for output on a particular image setter may contain transfer functions that compensate for the dot gain inherent to that printer.



---

**Note:** Transfer functions are not allowed in PDF/X compliant documents.

---

**Related Actions**

- [Apply transfer function](#) on page 101
- [Remove custom transfer function](#) on page 271

## 3.1.14.20. Remove halftone

**Belongs to**

- **Category:** Prepress
- **Type:** Changes

**What it does**

Removes any custom halftone information from a document.

Halftoning is a method of printing shades using a single color ink. By varying the size or density of dots, the eye can see a shade somewhere between the solid color and the color of the background paper. Custom halftones are mostly used for screening frequency and angles.

Associated with every output device is a default halftone definition that is appropriate for that device. Only relatively sophisticated documents need to define their own halftones to achieve special effects. In general, when a PDF document provides its own halftone specifications, it sacrifices portability: they may lead to unpredictable printed output when the same document is sent to different printers. This is why they are generally undesirable.

**Related Actions**

[Check for custom halftone](#) on page 401

## 3.1.14.21. Remove halftone phase

**Belongs to**

- **Category:** Prepress
- **Type:** Changes

**What it does**

Removes all halftone phases from a PDF document.

A halftone phase is a shift in the alignment of halftone and pattern cells in device space, to compensate for window system operations that involve scrolling. It is no longer used, but may still be found in documents containing artwork from older source applications.



---

**Note:** It may be interesting to remove halftone phases, because halftone curves, when defined, overrule general transfer curves.

---

**Related Actions**

[Check halftone phase](#) on page 400

### 3.1.14.22. Remove non-PDF/X compliant halftone

**Belongs to**

- **Category:** Prepress
- **Type:** Changes

**What it does**

Removes any instances of halftones that are not compliant with the PDF/X specification.

Halftoning is a method of printing shades using a single color ink. By varying the size or density of dots, the eye can see a shade somewhere between the solid color and the color of the background paper. Some of these halftones are not allowed according to the PDF/X specification, which is why you might want to remove them.

**Related Actions**

[Check for non-PDF/X compliant halftone](#) on page 403

### 3.1.14.23. Remove rendering intent

**Belongs to**

- **Category:** Color; Prepress
- **Type:** Changes

**What it does**

Strips rendering intents from color managed objects in a PDF.

**About rendering intents**

A rendering intent is a remapping method, allowing to remap colors so that they best match the intended use. 'Remapping' means that colors from one output device's color space are mapped to the color space of another device.

For more information and examples, refer to [the PitStop Pro Reference Guide on the Enfocus website](#) (See Chapter "Rendering intents to remap colors").

For more information and examples, refer to the PitStop Pro Reference Guide(See Chapter "Rendering intents to remap colors").

**Related Actions**

- [Select by rendering intent](#) on page 427

- [Check rendering intent](#) on page 312
- [Change rendering intent](#) on page 104

### 3.1.14.24. Remove transparency

#### ***Belongs to***

- **Category:** Remove; Prepress
- **Type:** Changes

#### ***What it does***

Removes transparency from the objects in a PDF file.

You can remove transparency from **all** objects in the PDF, or from objects for which:

- Fill is set to overprint, and/or
- Stroke is set to overprint, and/or
- Spot colors are used.



---

**Note:** As of PitStop 2022, this Action also removes transparent annotations.

---

#### ***About transparency in PDF***

Transparency can cause some problems if you view documents in Adobe Acrobat 4.0 or earlier: transparent objects can be rendered incorrectly.

A transparent layer can also cause problems when you transpose the PostScript code of your PDF document to the halftone information of your printer (the 'ripping').

A typical example is saving graphics with transparent elements as PDF compatible with Acrobat 5.0 in Adobe Illustrator 9.0 or Adobe InDesign 2.0. In Adobe Acrobat 4.0, transparent objects in your PDF document are displayed and printed opaque, but transparency is not removed. If you open the same PDF document in Adobe Acrobat 5.x, the transparent objects will look (and print) fine again.

It can be useful to make the distinction between spot colors and CMYK colors when checking the transparency settings in your documents, because different rules govern the overprinting of spot colors.

#### ***Related Actions***

- [Check for transparent objects](#) on page 399
- [Select pages with transparent objects](#) on page 486
- [Select transparent objects](#) on page 504
- [Change transparency](#) on page 265

### 3.1.14.25. Remove undercolor removal

#### ***Belongs to***

- **Category:** Prepress
- **Type:** Changes

**What it does**

Removes any custom undercolor removal information from a PDF.

Undercolor removal is the process of removing large percentages of cyan (C), magenta (M), and yellow (Y) ink prior to printing, and replacing them with black (K) ink, in order to achieve a clearer black color in print, and to save on color inks.

**Related Actions**

[Check for custom undercolor removal](#) on page 402

## 3.1.15. Remove

---

### 3.1.15.1. Remove Certified PDF workflow information

**Belongs to**

- **Category:** Remove
- **Type:** Changes

**What it does**

Removes Certified PDF workflow information from a PDF.

Certified PDF workflow information is extra information that is added to a PDF when it's processed as part of an Enfocus Certified PDF workflow. This information can include save states of previous versions, a PDF Profile and other metadata.

For more information and examples, refer to [the PitStop Pro Reference Guide](#) (Chapter: Working with Certified PDF documents).

**Related Actions**

See also [Check Certified PDF state](#) on page 320

### 3.1.15.2. Remove concealed segments from line art

**Belongs to**

- **Category:** Remove
- **Type:** Changes
- **Since:** 25.07

**What it does**

Removes segments from not-filled line art that are hidden by other items in the same selection.

This can be useful to remove overlapping paths.

Note that the removed parts are reported in the Enfocus Navigator.

**Related Actions**

- [Select concealed objects](#) on page 493

### 3.1.15.3. Remove empty layers

**Belongs to**

- **Category:** Remove; Layers
- **Type:** Changes

**What it does**

Removes empty layers selected by another Action in the same Action List.

**Example**

The following Action List will remove **all** empty layers in the PDF:

```
Select layers <!-- Select layers on page 453 -->
Remove empty layers
```

To remove Layer1 and 2, if they are empty:

```
Select layers by name <!-- Select layers by name on page 454 - Choose "equals Layer
[12]" and "Use regular expressions" -->
Remove empty layers
```

**About PDF layers**

Layered content usually comes from applications such as InDesign, AutoCAD or Visio. When converted to PDF, the layers are retained and can be viewed and navigated in Adobe Acrobat. However, if you print a PDF file that contains layers, only the content that is visible on-screen is printed. This may or may not be desired.

**"Conventional" layers versus PDF layers**

**Layers in digital image editing** ("conventional" layers) are used to separate the different elements of an image. Each element is drawn on exactly one layer. The different layers are stacked on top of each other, and the order of the layers defines how the image looks like.

**Layers in PDF** have a different meaning. They are used to hide or show page content:

- Turning *on* a layer, all objects on this layer are shown on-screen.
- Turning *off* a layer, all objects on this layer are hidden, i.e. they become invisible.

As such, layers are also called "optional content groups": groups of objects that can be selectively viewed or hidden by the author of the document. Objects can belong to different layers, and the order of the layers is of no importance.

To work with layers in a PDF document in Adobe Acrobat, select **View > Show/Hide > Navigation Panes > Layers**.

For more information, refer to the Adobe Acrobat help.

**Related Actions**

- [Remove objects from layers](#) on page 155



### 3.1.15.4. Remove invisible objects without fill and stroke

**Belongs to**

- **Category:** Remove
- **Type:** Changes

**What it does**

Removes objects that have no fill or stroke color associated with them.

Designers sometimes leave such objects in a document rather than deleting them.



---

**Note:** This Action only works on vector art (paths) and text without fill and stroke.

---

**Related Actions**

- [Check for invisible objects without fill and stroke](#) on page 330
- [Select invisible objects without fill and stroke](#) on page 446

### 3.1.15.5. Remove object compression

**Belongs to**

- **Category:** Remove
- **Type:** Changes

**What it does**

Removes the object compression from a PDF.

**About object compression**

In a PDF, objects have content streams that define (a part of) the object. These content streams can be compressed in order to create smaller files, so this is mostly used if a PDF is to be put on a website. As older RIPS may have problems with this compression, this Action allows you to remove this compression.

**Related Actions**

- [Check object compression](#) on page 326
- [Check optimal compression](#) on page 334

### 3.1.15.6. Remove processing steps - ISO 19593-1

**Belongs to**

- **Application:** PitStop Pro

- **Category:** Packaging
- **Type:** Changes
- **Since Version:** 13 update 2

**What it does**

Allows you to remove processing steps metadata from the layers of a PDF. Processing steps metadata is defined by ISO standard 19593-1. For more information, refer to [the website of ISO \(International Organization for Standardization\)](#).

**Related Actions**

- [Select layers by processing steps - ISO 19593-1](#) on page 479
- [Check processing steps - ISO 19593-1](#) on page 369
- [Change layer processing steps - ISO 19593-1](#) on page 197

### 3.1.15.7. Remove pages

**Belongs to**

- **Application:** PitStop Pro
- **Category:** Remove
- **Type:** Changes
- **Since Version:** 2017

**What it does**

Deletes pages.

This Action has no attributes of its own; it needs to be preceded by a [Select pages](#) Action to define the pages you wish to remove.

**Example**

The following Action List will delete all even pages from the PDF:

```
Select pages (attributes: All pages - even)
Remove pages
```

**Related Actions**

- [Select pages](#) on page 484

### 3.1.15.8. Remove selection

**Belongs to**

- **Category:** Remove
- **Type:** Changes

**What it does**

Removes any currently selected object in a PDF.



**Note:** If forms are selected (for example with the "Select forms" Action), they are not removed, unless they are empty.

### 3.1.15.9. Remove transparency

**Belongs to**

- **Category:** Remove; Prepress
- **Type:** Changes

**What it does**

Removes transparency from the objects in a PDF file.

You can remove transparency from **all** objects in the PDF, or from objects for which:

- Fill is set to overprint, and/or
- Stroke is set to overprint, and/or
- Spot colors are used.



**Note:** As of PitStop 2022, this Action also removes transparent annotations.

**About transparency in PDF**

Transparency can cause some problems if you view documents in Adobe Acrobat 4.0 or earlier: transparent objects can be rendered incorrectly.

A transparent layer can also cause problems when you transpose the PostScript code of your PDF document to the halftone information of your printer (the 'ripping').

A typical example is saving graphics with transparent elements as PDF compatible with Acrobat 5.0 in Adobe Illustrator 9.0 or Adobe InDesign 2.0. In Adobe Acrobat 4.0, transparent objects in your PDF document are displayed and printed opaque, but transparency is not removed. If you open the same PDF document in Adobe Acrobat 5.x, the transparent objects will look (and print) fine again.

It can be useful to make the distinction between spot colors and CMYK colors when checking the transparency settings in your documents, because different rules govern the overprinting of spot colors.

**Related Actions**

- [Check for transparent objects](#) on page 399
- [Select pages with transparent objects](#) on page 486
- [Select transparent objects](#) on page 504
- [Change transparency](#) on page 265

### 3.1.16. Text

### 3.1.16.1. Add font metadata

**Belongs to**

- **Category:** Text
- **Type:** Changes

**What it does**

Adds font information to the PDF's metadata (based on the font resource).

**About font metadata**

Font metadata is descriptive information about the fonts used in a PDF, for example the name of the font, its type and encoding. You can find the font metadata of a file in Adobe Acrobat by selecting **File > Document Properties** and switching to the **Fonts** tab.

**Related Actions**

[Check font metadata](#) on page 409

### 3.1.16.2. Apply transfer function

**Belongs to**

- **Category:** Prepress;Text;LineArt;Color;Image
- **Type:** Changes

**What it does**

Adds a transfer function to paths, text, images or all these types of objects. You can exclude spot colors or apply the transfer function on tint values or alternate values only.

Transfer functions are used for creative purposes, artistic effect and to correct the characteristics of a specific, maybe poorly calibrated, output device. For example, a file that is intended for output on a particular image setter may contain transfer functions that compensate for the dot gain inherent to that printer.



---

**Note:** Transfer functions are not allowed in PDF/X compliant documents.

---

**Related Actions**

- [Check for custom transfer function](#) on page 402
- [Remove custom transfer function](#) on page 271

### 3.1.16.3. Change character spacing

**Belongs to**

- **Category:** Text

- **Type:** Changes

**What it does**

Changes the amount of space between two characters in a selected text string.

The amount of space is expressed in 'em' units. An 'em' refers to the width of the capital M in the current font.

### 3.1.16.4. Change corrupt font widths

**Belongs to**

- **Category:** Text
- **Type:** Changes

**What it does**

Changes corrupt font widths.

Corrupt font widths may occur in a PDF, when "artificial" bold or italic was used instead of the "bold" or "italic" version of the font concerned. For example, if "Futura" is used in your PDF, the "Futura-Bold" and "Futura-Oblique" fonts should be used instead of applying bold and italics on the regular Futura font. Artificial font may cause problems when printing the PDF.

**Related Actions**

- [Check corrupt font widths](#) on page 406
- [Select corrupt font widths](#) on page 506

### 3.1.16.5. Change fill and/or stroke

**Belongs to**

- **Category:** LineArt;Text
- **Type:** Changes

**What it does**

Allows you to turn on or off the fill and/or stroke for the selected objects.

### 3.1.16.6. Change fill type

**Belongs to**

- **Category:** LineArt;Text
- **Type:** Changes

**What it does**

Allows you to change the fill type of the selected objects to either Non-Zero Winding (Fill) or Even-odd (Eofill).

**About the fill type**

The fill type is an attribute of polygons and loops: compound paths with intersecting lines. To determine whether a point is part of the shape, two different rules can be applied:

- The **Non-Zero Winding** rule (or standard rule). This rule supposes that you draw a line from a point inside the shape to the outside of the shape, without passing through a vertex. You must now count the number of times edges wind around the point inside the shape, in a counter-clockwise direction:
  - For every edge that crosses the line from the point inside the shape in one direction, add 1 to the winding number.
  - For every edge that crosses the line in the opposite direction, subtract 1.

If the winding number is not equal to zero, the shape area to which the point belongs, is filled. For more information, refer to <http://www.wikipedia.org/wiki/nonzero-rule>.

- The **Even-odd rule**: This rule also supposes that you draw a line between a point inside the shape outline and a point outside its outline.
  - If that line crosses the line of the shape an odd number of times, the shape area to which the point belongs, is filled.
  - If the number of crossings is even, the area is not filled.

**Checking the fill type of line art**

To see which rule is applied, check the object's fill attributes:

1. Select the object, using the Enfocus Select tool .
2. Click  to display the Enfocus Inspector and select  > .
3. At the bottom, check which button is selected:
  - If  **Fill** is selected, the **Non-zero Winding** rule applies.
  - If  **Eofill** is selected, the **Even-odd** rule applies.

**Related Actions**

- [Select paths by fill type](#) on page 460

## 3.1.16.7. Change flatness

**Belongs to**

- **Category:** LineArt;Text
- **Type:** Changes

**What it does**

Allows you to set the flatness of a PostScript curve.

The flatness determines how the objects in a document are printed on a PostScript printer.

The default setting for flatness is 1. Increasing this value will speed up printing, but can reduce the print quality (resulting in visible segments in the curve). Decreasing this value will slow down printing, but will improve the print quality.

**Related Actions**

- [Check flatness](#) on page 399
- [Select flatness](#) on page 503

### 3.1.16.8. Change font

**Belongs to**

- **Category:** Text
- **Type:** Changes

**What it does**

Allows you to replace the current font with another one.

Choose the font that should replace the current font:

- To combine a font name with the preferred type and subtype, select **Search for a font by name:**
  1. Click **Select Font Name** and select the appropriate font. Click **OK**.
  2. Select the preferred type and subtype.
  3. Select the **Embed** checkbox as required.
- To use an existing font, select **Select an existing font.**
  1. Click **Create Font Resource**.
  2. Select the appropriate font.
  3. Select **Embed, Don't embed** or **Embed Subset**.
  4. Click **OK**.

You should also indicate how the embedded composite font should be handled.

**Remark**

In case the text of which you want to change the font contains missing glyphs, PitStop is not able to change the font. You will get the following error: Could not convert Unicode to char codes.

However, in some cases you may want to ignore this error and change the font anyway. If so, select **Ignore text reencoding errors**. PitStop will proceed with the conversion, but be aware that the conversion could produce corrupt content.

### 3.1.16.9. Change line cap

**Belongs to**

- **Category:** LineArt;Text
- **Type:** Changes

**What it does**

Changes how the end of a vector line looks like.

**How to proceed**

- To have the line end exactly, click  **butt**.
- To put a round end on the line, click  **round**.
- To have corners projected beyond the length of the line, click  **projecting square**.

### 3.1.16.10. Change line join

**Belongs to**

- **Category:** LineArt; Text
- **Type:** Changes

**What it does**

Changes how a corner on a vector line looks like.

**How to proceed**

- To have a sharp corner, click  **miter**.
- To put a round corner on the line, click  **round**.
- To flatten the corners, click  **bevel**.

### 3.1.16.11. Change line weight

**Belongs to**

- **Category:** LineArt;Text
- **Type:** Changes

**What it does**

Changes the thickness of a selected line to the desired line weight.

**Related Actions**

- [Normalize line weight](#) on page 133
- [Select by line weight](#) on page 457



- [Check line weight](#) on page 346

### 3.1.16.12. Change miter limit

**Belongs to**

- **Category:** LineArt; Text
- **Type:** Changes

**What it does**

Changes the length of the extension of a corner on a vector line.

The miter limit is the limit when a join switches from mitered (pointed) to beveled (squared-off). To allow “pointier” angles, you can increase the miter limit.

For more information on how to calculate the miter limit, refer to the topic "Stroke attributes: Miter limit" in [the PitStop Pro Reference Guide on the Enfocus website](#).

For more information on how to calculate the miter limit, refer to the topic "Stroke attributes: Miter limit" in the PitStop Pro Reference Guide.

### 3.1.16.13. Change point size

**Belongs to**

- **Category:** Text
- **Type:** Changes

**What it does**

Changes the point size of a selection by or to a given amount.

### 3.1.16.14. Change stroke adjustment

**Belongs to**

- **Category:** LineArt; Text
- **Type:** Changes

**What it does**

Allows you to enable or disable stroke adjustment.

Stroke adjustment takes care of the rendering of paths on a raster device (printing device, computer monitor, etc.).

**Example**

If stroke adjustment is **turned off**, the device will draw the pixel only if it covers the path for more than 50%.

This means that a 1 pixel wide line can be drawn in different ways:

- If the line is drawn nicely on top of a pixel of the screen, the line will look fine.
- If the line is spread over 2 pixels of the screen, the width will be 2 pixels on some places and 1 pixel on other places, turning the line into an ugly, jaggy line.

If stroke adjustment is **turned on**, a correction will be made in such a way that the line looks nice and has the same width (1 pixel) everywhere.

### 3.1.16.15. Change word spacing

#### ***Belongs to***

- **Category:** Text
- **Type:** Changes

#### ***What it does***

Changes the word spacing of a selected text string to a given value (in em).

### 3.1.16.16. Consolidate fonts

#### ***Belongs to***

- **Category:** Text
- **Type:** Changes
- **Since:** 2021

#### ***What it does***

Removes duplicate font information that increases the size of a PDF file.

Multiple subsets of the same font can be created by the generating application, or when multiple PDF files are combined into a single file. Multiple subsets make the file overly complex and can impact the output RIP time.



**Note:** There's one important limitation: for this Action to work properly, all fonts must be installed on your system! Fonts that are not present, will remain untouched. This is also the case for fonts of which the license does not allow embedding.

The Action works as follows:

1. First, all fonts are unembedded (on condition they can be re-embedded afterwards, this is checked first, to avoid font issues).
2. Next, all font dictionaries are compared and duplicate dictionaries are removed, to make sure that the same fonts share one and the same font dictionary.
3. Finally, the fonts are subset or embedded again, depending on the chosen embedding type in the attributes of this Action.



**Note:** The option to use subsetting or embedding will only work for fonts that were originally subset or embedded. Otherwise, this Action would increase (instead of reduce) the file size.

### 3.1.16.17. Convert text to outlines

***Belongs to***

- **Category:** Text
- **Type:** Changes

***What it does***

Allows you to outline the text segments in your selection.

This means you turn the text characters into a set of compound paths. In other words, your text will no longer be a true font, but it will be replaced with a graphical representation of the characters. You can then for example change the fill or stroke color as required.

This can be useful to make sure that your text is printed exactly "as is" or, if you cannot embed the font, for example due to font licensing restrictions.



---

**Note:** By default, invalid characters (often represented as a small box containing an X or a question mark) are not converted, unless you select the **Outline invalid characters (.notdef glyph)** checkbox.

---

### 3.1.16.18. Embed font

***Belongs to***

- **Category:** Text
- **Type:** Changes

***What it does***

Embeds a selected font if it is available on the system of the machine PitStop is running on.

You can include the entire font or only embed a subset.



---

**Note:** By default, PitStop embeds the CMap of Type0 CID fonts. However, this may cause problems, especially on Mac, when displaying the embedded subset characters in a browser viewer. In that case, you may clear the **Embed CMap of Type0 CID fonts** checkbox to fix that problem.

---

***About embedding fonts***

**Embedding fonts** in a PDF document means that every character of this font is copied and stored in the PDF document. This is useful if you create PDF documents to be displayed on different systems and to be printed on different devices: these are often systems that do not contain exactly the same fonts.

Embedding a font as a **subset** means that only those characters of the font that are actually used in the text are embedded. This reduces the file size by not including superfluous font information.

***Related Actions***

- [Unembed font](#) on page 293

- [Select embedded fonts](#) on page 507
- [Check font embedding](#) on page 408

### 3.1.16.19. Find and replace text

#### ***Belongs to***

- **Category:** Text
- **Type:** Changes
- **Since:** 2020

#### ***What it does***

Enables you to find a particular string and replace it with another string, optionally using variables.

You can carry out a case sensitive search by selecting the **case sensitive** checkbox: in that case, PitStop takes into account the case (upper case/lower case) of the search string.

Note that font license restrictions may disallow font editing, hence block the text replacement. However, if you're sure that it's allowed to manipulate the font or if you have an agreement with the print vendor, you may consider selecting the **Skip font license restrictions** checkbox in the PitStop Pro user preferences (Fonts category).



#### **Note:**

- Find and replace is suitable for replacing words or small lines of text. It's not suitable for replacing text involving reflow of lines.
- Find and replace also works on text that is split in characters, as long as all characters are put on the same line.
- Find and replace does not work on subset fonts if not all characters of the matching search string are embedded.
- Non-Latin characters are also supported.

#### ***Example 1***

Replace "MyCompany" with "MYCOMPANY"

- with "case sensitive" cleared, all versions of the string regardless of the case will be replaced (Mycompany, mycompany, myCompany, etc).
- with "case sensitive" selected, only the exact match ("MyCompany") will be replaced.

#### ***Example 2***

Replace "Configurator Module" with "CONFIGURATOR MODULE"

When executed on the text below, only one instance (in blue) is replaced. The matching string in the left column is not replaced, because it's divided over two lines.

|                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Configurator Module | <ul style="list-style-type: none"> <li>Allows you to use a number of third-party applications in a Switch flow, such as the Adobe Creative Suite and other applications that are often used in the graphical industry. For a list of all supported applications, refer to the <a href="#">CONFIGURATOR MODULE documentation</a>.</li> <li>For each of the supported applications, Switch offers a configurator which streamlines the connection between Switch and the application concerned, and controls the output destination of the processed files.</li> </ul> |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

### 3.1.16.20. Fix bounding box values of Type 3 fonts

#### **Belongs to**

- **Category:** Text
- **Type:** Changes
- **Since:** 2020

#### **What it does**

Fixes embedded Type 3 fonts that have very small bounding box values.

Such Type 3 fonts are usually wrongly converted SVG fonts, i.e. fonts that are used in Illustrator, Indesign, Photoshop, ... but that are not supported by the PDF specs and most RIPs, and therefore converted to Type 3. PitStop recalculates the bounding box values, so the font can be handled by most RIPs.

#### **Related Actions**

[Flatten Type 3 fonts](#) on page 290

### 3.1.16.21. Fix inconsistent Type 3 font width information

#### **Belongs to**

- **Category:** Text
- **Type:** Changes
- **Since:** 2022

#### **What it does**

Fixes inconsistent Type 3 font widths (Type 3 glyphs d0 or d1 values that are inconsistent with the font's widths array).

Type 3 fonts are usually wrongly converted SVG fonts, i.e. fonts that are used in Illustrator, Indesign, Photoshop, ... but that are not supported by the PDF specs and most RIPs, and therefore converted to Type 3. PitStop fixes this, so the font can be handled by most RIPs.

#### **Related Actions**

- [Check for inconsistent Type 3 font width information](#) on page 411

- [Select by inconsistent Type 3 font width information](#) on page 505

### 3.1.16.22. Fix invalid characters (.notdef usage)

**Belongs to**

- **Category:** Text
- **Type:** Changes

**What it does**

Fixes invalid .notdef glyphs in a PDF.

.notdef glyphs are replacement characters for undefined characters in a PDF; they often look like a small box containing an X or a question mark and are not PDF/X compliant.

**Related Actions**

[Check if invalid character \(.notdef glyph\) is used](#) on page 413

### 3.1.16.23. Fix non well-formed XMP metadata

**Belongs to**

- **Category:** Text
- **Type:** Changes

**What it does**

Corrects badly formed XMP metadata and optionally removes it, if it cannot be fixed, ensuring that PDF files can be made PDF/X-4 compliant.

**About XMP metadata**

XMP metadata is descriptive information about the file embedded in the PDF, for example the name of the author, keywords, copyright information... XMP refers to labeling technology that is used, i.e. Adobe's Extensible Metadata Platform. You can view the XMP metadata in a file's Document Properties in Acrobat (Click the **Additional Metadata** button, then select **Advanced**).

**Related Actions**

[Check if XMP metadata is well-formed](#) on page 361

### 3.1.16.24. Flatten Type 3 fonts

**Belongs to**

- **Category:** Text
- **Type:** Changes
- **New since:** PitStop 2021

**What it does**

Flattens Type 3 fonts, i.e. converts these fonts (that are often not rendered correctly in PDF) to normal page content so that they can be successfully output.

**About Type 3 fonts**

Type 3 fonts are actually bitmaps, typically emoji fonts or colorful fonts with graphic properties within a glyph.

For more information, refer to the [PitStop Pro Reference Guide](#) (Chapter: Types of fonts and their usage), available on the Enfocus website.

For more information, refer to the PitStop Pro Reference Guide (Chapter: Types of fonts and their usage).

**Related Actions**

[Fix bounding box values of Type 3 fonts](#) on page 289

### 3.1.16.25. Merge into text lines

**Belongs to**

- **Category:** Text
- **Type:** Changes

**What it does**

Allows you to merge text into text lines.

This Action merges all text that occurs on one line and has the same font into one text object. This is useful if you want to change text (e.g. the font) on a line by line basis.

**Related Actions**

- [Split in words](#) on page 293
- [Split in characters](#) on page 292

### 3.1.16.26. Make TrueType fonts PDF/X compliant

**Belongs to**

- **Category:** Text
- **Type:** Changes

**What it does**

Makes TrueType fonts compliant with a particular PDF/X or PDF/A version. Options are PDF/A-1, PDF/A-2, PDF/X-4 and PDF/X-6.

This Action is useful if you have detected a TrueType font error (for example through running a Preflight Profile or an Action List).



**Note:** This fix has been added to all default PDF Preflight Profiles that check and fix compliance with a PDF Standard. That way, if non-compliant TrueType fonts are detected

during a Preflight check, and the automatic fix to make the document compliant with the standard is enabled, they will be fixed automatically.

---

**Related Actions**

- [Check if TrueType fonts are PDF/X compliant](#) on page 413
- [Check TrueType font encoding according to PDF/A](#) on page 415
- [Select non-PDF/X or PDF/A compliant TrueType fonts](#) on page 510

### 3.1.16.27. Remove CharSet or CIDSet

**Belongs to**

- **Category:** PDF 2.0, Text
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Removes the CharSet or CIDSet if present in the PDF.

If a font is subset, only the characters of the font that are actually used are embedded in the document. They are held in a CharSet (simple fonts) or a CIDSet (composite fonts).

CharSets and CIDSets are deprecated in PDF 2.0. That means that they are allowed, but not needed, so they can as well be removed.

**Related Actions**

[Check if a subset font contains a complete CharSet or CIDSet](#) on page 412

### 3.1.16.28. Split in characters

**Belongs to**

- **Category:** Text
- **Type:** Changes

**What it does**

Allows you to split text objects in a PDF in separate characters.

This allows you to change for example the font or format of single characters (e.g. increase the size of capital letters).

**Related Actions**

- [Split in words](#) on page 293
- [Merge into text lines](#) on page 291



### 3.1.16.29. Split in words

***Belongs to***

- **Category:** Text
- **Type:** Changes

***What it does***

Allows you to split the text objects in a PDF in separate words, for example to modify the spacing.

***Related Actions***

- [Split in characters](#) on page 292
- [Merge into text lines](#) on page 291

### 3.1.16.30. Strip OpenType embedded fonts

***Belongs to***

- **Category:** Text
- **Type:** Changes

***What it does***

Allows you to remove the font's OpenType **info** from the PDF.

An OpenType embedded font is a PDF font resource that has its font embedded in the 'FontFile3' key with as 'SubType' the value 'OpenType'. This is not supported by older software. Running this Action will convert the PDF font resource to a format that is supported by older software as well.

### 3.1.16.31. Unembed font

***Belongs to***

- **Category:** Text
- **Type:** Changes

***What it does***

Removes embedded fonts from a document.

This can make the PDF lighter for internet distribution but risks messing up formatting if the font is not present on the end user's machine.

Optionally, you can choose not to execute this Action if the resulting font is unsafe.

***About embedding fonts***

**Embedding fonts** in a PDF document means that every character of this font is copied and stored in the PDF document. This is useful if you create PDF documents to be displayed on different

systems and to be printed on different devices: these are often systems that do not contain exactly the same fonts.

Embedding a font as a **subset** means that only those characters of the font that are actually used in the text are embedded. This reduces the file size by not including superfluous font information.

#### **Related Actions**

[Embed font](#) on page 287

## 3.2. Checks

---

The following Actions allow you to check various properties in PDF documents (for example font-related properties) or detect specific objects or elements (for example empty pages).

Each of these Actions can be logged as "Information", "Warning", "Sign-Off" or "Error" in the Preflight Report.

### 3.2.1. Color

---

#### 3.2.1.1. Check bleed

##### ***Belongs to***

- **Category:** Prepress
- **Type:** Checks
- **Since version:** 2020

##### ***What it does***

Allows you to check if bleed is missing. You should indicate the areas to be checked, that is the region(s) between the left, right, top or bottom corner of the trim box and the bleed box.

You should also specify where the bleed should start (= distance from the inside of the trim box).

Optionally you can enable the **Mirror margins according to page binding** checkbox and set a **white threshold for white** (by moving the slider or entering a value (in %)). The threshold for white makes sure that a color that is "almost white" (and looks white when printed) is considered white.

New as of PitStop 2021 is the slider to increase or decrease the **detection sensitivity**. A high bleed edge sensitivity will report missing bleed for e.g. tapered objects (because of the small gaps between them). A lower sensitivity value won't. The default value (which usually gives the best results) is 30%.



**Note:** When upgrading from older PitStop versions, existing Check bleed Actions get a detection sensitivity of 100%, because that best matches the old behavior.

The last option (**Ignore missing bleed smaller than**) allows you to ignore extremely small areas.



**Note:**

- This is a page-based, pixel-based check: it doesn't look at individual objects, but it renders the whole page and checks the pixels.
- Text objects that cross the trim box but don't reach the bleed box do not trigger bleed errors.

---


**Important remark:** The document must have a *valid trim and bleed box*. This is required for PitStop to know where the bleed should start and how big it should be.

**Example**

Example file with page boxes (media, bleed, trim box) shown:



When 'Highlight' is enabled in the Enfocus Navigator, the white areas show where bleed is missing:

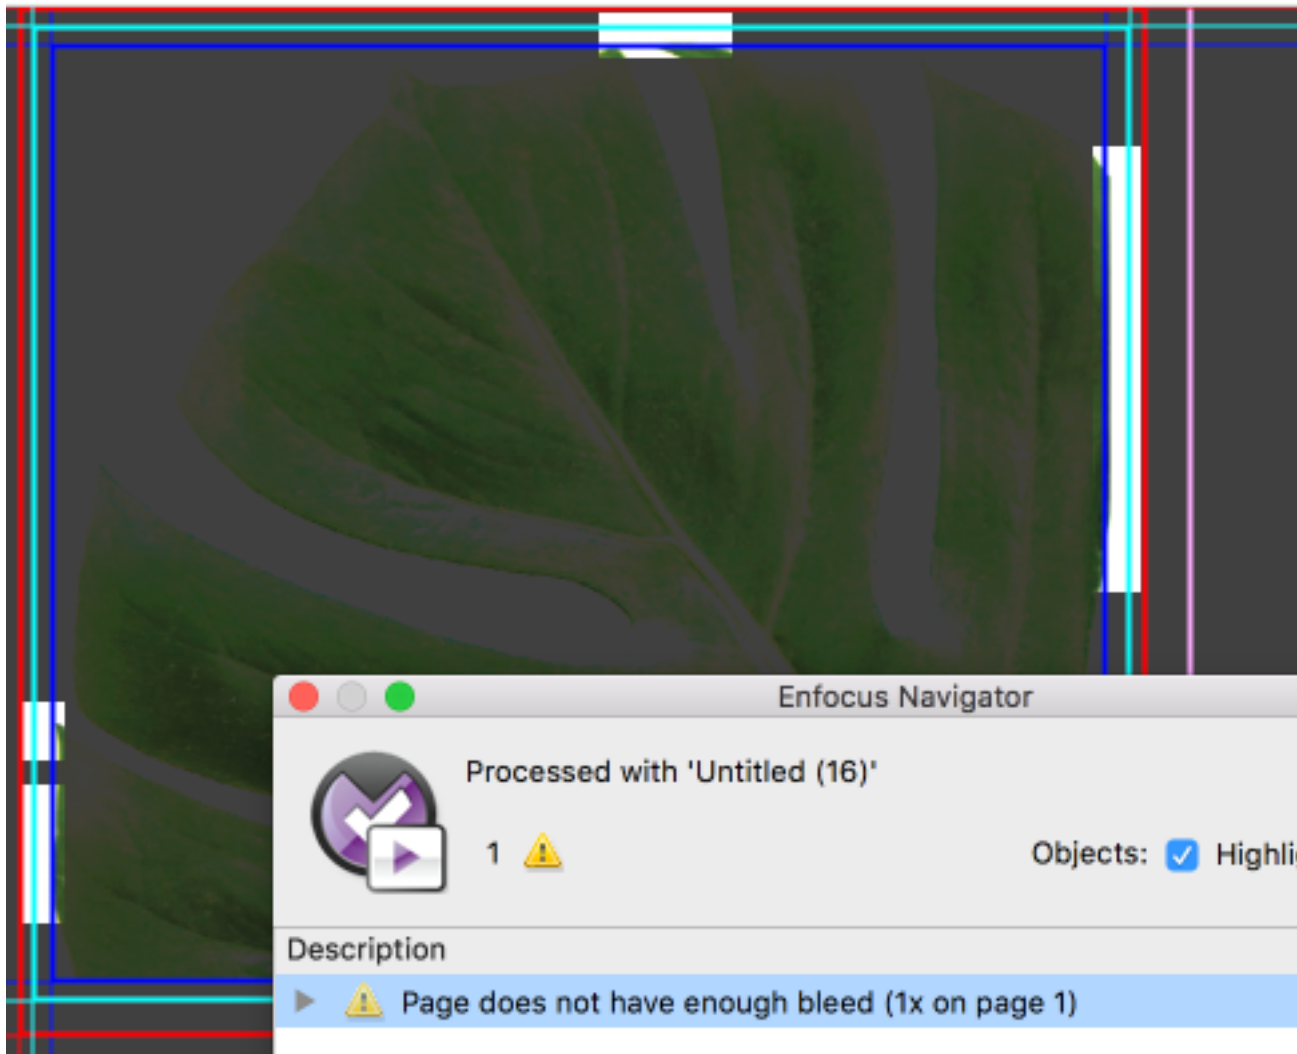

#### **Remark about the corners**

By default, corners are checked for bleed if one of the touching sides is being checked. For example, if only the left side of the page should be checked, the upper and bottom left corner of the page will also be included in the bleed check.

There is one exception: if the Action is configured to NOT check the *inner* sides and the check depends on page binding (**Mirror margins according to page binding** selected), the inner corners (the bleed areas of the top and bottom that extend into the inner side) are NOT checked. This is not needed, because in that case, the corners are cut off anyway, so there's no need to check them.

#### **Example: Checking bleed on a saddle-stitched (bound) book**

If you only need to have bleed on the outer edges of your document:

1. Enable **Mirror margins according to page binding**. This changes the options left/right to inner/outer.

2. Disable the "Inner" option so the check will not include the binding edge. Note that it will depend on the page binding setting of the document and page index of the checked page if the inner edge means the 'left' or 'right' edge (for that page).

**Attributes for Check bleed:**

Check bleed between these trim box edges and the bleed box:

☐ Inner

☒ Outer

☒ Top

☒ Bottom

---


Bleed must start at this distance from the inside of the trim box:

Inner

Outer

Top

Bottom



☒ Mirror margins according to page binding.

#### Related Actions

- [Check bleed around contour](#) on page 297
- [Check bleed contours](#) on page 300
- [Add bleed](#) on page 255
- [Add bleed around contour](#) on page 258

### 3.2.1.2. Check bleed around contour

#### Belongs to

- **Category:** Prepress
- **Type:** Checks
- **Since version:** 2021

#### What it does

Allows you to check if bleed is missing around a contour (typically a dieline or a cut line).

Note that this Action only works on *selected* line art that is not filled. The contour must be closed and it must be a compound path of at least 3 nodes. You must also indicate the color of the contour.



**Tip:** If the line art you want to check is not a closed or compound path, you can use [Close path](#) on page 162 and/or [Combine subpaths](#) on page 162 to create one.

Note that text objects that cross the trim box but don't reach the bleed box do not trigger bleed errors.



Attributes

| Attribute                               | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Bleed offset                            | The desired amount of bleed (starting from the contour).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Use different offset for inner contours | Optionally, if you want a different bleed distance value for the outside and inside of a compound shape, you can select this checkbox and enter the value of your choice for the inner contours.                                                                                                                                                                                                                                                                                                                                               |
| Trim area margin                        | Indicates how close/far from the trim area the bleed check should start.                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| White threshold                         | The threshold for white makes sure that a color that is "almost white" (and looks white when printed) is considered white. The default value is 10%.                                                                                                                                                                                                                                                                                                                                                                                           |
| Ignore missing bleed smaller than       | This option allows you to ignore extremely small objects, like jpeg artefacts.                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Overlay color                           | <p>The color used to highlight where bleed is missing (when viewing the result of the Action List through the Navigator).</p> <p>You could use this option to distinguish between 'missing bleed' (critical error, highlighted in red) and 'not enough bleed' (not critical, highlighted in orange). To get this, you need to add two instances of this Action to your Action List; one with the minimal bleed value (e.g. 2 mm) and red as overlay color, and one with the preferred bleed value (e.g. 4 mm) and orange as overlay color.</p> |

Example Action List

```
Select line art
Select spot color <!-- color of the contour -->
AND
Check bleed around contour
```

Example 1

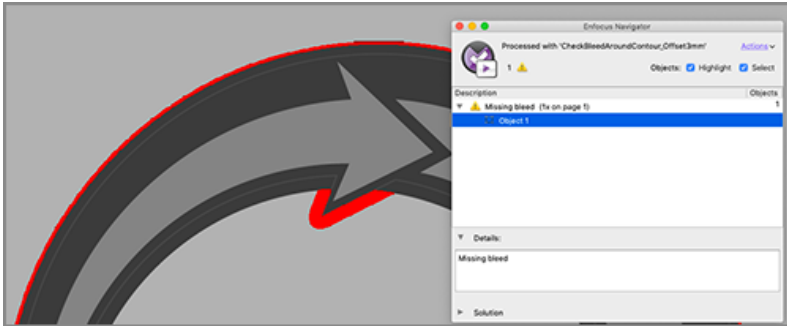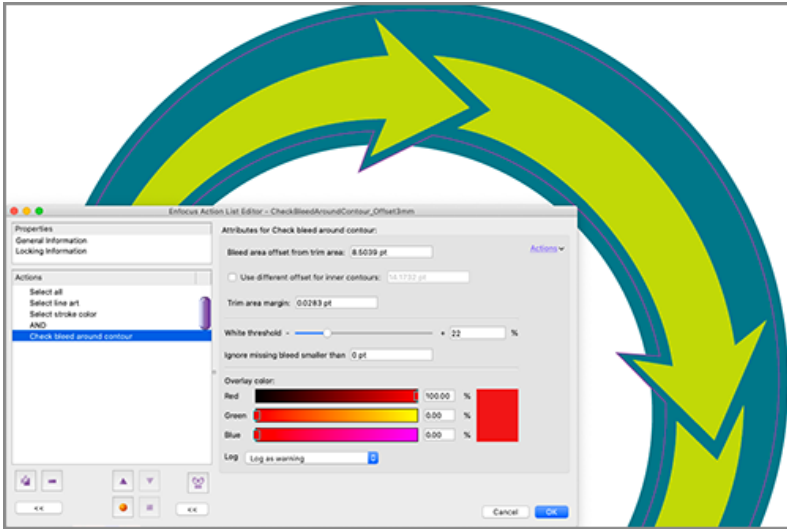

**Example 2**

This Action also works with irregular shapes. Both internal and external missing bleed are highlighted in red (= the chosen overlay color).



**Related Actions**

- [Check bleed](#) on page 294
- [Check bleed contours](#) on page 300
- [Add bleed](#) on page 255

### 3.2.1.3. Check bleed contours

**Belongs to**

- **Category:** Prepress
- **Type:** Checks
- **Since version:** 2021


**What it does**

Allows you to check if bleed contours (typically dielines or cut lines) overlap. That way you can detect if there are objects that come too close to each other. That may for example happen when several different files are merged into one document.

Note that this Action only works on selected line art that is not filled. The contour must be closed and it must be a compound path of at least 3 nodes.



**Tip:** If the line art you want to check is not a closed or compound path, you can use [Close path](#) on page 162 and/or [Combine subpaths](#) on page 162 to create one.

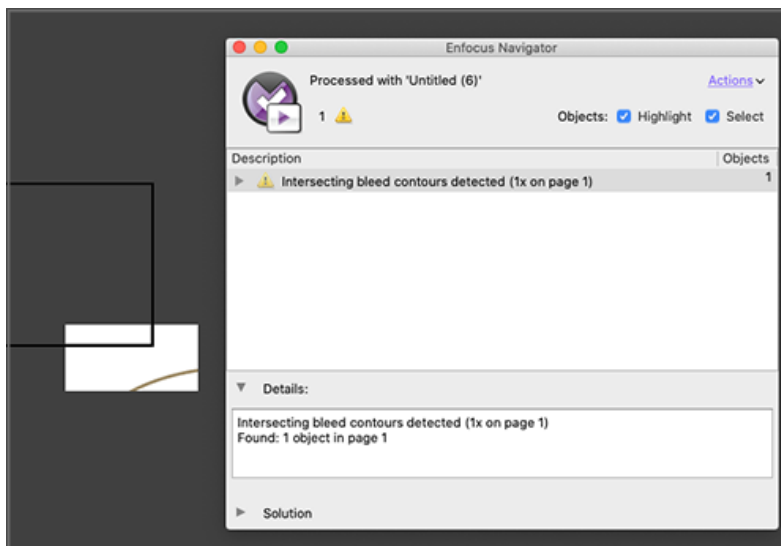**Example****Related Actions**

- [Check bleed](#) on page 294
- [Check bleed around contour](#) on page 297
- [Add bleed](#) on page 255



### 3.2.1.4. Check color type

***Belongs to***

- **Category:** Color
- **Type:** Checks

***What it does***

Checks if a particular color space is used for particular objects.

For example, check if the **device-specific color space** is used for **text and line-art**.

You can ignore process colors in DeviceN color spaces, as required. (It may not be required to check for the presence of process colors, as they are by default available on the printer.)

In case of ICC Profile Colors, you can either check for all types or for one particular ICC space (ICC based gray, ICC based RGB, ICC based CMYK or ICC based Lab).

### 3.2.1.5. Check default color spaces

***Belongs to***

- **Category:** Color
- **Type:** Checks

***What it does***

Checks whether default color spaces are used and whether or not they are PDF/X-3 compliant.

### 3.2.1.6. Check DeviceN attributes

***Belongs to***

- **Category:** Color
- **Type:** Checks

***What it does***

Checks if the PDF's color space is DeviceN or NChannel with a particular attribute.

You can check the following attributes:

- Spot color definitions
- Process color mapping
- Mixing hints
- Solidities
- Printing order
- Dot gain

**Related Actions**

[Select DeviceN with attributes](#) on page 432

### 3.2.1.7. Check DeviceN colorants

**Belongs to**

- **Category:** Color
- **Type:** Checks

**What it does**

Checks if the non-process colors used in the DeviceN color space are defined in the colorants dictionary, so that they can be used on other devices.

**About the DeviceN color space**

The DeviceN color space is defined as a list of names. These names can refer to the process colors (CMYK, RGB or Gray) or spot colors. Spot colors can have an alternate in CMYK for output devices that do not recognize their name, or they can just be a name without color definition. If the color is just a name (for example: "Silver" or "MySpot"), it cannot be used on other devices.

**Checking the colorants dictionary**

You can use the Enfocus PitStop Inspector to check whether a particular spot color has been defined in the colorants dictionary. The colorants dictionary describes the colorants used in the DeviceN color space. Proceed as follows:

1. Select an object with the color you want to check (using the Enfocus Select Object Tool .
2. Click  to display the Enfocus Inspector and select  > . Next to the Fill icons, you will see "DeviceN (Spot + process colors)". Below you will see the number of components and their names.
3. Click the **Actions** link (in the top right corner) and select **Color Picker**.
4. In the left part of the Color Picker dialog, navigate to the **Document Spot Colors** folder. This folder contains all spot colors used in the document (not only the ones used for the selected object).
5. Select the spot color you want to check. If the color is just a color name, without a color definition, the Alternate Color Space is Gray.

**Related Actions**

[Select undefined DeviceN colorants](#) on page 442

### 3.2.1.8. Check DeviceN for process color spaces

**Belongs to**

- **Category:** Color
- **Type:** Checks

**What it does**

Checks whether the DeviceN process color space matches the PDF/X Output Intent color space, i.e. whether the DeviceN color space contains only process colors.

**About the DeviceN color space**

The DeviceN color space is defined as a list of names. These names can refer to the process colors (CMYK, RGB or Gray) or spot colors. Spot colors can have an alternate in CMYK for output devices that do not recognize their name, or they can just be a name without color definition. If the color is just a name (for example: "Silver" or "MySpot"), it cannot be used on other devices.

### 3.2.1.9. Check for NChannel colors with non-trivial process dictionary

**Belongs to**

- **Category:** Color
- **Type:** Checks

**What it does**

Checks whether the PDF contains NChannel colors with non-trivial process dictionary.

**About NChannel**

NChannel is an extension of the DeviceN color space, a multi-component, device-dependent color space. NChannel color spaces give applications greater flexibility when representing colors that are not available on a target device.

NChannel is supported from PDF 1.6 (Acrobat 7.x) onwards. If you are opening a PDF in an earlier version of Adobe Acrobat, colors can print or display incorrectly.

**About process dictionaries**

NChannel requires a process dictionary which maps the names used in the colorants list to device colors. This allows giving aliases for process colors.

A "trivial" process dictionary uses aliases that are easy to understand, e.g. maps "Cyan" to the process color "Cyan".

A "non-trivial" process dictionary would use custom aliases, such as "My Process color".

**Related Actions**

- [Make DeviceN without NChannel information](#) on page 109
- [Select DeviceN with attributes](#) on page 432

### 3.2.1.10. Check for pre-separated pages

**Belongs to**

- **Category:** Color; Page
- **Type:** Checks

**What it does**

Checks if the PDF document contains any pages that already have been separated.

A pre-separated PDF contains pages that have been separated into their CMYK components. In offset printing each of these colors is printed with a separate plate. This means that each page in a PDF document is separated into its four constituent colors: cyan, magenta, yellow and black. For example, a pre-separated PDF file for a two-page CMYK print job, results in a PDF file with 8 pages.

This separation process is usually carried out by the RIP, and not in the source PDF document.

### 3.2.1.11. Check for solids and tints

**Belongs to**

- **Category:** Color; Page
- **Type:** Checks

**What it does**


Checks if the PDF document contains any colors that have a tint below or above a set threshold.

The threshold is set in the **Effective solidness threshold** field. The default is 100%.

It's also possible to define a threshold for considering a colorant as a tint, by selecting the **Ignore tints that cover a surface area below** checkbox and entering a value of your choice (in ppm). You can take into account the printable surface area, the surface area of the own channel, or the surface area of all channels. This option is useful to avoid that colorants on pages with for example only 1 non-solid pixel in the rendered page would be marked as a tint.

**Example**

In this example, the threshold was set to 90%.

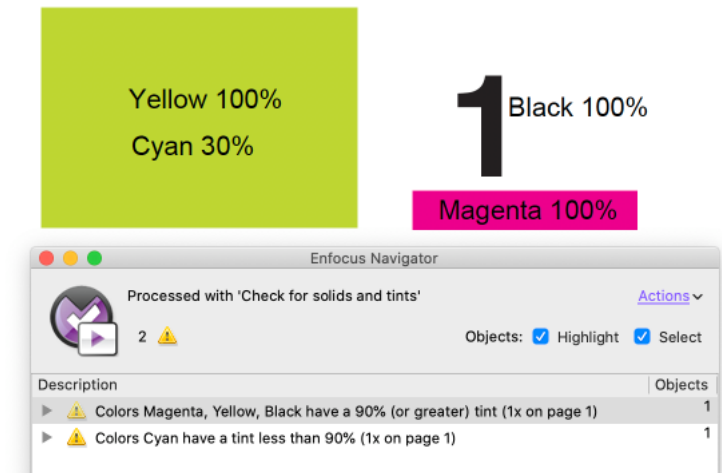

### 3.2.1.12. Check for spot color ambiguity

#### ***Belongs to***

- **Category:** Color
- **Type:** Checks

#### ***What it does***

Searches for ambiguous spot colors. Spot colors are considered ambiguous if the name of the spot color refers to more than one set of color values.

You can set a number of options, to make the check less strict. You can also include a check on DeviceN color spaces.

### 3.2.1.13. Check ICC tagging

#### ***Belongs to***

- **Category:** Color
- **Type:** Checks

#### ***What it does***

Checks objects to see whether or not they are ICC tagged or tagged with a particular ICC profile in a particular color space. You can check if the fill and/or stroke of the objects are ICC tagged.

#### ***About ICC tagging***

Every input and output device reproduces color and grayscales in a slightly different way. As a result, the colors you see in a PDF file on your screen may not match the colors produced when you print the PDF to an output device.

ICC color profiles are used to avoid this. An ICC color profile is a mathematical description of the color space used by a specific device. In other words, the color profile describes how the colors produced by the device relate to the reference CIE LAB color space (a device-independent color

space). As such, they allow you to set up a workflow in which all devices use color management to compensate for their individual color reproduction characteristics, based on the information in the ICC profiles.

**Related Actions**

- [Remove ICC tag](#) on page 116
- [Select by tagged ICC Profile](#) on page 429
- [Tag object with an ICC profile](#) on page 119
- [Check if ICC profile differs from ICC profile in PDF/X Output Intent](#) on page 307
- [Select objects of which ICC profile is equal to ICC profile in PDF/X output](#) on page 433
- [Check ICC profile version](#) on page 306

### 3.2.1.14. Check ICC profile version

**Belongs to**

- **Category:** Color
- **Type:** Checks

**What it does**

Checks if the ICC profile version is equal to or lower than a particular version number.

**About ICC tagging**

Every input and output device reproduces color and grayscales in a slightly different way. As a result, the colors you see in a PDF file on your screen may not match the colors produced when you print the PDF to an output device.

ICC color profiles are used to avoid this. An ICC color profile is a mathematical description of the color space used by a specific device. In other words, the color profile describes how the colors produced by the device relate to the reference CIE LAB color space (a device-independent color space). As such, they allow you to set up a workflow in which all devices use color management to compensate for their individual color reproduction characteristics, based on the information in the ICC profiles.

**Related Actions**

- [Remove ICC tag](#) on page 116
- [Select by tagged ICC Profile](#) on page 429
- [Check ICC tagging](#) on page 305
- [Check if ICC profile differs from ICC profile in PDF/X Output Intent](#) on page 307
- [Select objects of which ICC profile is equal to ICC profile in PDF/X output](#) on page 433
- [Tag object with an ICC profile](#) on page 119

### 3.2.1.15. Check if DeviceN printing order is consistent

**Belongs to**

- **Category:** Color
- **Type:** Checks

**What it does**

Check whether the DeviceN printing order is consistent and whether all colorants are defined in the DeviceN printing order.

### 3.2.1.16. Check if ICC profile differs from ICC profile in PDF/X Output Intent

**Belongs to**

- **Category:** Color
- **Type:** Checks

**What it does**

Checks whether the fill and/or stroke ICC profile differs from the ICC profile in the PDF/X Output Intent.

As of PitStop 2022, it's possible to compare the ICC profile either with the document Output Intents or with the effective Output Intents. The effective Output Intent is the intent that is actually used. For example, if different Output Intents are applied on different levels (document/page/object), the most specific one is applied.

You can either check the ICC profile of the fill or the stroke, or both.

**About ICC tagging**

Every input and output device reproduces color and grayscales in a slightly different way. As a result, the colors you see in a PDF file on your screen may not match the colors produced when you print the PDF to an output device.

ICC color profiles are used to avoid this. An ICC color profile is a mathematical description of the color space used by a specific device. In other words, the color profile describes how the colors produced by the device relate to the reference CIE LAB color space (a device-independent color space). As such, they allow you to set up a workflow in which all devices use color management to compensate for their individual color reproduction characteristics, based on the information in the ICC profiles.

**About PDF/X Output Intents**

Output intents specify the intended printing process and paper type as described by a corresponding ICC profile. The PDF/X Output Intents are defined by the Ghent Workgroup; only printer profiles are allowed as Output Intents, whereas PDF/A also allows monitor profiles.

Output intents are generally specified by the print service provider, but there are also a number of standard Output Intents available, which can be found in the Enfocus Output Intent Panel. For more information, refer to the PitStop Reference Guide.

Note that as of PDF 2.0 it is possible to define Output Intents on page level, whereas before, only document Output Intents were allowed.

**Related Actions**

- [Remove ICC tag](#) on page 116
- [Select by tagged ICC Profile](#) on page 429

- [Check ICC tagging](#) on page 305
- [Tag object with an ICC profile](#) on page 119
- [Select objects of which ICC profile is equal to ICC profile in PDF/X output](#) on page 433
- [Check ICC profile version](#) on page 306

### 3.2.1.17. Check if blending color space is defined

#### ***Belongs to***

- **Category:** Color; Page
- **Type:** Checks

#### ***What it does***

Checks if the page blending color space has been defined in the PDF document.

You must set the required blending color space and the required luminosity softmask blending color.

#### ***About blending color spaces***

When Adobe Acrobat interprets transparent objects and attempts to create a preview of the flattened artwork, it needs to do so using a single color space for all the items involved in the transparency group. This color space is called the **blending color space**.

The **page blending color space** is the blending color space assigned to a page; it is used when individual artwork does not have a blending color space.

The blending color space for soft masks (masks with soft transitions) is called the **luminosity softmask blending color space**. It is usually gray.

#### ***Related Actions***

- [Change blending color space](#) on page 103
- [Select by blending color space](#) on page 424

### 3.2.1.18. Check if solidities of DeviceN colorants are consistent

#### ***Belongs to***

- **Category:** Color
- **Type:** Checks

#### ***What it does***

Check if solidities of DeviceN colorants are consistent.

Solidity refers to how spot colors are shown on screen. 100% solidity means that the colors are completely opaque on screen in areas where it is printed at 100% ink density. This Action checks if the solidities are the same for all colors in the DeviceN color space.



### 3.2.1.19. Check if the color spaces used match the blend colorspace

**Belongs to**

- **Category:** Color
- **Type:** Checks

**What it does**

Checks if the color spaces used in the PDF match the blend colorspace.

### 3.2.1.20. Check ink coverage (basic object check)

**Belongs to**

- **Category:** Color;Prepress
- **Type:** Checks

**What it does**

Checks the total CMYK ink coverage of the color of the **objects** in the PDF.

You can for example check if the ink coverage is at least 300%.

When including images in the ink coverage check, the threshold will determine the minimum area in which the ink coverage has to be exceeded before reporting an error or warning. For example, when entering '0', even 1 dot exceeding the maximum ink coverage will be reported.

**Related Actions**

[Select by ink coverage \(basic object check\)](#) on page 426

### 3.2.1.21. Check ink coverage (total page check)

**Belongs to**

- **Category:** Color;Prepress
- **Type:** Checks

**What it does**

Allows you to check the CMYK ink coverage either of all colors combined or per separation on a page (inside a particular page box).

You can for example check if the ink coverage in the media box is at least 300%.

In case of a separation-based check, you may exclude separations with 0% ink coverage (i.e. empty areas without content).

It's also possible to ignore small areas, for example areas smaller than 1 inch.

### 3.2.1.22. Check number of color plates (basic object check)

#### ***Belongs to***

- **Category:** Color
- **Type:** Checks
- **Since Version:** 13 update 2

#### ***What it does***

Checks if the PDF contains *objects* that occur on a certain number of color plates (separations). You can check the object's fill and/or stroke as required.

#### ***Related Actions***

- [Select by number of color plates](#) on page 426
- [Check number of separations \(total page check\)](#) on page 310 (checks everything on a page)

### 3.2.1.23. Check number of separations (total page check)

#### ***Belongs to***

- **Category:** Color
- **Type:** Checks

#### ***What it does***

Checks the number of separations that occur in a PDF file. You can set a precise number (e.g. 5 separations) or a range (e.g. less than 5) and choose whether or not to exclude certain colors (e.g. CMYK plates, spot color All ...). You can also use regular expressions to indicate which separations should not be counted.



**Note:** From PitStop 2019 onwards, you can exclude C, M, Y and K separately. This is useful when checking black and white jobs, or jobs that have K and a spot color.

You can check the number of separations for the complete document, or for each page separately. The new page-based option allows you to work with a selection, so you can check specific pages, page ranges or other page based selections, for example, you could check if every even page has two color separations.

Note that this option is also useful if you want to know on which page an issue occurs, because the page number is mentioned in the Preflight Report and in the Navigator.

#### ***Checking ICC tagged objects***

ICC tagging is a way to specify colors independent from the output device: objects are tagged with an ICC profile that contains the transformation from the object's color to a device-independent color. When outputting this on a specific device, that device-independent color is in turn converted to the output device's color space.

Because this conversion depends on the output device, and because it will rarely (if ever) result in less than 4 color plates being used, checking the number of separations on an ICC tagged object will always result in 4 separations.

For example, if you have a black (100% K) ICC tagged object, the number of separations reported by this Action will be 4 (C, M, Y, K) instead of 1 (only K) because some ink will be used on all plates in order to reproduce the color correctly.

#### **Related Actions**

- [Check number of color plates \(basic object check\)](#) on page 310 (checks the fill and/or stroke of objects)

### 3.2.1.24. Check number of spot colors

#### **Belongs to**

- **Category:** Color
- **Type:** Checks

#### **What it does**

Checks the number of spot colors in a document.

You must enter the number of spot colors the document must have.

If you select the option **Spot colors whose names differ only by their suffix are counted as one**, spot colors with the same name but with a different suffix (e.g. PANTONE 3258 C, PANTONE 3258 U, PANTONE 3258 M) are counted as one color instead of different (3 in this example) colors. For more information about suffixes, refer to [Change spot color suffix](#) on page 105.

Note that spot color "All" is also counted. This spot color appears on all printing plates (hence the name) and is used for registration and printer marks that lie outside the trim and bleed boxes.

#### **Related Actions**

- [Check number of separations \(total page check\)](#) on page 310 (this Action has an option to not count Spot Color All)

### 3.2.1.25. Check objects by tiling pattern

#### **Belongs to**

- **Category:** Color
- **Type:** Checks
- **Since version:** 2020

#### **What it does**

Allows you to check for tiling patterns in the fill or stroke of text and line art, or in the fill of image masks. You can search for colored or uncolored tiling patterns or both.



---

**Note:** You should select at least one checkbox above the divider and one below the divider.

---

**Related Actions**

- [Select by tiling pattern](#) on page 430
- [Select tiling pattern contents according to parent object selection](#) on page 441

### 3.2.1.26. Check Output Intent

**Belongs to**

- **Category:** Color
- **Type:** Checks

**What it does**

Checks if the desired color management Output Intent is used on page or document level. Note that the document can only have one Output Intent, whereas different pages in the document can have different Output Intents.

You can check for compliance with a particular PDF/X version and/or check if a particular ICC profile or ICC characterization is used.

**Related Actions**

[Change Output Intent](#) on page 104

### 3.2.1.27. Check rendering intent

**Belongs to**

- **Category:** Color; Prepress
- **Type:** Checks

**What it does**

Allows you to check the rendering intent of particular objects (Paths, Text, Paths or Text, Images, or all Rendering objects) in a PDF.

You can check whether or not they use rendering, and if they do, which type:

- Absolute Colorimetric
- Relative Colorimetric
- Perceptual
- Saturation

**About rendering intents**

A rendering intent is a remapping method, allowing to remap colors so that they best match the intended use. 'Remapping' means that colors from one output device's color space are mapped to the color space of another device.

For more information, refer to the chapter "Rendering intents to remap colors" in [the PitStop Pro Reference Guide on the Enfocus website](#).

For more information, refer to the chapter "Rendering intents to remap colors" in the PitStop Pro Reference Guide.

**Related Actions**

- [Select by rendering intent](#) on page 427
- [Change rendering intent](#) on page 104
- [Remove rendering intent](#) on page 117

### 3.2.1.28. Check required color set

**Belongs to**

- **Category:** Color
- **Type:** Checks

**What it does**

Checks for a restrictive range of tints in a PDF.

**How to proceed**

Define the color set to be checked:

1. To allow the use of 100% black, select **Black**.



---

**Note:** If only black is allowed in the PDF, **only** select the **Black** checkbox. Do not add any other color.

---

2. To add another color that is allowed in the PDF:
  - a. Click **New**. A new entry will appear in the text box.
  - b. To allow a spot color (optionally), select the **Spot color** checkbox and type the name of the spot color in the text field. You should define a CMYK equivalent too (see next step). The name of the spot color will be shown in the text box.
  - c. Enter the required values for CMYK (expressed in %) in the fields below the New/Remove button. Your changes will be shown in the text box.
3. If slight color deviations are allowed, enter a value in **Maximum ... % of color deviation of each channel**. The default value is 0.01%.
4. If only one color should be used for images, select that color from the **Images must use only** list.

**Related Actions**

- [Snap color to color set](#) on page 118
- [Select required color set](#) on page 436

### 3.2.1.29. Check spot color by alternate color space

**Belongs to**

- **Category:** Color
- **Type:** Checks

**What it does**

Searches for spot colors with an alternate color space definition.

You can search for the following alternate color spaces:

- Device CMYK
- Device gray
- Device RGB
- ICC tagged gray
- ICC tagged RGB
- ICC tagged CMYK
- ICC tagged Lab
- Calibrated gray
- Calibrated RGB
- Lab

### 3.2.1.30. Check spot color by PANTONE library

#### ***Belongs to***

- **Category:** Color
- **Type:** Checks
- **Since Version:** 2018

#### ***What it does***

Checks if the spot colors in the PDF are (are not) part of the selected PANTONE library.

The PANTONE libraries are by default installed with PitStop Pro and PitStop Server.

Extra options are:

- **Ignore non PANTONE spot color names** (to only consider the color type and to ignore differences with respect to the subcategory)
- **Check alternate color values** (to take into account the CMYK/LAB values)

#### ***Use case***

You can use this Action to identify any "strange" colors of which you do not know how to print them.

#### ***Related Actions***

- [Normalize PANTONE library names](#) on page 111
- [Select spot color](#) on page 437

### 3.2.1.31. Check spot color by name

#### ***Belongs to***

- **Category:** Color
- **Type:** Checks

#### ***What it does***

Checks if one or more particular spot colors are present in the document.

**Note:**

- From version 12 update 2 onwards, you can use regular expressions to define the spot color name.
- From version 13 update 1 onwards, there is an extra option to search for spot color(s) based on a list of names. This new option is useful if different spot color names refer to the same color. It also allows you to check for different spot colors in one go.

**How to proceed**

In the attributes of the Check spot color Action, proceed as follows:

1. Select the appropriate option from the list:
  - If you choose **Check all spot colors**, no other options have to be set.
  - If you choose one of the other options, you have to specify the name of the spot color(s) that have to be checked. Proceed with step 2.
2. Enter the name of the spot color(s) concerned:
  - In case of **Check spot color by regular expression**, you can use regular expressions. PitStop supports Boost Regular Expressions. For an overview of the options, refer to [http://www.boost.org/doc/libs/1\\_55\\_0/libs/regex/doc/html/boost\\_regex/syntax/perl\\_syntax.html](http://www.boost.org/doc/libs/1_55_0/libs/regex/doc/html/boost_regex/syntax/perl_syntax.html).
  - In case of **Check spot color by name** or **Check spot color by name from list**, you can simply type the name of the spot color(s) concerned or use the color picker or the Grab color button . Note that, in case of a list, you must enter the names one by one, each on a separate line. It is for example not possible to select two colors in the document, and select them in one go, using the Grab color button . Instead, you must select the first color, grab it, then select the second color, and grab it and so on.
3. If the case of the spot color name (upper or lower case letters) does not matter, select the **Ignore case** checkbox.

**Related Actions**

[Select spot color](#) on page 437

### 3.2.1.32. Check spot color suffix

**Belongs to**

- **Category:** Color
- **Type:** Checks

**What it does**

Checks whether the spot colors in the PDF have a given suffix. It's also possible to check for unknown suffixes.

You can find an overview of the available suffixes in the table below.

**About spot color suffixes**

Suffixes represent the **apparent** color of the color when printed on different types of paper. For example, PANTONE 3258 **C** and PANTONE 3258 **U** refer to the same color, but when printed on **coated**, respectively **uncoated** paper, they will look different, although the same ink formula was used.

Besides C (coated), U (uncoated) and M (matte), in software color palettes, you can find suffixes that refer to on-screen simulations of how colors will look when printed on different paper types. For example, PANTONE 3258 CVU is an on-screen indication of how PANTONE 3258 will look like when printed on uncoated paper.

**Suffix overview**

| Suffix | Meaning                                                                                           |
|--------|---------------------------------------------------------------------------------------------------|
| CV     | Computer video (electronic simulation)                                                            |
| CVC    | Computer video - coated                                                                           |
| CVU    | Computer video - uncoated                                                                         |
| CVS    | Process coated (old; now C)                                                                       |
| CVP    | Solid to process (old; now PC)                                                                    |
| C      | Coated paper                                                                                      |
| M      | Matte paper                                                                                       |
| U      | Uncoated paper                                                                                    |
| EC     | Euro process simulation, coated paper                                                             |
| PC     | Process simulation, coated paper                                                                  |
| CP     | Coated paper, process simulation (e.g. PANTONE 185 CP (used in PANTONE+ COLOR BRIDGE COATED))     |
| UP     | Uncoated paper, process simulation (e.g. PANTONE 185 UP (used in PANTONE+ COLOR BRIDGE UNCOATED)) |
| HC     | Hexachrome coated                                                                                 |
| TC     | TC Textile Cotton                                                                                 |
| TCX    | Textile Cotton eXtended                                                                           |
| TP     | Textile Paper                                                                                     |
| TPX    | TPX Textile Paper eXtended                                                                        |
| XGC    | eXtended Gamut Coated                                                                             |

**Related Actions**

- [Select by spot color suffix](#) on page 428



- [Change spot color suffix](#) on page 105

### 3.2.1.33. Check usage of device color spaces for PDF/X

#### **Belongs to**

- **Category:** Color
- **Type:** Checks
- **New since:** PitStop 2022

#### **What it does**

Checks whether the device color space maps to the document Output Intent for the chosen PDF/X version (PDF/X-4 or PDF/X-6).

### 3.2.1.34. Compare gamuts

#### **Belongs to**

- **Category:** Color
- **Type:** Checks
- **New since:** 25.03

#### **What it does**

Renders pages with two different output profiles, calculates the color differences, and stores the result in a heatmap that shows the distance from the threshold through colors.

This Action is typically used to check how colors would look if printed using a different output profile. This is useful to identify potential color conversion issues before they occur, ensuring color accuracy and consistency.



**Note:** This option is also available in the Enfocus Inspector (Prepress > Compare gamuts).

#### **Attributes**

| Attributes                          | Meaning                                                                                                                                                                                 |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Reference Output Profile            | Click the list to select the appropriate profile from the list or from your computer.<br><br>Once selected, you can click the info icon for an overview of the ICC profile information. |
| Output intent overrides the profile | Select this checkbox if the output intent - if there is one, either on document or page level - should override the selected reference profile.                                         |
| Target Output Profile               | Click the list to select the appropriate profile from the list or from your computer.                                                                                                   |

| Attributes              | Meaning                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                         | Once selected, you can click the info icon for an overview of the ICC profile information.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Spot Color Policy       | <p>As colors can only be compared in the process color space, determine how spot colors should be handled:</p> <ul style="list-style-type: none"> <li>• <b>Only use the process color space, ignoring spot colors:</b> Render the page as if all spot colors were removed from the PDF. For example, a spot color overprinting CMYK will have no effect; knockout will result in white.</li> </ul> <hr/> <p> <b>Note:</b> This option is useful if you have the exact spot colors on your printing press, or if they are technical colors which will never be printed.</p> <hr/> <ul style="list-style-type: none"> <li>• <b>Combine the process color space and the spot colors:</b> Blend the spot colors into the process color space and after that check the color differences.</li> </ul> <hr/> <p> <b>Note:</b> This option is useful if you don't have the spot colors on your press, so they must be converted (probably to CMYK), and hence the gamut compare Action can be used to check the color difference different profiles would give when doing so. Note that this Action indicates the difference between the reference CMYK and the target CMYK, after spot conversion. It is NOT the difference between the pure spot and its CMYK conversion.</p> <hr/> |
| Color Difference Metric | <p>A color difference metric determines how the color differences are calculated. Different metrics exist, which may lead to slightly different results. See all <a href="https://en.wikipedia.org/wiki/Color_difference">https://en.wikipedia.org/wiki/Color_difference</a>.</p> <p>Choose the metric of your choice:</p> <ul style="list-style-type: none"> <li>• Delta E (CIE 1976)</li> <li>• Delta E (CIE 1994)</li> <li>• Delta E (CIE 2000) (default)</li> <li>• CMC l:c</li> <li>• BFD</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

| Attributes                 | Meaning                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Color Difference Threshold | <p>Determine the threshold.</p> <ul style="list-style-type: none"> <li>• 0 = No difference allowed</li> <li>• 1 = Slight difference allowed, just noticeable for the human eye.</li> <li>• 2 = Some more difference allowed</li> <li>• 3 = Acceptable difference allowed for printing (default)</li> <li>• 4 and more ... = More difference allowed</li> </ul> <p>Only if the threshold is exceeded, the difference is logged and a heatmap is generated.</p>                                                                            |
| Ignore areas smaller than  | <p>Sometimes a color difference exceeding the threshold only occurs in a very small area. To avoid that such differences have a big impact, you can filter them out.</p> <div>  <p><b>Note:</b> This option does not have an impact on how the heatmap looks. It only determines whether or not the color difference is logged.</p> </div> <p>Determine the size of the areas with color differences exceeding the threshold, for example: 1 point.</p> |

### Heatmap

If the color difference exceeds the set threshold, a heatmap is shown. The colors indicate the distance from the threshold: the darker the color, the more difference. Colors go from yellow and orange to red, purple, and blue.

White means no difference. Gray is a desaturated transparent view of the document.



**Note:** The heatmap is also shown in Annotated Reports.

### Example



**Note:** The heatmap is visible when *Objects: Highlight* is enabled in the Enfocus Navigator as shown in the screenshot below.



## 3.2.2. Document

---

### 3.2.2.1. Check access control

#### ***Belongs to***

- **Category:** Doc
- **Type:** Checks

#### ***What it does***

Checks whether the document is protected in any way, for example with passwords, certificate IDs or file permission settings.

As of PitStop 2022, this Action has a number of attributes. You can now either check for the presence of a permission dictionary or for the presence of certain permission types (UR, UR3, DocMDP, DocMDP with a Signature references dictionary containing DigestLocation, DigestMethod or DigestValue).

Note that this check is useful to check for PDF/X-6 compliance (which allows UR3 and DocMDP).

### 3.2.2.2. Check Certified PDF state

#### ***Belongs to***

- **Category:** Doc
- **Type:** Checks

#### ***What it does***

Checks the Enfocus Certified PDF status of a PDF.

You can log whether

1. The Certified Preflight Profile matches a particular Profile. You can select a Profile from the database on your computer or from your disk/network (which hasn't been imported yet in PitStop).
2. The PDF being checked is Preflighted or Preflighted without errors.
3. All saved sessions or only the last saved session must be valid.



---

**Note:** A session is invalid if it refers to changes made by an external program.

---

For more information, refer to the chapter "Working with Certified PDF documents" in [the PitStop Pro Reference Guide on the Enfocus website](#).

For more information, refer to the chapter "Working with Certified PDF documents" in the PitStop Pro Reference Guide.

#### **Related Actions**

See also [Remove Certified PDF workflow information](#) on page 275

### 3.2.2.3. Check contents compression

#### **Belongs to**

- **Category:** Doc
- **Type:** Checks

#### **What it does**

Checks if the PDF contains streams that are not compressed with some content compression method (CCITT, Flate, DCT or JBIG2). Compression allows you to make the file smaller.

### 3.2.2.4. Check data format

#### **Belongs to**

- **Category:** Doc
- **Type:** Checks

#### **What it does**

Checks if the data format of a PDF is either Binary (=non-ASCII) or ASCII.

ASCII-encoding increases the file size, but allows files to be sent through older network protocols that cannot handle non-alphanumeric characters.

#### **ASCII versus Binary encoding**

ASCII encoding may increase the file size, but allows you to edit the file manually.

Binary encoding makes the file smaller, but does not allow you to edit the file manually.

#### **Related Actions**

- [Select by document encoding](#) on page 443

- [Change document encoding](#) on page 120

### 3.2.2.5. Check document unique IDs

**Belongs to**

- **Category:** Doc
- **Type:** Changes

**What it does**

Allows you to check if the PDF has a unique document ID.

**Related Actions**

[Add unique document IDs](#) on page 120

### 3.2.2.6. Check file identifiers in document XMP metadata

**Belongs to**

- **Category:** Doc
- **Type:** Checks

**What it does**

Checks the PDF for missing file identifiers in the document metadata, for example: VersionID, DocumentID or RenditionClass.

**About XMP metadata**

XMP metadata is descriptive information about the file embedded in the PDF, for example the name of the author, keywords, copyright information... XMP refers to labeling technology that is used, i.e. Adobe's Extensible Metadata Platform. You can view the XMP metadata in a file's Document Properties in Acrobat (Click the **Additional Metadata** button, then select **Advanced**).

**Related Actions**

- [Check presence of document metadata stream](#) on page 364
- [Check if date is present in document XMP metadata](#) on page 358
- [Set XMP file identifiers](#) on page 194

### 3.2.2.7. Check for alternate presentations

**Belongs to**

- **Category:** Doc
- **Type:** Checks

**What it does**

Checks whether the PDF contains alternate presentations.

This mechanism is used for slideshow displays and is therefore not desired in a print document.

### 3.2.2.8. Check for garbage after the PDF End-Of-File marker %%EOF

***Belongs to***

- **Category:** Doc
- **Type:** Checks

***What it does***

Checks whether the PDF contains undesired characters after the end-of-file marker EOF.

If this is the case, the PDF is malformed. The last line of a PDF should only contain the EOF marker.

To solve this problem, you can do one of the following:

- Open the PDF in Adobe Acrobat and save it (using **File > Save As**).
- Process the PDF with PitStop Server (with the option **Full Save** enabled).

***Related Actions***

[Check for unreadable data in front of the PDF header signature](#) on page 323

### 3.2.2.9. Check for file structure problems

***Belongs to***

- **Category:** Doc
- **Type:** Checks

***What it does***

Checks whether the structure of the PDF conforms to the file structure as defined by the PDF specification of your choice.

Options are:

- PDF/A-1
- PDF/A-2
- PDF/X-6

### 3.2.2.10. Check for unreadable data in front of the PDF header signature

***Belongs to***

- **Category:** Doc
- **Type:** Checks

**What it does**

Checks for unreadable data in front of the PDF header signature.

**Related Actions**

[Check for garbage after the PDF End-Of-File marker %%EOF](#) on page 323

### 3.2.2.11. Check if compression filters are PDF/X compliant

**Belongs to**

- **Category:** Doc
- **Type:** Checks

**What it does**

Checks whether compression filters used in the PDF are compliant with a specific PDF/X version.

Select the desired PDF/X version:

- PDF/X-1a:2001
- PDF/X-3:2002
- PDF/X-1a:2003
- PDF/X-3:2003
- PDF/X-4
- PDF/X-4p
- PDF/X-6
- PDF/X-6p
- PDF/A-1
- PDF/A-2

### 3.2.2.12. Check if document does not need repair

**Belongs to**

- **Category:** Doc
- **Type:** Checks

**What it does**

Checks whether a PDF is damaged and needs to be repaired when it is opened.

A PDF file can be damaged, for example, if you downloaded it from the Internet and the file transfer was incomplete.



If a PDF is damaged, you can try to redistill it or save it in Adobe Acrobat, using **File > Save as**. If this doesn't solve the problem, you will have to recreate the PDF from the source file, or download it again (if the problem was caused by a corrupt download).

### 3.2.2.13. Check if document has enough high-ASCII bytes in the PDF header

***Belongs to***

- **Category:** Doc
- **Type:** Checks

***What it does***

Checks if the PDF header contains at least 4 high-ASCII bytes in the PDF header.

There are three checkboxes:

- **Check header has at least 4 high-ASCII bytes**
- **Check for single EOL character after version header**
- **Check version header format**

The PDF specs require that there should be 4 contiguous high-ASCII bytes in the PDF header, so to check the compliance with the PDF specs, the first checkbox should be selected.

The PDF/A specs require that the 4 contiguous high-ASCII bytes in the PDF header should be the first bytes immediately after the header line, so to check the compliance with PDF/A, checkbox 1 and checkbox 2 should be selected.

For PDF/A-2 and PDF/X-6, all three checkboxes should be selected.

For a check for PDF/A-1, only the first checkbox should be selected.

### 3.2.2.14. Check if document is optimized for Fast Web View

***Belongs to***

- **Category:** Doc
- **Type:** Checks

***What it does***

Verifies if the document is optimized for the Web.

A document that has been optimized for the Web often has a significantly smaller file size. This is achieved by replacing images that occur more than once in the document with pointers to the first instance of these images. Also, the PDF document is restructured to allow page-at-a-time

downloading over the Internet: only the page viewed by the user is downloaded, thus avoiding long loading times for larger PDF documents.

### 3.2.2.15. Check if document requires PostScript LanguageLevel 3

***Belongs to***

- **Category:** Doc
- **Type:** Checks

***What it does***

Checks a PDF to see if it contains PostScript Level 3-specific features such as transparency or smooth shadings.

***About Adobe PostScript***

Adobe PostScript is a page describing language developed by Adobe in 1985. The language has changed over the years, resulting in different versions:

- Adobe PostScript Level 1: first, original version.
- Adobe PostScript Level 2: enhanced version; added support for different page sizes and better color printing.
- Adobe PostScript LanguageLevel 3: improved handling of graphics, supports more fonts, and speeds up printing.

For more information, refer to <http://www.adobe.com/products/postscript/pdfs/PLRM.pdf>.

### 3.2.2.16. Check number of pages

***Belongs to***

- **Category:** Page;Doc
- **Type:** Checks

***What it does***

Checks the number of pages in a PDF.

You can for example check if there are less/more than x page(s), or if the PDF contains an odd/even number of pages ...

### 3.2.2.17. Check object compression

***Belongs to***

- **Category:** Doc
- **Type:** Checks

***What it does***

Checks the compression of the PDF structure (possible as of PDF 1.5).

You can also check if the compression is compliant with PDF/X.

#### **About object compression**

In a PDF, objects have content streams that define (a part of) the object. These content streams can be compressed in order to create smaller files, so this is mostly used if a PDF is to be put on a website. As older RIPS may have problems with this compression, this Action allows you to check if the PDF contains such compressed streams, which you can afterwards remove if required.

#### **Related Actions**

- [Remove object compression](#) on page 277
- [Check optimal compression](#) on page 334

### 3.2.2.18. Check PDF text string encoding

#### **Belongs to**

- **Category:** Document, PDF 2.0
- **Type:** Checks
- **New since:** PitStop 2022

#### **What it does**

Allows you to check if the text encoding of a PDF complies with a particular PDF version. Choices are compatibility with the current document version, with PDF 1.7 (PDFDocEncoding or UTF-16BE) or with PDF 2.0 (ASCII or UTF-8).

#### **Related Actions**

- [Change PDF text string encoding](#) on page 122

### 3.2.2.19. Check PDF/X viewer preferences

#### **Belongs to**

- **Category:** Doc
- **Type:** Checks

#### **What it does**

Checks if the PDF document complies with the viewer preferences as required by the PDF/X specifications.

PDF/X-1a:2001 and PDF/X-3:2002 have no special viewer requirements.

PDF/X-1a:2003, PDF/X-3:2003, PDF/X-4 and PDF/X-4p require the view area, view clip, print area and print clip to be set to the media (or bleed) box. If set to the bleed box, PDF/X-3:2003 requires that at least one page has a bleed box, whereas PDF/X-4(p) requires that all pages have a bleed box.

PDF/X-6 and PDF/X-6p do not allow a view area, view clip, print area or print clip.

**Related Actions**

[Make viewer preferences PDF/X compliant](#) on page 124

### 3.2.3. General

---

#### 3.2.3.1. Check encoding of name objects

**Belongs to**

- **Category:** General
- **Type:** Checks

**What it does**

Allows you to check if the encoding of font names, separation names or structure type names is UTF8.

This may not be the case if you receive PDFs from Japanese or Chinese designers.



**Note:** This Action verifies if the name *data* is valid UTF8 data. Note that this does not necessarily mean that the name actually is UTF8 encoded. It just checks if it would be a valid string when interpreted as UTF8.

---

#### 3.2.3.2. Check file specification keys

**Belongs to**

- **Category:** General
- **Type:** Checks

**What it does**

Searches the PDF for file specification keys.

PDF streams are holders of large amounts of data, such as image pixels, page contents, embedded fonts, etc. In some instances, the streams do not contain the data inside the PDF but point to embedded or even external files. This Action will search for this type of links and check if they contain either the required file specification keys or the PDF 2.0 specific keys.

**Related Actions**

- [Check for file specifications](#) on page 330
- [Remove file specification from streams](#) on page 140

- [Remove file specification keys](#) on page 233

### 3.2.3.3. Check for associated files

**Belongs to**

- **Category:** General, PDF2.0
- **Type:** Checks
- **New since:** PitStop 2022

**What it does**

Checks if a PDF file contains associated files.

This is a PDF 2.0 feature. If you don't want PDF 2.0 features in your file, you can remove the associated files using a dedicated [Action](#).

For more information about associated files, refer to [PDF 2.0 Application Note 002: Associated Files](#).

**Related Actions**

- [Remove associated files](#) on page 140

### 3.2.3.4. Check for embedded PostScript fragments

**Belongs to**

- **Category:** General
- **Type:** Checks

**What it does**

Searches for fragments of embedded PostScript in a PDF document.

Embedded PostScript fragments do not show up in the screen preview, but could change the appearance of the printed document. They are generally undesirable in a print production environment.

**Related Actions**

- [Select embedded PostScript fragments](#) on page 444
- [Remove PostScript](#) on page 140

### 3.2.3.5. Check for external streams

**Belongs to**

- **Category:** General
- **Type:** Checks

**What it does**

Checks if the PDF contains links to external data.

### 3.2.3.6. Check for file specifications

**Belongs to**

- **Category:** General
- **Type:** Checks

**What it does**

Checks if the PDF contains URLs or links to embedded or external files in PDF streams.

PDF streams are holders of large amounts of data, such as image pixels, page contents, embedded fonts, etc. In some instances, the streams do not contain the data inside the PDF but point to embedded or even external files, or to websites (URLs). This Action allows you to check if the PDF contains such links.

You can check for either URL or file specifications, and search for embedded, non-embedded, or both types of links.

**Related Actions**

- [Check file specification keys](#) on page 328
- [Remove file specification from streams](#) on page 140

### 3.2.3.7. Check for invisible objects without fill and stroke

**Belongs to**

- **Category:** General
- **Type:** Checks

**What it does**

Searches the PDF document for any objects that have no fill or stroke color associated with them.



**Note:** This Action only works on vector art (paths) and text without fill and stroke.

Designers sometimes leave such objects in a document rather than deleting them.

**Related Actions**

- [Select invisible objects without fill and stroke](#) on page 446

- [Remove invisible objects without fill and stroke](#) on page 277

### 3.2.3.8. Check for reference XObjects

**Belongs to**

- **Category:** General
- **Type:** Checks

**What it does**

Checks the PDF for the presence of XObjects.

XObjects are PostScript objects, such as background images, that are defined only once in a PDF file, but used several times (e.g. on several pages). Using XObjects can speed up printing but requires extra printer memory.

XObjects are supported as of PDF 1.4.

**Related Actions**

[Select XObjects](#) on page 448

### 3.2.3.9. Check for unknown objects

**Belongs to**

- **Category:** General
- **Type:** Checks

**What it does**

Checks if the PDF contains unknown objects.

Unknown objects in this context are objects that are not defined in the PDF 1.3 standard. The PDF/X standards require all objects in the document to be “known”, or defined in the PDF 1.3 specification.

This avoids differences in output between older and newer RIPs, for example. Older RIPs may not be able to process certain objects, and produce blank pages, whereas a more recent RIP can deal with those objects correctly and will produce the intended output.

### 3.2.3.10. Check if visual content exists

**Belongs to**

- **Category:** General
- **Type:** Checks
- **Since:** 2020

**What it does**

Enables you to check if a group of graphical shapes (e.g. an embedded image, such as a logo or line art) is visible in the PDF document. You can either check if the group of shapes is found, not found or how many times it occurs.

Note that the Action is able to find rotated shapes, partially cropped images, bigger or smaller shapes and shapes that are more or less similar (depending on the configuration, see below).



**Note:** The Action can detect all types of shapes (vector, raster, pixels, ...) embedded in the PDF. External images and simple geometric shapes are not supported.

**How it works**

The page the Action is running on is rasterized in the background. This may take a while. When this is finished, PitStop scans the page and searches for control points that are similar to the ones in the shape you want to check and uses this information to detect them.

Simple geometric shapes are not supported, because they do not provide enough control points.

**Use cases**

- Automatic artwork replacement
- Checking for incorrect or wrongly placed logos
- Checking for missing or invisible logos
- Also useful for packshots (for example to find outdated or old images)

**How to proceed**

1. Select the group of shapes (e.g. a logo) you want to check using the PitStop Select Objects tool .
2. In the attributes of the Action, click the **Grab selection** button. The selected image will be shown in the field above the button. Note that, if the image is too large (+15 cm) or too small (-1 cm), you'll get a warning.
3. Enter a label (e.g. "PitStop logo"). This is a mandatory field. Note that the label is only used for logging purposes.
4. From the 'Log a message' list at the top, select the appropriate option:

*Log a message ...*

- for each visual object that was found
- if no visual object was found
- if amount of visual objects meets criteria (this option allows you to set a threshold, e.g. log a message if more than one logo is found).



**Note:** If you run the Action List with the above mentioned options, the check will include rotated shapes, shapes that are somewhat bigger and somewhat smaller and shapes that have a certain visual similarity. The attributes explained below allow you to make the check more precise.

5. Configure the following options as required:


| Attribute                    | Meaning                                                               |
|------------------------------|-----------------------------------------------------------------------|
| <b>Scan resolution (ppi)</b> | Default value is 300, the minimal value (to get a good result) is 72. |



| Attribute                         | Meaning                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                   | <p>To use the resolution of the visual object in the document, clear this field before grabbing the visual object. The current resolution will be entered automatically.</p> <p>Note that a higher resolution will slow down processing, but increase accuracy (as more control points will be checked), whereas a lower resolution will speed up processing but decrease accuracy.</p> <p>The optimal value also depends on the complexity of the visual object: a very complicated object will be difficult to track on a low resolution.</p>                                                   |
| <b>Restrict size</b>              | <p>Make sure to enter the largest side of the visual content in the first field.</p> <p>Note that (specifically in case of a rotated object) the Action considers the sides of the object, not of the bounding box.</p> <hr/> <p> <b>Note:</b> Take into account that there's an error margin; the actual reported shapes may be a bit smaller or larger.</p> <hr/>                                                                                                                                              |
| <b>Restrict rotation</b>          | <p>Make sure to set the rotation to 0 degrees if you don't want to report rotated content. In all other cases, enter the value of your choice. Note that you can enter a number of values (separated by a comma) or use a range (using a hyphen) or a combination.</p> <hr/> <p> <b>Note:</b> Take into account that there's an error margin of 2 or 3 degrees.</p> <hr/>                                                                                                                                      |
| <b>Restrict visual similarity</b> | <p>This option enables you to find objects that are partly hidden by other objects or to find objects that should not be in the document. It also works on colors, for example to find logos with a color difference; note however that there should be enough contrast for PitStop to be able to detect it.</p> <hr/> <p> <b>Note:</b> Take into account that there's an error margin. We advise playing with the values to find a value that is optimal for the visual content you want to detect.</p> <hr/> |

**Example**

The image below shows that the Action is able to detect a logo, even if it's slightly different in size or color, or when it's rotated, cropped or partly hidden. The marked logo is the one that was grabbed in the Action. Using the Action's attributes you can restrict the found instances.

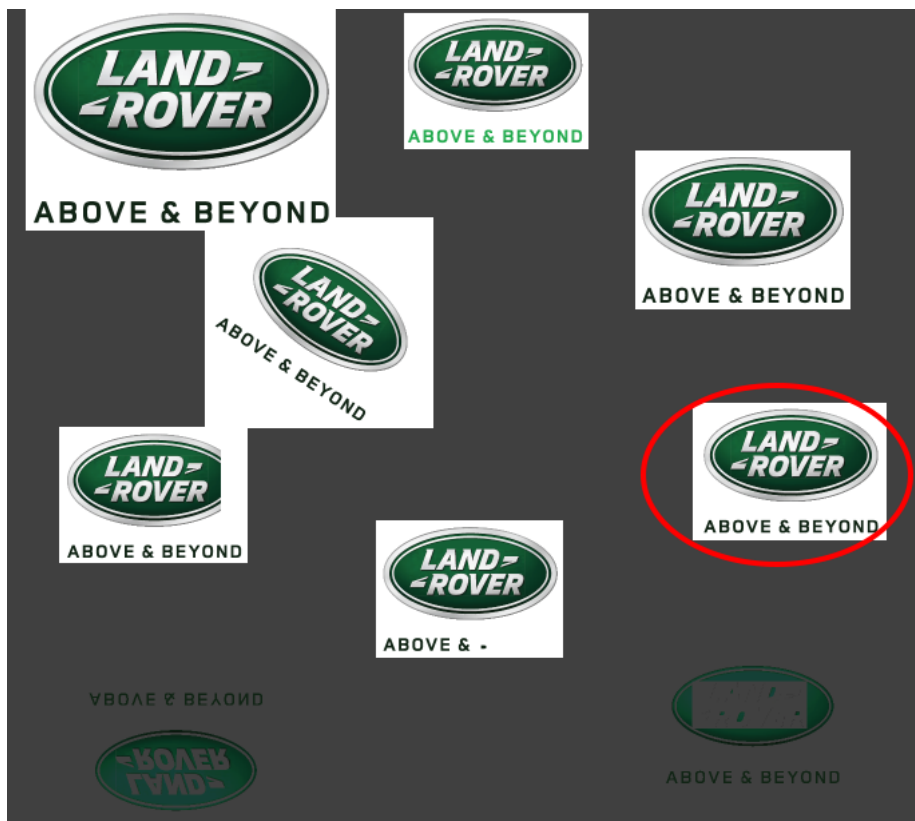

### 3.2.3.11. Check optimal compression

#### ***Belongs to***

- **Category:** General
- **Type:** Checks

#### ***What it does***

Checks if the latest and most efficient compression mechanisms have been applied in the PDF document.

Previous versions of Adobe Acrobat (2.1, 3.0, 4.0) featured less advanced compression mechanisms.

#### ***About object compression***

In a PDF, objects have content streams that define (a part of) the object. These content streams can be compressed in order to create smaller files, so this is mostly used if a PDF is to be put on a website. As older RIPS may have problems with this compression, this Action allows you to check if the PDF contains such compressed streams, which you can afterwards remove if required.

#### ***Related Actions***

- [Check object compression](#) on page 326
- [Remove object compression](#) on page 277

### 3.2.3.12. Log selection

#### ***Belongs to***

- **Category:** General
- **Type:** Checks

#### ***What it does***

Allows you to log the presence or absence of a selection you made with another Action in the same Action list.

This Action is useful if you want to check something for which no "Check" Action is available. For example, if you want to check if the PDF contains red text, you can first select all red text, and then use Log selection to display a message either if the document does or does not contain red text.

Note that you can also log the presence or absence of layers.

#### ***How to proceed***

1. From the list at the top of the pane, choose the appropriate option:
  - To display a message if the selection was found, select *Log a message if objects are selected*.
  - To display a message if the selection was NOT found, select *Log a message if no objects are selected*.
2. Indicate whether or not the following information should be logged as well (if applicable):
  - The type of page and document objects
  - The annotation objects



**Note:** By default, annotations aren't logged. Even if Log selection applies to a selection made by [Select annotations](#), nothing will be logged, unless the **Report the annotation objects** checkbox is selected.

3. Enter the message that should appear in the Report if the selection was found/not found (depending on the choice made in step1).



**Note:** You can configure different descriptions for different languages (for example: *JPEG images* in English versus *JPEG afbeeldingen* in Dutch). The language shown in the log file depends on the PitStop Pro language (See **Edit > Preferences > PitStop Pro Preferences**).

4. Select the desired log level.



**Note:** In this case, it doesn't make sense to choose "Don't log", since the result of this Action is always shown in the Enfocus Navigator.

#### ***Example***

To check for the presence of red text in a document, you could create the following Action List:

```
Select fill and stroke color
```

```
<!-- Add Select color on page 430. Select fill and stroke and determine the
color you want to check for, for example using the Grab fill and Grab stroke icon -->
Select text segments
  <!-- Select text segments on page 514 -->
AND
  <!-- AND on page 470 : necessary to combine the two previous Actions -->
Log selection
  <!-- Choose "Log a message if objects are selected".
        Configure an English message, for example "This document contains some
        text in red".
        Select "Log as warning". -->
```

If you run this Action List, all red text will be selected and logged as a warning. In the Enfocus Navigator, if you select an object in the Description field, you will see the description ("Red text") under Details. You will also find a warning in the Preflight Report (e.g. "This document contains some text in red (x times on pages y-z)").

Alternatively, if you only want a warning if no red text is found, in the attributes of **Log selection**, choose "Log a message if no objects are selected" and configure a message such as "This document does not contain any red text".

## 3.2.4. Image

---

### 3.2.4.1. Check for alternate images

#### ***Belongs to***

- **Category:** Image
- **Type:** Checks

#### ***What it does***

Searches a PDF for alternate images.

Alternate images are low resolution versions of images that are used for on-screen proofing because they render more quickly. PitStop can check for the presence of all alternate images or only those that are set to print as default.

#### ***Related Actions***

- [Add alternate images](#) on page 141
- [Select by alternate images](#) on page 448
- [Remove alternate images](#) on page 146

### 3.2.4.2. Check for corrupt images

#### ***Belongs to***

- **Category:** Image
- **Type:** Checks

- **Since version:** 2020

**What it does**

Detects images with corrupt image data.

This Action enables you to find corrupt images early in the production process, so you can take corrective action.

### 3.2.4.3. Check for images with 16 bits per channel

**Belongs to**

- **Category:** Image
- **Type:** Checks

**What it does**

Searches a PDF for images with 16 bits per channel.

These images have a much larger color range than standard 8 bit images. Note that not all of these colors can be accurately reproduced on press.

### 3.2.4.4. Check if JPEG 2000 compressed images are PDF/X compliant

**Belongs to**

- **Category:** Image
- **Type:** Checks

**What it does**

Check if JPEG 2000 compressed images are PDF/X-4 or PDF/X-6 compliant.

You might want to remove or replace non-compliant images.

### 3.2.4.5. Check image compression

**Belongs to**

- **Category:** Image
- **Type:** Checks

**What it does**

Checks image filters to ensure that the images in the PDF are not compressed using a particular compression method.

You can check for the following compression methods:

- CCITT

- JPEG
- ZIP
- LZW
- RunLength
- JBIG2
- JPEG 2000

By default, soft-mask images are not included, unless you select the **Also check soft-mask images** checkbox.

### 3.2.4.6. Check image compression ratio

#### ***Belongs to***

- **Category:** Image
- **Type:** Checks

#### ***What it does***

Checks the compression ratio of the images in a PDF against a particular threshold.

You can check the compression ratio of images compressed with one of the following compression methods:

- CCITT
- JPEG
- ZIP
- LZW
- RunLength
- JBIG2
- JPEG 2000

#### ***Example***

If the JPEG images in your PDF should not be compressed at all, use the following values:

```
Compression ratio of JPEG images must be      <!-- Choose JPEG -->  
equal to 100                                  <!-- Choose "equal to" and "100" -->
```

A compression ratio of "100" means "no compression"; a compression ratio of "50" means "50%", ...

### 3.2.4.7. Check image interpolation

#### ***Belongs to***

- **Category:** Image
- **Type:** Checks

#### ***What it does***

Checks if images in the PDF have been resampled.

### 3.2.4.8. Check inline image syntax

**Belongs to**

- **Category:** Image; PDF 2.0
- **Type:** Checks
- **New since:** PitStop 2022

**What it does**

Checks the presence and/or validity of the L key (or Length key) of a PDF.

The L key specifies the length of the image data and allows users to skip inline images if required.

Choices are:

- Inline images must not have the Length key
- Inline images must have the Length key
- Inline images must have a valid Length key.

Note that PDF 2.0 allows (but does not impose) the presence of an L key, but if it's present, it must match the actual inline image data length.

**Related Actions**

- [Select inline image syntax](#)
- [Change inline image syntax](#)

### 3.2.4.9. Check number of images on page

**Belongs to**

- **Category:** Image
- **Type:** Checks
- **Since:** 2020

**What it does**

Checks the number of images on a page.

**Use case**

Badly created PDF files can have hundreds of images, which can take a long time to rip. This Action can help you detect the pages with more images than expected. Such pages can then be simplified using [Rasterize selection](#) or similar tools.

**Related Actions**

- [Select page by number of images](#) on page 452
- [Rasterize selection](#) on page 138

### 3.2.4.10. Check OPI path

**Belongs to**

- **Category:** Image
- **Type:** Checks

**What it does**

If your document contains objects with OPI information, you can use this Action to detect images that cannot be found in the location specified in the OPI pointer.

**About OPI**

OPI (Open Prepress Interfaces) replaces high resolution images with "preview" images; low resolution substitutes which are stored in the PDF, together with the path to the high resolution images. This facilitates data storage and data transfer of PDFs with a large number of images.

**Related Actions**

- [Change OPI info](#) on page 144
- [Check OPI type](#) on page 340
- [Gather OPI information](#) on page 418
- [Remove OPI](#) on page 146
- [Select images with OPI info](#) on page 450

### 3.2.4.11. Check OPI type

**Belongs to**

- **Category:** Image
- **Type:** Checks

**What it does**

Checks which OPI types are allowed in a PDF.

You can check for the following OPI types:

- None
- 1.3
- 2.0
- both 1.3 and 2.0

**About OPI**

OPI (Open Prepress Interfaces) replaces high resolution images with "preview" images; low resolution substitutes which are stored in the PDF, together with the path to the high resolution images. This facilitates data storage and data transfer of PDFs with a large number of images.

**Related Actions**

- [Check OPI path](#) on page 340



- [Change OPI info](#) on page 144
- [Gather OPI information](#) on page 418
- [Remove OPI](#) on page 146
- [Select images with OPI info](#) on page 450

### 3.2.4.12. Check resolution

#### ***Belongs to***

- **Category:** Image
- **Type:** Checks

#### ***What it does***

Checks the resolution of particular image types (color or grayscale images, 1-bit images or any images) against a particular value, e.g. checks if the resolution is not more/less/... than x ppi.

This Action checks for the **effective** resolution; if the image has been resized, this is the resolution after scaling.

As of PitStop 2018 you can disregard any soft-mask images that are used in the PDF, by selecting the **Ignore soft-masks** option. The resolution of a soft-mask image can be lower than what it acceptable for images, but as this does not affect the end result, it's safe to exclude them from the resolution check.

Note that the log message also mentions the resolution of the matching images.

#### ***Related Actions***

[Select by image resolution](#) on page 449

## 3.2.5. Layers

---

### 3.2.5.1. Check for empty layers

#### ***Belongs to***

- **Category:** Layers
- **Type:** Checks
- **Since version:** 12 update 3

#### ***What it does***

Allows you to check if the selected layers are empty. The Action must be preceded by another Action that selects the layer(s) concerned.

#### ***Example***

To check if the PDF contains any empty layers:

```
Select layers <!-- Select layers on page 453 selects ALL layers -->
```

```
Check for empty layers
```

**Related Actions**

[Remove objects from layers](#) on page 155

### 3.2.5.2. Check if layer is PDF/X-4 compliant

**Belongs to**

- **Category:** Layers
- **Type:** Checks

**What it does**

Checks if the layers in a PDF document comply with the PDF/X-4 specification.

**About layers in PDF/X-4**

The PDF/X-4 standard allows the use of layers (OCGs = Optional Content Groups) in PDF. These layers can have different states (ON or OFF). The state of all OCGs must be defined in an Optional Content Configuration Dictionary (OCCD). This dictionary must be used by compliant readers to switch on or off the layers.

### 3.2.5.3. Check layer print state

**Belongs to**

- **Category:** Layers
- **Type:** Checks
- **Since Version:** 2018

**What it does**

Allows you to check the print state of a layer, which determines whether or not objects on the layer are printed.


Print state options are:

- Always prints
- Prints when visible
- Never prints

**Example**

If you never want to print content on layers, check if all layers have the print state set to 'Never prints'. Using the following Action List, you'll get a warning if that's not the case.

```
Select all  
Check layer print state <!-- with the option Print State must be: Never prints -->
```

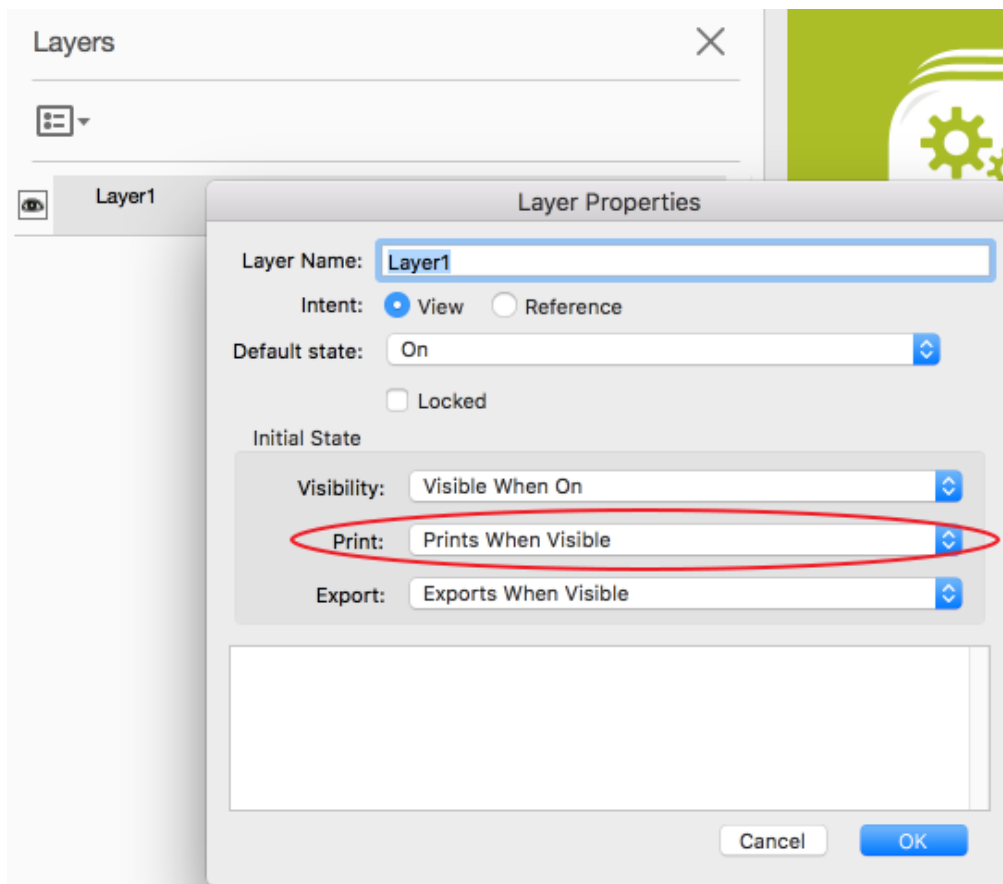**Related Actions**

- [Check layer properties](#) on page 343
- [Change layer print state](#) on page 150
- [Select layers by print state](#) on page 454

### 3.2.5.4. Check layer properties

**Belongs to**

- **Category:** Layers
- **Type:** Checks

**What it does**

Checks certain properties, i.e. default visibility and presence in the Layers panel ("layer configuration") of the layers selected by another Action in the same Action List.

**Example**

To check the properties of **all** layers in the PDF, create the following Action List:

```
Select layers <!-- Select layers on page 453 -->
```

Check layer properties

#### **Related Actions**

- [Change layer properties](#) on page 150
- [Select objects in layers by layer properties](#) on page 455

### 3.2.5.5. Check layers

#### **Belongs to**

- **Category:** Layers
- **Type:** Checks

#### **What it does**

Checks the layers in a PDF.

You can set a number of different checks, such as:

- Document must not have layers, i.e. optional content is not allowed.
- The document catalog dictionary must not contain OCPProperties key.
- Document must not have alternate layer configurations, i.e. only one Layers panel ("layers palette") is allowed.
- Layer configuration (i.e. the Layers panel) must have a name.
- Multiple layer configurations (i.e. Layers panels) must not have the *same* name.
- Layer group must not be missing from order, i.e. the Layer group must be present in the order of the Layer panel.
- Layer configuration (i.e. the Layers panel) must not contain application specific usage entry.

#### **About PDF layers**

Layered content usually comes from applications such as InDesign, AutoCAD or Visio. When converted to PDF, the layers are retained and can be viewed and navigated in Adobe Acrobat. However, if you print a PDF file that contains layers, only the content that is visible on-screen is printed. This may or may not be desired.

#### **"Conventional" layers versus PDF layers**

**Layers in digital image editing** ("conventional" layers) are used to separate the different elements of an image. Each element is drawn on exactly one layer. The different layers are stacked on top of each other, and the order of the layers defines how the image looks like.

**Layers in PDF** have a different meaning. They are used to hide or show page content:

- Turning *on* a layer, all objects on this layer are shown on-screen.
- Turning *off* a layer, all objects on this layer are hidden, i.e. they become invisible.

As such, layers are also called "optional content groups": groups of objects that can be selectively viewed or hidden by the author of the document. Objects can belong to different layers, and the order of the layers is of no importance.

To work with layers in a PDF document in Adobe Acrobat, select **View > Show/Hide > Navigation Panes > Layers**.

For more information, refer to the Adobe Acrobat help.

**Related Actions**

- [Change layer properties](#) on page 150
- [Select objects in layers by layer properties](#) on page 455
- [Fix layers](#) on page 151

## 3.2.6. Line Art

---

### 3.2.6.1. Check for objects with negative dash pattern phase


**Belongs to**

- **Category:** LineArt
- **Type:** Checks
- **Since version:** 13

**What it does**

Detects if the document contains a dash pattern phase with a negative value.

The dash pattern phase specifies the distance into the dash pattern to start the dash. Negative values may not be supported by the RIP.

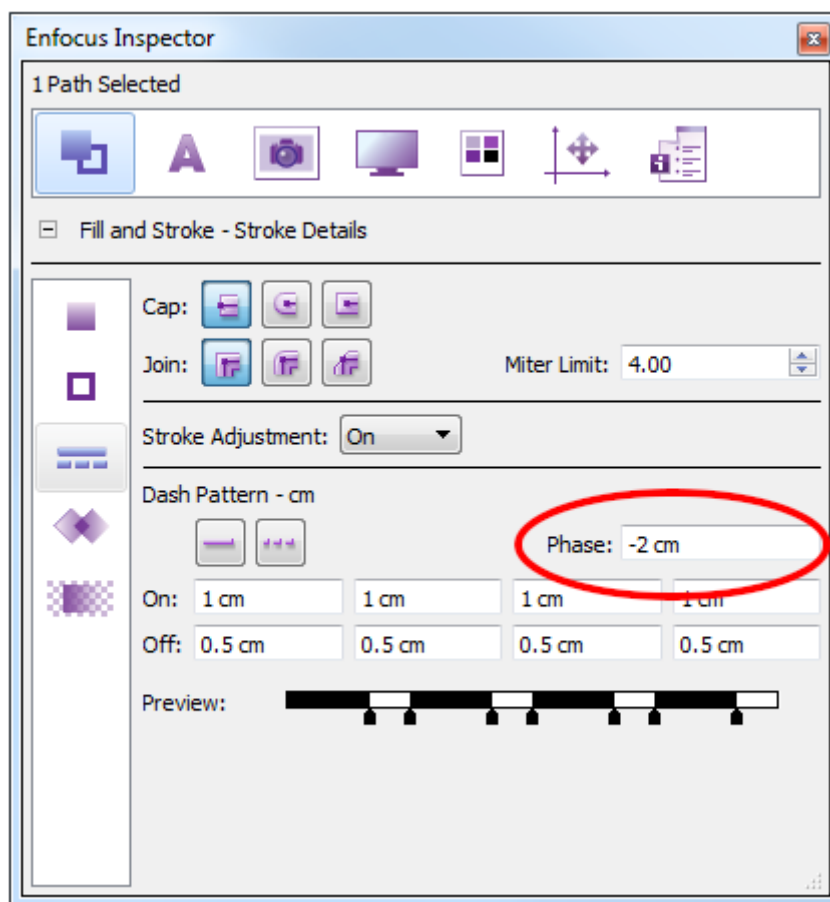

**Related Actions**

- [Select objects with negative dash pattern phase](#) on page 458
- [Fix negative dash pattern phase](#) on page 169

### 3.2.6.2. Check for zero fill line art

**Belongs to**

- **Category:** LineArt
- **Type:** Checks
- **Since version:** 2020

**What it does**

Detects if the document contains line art of which the fill is empty ('zero-width filled lines').

This type of line art may be visible in a PDF but usually it doesn't print or rasterize, so it's important that it is detected in advance.



---

**Note:** Zero fill clip paths are also detected.

---

### 3.2.6.3. Check line art by length

**Belongs to**

- **Category:** LineArt
- **Type:** Checks
- **Since Version:** 2019

**What it does**

Checks if the line art has a particular length. You can either check the length of individual line art or the total length of all line art in the document.

The exact length is mentioned in the Preflight Report and the Navigator.

**Use case**

Users with a cutting table may want to know the length of a cut path so they can estimate how long the job will take to cut on the table.

### 3.2.6.4. Check line weight

**Belongs to**

- **Category:** LineArt; Prepress

- **Type:** Checks

**What it does**

Checks if the line weight of the selected objects is higher or lower than a particular value.

**Related Actions**

- [Change line weight](#) on page 161
- [Select by line weight](#) on page 457
- [Normalize line weight](#) on page 133

### 3.2.6.5. Check maximum path length

**Belongs to**

- **Category:** Line Art
- **Type:** Checks

**What it does**

Checks for a maximum amount of nodes in a path.

### 3.2.6.6. Check number of paths on page

**Belongs to**

- **Category:** Line Art
- **Type:** Checks

**What it does**

Checks the number of paths on one page.

You can for example log a warning if the PDF contains more than 4 paths on a page.

**Related Actions**

[Select page by number of paths](#) on page 459

### 3.2.6.7. Check thin objects

**Belongs to**

- **Category:** Line Art
- **Type:** Checks
- **Since version:** 2019

**What it does**

Allows you to check if the document contains objects with a stroke smaller than a set threshold.

If desired, you can indicate that for objects of which stroke and fill have the same color, the width of the fill and stroke should be added together.

This Action is typically used to check for thin white lines that may be visible on small screens (e.g. on an iPad screen).

**Related Actions**

[Select thin objects](#) on page 462

### 3.2.6.8. Check total number of nodes on page

**Belongs to**

- **Category:** Line Art
- **Type:** Checks
- **Since version:** 13 update 1

**What it does**

Checks how many nodes are present on each page, depending on the set threshold (e.g. less than/more than (...) the set number of nodes). This Action is useful to detect complex pages, which may take a considerable amount of time to rip and therefore may cause a production bottleneck.

**Related Actions**

- [Select page by total number of nodes](#) on page 460

## 3.2.7. Metadata

---

### 3.2.7.1. Check annotation flags settings

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Allows you to check if particular annotation flags are enabled or disabled.

Flags that can be checked:

- Invisible
- Print
- NoRotate



- ReadOnly
- ToggleNoView
- Hidden
- NoZoom
- NoView
- Locked

**How to proceed**

1. Select all flags you want to check.
2. Choose the appropriate option:
  - If **The flag must be on** is enabled, a message will be displayed if the selected flags are disabled.
  - If **The flag must be off** is enabled, a message will be displayed if the selected flags are enabled.

**Related Actions**

- [Check annotations print setting](#) on page 349
- [Use flags to select annotation](#) on page 469

### 3.2.7.2. Check annotations print setting

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Check annotations' print settings allows you to log annotations with a particular print setting (print or non-printing).

**Related Actions**

- [Check annotation flags settings](#) on page 348

### 3.2.7.3. Check annotations type

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Check annotations' type allows you to log the occurrence of particular types of annotations in a PDF, for example: text, hyperlinks, movies,...

### 3.2.7.4. Check appearances of annotations and interactive form fields

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks if the document contains annotations and interactive form fields according to the specifications of a particular PDF/X version.

This is useful if you want to print the document (as annotations and interactive form fields cannot be printed) or if your output device or PDF renderer does not support form fields.

**Related Actions**

- [Check form fields](#) on page 355
- [Flatten form fields](#) on page 188
- [Remove form fields](#) on page 191
- [Check for annotations inside art box or trim box](#) on page 370

### 3.2.7.5. Check article threads

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks for the existence of article threads in a PDF file.

Article threads are electronic threads defined by the author of the PDF. They indicate which elements in a PDF belong together as part of a single story, even if they do not follow each other sequentially in the layout of the document.

### 3.2.7.6. Check binding

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks if binding is left or right.

Most European language documents are bound on the left.



**Note:** To check a document's binding, in Adobe Acrobat, go to **File > Properties** and switch to the **Advanced** tab. The document's binding property (Left Edge or Right Edge) is displayed under Reading Options.

#### **Related Actions**

- [Select by binding](#) on page 465
- [Change binding](#) on page 179

### 3.2.7.7. Check bookmarks

#### **Belongs to**

- **Category:** Metadata
- **Type:** Checks

#### **What it does**

Checks if the PDF contains bookmarks.

Bookmarks are links in the left hand side bar of a PDF that take you to different sections.

#### **Related Actions**

- [Select pages with bookmarks](#) on page 485

### 3.2.7.8. Check creation and modification date

#### **Belongs to**

- **Category:** Metadata
- **Type:** Check

#### **What it does**

Checks the creation and modification date.

You can indicate which metadata location should be checked, for example only the most recently changed one, or "any" metadata location (if it doesn't matter), ...

#### **About metadata locations in a PDF file**

There are two metadata locations in a PDF file:

- The **info dictionary** contains information about the file, such as the title, the author, the creation date ... and is visible through the file's Document properties. It's not in XML format.
- The **XMP metadata stream** also contains information about the file, but this information is represented as XMP metadata - XMP referring to Adobe's labeling technology **E**xtensible **M**etadata **P**latform. All information in the info dictionary is also represented in the XMP metadata stream dictionary, in the form of XMP properties.

Inconsistencies may occur when only one of the metadata locations has been updated.

#### **Related Actions**

[Add missing creation and modification date](#) on page 177

### 3.2.7.9. Check document info

#### **Belongs to**

- **Category:** Metadata
- **Type:** Checks

#### **What it does**

Searches for the requested document info in the document properties of the PDF.

You can check:

- Title
- Subject
- Author
- Keywords
- Producer
- Creator

Use the **Compare with** field to enter (part of) the name of the document info you are looking for.

Use the operator methods **equals** and **doesn't equal** if you are looking for an exact match; use **contain** or **doesn't contain** if the entered value is just part of the document info you are looking for.

Select the **Match case** checkbox if you want the search to take into account the lower and upper cases of the entered value.



**Note:** From version 12 update 2 onwards, you can use regular expressions to define the value in the **Compare with** field (if you select **Equals/Does not equal** as operator method).

#### **Related Actions**

- [Change document info](#) on page 179
- [Select by document info](#) on page 465

### 3.2.7.10. Check document information dictionary compliance

#### **Belongs to**

- **Category:** Metadata; PDF 2.0
- **Type:** Checks
- **Since:** 2022

**What it does**

Checks if the information dictionary is compliant with the chosen PDF version (PDF/X-6 or PDF 2.0).

For more information about the information dictionary, refer to [Change document information dictionary compliance](#) on page 181.

**Related Actions**

- [Change document information dictionary compliance](#) on page 181

### 3.2.7.11. Check document permissions

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Allows you to check the permission settings of a PDF, such as (low/high resolution) printing, copying, editing, ...

**About document permissions**

The table below gives an overview of the permissions that can be set in a PDF.

| Document permission      | If enabled...                                                                                   |
|--------------------------|-------------------------------------------------------------------------------------------------|
| Assembly                 | Users can insert, delete and rotate pages, and create bookmarks and thumbnails.                 |
| Content accessibility    | Accessibility software (such as a screen reader) is allowed to use the content of the document. |
| Fill-in or changing      | Users can fill in and change forms.                                                             |
| Annotating               | Users can make annotations.                                                                     |
| Copying                  | Users can select and copy contents to the clipboard.                                            |
| Editing                  | Users can make modifications to the document.                                                   |
| Low resolution printing  | Users can print a low-resolution bitmapped image of the pages (for personal use).               |
| High resolution printing | Users can print the document with a high resolution output.                                     |
| Printing                 | Users can print the document.                                                                   |

To view a summary of the document permissions, proceed as follows:

1. Open Adobe Acrobat.
2. Select **File > Properties**.
3. Switch to the **Security** tab. The document restrictions are displayed in the lower part of the dialog.

### 3.2.7.12. Check document security

**Belongs to**

- **Category:** Metadata, PDF 2.0
- **Type:** Checks

**What it does**

Checks if a particular encryption was used to secure the PDF file.

Options:

- A PDF version (1.3 - 2.0)
- A combination of "none" and a PDF version (1.3 - 2.0)
- None
- None or Standard (= no custom security)
- Custom (enter a custom name in the text field)

### 3.2.7.13. Check document trapped flag

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Allows you to check the value of the trapped flag in a PDF.

**About trapping**

The trapped flag indicates whether or not a file has been "trapped", i.e. has been corrected for slight color misregistrations. The trapped flag must be defined in PDF/X documents.

The flag can be set to:

- **True:** the document has been trapped, or the creator of the document has decided that it should not be trapped.
- **False:** the document has not been trapped
- **Unknown:** it's not known whether or not the document has been trapped. Note that this status should be avoided.

The trapped flag is stored in the info dictionary and/or in the XMP metadata stream, but the data can be inconsistent; that's why you must indicate where the trapped flag must be taken from, e.g. from the most recent metadata location.

**Related Actions**

- [Change trapped flag](#) on page 185

- [Select by trapped flag](#) on page 466
- [Check Trapnets for PDF/X](#) on page 365

### 3.2.7.14. Check external hyperlink annotations

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks if the annotations in the PDF contain hyperlinks to files, applications, and/or web pages.

**Related Actions**

[Check if URLs in Link Annotations are valid](#) on page 361

### 3.2.7.15. Check form fields

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Looks for the presence of form fields in a PDF.

**Related Actions**

- [Flatten form fields](#) on page 188
- [Remove form fields](#) on page 191

### 3.2.7.16. Check for zero fill line art

**Belongs to**

- **Category:** LineArt
- **Type:** Checks
- **Since version:** 2020

**What it does**

Detects if the document contains line art of which the fill is empty ('zero-width filled lines').

This type of line art may be visible in a PDF but usually it doesn't print or rasterize, so it's important that it is detected in advance.



---

**Note:** Zero fill clip paths are also detected.

---

### 3.2.7.17. Check for action dictionaries

***Belongs to***

- **Category:** Metadata
- **Type:** Checks

***What it does***

Checks if a PDF contains particular action dictionaries, i.e. action types.

***About action dictionaries***

Action dictionaries are actions that are executed when you click a bookmark or a link, hover over an annotation, open a file ... There are several types of actions, e.g. a music track can be played, a specific page or website can be opened ...

You may want to remove these actions, as they are not allowed in a PDF/X file. The Remove action dictionaries Action will remove the action only; the object (the bookmark, annotation) the actions are linked to will not be removed. For example, if you remove the action from a bookmark, the bookmark is still visible, but not clickable anymore.

***Related Actions***

- [Remove action dictionaries](#) on page 189
- [Check for additional actions](#) on page 356

### 3.2.7.18. Check for additional actions

***Belongs to***

- **Category:** Metadata
- **Type:** Checks

***What it does***

Checks if a PDF contains action dictionaries, i.e. action types, other than the standard ones.

***About action dictionaries***

Action dictionaries are actions that are executed when you click a bookmark or a link, hover over an annotation, open a file ... There are several types of actions, e.g. a music track can be played, a specific page or website can be opened ...

***Related Actions***

- [Remove action dictionaries](#) on page 189
- [Check for action dictionaries](#) on page 356



### 3.2.7.19. Check for annotations inside printable area

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Searches a PDF for any annotations that appear in the printable area of the PDF.

### 3.2.7.20. Check for deprecated attributes in XMP metadata

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks if the XMP metadata streams in the PDF contain attributes that are outdated.

**About XMP metadata**

XMP metadata is descriptive information about the file embedded in the PDF, for example the name of the author, keywords, copyright information... XMP refers to labeling technology that is used, i.e. Adobe's Extensible Metadata Platform. You can view the XMP metadata in a file's Document Properties in Acrobat (Click the **Additional Metadata** button, then select **Advanced**).

**Related Actions**

[Check if XMP metadata is well-formed](#) on page 361

### 3.2.7.21. Check for Javascript

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks if a PDF contains instances of the JavaScript programming language.

This language is often used to add interactive functionality to PDF files. However, in a print production environment, these scripts serve no purpose and may result in increased file sizes.

**Related Actions**

[Remove Javascript](#) on page 191

### 3.2.7.22. Check for XFA forms

***Belongs to***

- **Category:** Metadata
- **Type:** Checks

***What it does***

Checks whether the PDF contains XFA forms.

An XFA form is a web form and is not suited for printing documents. XFA stands for XML Forms Architecture. It's an XML specification, which is rather vague and does not specify any rendering.

Optionally, you can also check if a NeedsRendering key is present in the PDF document (**log if NeedsRendering key is present**).

### 3.2.7.23. Check for XMP schema definitions as required by PDF/A

***Belongs to***

- **Category:** Metadata
- **Type:** Checks

***What it does***

Checks whether the PDF contains XMP schema definitions for identifying the document, as required by the PDF/A specification.

### 3.2.7.24. Check if date is present in document XMP metadata

***Belongs to***

- **Category:** Metadata
- **Type:** Checks

***What it does***

Checks for the date in the XMP metadata of a PDF.

***About XMP metadata***

XMP metadata is descriptive information about the file embedded in the PDF, for example the name of the author, keywords, copyright information... XMP refers to labeling technology that is used, i.e. Adobe's Extensible Metadata Platform. You can view the XMP metadata in a file's Document Properties in Acrobat (Click the **Additional Metadata** button, then select **Advanced**).

***Related Actions***

- [Check file identifiers in document XMP metadata](#) on page 322

- [Check presence of document metadata stream](#) on page 364

### 3.2.7.25. Check if document is produced by PDFWriter

#### ***Belongs to***

- **Category:** Metadata
- **Type:** Checks

#### ***What it does***

Checks if a PDF was produced by PDFWriter.

PDFs created with PDFWriter are not suitable for high-end printing.

### 3.2.7.26. Check if document metadata is consistent

#### ***Belongs to***

- **Category:** Metadata
- **Type:** Checks

#### ***What it does***

Checks if metadata that is present in different metadata locations is identical.

#### ***How it works***

There are two metadata locations in a PDF file:

- The **info dictionary** contains information about the file, such as the title, the author, the creation date ... and is visible through the file's Document properties. It's not in XML format.
- The **XMP metadata stream** also contains information about the file, but this information is represented as XMP metadata - XMP referring to Adobe's labeling technology **E**xtensible **M**etadata **P**latform. All information in the info dictionary is also represented in the XMP metadata stream dictionary, in the form of XMP properties.

Inconsistencies may occur when only one of the metadata locations has been updated.

#### ***Extra checks***

Optionally you can check if metadata in one location (selected from the list) is also present in the other location; if all metadata should be present in both locations, select **any metadata location**.

If multiple creators are not considered an inconsistency, select the **Allow multiple creators** checkbox.

#### ***Related Actions***

- [Make document metadata consistent](#) on page 188

- [Select if document metadata is inconsistent](#) on page 469

### 3.2.7.27. Check if document XMP metadata types are valid

#### ***Belongs to***

- **Category:** Metadata
- **Type:** Checks

#### ***What it does***

Checks if metadata streams defined in a PDF conform to the XMP schema.

#### ***About XMP metadata streams***

There are two metadata locations in a PDF file:

- The **info dictionary** contains information about the file, such as the title, the author, the creation date ... and is visible through the file's Document properties. It's not in XML format.
- The **XMP metadata stream** also contains information about the file, but this information is represented as XMP metadata - XMP referring to Adobe's labeling technology **E**xtensible **M**etadata **P**latform. All information in the info dictionary is also represented in the XMP metadata stream dictionary, in the form of XMP properties.

Inconsistencies may occur when only one of the metadata locations has been updated.

#### ***Related Actions***

- [Check if XMP metadata is well-formed](#) on page 361
- [Make document metadata consistent](#) on page 188
- [Select if document metadata is inconsistent](#) on page 469

### 3.2.7.28. Check if document XMP name space uses correct prefix

#### ***Belongs to***

- **Category:** Metadata
- **Type:** Checks

#### ***What it does***

The XMP metadata standard (used for labeling metadata in PDFs) defines namespaces for defined sets of core properties. This Action checks if the correct prefixes are used.

**Related Actions**

[Set correct document XMP name spaces](#) on page 194

### 3.2.7.29. Check if metadata streams do not have a compression filter

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks if metadata streams do not have a compression filter.

A compression filter is used to reduce the file size of a PDF. If no compression filter has been used, you may want to add one; if a compression filter has been used, you may want to check which one (e.g. to see if it complies with certain specifications).

**Related Actions**

[Check presence of document metadata stream](#) on page 364

### 3.2.7.30. Check if URLs in Link Annotations are valid

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks the validity of the hyperlinks in annotations with hyperlinks to web pages, i.e. checks if the target web page exists.

If you're using a proxy server, you should enter the proxy server address and port, and your user name and password. Otherwise, the check cannot be performed.

**Related Actions**

[Check external hyperlink annotations](#) on page 355

### 3.2.7.31. Check if XMP metadata is well-formed

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks if the XMP metadata streams in the PDF conform to the XMP specifications.  
If the XMP metadata is not well-formed, the document cannot be made PDF/X-4 compliant.



**Tip:** PitStop provides an Action to solve these problems: [Fix non well-formed XMP metadata](#) on page 290.

**About XMP metadata**

XMP metadata is descriptive information about the file embedded in the PDF, for example the name of the author, keywords, copyright information... XMP refers to labeling technology that is used, i.e. Adobe's Extensible Metadata Platform. You can view the XMP metadata in a file's Document Properties in Acrobat (Click the Additional Metadata button, then select Advanced).

### 3.2.7.32. Check marked content

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Logs content that has been identified with a marked content tag in a PDF.

Marked content is content tagged with special messages so that the application that opens it can read it in a particular way.

**Related Actions**

[Remove marked content](#) on page 191

### 3.2.7.33. Check PDF/Acrobat compatibility

**Belongs to**

- **Category:** Metadata, PDF 2.0
- **Type:** Checks

**What it does**

Allows you to check if a particular Acrobat or PDF version is used in a PDF document.

You can for example check if the Acrobat version is equal to or higher/lower than a particular version.



**Note:** As of PitStop 2020, you can check a PDF 1.7 by its extension level (Adobe Extension 1, 3, 5, 6 or 8). For more details concerning the extensions, refer to [https://www.adobe.com/devnet/pdf/pdf\\_reference.html](https://www.adobe.com/devnet/pdf/pdf_reference.html).

Note that the PDF version can be specified in 3 different locations (in the PDF header, in the document catalog and in the Adobe extension). If the versions are different, PitStop uses the

version from the Adobe extension. If there is no version specified in the Adobe extension, the header version or catalog version are considered, and the highest version number is taken.

### 3.2.7.34. Check PDF/A version key

***Belongs to***

- **Category:** Metadata
- **Type:** Checks

***What it does***

Checks the PDF/A version key.

***Related Actions***

- [Change PDF/A version key](#) on page 183
- [Remove PDF/A version key](#) on page 193

### 3.2.7.35. Check PDF/X version key

***Belongs to***

- **Category:** Metadata
- **Type:** Checks

***What it does***

Checks the PDF/X version key.

***Related Actions***

- [Change PDF/X version key](#) on page 184
- [Remove PDF/X version key](#) on page 193

### 3.2.7.36. Check pdfxid prefix in XMP name space

***Belongs to***

- **Category:** Metadata
- **Type:** Checks

***What it does***

Checks if the pdfxid prefix in the XMP namespace is correct.

The namespace prefix is required for PDF/A.

### 3.2.7.37. Check presence of document metadata stream

***Belongs to***

- **Category:** Metadata
- **Type:** Checks

***What it does***

Checks if the PDF contains metadata, i.e. descriptive information about the file, such as the title, the author, the creation date ...

***About XMP metadata***

XMP metadata is descriptive information about the file embedded in the PDF, for example the name of the author, keywords, copyright information... XMP refers to labeling technology that is used, i.e. Adobe's Extensible Metadata Platform. You can view the XMP metadata in a file's Document Properties in Acrobat (Click the **Additional Metadata** button, then select **Advanced**).

***Related Actions***

- [Check if date is present in document XMP metadata](#) on page 358
- [Check file identifiers in document XMP metadata](#) on page 322

### 3.2.7.38. Check thin objects

***Belongs to***

- **Category:** Line Art
- **Type:** Checks
- **Since version:** 2019

***What it does***

Allows you to check if the document contains objects with a stroke smaller than a set threshold.

If desired, you can indicate that for objects of which stroke and fill have the same color, the width of the fill and stroke should be added together.

This Action is typically used to check for thin white lines that may be visible on small screens (e.g. on an iPad screen).

***Related Actions***

[Select thin objects](#) on page 462

### 3.2.7.39. Check thumbnails

***Belongs to***

- **Category:** Metadata



- **Type:** Checks

**What it does**

Checks if the PDF contains thumbnails.

### 3.2.7.40. Check Trapnets for PDF/X

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks whether trapnet information in a PDF is compliant with PDF/X-1, PDF/X-3 or PDF/X-6 standards.

**About trapping**

In printing, even the slightest misregistration of the plates can cause gaps or color shifts between colored objects to appear. **Trapping** is a technique that compensates for misregistration by expanding adjacent colored objects so that they overlap. Trapping can be performed by the source application, in the PDF, by dedicated trapping tools, or during the RIP-process.

If the traps in a document were added before the PDF document was created, they are included in the PDF file as **trap networks**. A page may have more than one trap network, e.g. one for each intended output device, but all the different trap networks are stored in the same trap network, also called **trapnet annotation**. When printed, the trapnet annotation provides all the required trapping information for the page.

**About the PDF/X Requirements for trapping**

When trapnet annotations are found in the document, **PDF/X-1a:2001** requires that:

- The **trapped flag** in the document is set to either True or False (Unknown is not allowed).
  - If the trapped flag is **False**, the document does not contain trapnet annotations.
  - If the trapped flag is **True**, the document is completely trapped, and the document contains trapnet annotations.
- **Font substitution** is not used.
- The **CMYK** color space is used.

When trapnet annotations are found in the document, **PDF/X-3:2002** requires that:

- Trapping occurs only when all the **fonts in the document are embedded**.
- The **CMYK** color space is used.

In **PDF/X-6** and **PDF/X-6p**, trapnet annotations are not allowed.

**Related Actions**

- [Check document trapped flag](#) on page 354
- [Select by trapped flag](#) on page 466

- [Change trapped flag](#) on page 185

### 3.2.7.41. Check unused destinations

***Belongs to***

- **Category:** Metadata
- **Type:** Checks

***What it does***

Destinations identify locations or views in a PDF you can point to using bookmarks or links. As destinations increase the file size, you may want to check for and remove destinations that are not used.

This Action allows you to **verify** if there are any unused destinations in a PDF document.

The Action [Remove unused destinations](#) allows you to **remove** them from the PDF.

### 3.2.7.42. Check version compatibility with PDF/A-2

***Belongs to***

- **Category:** PDF 2.0, Metadata
- **Type:** Checks
- **New since:** PitStop 2022

***What it does***

Checks if the version of the PDF complies with PDF/A-2.

Note that the PDF version can be specified in 3 different locations (in the PDF header, in the document catalog and in the Adobe extension). PDF/A-2 requires that both the version specified in the header and the version specified in the document catalog are 1.x (so the version should be lower than 2.0).

***Related Actions***

- [Fix version compatibility with PDF/A-2](#) on page 186

### 3.2.7.43. Check version compatibility with PDF/X-6

***Belongs to***

- **Category:** PDF 2.0, Metadata
- **Type:** Checks
- **New since:** PitStop 2022

***What it does***

Checks if the version of the PDF complies with PDF/X-6 or PDF/X-6p.

Note that the PDF version can be specified in 3 different locations (in the PDF header, in the document catalog and in the Adobe extension). PDF/X-6 and PDF/X-6p require that both the version specified in the header and the version specified in the document catalog are 2.0 (or higher).

#### **Related Actions**

- [Fix version compatibility with PDF/X](#)

## 3.2.8. Packaging

### 3.2.8.1. Check barcode

#### **Belongs to**

- **Category:** Packaging
- **Type:** Checks
- **Since Version:** 2019

#### **What it does**

Checks the presence of barcodes in your document. You can either log a message for each barcode found, or a message in case no barcodes were found in the document.

The Action also works on user selections.

#### **Properties Overview**

| Fields                     | Meaning                                                                                                                                                                                                                  |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Barcode tab</b>         | Select the barcode(s) you want to check for.                                                                                                                                                                             |
| Select all                 | Select this checkbox to check for all barcode types in the list.<br>Clear this checkbox to deselect all types and manually click the ones you want to check for.                                                         |
| Value                      | Select this checkbox to check for a particular value.                                                                                                                                                                    |
| <b>Options tab</b>         | Select one or more options. You can use variables as required.<br> <b>Note:</b> Extra options (checkboxes) will slow down processing. |
| Scan resolution (ppi)      | Enter the scan resolution. The default is set to 300 dpi. Note that a higher resolution will slow down processing.                                                                                                       |
| Scan for multiple barcodes | When selected, the document is checked until all barcodes are found. Note that this slows down processing! If you know that there's only one barcode in the document, we recommend clearing this checkbox.               |
| Scan for rotated barcodes  | When selected, PitStop also searches for rotated barcodes.                                                                                                                                                               |
| Enhanced scan              | When selected, PitStop searches for very small barcodes too.                                                                                                                                                             |

**Note:**

- If the option **Scan for multiple barcodes** (on the Options tab) is enabled, EAN and UPC barcodes may be reported twice per barcode. This is a known issue.
- MaxiCode barcodes cannot be detected when they are rotated.

**Related Actions**

- [Check Esko barcode value](#) on page 368
- [Check Esko barcode type](#) on page 368
- [Select Esko barcode type](#) on page 478
- [Add barcode](#) on page 68

### 3.2.8.2. Check Esko barcode type

**Belongs to**

- **Category:** Packaging
- **Type:** Checks
- **Since Version:** 13 update 2

**What it does**

Checks if the Esko barcode matches a particular type (chosen from a list).

Both the new ArtPro Plus barcodes as well as the old XMP ones are supported.

As of PitStop 25.07, the EAN-13 Iceland Foods barcode is also in the list.

**Related Actions**

- [Check Esko barcode value](#) on page 368
- [Select Esko barcode](#) on page 478
- [Select Esko barcode type](#) on page 478
- [Add barcode](#) on page 68

### 3.2.8.3. Check Esko barcode value

**Belongs to**

- **Category:** Packaging
- **Type:** Checks
- **Since Version:** 13 update 2

**What it does**

Checks if the Esko barcode contains or equals a particular string. You can take into account the case of the string or use regular expressions or Smart Preflight variables as required. The actual value of the Esko barcode is mentioned in the log, in the Navigator and in the Preflight Report, for example: Esko barcode value "1234567890128" does not contain "222".

Both the new ArtPro Plus barcodes as well as the old XMP ones are supported.

As of PitStop 25.07, the EAN-13 Iceland Foods barcode is also in the list.



**Note:** The metadata attached to the barcode is checked. If the metadata is absent, the Action won't be able to check the barcode.

#### **Related Actions**

- [Check Esko barcode type](#) on page 368
- [Select Esko barcode](#) on page 478
- [Select Esko barcode type](#) on page 478
- [Add barcode](#) on page 68

### 3.2.8.4. Check processing steps - ISO 19593-1

#### **Belongs to**

- **Application:** PitStop Pro
- **Category:** Packaging
- **Type:** Checks
- **Since Version:** 13 update 2

#### **What it does**

Allows you to check if particular processing steps metadata is present in a file. Processing steps metadata is defined by ISO standard 19593-1.

Note that you must select a processing steps group; a processing steps type is optional.

Supported groups:

- Structural
- Dimensions
- Braille
- Legend
- Positions
- White
- Varnish

You can as well define a custom group and/or custom step types.

#### **Related Actions**

- [Select layers by processing steps - ISO 19593-1](#) on page 479
- [Change layer processing steps - ISO 19593-1](#) on page 197
- [Remove processing steps - ISO 19593-1](#) on page 277

### 3.2.9. Page

### 3.2.9.1. Check for annotations inside art box or trim box

**Belongs to**

- **Category:** Page
- **Type:** Checks

**What it does**

Searches a PDF for any annotations that appear inside the art box or trim box - an undesirable location for printing.

### 3.2.9.2. Check for differences in page boxes

**Belongs to**

- **Category:** Page
- **Type:** Checks

**What it does**

Allows you to compare a certain page box's size with that of another page box.



---

**Note:** As of PitStop 2021, you can use variables to specify the difference in size.

---

**Example**

Check if the media box is x inch wider and y inch higher than the trim box.

### 3.2.9.3. Check for empty pages

**Belongs to**

- **Category:** Page
- **Type:** Checks

**What it does**

Checks if the PDF has pages without content.

Additionally, you can specify that elements outside of a specific page box should be ignored.

It's also possible to ignore visually empty pages (with paper-white and invisible (fully transparent) objects on it).

**Related Actions**

- [Remove empty page](#) on page 215

- [Select empty pages](#) on page 482

### 3.2.9.4. Check for pre-separated pages

***Belongs to***

- **Category:** Color; Page
- **Type:** Checks

***What it does***

Checks if the PDF document contains any pages that already have been separated.

A pre-separated PDF contains pages that have been separated into their CMYK components. In offset printing each of these colors is printed with a separate plate. This means that each page in a PDF document is separated into its four constituent colors: cyan, magenta, yellow and black. For example, a pre-separated PDF file for a two-page CMYK print job, results in a PDF file with 8 pages.

This separation process is usually carried out by the RIP, and not in the source PDF document.

### 3.2.9.5. Check for solids and tints

***Belongs to***

- **Category:** Color; Page
- **Type:** Checks

***What it does***


Checks if the PDF document contains any colors that have a tint below or above a set threshold.

The threshold is set in the **Effective solidness threshold** field. The default is 100%.

It's also possible to define a threshold for considering a colorant as a tint, by selecting the **Ignore tints that cover a surface area below** checkbox and entering a value of your choice (in ppm). You can take into account the printable surface area, the surface area of the own channel, or the surface area of all channels. This option is useful to avoid that colorants on pages with for example only 1 non-solid pixel in the rendered page would be marked as a tint.

***Example***

In this example, the threshold was set to 90%.

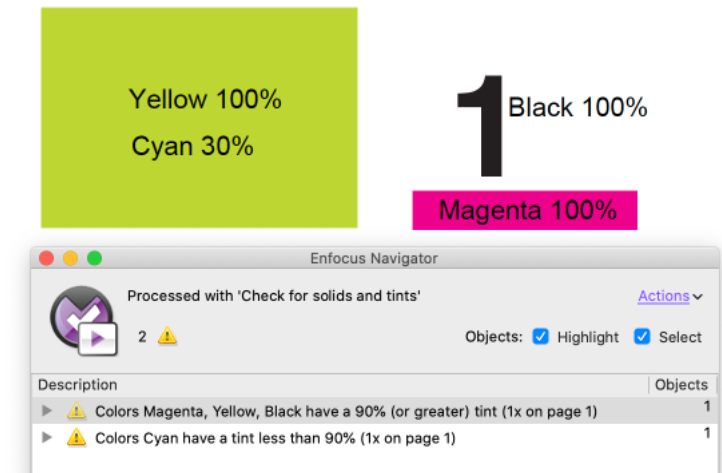

### 3.2.9.6. Check for sub-page navigation support

#### ***Belongs to***

- **Category:** Page
- **Type:** Checks

#### ***What it does***

Checks if the PDF supports sub-page navigation, i.e. the possibility to navigate from one layer to another layer on the same page.

Sub-page navigation support is not desired in documents for print.

#### ***About page and sub-page navigation***

Page navigation allows you to navigate from one **page** to another, whereas sub-page navigation allows you to navigate from **one layer to another layer** on the same page.

#### ***Example***

Suppose you have a single page PDF showing the slides of a presentation. Each slide is on a different layer. When the user presses the forward arrow, the next slide (on the same page, but on another layer) is shown and the previous one (on another layer) is hidden.

### 3.2.9.7. Check if blending color space is defined

#### ***Belongs to***

- **Category:** Color; Page
- **Type:** Checks

#### ***What it does***

Checks if the page blending color space has been defined in the PDF document.



You must set the required blending color space and the required luminosity softmask blending color.

#### **About blending color spaces**

When Adobe Acrobat interprets transparent objects and attempts to create a preview of the flattened artwork, it needs to do so using a single color space for all the items involved in the transparency group. This color space is called the **blending color space**.

The **page blending color space** is the blending color space assigned to a page; it is used when individual artwork does not have a blending color space.

The blending color space for soft masks (masks with soft transitions) is called the **luminosity softmask blending color space**. It is usually gray.

#### **Related Actions**

- [Change blending color space](#) on page 103
- [Select by blending color space](#) on page 424

### 3.2.9.8. Check if object is close to the page edge

#### **Belongs to**

- **Category:** Page
- **Type:** Checks

#### **What it does**

Checks whether the selected object is situated close to the page edge and might need to be enlarged.

You must specify the required distance to the trim box and the distance into the bleed. Optionally, you can choose to treat subpaths of compound paths individually. In that case, each of the subpaths will be checked separately.

See also:

- [Select objects close to the page edge](#) on page 483
- [Change objects that are close to the page edge](#) on page 205

### 3.2.9.9. Check if object is completely outside page box

#### **Belongs to**

- **Category:** Page; Position and size
- **Type:** Checks

#### **What it does**

Searches for (and optionally selects) objects that lie completely outside the selected page box. Depending on your workflow, you may want to remove these objects before printing.

### 3.2.9.10. Check if page box is defined

**Belongs to**

- **Category:** Page
- **Type:** Checks

**What it does**

Checks if the selected page box (trim, crop, art or bleed box) has been defined in the PDF.

### 3.2.9.11. Check if page box is too large

**Belongs to**

- **Category:** Page
- **Type:** Checks

**What it does**

Checks if the selected page box (art, bleed, crop, or trim box) lies inside the media box.

### 3.2.9.12. Check if page scaling factor is used

**Belongs to**

- **Category:** Page; Position and size
- **Type:** Checks

**What it does**

Checks whether the PDF uses a page scaling factor. If so, you can optionally check if a certain page scaling factor applies.

A page with scaling factor 2 will be displayed and printed twice the original size (= scaling factor 1). Page scaling has been introduced in PDF 1.6 and allows you to extend the maximum page size beyond 200 by 200 inch.

**Related Actions**

- [Apply page scaling factor](#) on page 201
- [Remove page scaling factor](#) on page 216

### 3.2.9.13. Check if trim marks match page box

**Belongs to**

- **Category:** Page
- **Type:** Checks

## What it does

Checks if trim marks found in the PDF match the trim box and/or the bleed marks match the bleed box.

## How to proceed

1. Indicate which marks you want to check: trim marks, bleed marks or both.
2. To help PitStop detect the trim marks, specify the potential color of the marks, by choosing one or more of the following:

- 400% CMYK
- Separation All (registration)
- 100% black
- A specific color

In case of a specific color, do one of the following:

- Select a color space from the list and use the sliders to select the appropriate color.
- Click  and select the appropriate color.
- Select an object with the Enfocus Selection tool and click  to grab the fill or stroke color from the selection.

3. If desired, specify how much the marks are allowed to deviate from the expected position:
  - The unit is the unit set in the PitStop Preferences (Units & Guides category), for example: cm or pt
  - The maximum value is 2.7 pt; if you enter a higher value, it is automatically reset to 2.7 pt or an equivalent value, if you're using a different unit.

## Example

In the image below, the red marks are detected as trim marks, although the position of the vertical marks in the top and bottom left corner is not as expected (they are not exactly on one vertical line). In this case, the deviation (= difference between the position of both marks) is less than the specified threshold.



**Remark**

A filled path with 3 lines is accepted as a trim mark if:

- The color is as specified in the attributes of this Action.
- It has no dash pattern.
- The 4 points of the 3 lines are a rectangle.
- The path is closed.
- The width is between 0.1 and 2 pt.
- The length is between 8 and 40 pt.

**Related Actions**

- [Use trim marks to set page box](#) on page 224
- [Select trim marks](#) on page 488

### 3.2.9.14. Check media box origin

**Belongs to**

- **Category:** Page; Position and size
- **Type:** Checks

**What it does**

Checks whether the media box is set to coordinates 0,0.

The media box is the largest page box and defines the size of the physical medium on which the page will be printed or displayed. Some applications don't give the lower left 0,0 coordinates, but for example 100,100, which will cause problems when preflighting the file.

**Related Actions**

- [Select by media box origin](#) on page 480
- [Move media box to 0.0](#) on page 211

### 3.2.9.15. Check Mixing Hints in Output Intent

**Belongs to**

- **Category:** PDF 2.0
- **Type:** Checks
- **New since:** PitStop 2022

**What it does**

Checks if the document contains an Output Intent on document or page level that contains the Mixing Hints dictionary. Note that only the presence of the dictionary, not the contents is checked.

A Mixing Hints dictionary provides information about how spot colors interact with each other. That information may be used in blending calculations when the actual spot colors are not available on the target device. As of PDF 2.0, a Mixing Hints dictionary is allowed in an Output intent dictionary for the complete PDF.

### 3.2.9.16. Check number of pages

***Belongs to***

- **Category:** Page;Doc
- **Type:** Checks

***What it does***

Checks the number of pages in a PDF.

You can for example check if there are less/more than x page(s), or if the PDF contains an odd/even number of pages ...

### 3.2.9.17. Check page bleed box

***Belongs to***

- **Category:** Page
- **Type:** Checks

***What it does***

Checks and compares the size of the bleed box with the size of the trim or crop box.

As of PitStop 2022, you can indicate which side(s) should be checked (left, right, top or bottom). Also, you can enable **Mirror according to page binding**, a new option that, when selected, checks the inner and/or outer side instead of the left and/or the right side of the page. This is useful in case of books, where you may want to ignore the inner edge (which does not require bleed).

### 3.2.9.18. Check page boxes consistency

***Belongs to***

- **Category:** Page
- **Type:** Checks

***What it does***

Checks if two different page boxes (if defined) have the same size and position.

You can either compare the trim and art box, or the trim and crop box.

### 3.2.9.19. Check page box layout

***Belongs to***

- **Category:** Page
- **Type:** Checks

**What it does**

Checks whether the page boxes comply with the selected layout (Press, Screen viewing or PDF/X layout).

The attributes depend on the chosen layout:

- **Press layout** (typically for print)

If you select this layout, the Action derives the correct media size from the first page box that is present in the document. The order in which is searched, is fixed: first the art box, then the trim, crop, bleed and finally the media box.

You can define the minimum distance required between the media and bleed box and between the bleed and trim box, and you should choose one of the following options:

- **Crop box must equal trim box**, or
- **No crop box must be defined or the crop box equals the media box.** This means that it is OK if the crop box is not defined, but if it is defined, it should have the same size and position as the media box.
- **Screen viewing**

If you select this layout, the Action checks if the page is defined solely by the crop box, which should have the same size as the media box. No other page boxes are allowed.
- **PDF/X layout**

If you select this layout, the Action checks if the page box layout is compliant with the selected PDF/X version.

  - If you have chosen PDF/X-1a:2003 or PDF/X-3:2003, the art box or trim box shall not extend beyond the boundaries of the bleed box and the crop box.
  - PDF/X-4 allows either a trim or an art box but forbids having both.
  - PDF/X-6 allows an art box, next to the mandatory trim box.

**Related Actions**

[Change page box layout](#) on page 206

## 3.2.9.20. Check page format

**Belongs to**

- **Category:** Page
- **Type:** Checks

**What it does**

Ensures that the media box is defined as being the width or height of a multiple of a particular measurement. This allows you to check whether the page size of your document fits your column and/or row layout.

**Example**

To set all your page boxes to a multiple of 22cm wide

1. Select **A multiple of columns**.

2. To have pages that are always multiples of 22 cm:
  - a. Enter 22 cm as column width.
  - b. Enter 0 as column spacing.

**Related Actions**

[Change page format](#) on page 207

### 3.2.9.21. Check page orientation

**Belongs to**

- **Category:** Page
- **Type:** Checks

**What it does**

Checks if all the pages in a PDF have a given orientation (portrait, landscape, all the same orientation or the most used orientation).

The orientation is based on the selected page box.

**Related Actions**

- [Change page orientation](#) on page 208
- [Select by page orientation](#) on page 481

### 3.2.9.22. Check page rotation angle

**Belongs to**

- **Category:** Page; Position and size
- **Type:** Checks

**What it does**

Checks whether the page rotation angle is equal to a specific value.

You can check for a rotation angle of -90°, 0°, 90°, or 180° (clockwise).

**Related Actions**

- [Select by page rotation angle](#) on page 481
- [Apply page rotation](#) on page 200

### 3.2.9.23. Check page safe type zone

**Belongs to**

- **Category:** Page
- **Type:** Checks

### What it does

Checks for text or objects that overlap or come close to an edge limit in a PDF.

The safe type zone is the area where you must not place any text or objects, unless these objects are intended as bleed.


### How to proceed

1. Define the safe type zone as one of the page boxes.
2. Optionally define values for the left, right, top and/or bottom margin.
3. To make sure that even and odd pages are mirrored, select **Mirror horizontal margins**. This is recommended if the left and right margin have a different size.

Figure 1: Mirror horizontal margins illustrated

**A = Mirror horizontal margins** is not selected. Margins of odd and even pages are the same; the left margin is larger than the right margin.

**B = Mirror horizontal margins** is selected. Odd and even pages are mirrored; the outer margin is smaller than the inner margin.

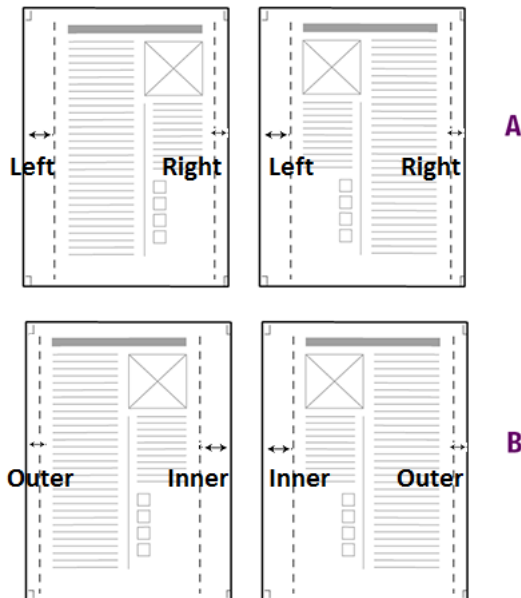

4. To only check for text in the page safe type zone, select the **Restrict this check to text** checkbox.

## 3.2.9.24. Check page size

### Belongs to

- **Category:** Page
- **Type:** Checks

### What it does

Allows you to check if the size or position of a specific page box matches the desired size or position.



**How to proceed**

1. Do one of the following:
  - To check the coordinates of the selected page box, select **Rectangle**.
  - To check the height and width of the selected page box, select **Size**.
2. Select the page box of which you want to check the size or position.
3. Enter the required values (coordinates or width and height).
4. In the **Precision** field, indicate how much the actual size or position is allowed to deviate from the entered values.

A precision of 0 means that no deviation is allowed: the size or position needs to match exactly the entered values. For example, if you are checking for a height of 10 inch, even a very small difference (e.g. a page box height of 10.001 inch) will result in an error or warning.

5. Disable **Ignore page orientation** as required.

When enabled (default setting), the smallest value is considered the width and the largest value is considered the height. When disabled, the page orientation is taken into account, meaning that the first value is considered the width and the second the height.



**Note:** Action Lists upgraded from older versions (before this option was introduced) will have **Ignore page orientation** disabled. There's one exception: in Action Lists upgraded from version 17.1 to 2018, the checkbox will be *enabled*, and this may yield unexpected results. We advise reviewing such Action Lists before using them.

**Related Actions**

[Select by page size](#) on page 481

### 3.2.9.25. Check pages have same size

**Belongs to**

- **Category:** Page
- **Type:** Checks

**What it does**

Checks whether all pages in a PDF have the same size. The page size is based on the selected page box.

## 3.2.10. PDF 2.0

---

### 3.2.10.1. Check black point compensation

**Belongs to**

- **Category:** PDF 2.0
- **Type:** Checks


- **New since:** PitStop 2022

**What it does**

Checks if either black point compensation is not present or has a particular value (On, Off, or Default).

The black point compensation option is a feature of Adobe Photoshop to address color conversion problems caused by differences between the darkest level of black achievable on one device and the darkest level of black achievable on another.

Note that the black point compensation attribute of a selected object can be found in the Enfocus Inspector, on the **Prepress - General** tab. Possible values are On, Off or Default. When no blackpoint compensation is set (or when multiple objects with different black point compensation values are selected), you'll see a dash.

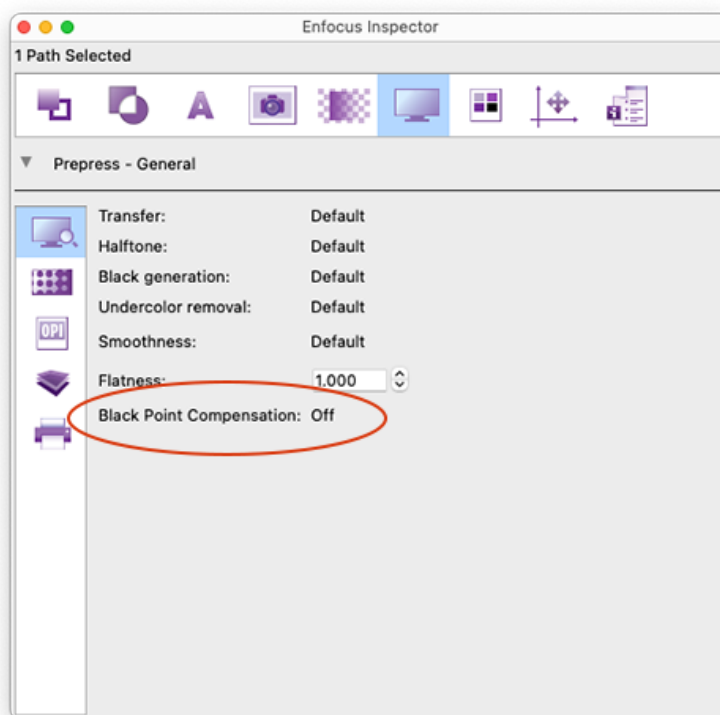**Related Actions**

- [Remove black point compensation](#) on page 232
- [Select black point compensation](#) on page 489
- [Set black point compensation](#) on page 235

### 3.2.10.2. Check document information dictionary compliance

**Belongs to**

- **Category:** Metadata; PDF 2.0
- **Type:** Checks

- **Since:** 2022

**What it does**

Checks if the information dictionary is compliant with the chosen PDF version (PDF/X-6 or PDF 2.0).

For more information about the information dictionary, refer to [Change document information dictionary compliance](#) on page 181.

**Related Actions**

- [Change document information dictionary compliance](#) on page 181

### 3.2.10.3. Check document security

**Belongs to**

- **Category:** Metadata, PDF 2.0
- **Type:** Checks

**What it does**

Checks if a particular encryption was used to secure the PDF file.

Options:

- A PDF version (1.3 - 2.0)
- A combination of "none" and a PDF version (1.3 - 2.0)
- None
- None or Standard (= no custom security)
- Custom (enter a custom name in the text field)

### 3.2.10.4. Check DPart metadata

**Belongs to**

- **Category:** PDF 2.0
- **Type:** Checks
- **New since:** PitStop 2022

**What it does**

Checks if the document contains DPart metadata.

DPart (Document Part) metadata provides information about pages or parts of a PDF, allowing PDF processors to easily identify pages or page ranges that have particular properties.

This is a PDF 2.0 feature, hence this Action is typically used to check for PDF 2.0 features.

**Related Actions**

- [Remove DPart metadata](#) on page 232

### 3.2.10.5. Check enforced viewer preferences

**Belongs to**

- **Category:** PDF2.0
- **Type:** Checks
- **New since:** PitStop 2022

**What it does**

Checks if the Enforced key is used in the Viewer preferences.

Enforcing the viewer preferences is a PDF 2.0 feature, hence this Action is typically used to find (and remove) PDF 2.0 features.

**Related Actions**

- [Remove enforcements on viewer preferences](#) on page 233

### 3.2.10.6. Check file specification keys

**Belongs to**

- **Category:** General
- **Type:** Checks

**What it does**

Searches the PDF for file specification keys.

PDF streams are holders of large amounts of data, such as image pixels, page contents, embedded fonts, etc. In some instances, the streams do not contain the data inside the PDF but point to embedded or even external files. This Action will search for this type of links and check if they contain either the required file specification keys or the PDF 2.0 specific keys.

**Related Actions**

- [Check for file specifications](#) on page 330
- [Remove file specification from streams](#) on page 140
- [Remove file specification keys](#) on page 233

### 3.2.10.7. Check for associated files

**Belongs to**

- **Category:** General, PDF2.0
- **Type:** Checks
- **New since:** PitStop 2022

**What it does**

Checks if a PDF file contains associated files.

This is a PDF 2.0 feature. If you don't want PDF 2.0 features in your file, you can remove the associated files using a dedicated [Action](#).

For more information about associated files, refer to [PDF 2.0 Application Note 002: Associated Files](#).

**Related Actions**

- [Remove associated files](#) on page 140

### 3.2.10.8. Check halftone origin

**Belongs to**

- **Category:** PDF2.0
- **Type:** Checks
- **New since:** PitStop 2022

**What it does**

Logs either objects with or without default HTO (halftone) values, or with particular HTO values.

PDF 2.0 allows specifying the halftone origin, whereas in earlier versions, the halftone origin value had to be 'Default' (= not specified). If you want to remove the halftone origin from your document, you can use the [Set default halftone origin](#) Action.

**Related Actions**

- [Select by halftone origin](#) on page 490
- [Change halftone origin](#) on page 226
- [Set default halftone origin](#) on page 236

### 3.2.10.9. Check if Output Intents are used

**Belongs to**

- **Category:** PDF2.0
- **Type:** Checks
- **New since:** PitStop 2022

**What it does**

Checks for the presence of Output Intents, either on page or document level.

An Output Intent describes the color characteristics of the output devices on which the PDF document might be rendered. The Output Intent may be defined on document and/or page level.

This Action can be useful if you don't want PDF2.0 features in your PDFs. You can remove Output Intents using a dedicated [Action](#).

**Related Actions**

- [Remove Output Intents](#) on page 234

### 3.2.10.10. Check if Requirements are used

**Belongs to**

- **Category:** PDF2.0
- **Type:** Checks
- **New since:** PitStop 2022

**What it does**

Checks if the PDF contains a Requirements dictionary in the Catalog, or one or more specific Requirement types (in that case you can specify which types to check for).

The Requirements dictionary specifies the requirements the PDF file has. Until PDF 2.0, the only *possible* requirement was 'EnableJavaScripts'. As of PDF 2.0, a number of new types are allowed, such as 3D Markup, Attachment, Encryption etc.

**Related Actions**

- [Change Requirements](#)

### 3.2.10.11. Check inline image syntax

**Belongs to**

- **Category:** Image; PDF 2.0
- **Type:** Checks
- **New since:** PitStop 2022

**What it does**

Checks the presence and/or validity of the L key (or Length key) of a PDF.

The L key specifies the length of the image data and allows users to skip inline images if required.

Choices are:

- Inline images must not have the Length key
- Inline images must have the Length key
- Inline images must have a valid Length key.

Note that PDF 2.0 allows (but does not impose) the presence of an L key, but if it's present, it must match the actual inline image data length.

**Related Actions**

- [Select inline image syntax](#)

- [Change inline image syntax](#)

### 3.2.10.12. Check Mixing Hints in Output Intent

**Belongs to**

- **Category:** PDF 2.0
- **Type:** Checks
- **New since:** PitStop 2022

**What it does**

Checks if the document contains an Output Intent on document or page level that contains the Mixing Hints dictionary. Note that only the presence of the dictionary, not the contents is checked.

A Mixing Hints dictionary provides information about how spot colors interact with each other. That information may be used in blending calculations when the actual spot colors are not available on the target device. As of PDF 2.0, a Mixing Hints dictionary is allowed in an Output intent dictionary for the complete PDF.

### 3.2.10.13. Check PDF text string encoding

**Belongs to**

- **Category:** Document, PDF 2.0
- **Type:** Checks
- **New since:** PitStop 2022

**What it does**

Allows you to check if the text encoding of a PDF complies with a particular PDF version. Choices are compatibility with the current document version, with PDF 1.7 (PDFDocEncoding or UTF-16BE) or with PDF 2.0 (ASCII or UTF-8).

**Related Actions**

- [Change PDF text string encoding](#) on page 122

### 3.2.10.14. Check PDF/Acrobat compatibility

**Belongs to**

- **Category:** Metadata, PDF 2.0
- **Type:** Checks

**What it does**

Allows you to checks if a particular Acrobat or PDF version is used in a PDF document.

You can for example check if the Acrobat version is equal to or higher/lower than a particular version.



**Note:** As of PitStop 2020, you can check a PDF 1.7 by its extension level (Adobe Extension 1, 3, 5, 6 or 8). For more details concerning the extensions, refer to [https://www.adobe.com/devnet/pdf/pdf\\_reference.html](https://www.adobe.com/devnet/pdf/pdf_reference.html).

Note that the PDF version can be specified in 3 different locations (in the PDF header, in the document catalog and in the Adobe extension). If the versions are different, PitStop uses the version from the Adobe extension. If there is no version specified in the Adobe extension, the header version or catalog version are considered, and the highest version number is taken.

### 3.2.10.15. Check Spectral Data in Output Intent

***Belongs to***

- **Category:** PDF 2.0
- **Type:** Checks
- **New since:** PitStop 2022

***What it does***

Checks if the document contains an Output Intent on document or page level that contains the Spectral Data dictionary. Note that only the presence of the dictionary, not the contents is checked.

The Spectral Data dictionary provides information about the spectral characteristics and the opacity properties of spot colors.

### 3.2.10.16. Check version compatibility with PDF/X-6

***Belongs to***

- **Category:** PDF 2.0, Metadata
- **Type:** Checks
- **New since:** PitStop 2022

***What it does***

Checks if the version of the PDF complies with PDF/X-6 or PDF/X-6p.

Note that the PDF version can be specified in 3 different locations (in the PDF header, in the document catalog and in the Adobe extension). PDF/X-6 and PDF/X-6p require that both the version specified in the header and the version specified in the document catalog are 2.0 (or higher).

***Related Actions***

- [Fix version compatibility with PDF/X](#)

## 3.2.11. Position and size



### 3.2.11.1. Check if page scaling factor is used

**Belongs to**

- **Category:** Page; Position and size
- **Type:** Checks

**What it does**

Checks whether the PDF uses a page scaling factor. If so, you can optionally check if a certain page scaling factor applies.

A page with scaling factor 2 will be displayed and printed twice the original size (= scaling factor 1). Page scaling has been introduced in PDF 1.6 and allows you to extend the maximum page size beyond 200 by 200 inch.

**Related Actions**

- [Apply page scaling factor](#) on page 201
- [Remove page scaling factor](#) on page 216

### 3.2.11.2. Check for flipped objects

**Belongs to**

- **Category:** Position/Size
- **Type:** Checks

**What it does**

Searches a PDF for objects that have been flipped, normally using QuarkXpress. These can slow down the RIP.

**Related Actions**

- [Flip content](#) on page 211
- [Flip selection](#) on page 242

### 3.2.11.3. Check for rotated objects

**Belongs to**

- **Category:** Position/Size
- **Type:** Checks

**What it does**


Checks if a PDF contains rotated objects. Objects can have been rotated by page layout applications such as QuarkXPress, and this may cause problems for (older) RIPs.

You can specify the non-permitted level of rotation, for example 'objects must not be rotated more than 2 degrees', optionally combined with two extra options:

- **Interpret all angles as rotations between 0 and 45 degrees from vertical or horizontal:** This option allows you to find small rotations in either direction. To decide whether or not an object is rotated, the measured angle is converted to an interval [0,45] degrees compared to the nearest horizontal or vertical page edge. As a consequence, a rotation of 88 degrees is converted to 2 (90-88) and a rotation of 271 degrees is converted to 1 (271-270). When checking for rotations smaller than 4 degrees, both rotations will be logged, whereas for example a rotation of 290 degrees (converted to 20 => 290-270) won't be logged. See example 1 below.
- **Ignore objects that are aligned horizontally or vertically:** This option allows you to exclude objects that are aligned exactly 0, 90, 180 or 270 degrees to the page edges. Such objects (rotated a multiple of 90 degrees) do not look rotated, so in most cases they should not be logged. See example 2 below.


### Remark

Note that you can check the rotation angle of an object using the PitStop Inspector.

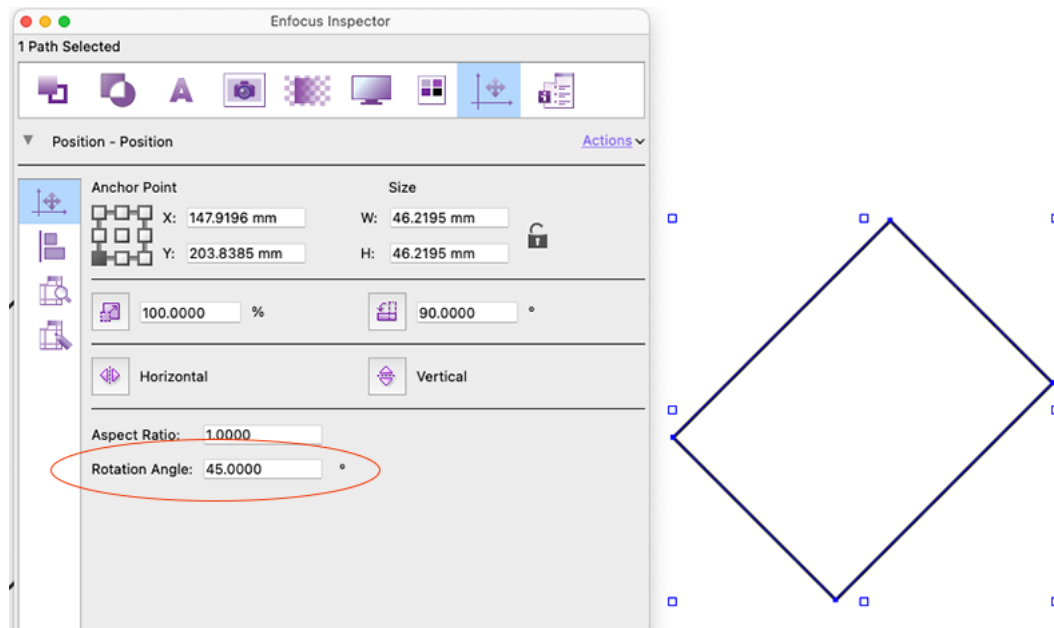


### Example 1

In the example below, all angles are interpreted as rotations between 0 and 45 degrees from vertical to horizontal (first option). The first three objects are logged because they have a rotation angle of less than 4 degrees from the nearest vertical or horizontal page edge (as explained higher).

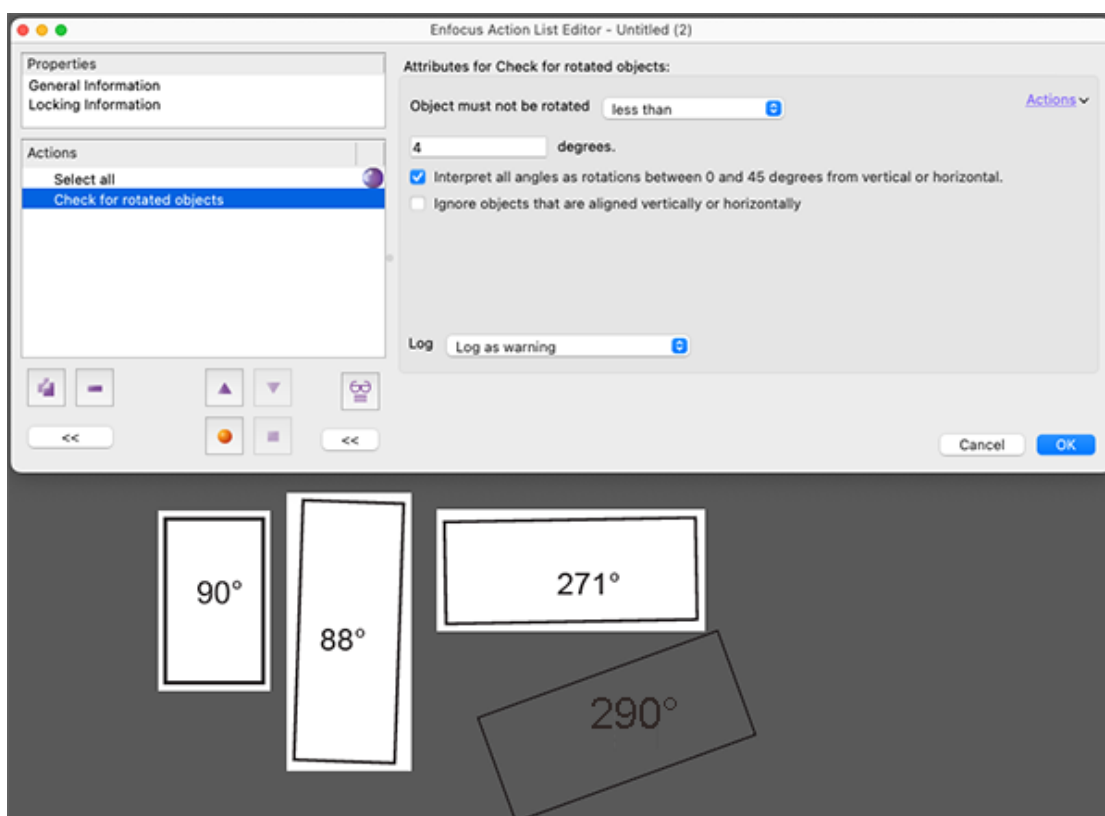

### Example 2

When the **Ignore objects that are aligned horizontally or vertically** checkbox is selected, the object that has a rotation angle of 90° is no longer logged.

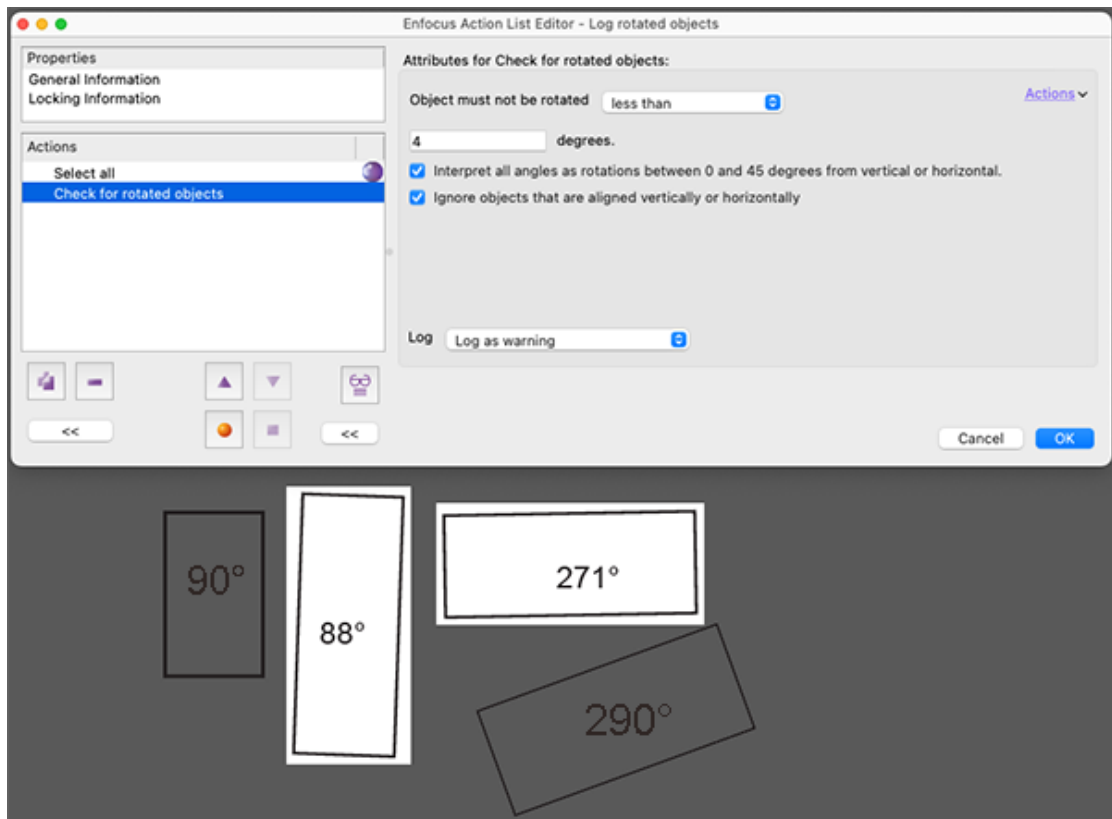

#### **Related Actions**

- [Rotate object](#) on page 247
- [Rotate content](#) on page 219
- [Rotate objects as group](#) on page 247
- [Select rotated objects](#) on page 497

### 3.2.11.4. Check for sheared objects

#### **Belongs to**

- **Category:** Position/Size
- **Type:** Checks

#### **What it does**

Checks if the PDF contains objects that have been disproportionally skewed or twisted in a page layout application such as QuarkXpress.

### 3.2.11.5. Check XY scaling difference

#### **Belongs to**

- **Category:** Position/Size

- **Type:** Checks

#### **What it does**

Checks the proportional scaling of a selected object.

If the XY scaling difference is 0%, the object is scaled proportionally, i.e. the height-to-width ratio is maintained. The object is enlarged or reduced both horizontally (X) and vertically (Y) with the same percentage.

In some cases, a small XY scaling difference is allowed, for example in line art (e.g. a rectangle in one color); in images this may cause distortions.

## 3.2.12. Prepress

---

### 3.2.12.1. Check bleed

#### **Belongs to**

- **Category:** Prepress
- **Type:** Checks
- **Since version:** 2020

#### **What it does**

Allows you to check if bleed is missing. You should indicate the areas to be checked, that is the region(s) between the left, right, top or bottom corner of the trim box and the bleed box.

You should also specify where the bleed should start (= distance from the inside of the trim box).

Optionally you can enable the **Mirror margins according to page binding** checkbox and set a **white threshold for white** (by moving the slider or entering a value (in %)). The threshold for white makes sure that a color that is "almost white" (and looks white when printed) is considered white.

New as of PitStop 2021 is the slider to increase or decrease the **detection sensitivity**. A high bleed edge sensitivity will report missing bleed for e.g. tapered objects (because of the small gaps between them). A lower sensitivity value won't. The default value (which usually gives the best results) is 30%.



**Note:** When upgrading from older PitStop versions, existing Check bleed Actions get a detection sensitivity of 100%, because that best matches the old behavior.

The last option (**Ignore missing bleed smaller than**) allows you to ignore extremely small areas.



#### **Note:**

- This is a page-based, pixel-based check: it doesn't look at individual objects, but it renders the whole page and checks the pixels.
- Text objects that cross the trim box but don't reach the bleed box do not trigger bleed errors.


**Important remark:** The document must have a *valid trim and bleed box*. This is required for PitStop to know where the bleed should start and how big it should be.

**Example**

Example file with page boxes (media, bleed, trim box) shown:



When 'Highlight' is enabled in the Enfocus Navigator, the white areas show where bleed is missing:

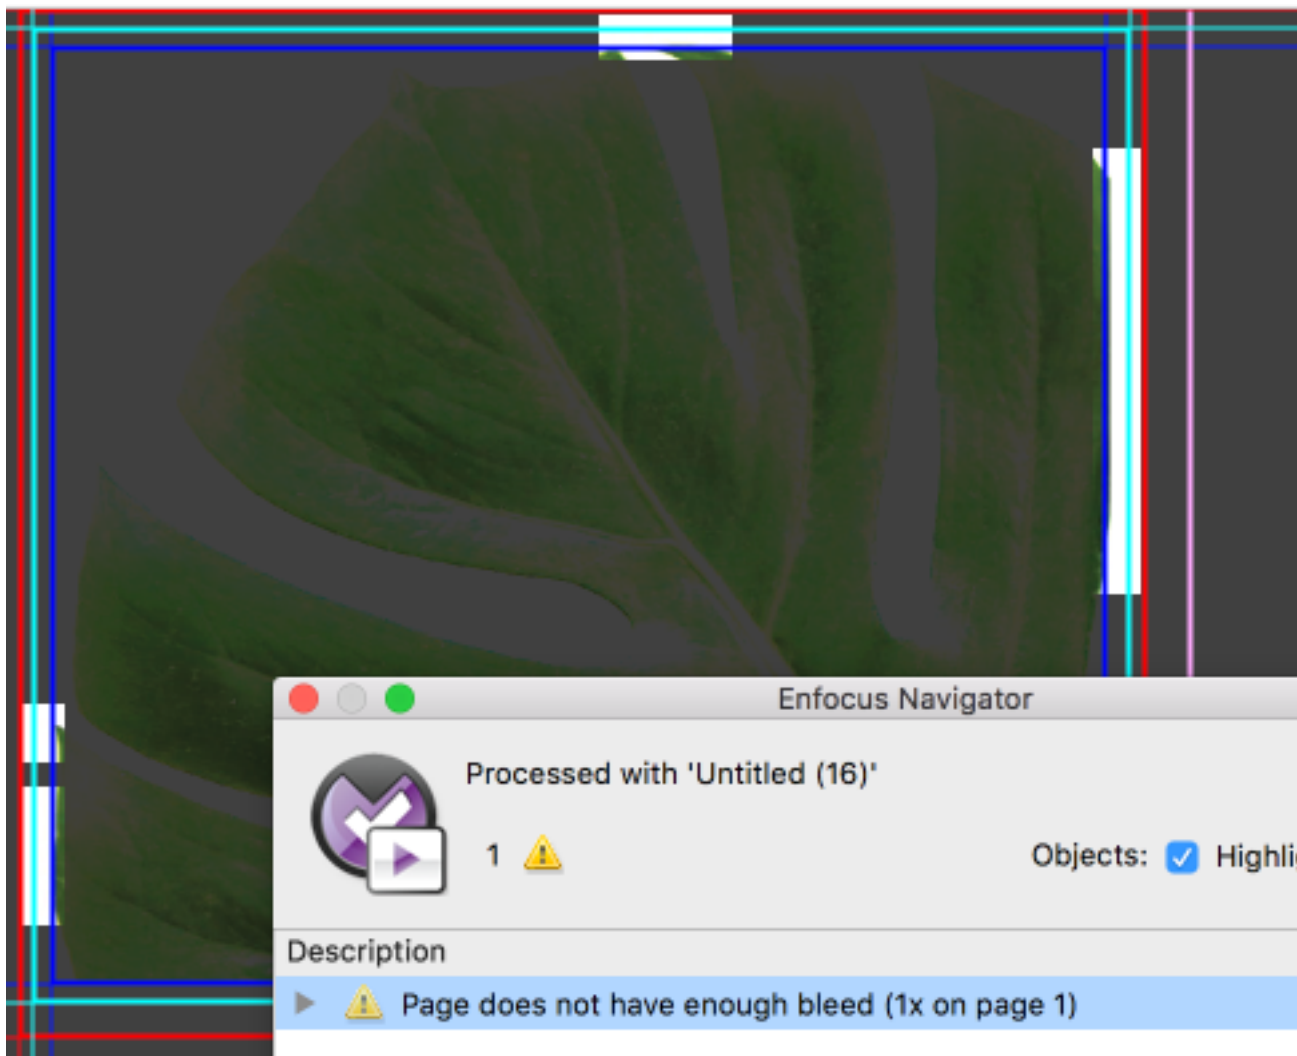

### **Remark about the corners**

By default, corners are checked for bleed if one of the touching sides is being checked. For example, if only the left side of the page should be checked, the upper and bottom left corner of the page will also be included in the bleed check.

There is one exception: if the Action is configured to NOT check the *inner* sides and the check depends on page binding (**Mirror margins according to page binding** selected), the inner corners (the bleed areas of the top and bottom that extend into the inner side) are NOT checked. This is not needed, because in that case, the corners are cut off anyway, so there's no need to check them.

### **Example: Checking bleed on a saddle-stitched (bound) book**

If you only need to have bleed on the outer edges of your document:

1. Enable **Mirror margins according to page binding**. This changes the options left/right to inner/outer.

2. Disable the "Inner" option so the check will not include the binding edge. Note that it will depend on the page binding setting of the document and page index of the checked page if the inner edge means the 'left' or 'right' edge (for that page).

**Attributes for Check bleed:**

Check bleed between these trim box edges and the bleed box:

☐ Inner

☒ Outer

☒ Top

☒ Bottom

---

Bleed must start at this distance from the inside of the trim box:


Inner

Outer

Top

Bottom

☒ Mirror margins according to page binding.



#### Related Actions

- [Check bleed around contour](#) on page 297
- [Check bleed contours](#) on page 300
- [Add bleed](#) on page 255
- [Add bleed around contour](#) on page 258

### 3.2.12.2. Check bleed around contour

#### Belongs to

- **Category:** Prepress
- **Type:** Checks
- **Since version:** 2021

#### What it does

Allows you to check if bleed is missing around a contour (typically a dieline or a cut line).

Note that this Action only works on *selected* line art that is not filled. The contour must be closed and it must be a compound path of at least 3 nodes. You must also indicate the color of the contour.





**Tip:** If the line art you want to check is not a closed or compound path, you can use [Close path](#) on page 162 and/or [Combine subpaths](#) on page 162 to create one.

Note that text objects that cross the trim box but don't reach the bleed box do not trigger bleed errors.



## Attributes

| Attribute                               | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Bleed offset                            | The desired amount of bleed (starting from the contour).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Use different offset for inner contours | Optionally, if you want a different bleed distance value for the outside and inside of a compound shape, you can select this checkbox and enter the value of your choice for the inner contours.                                                                                                                                                                                                                                                                                                                                               |
| Trim area margin                        | Indicates how close/far from the trim area the bleed check should start.                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| White threshold                         | The threshold for white makes sure that a color that is "almost white" (and looks white when printed) is considered white. The default value is 10%.                                                                                                                                                                                                                                                                                                                                                                                           |
| Ignore missing bleed smaller than       | This option allows you to ignore extremely small objects, like jpeg artefacts.                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Overlay color                           | <p>The color used to highlight where bleed is missing (when viewing the result of the Action List through the Navigator).</p> <p>You could use this option to distinguish between 'missing bleed' (critical error, highlighted in red) and 'not enough bleed' (not critical, highlighted in orange). To get this, you need to add two instances of this Action to your Action List; one with the minimal bleed value (e.g. 2 mm) and red as overlay color, and one with the preferred bleed value (e.g. 4 mm) and orange as overlay color.</p> |

## Example Action List

```
Select line art
Select spot color <!-- color of the contour -->
AND
Check bleed around contour
```

## Example 1

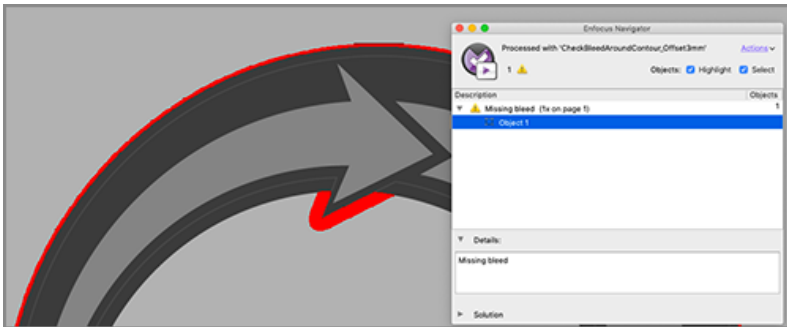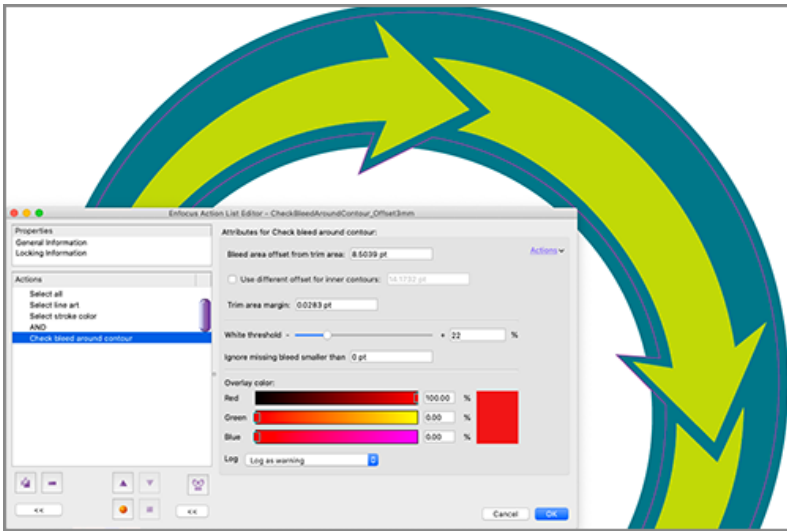

**Example 2**

This Action also works with irregular shapes. Both internal and external missing bleed are highlighted in red (= the chosen overlay color).



**Related Actions**

- [Check bleed](#) on page 294
- [Check bleed contours](#) on page 300
- [Add bleed](#) on page 255

### 3.2.12.3. Check flatness

**Belongs to**

- **Category:** Prepress
- **Type:** Checks

**What it does**

Allows you to check the minimum or maximum flatness of a line art curve.

The default setting to produce a smooth curve is 1. A value higher than 1 can produce a jaggy edge; lower than 1 can slow down the RIP.

**Related Actions**

- [Check flatness](#) on page 399
- [Select flatness](#) on page 503

### 3.2.12.4. Check for transparent objects

**Belongs to**

- **Category:** Prepress
- **Type:** Checks

**What it does**

Searches the PDF document for any objects with transparency.

You can check the transparency of different elements, such as the fill or stroke, the blend modes, ... For the whole list of options, check the attributes of the Action in PitStop.

You can either search for all transparent objects or you can restrict your search to transparent objects that have *all* or *at least one* of the following *selected* properties:

- Fill is set to overprint
- Stroke is set to overprint
- Graphic element uses a spot color

**About transparency in PDF**

Transparency can cause some problems if you view documents in Adobe Acrobat 4.0 or earlier: transparent objects can be rendered incorrectly.

A transparent layer can also cause problems when you transpose the PostScript code of your PDF document to the halftone information of your printer (the 'ripping').

A typical example is saving graphics with transparent elements as PDF compatible with Acrobat 5.0 in Adobe Illustrator 9.0 or Adobe InDesign 2.0. In Adobe Acrobat 4.0, transparent objects in your PDF document are displayed and printed opaque, but transparency is not removed. If you open the same PDF document in Adobe Acrobat 5.x, the transparent objects will look (and print) fine again.

It can be useful to make the distinction between spot colors and CMYK colors when checking the transparency settings in your documents, because different rules govern the overprinting of spot colors.

**Related Actions**

- [Select transparent objects](#) on page 504
- [Select pages with transparent objects](#) on page 486
- [Remove transparency](#) on page 274
- [Change transparency](#) on page 265

### 3.2.12.5. Check halftone phase

**Belongs to**

- **Category:** Prepress
- **Type:** Checks

**What it does**

Checks the PDF documents for the presence of halftone phases.

A halftone phase is a shift in the alignment of halftone and pattern cells in device space, to compensate for window system operations that involve scrolling. It is no longer used, but may still be found in documents containing artwork from older source applications.

**Related Actions**

[Remove halftone phase](#) on page 272

### 3.2.12.6. Check if object is set to knockout

**Belongs to**

- **Category:** Prepress
- **Type:** Checks

**What it does**

Checks if a selected object is set to knockout or not. You can distinguish between the fill and stroke being 'knocked out'.

If an object is set to knockout, the colors of this object cut out the area underneath. The background color is erased.

### 3.2.12.7. Check if object is set to overprint

**Belongs to**

- **Category:** Prepress
- **Type:** Checks

**What it does**

Checks if the fill and/or stroke of a selected object is set to overprint.

Black objects and particularly smaller text objects should be set to overprint, to compensate for misregistration and to preserve the legibility of the text.

**Related Actions**

[Change overprint](#) on page 263

### 3.2.12.8. Check for custom black generation

**Belongs to**

- **Category:** Prepress
- **Type:** Checks

**What it does**

Checks if custom black generation curves (BG) have been included in the PDF document.

Black generation (BG) is the process of adding black ink to CMY-generated black and gray, in order to achieve a clear black color and to save valuable color ink.

**Related Actions**

[Remove black generation](#) on page 271

### 3.2.12.9. Check for custom halftone

**Belongs to**

- **Category:** Prepress
- **Type:** Checks

**What it does**

Searches a PDF for objects to which custom halftones are applied.

Halftoning is a method of printing shades using a single color ink. By varying the size or density of dots, the eye can see a shade somewhere between the solid color and the color of the background paper. Custom halftones are mostly used for screening frequency and angles.

Associated with every output device is a default halftone definition that is appropriate for that device. Only relatively sophisticated documents need to define their own halftones to achieve special effects. In general, when a PDF document provides its own halftone specifications, it sacrifices portability: they may lead to unpredictable printed output when the same document is sent to different printers. This is why they are generally undesirable.

**Related Actions**

[Remove halftone](#) on page 272

### 3.2.12.10. Check for custom transfer function

**Belongs to**

- **Category:** Prepress
- **Type:** Checks

**What it does**

Checks if a PDF contains objects to which transfer functions are applied.

Transfer functions are used for creative purposes, artistic effect and to correct the characteristics of a specific, maybe poorly calibrated, output device. For example, a file that is intended for output on a particular image setter may contain transfer functions that compensate for the dot gain inherent to that printer.



---

**Note:** Transfer functions are not allowed in PDF/X compliant documents.

---

**Related Actions**

- [Apply transfer function](#) on page 101
- [Remove custom transfer function](#) on page 271

### 3.2.12.11. Check for custom undercolor removal

**Belongs to**

- **Category:** Prepress
- **Type:** Checks

**What it does**

Checks if custom undercolor removal definitions (UCR) have been included in the PDF document.

Undercolor removal is the process of removing large percentages of cyan (C), magenta (M), and yellow (Y) ink prior to printing, and replacing them with black (K) ink, in order to achieve a clearer black color in print, and to save on color inks.

**Related Actions**

[Remove undercolor removal](#) on page 274

### 3.2.12.12. Check for non-PDF/X compliant halftone

**Belongs to**

- **Category:** Prepress
- **Type:** Checks

**What it does**

Searches a PDF for objects with halftones that are not compliant with the PDF/X specification.

Halftoning is a method of printing shades using a single color ink. By varying the size or density of dots, the eye can see a shade somewhere between the solid color and the color of the background paper. Some of these halftones are not allowed according to the PDF/X specification.

**Related Actions**

[Remove non-PDF/X compliant halftone](#) on page 273

### 3.2.12.13. Check for non-standard blend modes

**Belongs to**

- **Category:** Prepress
- **Type:** Checks

**What it does**

Checks whether the PDF contains objects with a blend mode other than one of the standard blend modes.

Blend modes determine how colors on different layers blend with each other.

There are 16 standard blend modes described in the PDF Specifications. They can be detected using the PitStop Inspector or the [Select by blend modes](#) Action. If new blend modes would be introduced (which is theoretically possible), this Action could be used to detect them.

For more information about blend modes, visit the Adobe website (<http://www.adobe.com>) or refer to the Help or documentation of your design application (Adobe InDesign, QuarkXPress, ...)

**Related Actions**

[Select by blend modes](#) on page 500

### 3.2.12.14. Check ink coverage (total page check)

**Belongs to**

- **Category:** Color;Prepress
- **Type:** Checks

**What it does**

Allows you to check the CMYK ink coverage either of all colors combined or per separation on a page (inside a particular page box).

You can for example check if the ink coverage in the media box is at least 300%.

In case of a separation-based check, you may exclude separations with 0% ink coverage (i.e. empty areas without content).

It's also possible to ignore small areas, for example areas smaller than 1 inch.

### 3.2.12.15. Check ink coverage (basic object check)

**Belongs to**

- **Category:** Color;Prepress
- **Type:** Checks

**What it does**

Checks the total CMYK ink coverage of the color of the **objects** in the PDF.

You can for example check if the ink coverage is at least 300%.

When including images in the ink coverage check, the threshold will determine the minimum area in which the ink coverage has to be exceeded before reporting an error or warning. For example, when entering '0', even 1 dot exceeding the maximum ink coverage will be reported.

**Related Actions**

[Select by ink coverage \(basic object check\)](#) on page 426

### 3.2.12.16. Check Output Intents for DotGain

**Belongs to**

- **Category:** Prepress
- **Type:** Checks
- **New since:** PitStop 2022

**What it does**

Checks if the Output Intents contain a DotGain dictionary.

A DotGain dictionary is a PDF 2.0 feature.

### 3.2.12.17. Check overprint mode

**Belongs to**

- **Category:** Prepress



- **Type:** Checks

**What it does**

Checks if fill and/or stroke overprint is set to Standard overprint mode (OPM 0), or Illustrator overprint mode (OPM 1).

**About overprint modes**

- In **Standard overprint mode** (OPM 0), the tint value 0 of one of the CMYK inks in the foreground object has a knockout effect on the color rendering of the underlying object. In other words, a foreground ink with a C, M, Y or K value of 0 % erases the corresponding background ink. Here, the “foreground inks win” principle applies.
- In **Illustrator overprint mode** (OPM 1), the tint value 0 is neutral: it is ignored (as if it were “not specified”) and has therefore no effect on the color rendering of the underlying object.

For more information and examples, refer to [the PitStop Pro Reference Guide on the Enfocus website](#).

**Related Actions**

- [Change overprint mode](#) on page 263
- [Select by overprint mode](#) on page 502

### 3.2.12.18. Check rendering intent

**Belongs to**

- **Category:** Color; Prepress
- **Type:** Checks

**What it does**

Allows you to check the rendering intent of particular objects (Paths, Text, Paths or Text, Images, or all Rendering objects) in a PDF.

You can check whether or not they use rendering, and if they do, which type:

- Absolute Colorimetric
- Relative Colorimetric
- Perceptual
- Saturation

**About rendering intents**

A rendering intent is a remapping method, allowing to remap colors so that they best match the intended use. ‘Remapping’ means that colors from one output device’s color space are mapped to the color space of another device.

For more information, refer to the chapter “Rendering intents to remap colors” in [the PitStop Pro Reference Guide on the Enfocus website](#).

For more information, refer to the chapter “Rendering intents to remap colors” in the PitStop Pro Reference Guide.

**Related Actions**

- [Select by rendering intent](#) on page 427
- [Change rendering intent](#) on page 104
- [Remove rendering intent](#) on page 117

## 3.2.13. Text

---

### 3.2.13.1. Check CMap

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Checks if a PDF contains an embedded CMap, and if so, whether its name is consistent with any matching external file. This is necessary for PDF/A compliance.

**About CMaps**

CMap (Character Map) is a mapping of character codes to an ID. This ID is used to map the characters to the correct glyphs.

CMaps can be external or embedded:

- When the CMap is external, it is referenced in the PDF by a name.



**Note:** Some CMaps are shipped (as external files) along with PitStop.

- When the CMap is embedded, it's often also referenced inside the PDF.

### 3.2.13.2. Check corrupt font widths

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Searches a PDF for fonts that have corrupt widths. You might want to remove or replace these fonts.

By default, horizontal writing is checked, but you can also include vertical writing by selecting the **Also check metrics for vertical writing** checkbox.

Corrupt font widths may occur in a PDF, when "artificial" bold or italic was used instead of the "bold" or "italic" version of the font concerned. For example, if "Futura" is used in your PDF, the

"Futura-Bold" and "Futura-Oblique" fonts should be used instead of applying bold and italics on the regular Futura font. Artificial font may cause problems when printing the PDF.

As of PitStop 2022, you can set a threshold in the **Tolerance** field. This value, expressed in 1/1000 em, specifies the maximum acceptable deviation of the standard font width. For example, if the tolerance is set to 5, a font width that deviates 5/1000 em (or less) from the normal font width will not be logged.

Some PDF standards allow font size deviations. For example, PDF/X-4 allows a deviation of 5 1/1000 em, PDF/X-6 allows a deviation of 1 1/1000 em ... This Action can be used to search for font widths that do not comply with certain PDF/X versions.

#### **About the em as unit**

The unit used to set the tolerance is '1/1000 em'. 'em' is used because the size of an 'em' is relative to the size of the font: it denotes the point size. For example: 1 em in a 16-point typeface is 16 points, 1 em in an 8-point typeface is 8 points. As a consequence, if the tolerance is set to 1, the relative size is the same, but the absolute size differs depending on the font size.

The name 'em' comes from the width of the capital M in the typeface.

#### **Related Actions**

- [Select corrupt font widths](#) on page 506
- [Change corrupt font widths](#) on page 281

### 3.2.13.3. Check embedded font is OpenType

#### **Belongs to**

- **Category:** Text
- **Type:** Checks

#### **What it does**

Allows you to check if the embedded font is OpenType.

#### **About OpenType embedded fonts**

OpenType is an extension of the TrueType format that can contain TrueType and/or Type 1 font data. In PDF files it can only appear as an embedded font. It has been introduced in PDF 1.6.

#### **Related Actions**

- [Select embedded fonts](#) on page 507
- [Select OpenType embedded fonts](#) on page 510

### 3.2.13.4. Check font by name

#### **Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Checks for the presence of a particular font.

Enter the name of the font you want to check for in the text field, or use the **FontPicker** button to select it.



---

**Note:** From version 12 update 2 onwards, you can use a regular expression to define the font name.

---

### 3.2.13.5. Check font embedding

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Checks whether or not fonts are embedded.

**About embedding fonts**

**Embedding fonts** in a PDF document means that every character of this font is copied and stored in the PDF document. This is useful if you create PDF documents to be displayed on different systems and to be printed on different devices: these are often systems that do not contain exactly the same fonts.

Embedding a font as a **subset** means that only those characters of the font that are actually used in the text are embedded. This reduces the file size by not including superfluous font information.

**Related Actions**

- [Select embedded fonts](#) on page 507
- [Unembed font](#) on page 293

### 3.2.13.6. Check font license

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Checks which operations the font's license allows without obtaining permission from the font's owner.

These operations are:

- Embed
- Subset
- Outline
- Preview and print

**Related Actions**

[Select fonts by license](#) on page 507

### 3.2.13.7. Check font metadata

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Allows you to check if the fonts in the PDF have been added correctly to the metadata.

**About font metadata**

Font metadata is descriptive information about the fonts used in a PDF, for example the name of the font, its type and encoding. You can find the font metadata of a file in Adobe Acrobat by selecting **File > Document Properties** and switching to the **Fonts** tab.

**Related Actions**

[Add font metadata](#) on page 280

### 3.2.13.8. Check font subsetting

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Checks if fonts are subsetted or complete.

If a font is subsetted, only the characters of the font that are actually used in the text are embedded in the document. This is done to keep a file as small as possible.

**Related Actions**

- [Select subset fonts](#) on page 512
- [Check if a subset font contains a complete CharSet or CIDSet](#) on page 412

### 3.2.13.9. Check font type

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Checks for particular font types in a PDF.

You can check for:

- TrueType
- Type 1
- Type 3
- Multiple Master
- Composite TT
- Composite T1
- Composite (all types)

**About types of fonts**

Refer to the [PitStop Pro Reference Guide](#) on the Enfocus website (Chapter: Types of fonts and their usage).

Refer to the PitStop Pro Reference Guide (Chapter: Types of fonts and their usage).

**Related Actions**

[Select fonts by type](#) on page 508

### 3.2.13.10. Check font vendor

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Checks to see if fonts from a particular vendor have been used in a PDF.

### 3.2.13.11. Check for artificial font style

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Searches a PDF for instances of artificial font style (artificial bold, italic or outline style).

**About artificial font style**

Some fonts consist of specific **font families** for each style. The font Futura, for example, has the font families Futura (for “regular” Roman style), Futura-Bold, Futura-Oblique etc. This implies that, if you want to put text in Futura and in bold, for example, you will have to select the font family “Futura-Bold”.

Certain design programs or word processors allow you to adapt the style of these fonts artificially. You can select text and to put it in italics or in bold by selecting the respective style within this font family. Sometimes, you can even do this by means of shortcuts, e.g. Control+b for bold or Control+i for italics. Text that has been modified in this manner uses a so-called **artificial bold or italic style**.

This method may seem very handy but it is recommended to avoid it, because these artificial styles can cause problems when printing: e.g. artificial bold is created when printing two characters on top of each other, one being one point size bigger than the other.

### 3.2.13.12. Check for corrupt images

***Belongs to***

- **Category:** Image
- **Type:** Checks
- **Since version:** 2020

***What it does***

Detects images with corrupt image data.

This Action enables you to find corrupt images early in the production process, so you can take corrective action.

### 3.2.13.13. Check for city fonts

***Belongs to***

- **Category:** Text
- **Type:** Checks

***What it does***

Searches a PDF for instances of city fonts.

City fonts are bitmap fonts that tend not to produce good results when printed.

### 3.2.13.14. Check for inconsistent Type 3 font width information

***Belongs to***

- **Category:** Text
- **Type:** Checks
- **Since:** PitStop 2022

***What it does***

Searches a PDF for Type 3 fonts that have corrupt widths (inconsistent d0 or d1 values). You might want to remove, replace or fix these fonts. Note that there's a dedicated Action to fix them.

**Related Actions**

- [Check corrupt font widths](#) on page 406
- [Fix inconsistent Type 3 font width information](#) on page 289

### 3.2.13.15. Check if a subset font contains a complete CharSet or CIDSet

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Checks if the subset fonts embedded in the document (if any) contain a complete character or CID set.

If a font is subset, only the characters of the font that are actually used in the text are embedded in the document. This is done to keep a file as small as possible. This Action allows you to check if all characters of the font are embedded. In case of simple fonts, the complete set is referred to as "CharSet"; in case of composite fonts, it's referred to as "CIDSet".

CID (Character Identifier) fonts are a format of Type 1 fonts that are typically used for Chinese, Japanese and Korean fonts.

**Related Actions**

- [Select subset fonts](#) on page 512
- [Check font subsetting](#) on page 409

### 3.2.13.16. Check if font contains all glyphs and metrics for all characters used

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Searches the PDF document for fonts that don't have the character set required to display and print the used characters correctly.

Optionally, you can include in your check the glyphs that were removed by subsetting fonts.

You can then replace these fonts by embedded or subset fonts that do have all required glyphs and metrics.

**Related Actions**

- [Select text with missing glyphs in its font](#) on page 514



### 3.2.13.17. Check if invalid character (.notdef glyph) is used

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Checks if the PDF contains invalid characters.

.notdef glyphs are replacement characters for undefined characters in a PDF; they often look like a small box containing an X or a question mark and are not PDF/X compliant. You might want to remove or fix them.

**Related Actions**

[Fix invalid characters \(.notdef usage\)](#) on page 290

### 3.2.13.18. Check if TrueType fonts are PDF/X compliant

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Checks if TrueType fonts are compliant with a particular PDF/X version. Options are PDF/X-4 and PDF/X-6.

**About OpenType embedded fonts**

OpenType is an extension of the TrueType format that can contain TrueType and/or Type 1 font data. In PDF files it can only appear as an embedded font. It has been introduced in PDF 1.6.

**Related Actions**

- [Select non-PDF/X or PDF/A compliant TrueType fonts](#) on page 510
- [Make TrueType fonts PDF/X compliant](#) on page 291

### 3.2.13.19. Check presence of ToUnicode map in font

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Checks if the unicode mappings of the fonts are compliant with a particular PDF/A version.

PDF/A requires that all text in the PDF file can be mapped to Unicode. Therefore, fonts used in the PDF should contain a character-to-glyph mapping that is consistent with character semantics as defined in the Unicode Standard.

This mapping is used to override the default text extraction behavior, for example when using the Acrobat text tool to copy and paste text to another application like Notepad.

### 3.2.13.20. Check resource locations in Type 3 fonts

#### ***Belongs to***

- **Category:** Text
- **Type:** Checks
- **Since version:** 2023 update 1

#### ***What it does***

Detects badly structured Type 3 fonts: fonts with resource dictionaries that are located in the wrong place (not in the Type 3 font dictionary, but in a different dictionary).

This sometimes happens when Illustrator generates Type 3 fonts from SVG fonts.

### 3.2.13.21. Check text point size

#### ***Belongs to***

- **Category:** Text
- **Type:** Checks

#### ***What it does***

Checks the text point size against a particular value.

#### ***Examples***

Text point size must be equal to 5 pt.

To check the minimum text point size, select "Text point size must be more than or equal to ... pt" and enter the appropriate value.

### 3.2.13.22. Check text x-height

#### ***Belongs to***

- **Category:** Text
- **Type:** Checks

#### ***What it does***

Check text x-height checks the font size by measuring the height of the lowercase x (= the x-height). The x-height refers to the distance between the baseline and the mean line in a typeface; this is typically the height of the letters x, u, v, w, and z. You can set a threshold for the text x-height expressed in points.

Note that the check only can work if at least one of the characters to be measured (x, u, v, w or z) is available in the PDF.

### 3.2.13.23. Check that composite TrueType CIDToGIDMap is present

***Belongs to***

- **Category:** Text
- **Type:** Checks

***What it does***

Checks if the PDF contains a mapping table for composite TrueType fonts to map CID (Character IDs) to GID (Glyph IDs), and if it's correctly defined. This is required by the PDF/A specification.

CID (Character Identifier) fonts are a format of Type 1 fonts that are typically used for Chinese, Japanese and Korean fonts.

GID (Glyph Identifier) are identifiers to identify all glyphs in a font.

### 3.2.13.24. Check TrueType font encoding according to PDF/A

***Belongs to***

- **Category:** Text
- **Type:** Checks

***What it does***

Checks whether the Truetype font used in the PDF complies with a given version of the PDF/A specification. Fonts must for example be embedded in the PDF.

***Related Actions***

- [Make TrueType fonts PDF/X compliant](#) on page 291

## 3.3. Informs

---

The following Actions allow you to collect information from PDF documents, for example information about fonts, OPI, colors, ... The requested information will be available in the Preflight report.

### 3.3.1. Color

---

#### 3.3.1.1. Gather color information

***Belongs to***

- **Category:** Color
- **Type:** Informs

***What it does***

Collects information about the color spaces used in a PDF and presents it in the log.

#### 3.3.1.2. Gather ink information

***Belongs to***

- **Category:** Color
- **Type:** Informs

***What it does***

Calculates the amount of each color separation needed to print a page, and a complete document, i.e. how much of each page is actually covered by each ink.

This Action reports the result in % of the page size and also as inch<sup>2</sup>, cm<sup>2</sup> or mm<sup>2</sup> depending on your unit preferences. The ink usage report is also included as part of the Preflight Profile editor, so it can be generated within a Preflight Report by checking the **Inks** checkbox (at the bottom

of the General section in the Preflight Profile editor). This check is off by default (because the calculation is time consuming).

### 3.3.2. Document

---

#### 3.3.2.1. Gather filters information

***Belongs to***

- **Category:** Doc
- **Type:** Informs

***What it does***

Collects information about:

- The data format of the file (ASCII/binary)
- Whether or not compression is used
- The compression filters (if any), for example: ZIP, JPEG, LZW, ...

This information is presented in the Preflight Report under **General File Information > Compression**.

***Related Actions***

[Check data format](#) on page 321

[Check contents compression](#) on page 321

#### 3.3.2.2. Gather Output Intent information

***Belongs to***

- **Category:** Doc
- **Type:** Informs

***What it does***

Collects information about the Output Intents used in a PDF document and presents it in the log.

In the report, you can find the following information (if Output Intents are used):

- ICC profile or ICC characterization name
- Registry name

- Additional information

### 3.3.3. Image

---

#### 3.3.3.1. Gather image information

***Belongs to***

- **Category:** Image
- **Type:** Informs

***What it does***

Collects information about the images used in a PDF and presents it in the log.

The following information is logged:

- Type
- Color Space
- Physical Resolution
- Effective Resolution
- Page found
- Angle
- Skew
- Flipped
- Custom Transfer
- Custom Halftone
- Custom BG (black generation)
- Custom UCR (undercolor removal definitions)

#### 3.3.3.2. Gather OPI information

***Belongs to***

- **Category:** Image
- **Type:** Informs

***What it does***

Collects information about the OPI (Open Prepress Interface) used in a PDF and presents it in the log.

***About OPI***

OPI (Open Prepress Interfaces) replaces high resolution images with "preview" images; low resolution substitutes which are stored in the PDF, together with the path to the high resolution images. This facilitates data storage and data transfer of PDFs with a large number of images.

Related Actions

- [Check OPI path](#) on page 340
- [Check OPI type](#) on page 340
- [Change OPI info](#) on page 144
- [Remove OPI](#) on page 146
- [Select images with OPI info](#) on page 450

3.3.4. Layers

3.3.4.1. Gather layer information

Belongs to

- **Category:** Layers
- **Type:** Informs
- **Since Version:** 2017

What it does

Collects information about the layers used in a PDF and presents it in a report.

You will get a clickable tree view (representing the sequence of the layers), followed by an overview of all layers (listed alphabetically) with their attributes.



PITSTOP  
PRO

ENFOCUS

Layer Information

Objects

Background

Visuals

Background

Intent

Default State

Locked

Initial State

Visibility

Print

Export

Empty

Objects

Intent

Default State

Locked

Initial State

Visibility

Print

Export

Empty

View

on

no

visible when on

prints when visible

exports when visible

yes

View

on

no

visible when on

prints when visible

exports when visible

yes

### 3.3.5. Metadata

---

#### 3.3.5.1. Gather pages information

***Belongs to***

- **Category:** Metadata; Page
- **Type:** Informs

***What it does***

Collects information about the pages (number of pages and range) in a PDF and presents it in the log.

### 3.3.6. Page

---

#### 3.3.6.1. Gather page box information

***Belongs to***

- **Category:** Page
- **Type:** Informs

***What it does***

Collects information about the page boxes used in a PDF document and presents it in the log.

In the report file (under Page boxes), each page box layout is represented by 2 drawings:

- One to show the page boxes that were defined in the document ("defined" page boxes)
- One to show the actual position of the page ("effective" page boxes).

Below these drawings, an overview of all page boxes and their sizes is listed:

- The pages this page box layout applies to
- The start position of the media box
- The page rotation



- The page scaling factor

### 3.3.7. Text

---

#### 3.3.7.1. Gather font information

***Belongs to***

- **Category:** Text
- **Type:** Informs

***What it does***

Collects information about fonts used in a PDF and presents it in the log.

The following information is logged:

- Font Name
- Type
- Encoding
- Embedded
- Subset

#### 3.3.7.2. Log text object properties

***Belongs to***

- **Category:** Text
- **Type:** Informs

***What it does***

Collects information about any selected text or clip text object used in a PDF and presents it in the log.

The following information is logged:

- Text content
- Baseline relative to the lower left of the media box



**Note:** The baseline is logged in the unit set in the PitStop Pro Preferences (Units & Guides category).

- Font size in pt
- Font name
- Character spacing in em
- Word spacing in em
- Leading in pt
- Horizontal scaling
- Text rise in pt
- Text rendering mode

- Text knockout
- Is clip text

## 3.4. Selections

---

The following Actions allow you to select elements in a PDF.

### 3.4.1. Color

---

#### 3.4.1.1. Select black & white objects

##### ***Belongs to***

- **Category:** Color
- **Type:** Selections
- **Since Version:** 2018

##### ***What it does***

Selects black and white images.

You can set a tolerance (an allowed deviation from '100% gray', default tolerance is '3') and tell PitStop how to determine what black and white is:

- **Calculate image average:** Take the color value of each pixel of the image (color and gray values) and calculate the average of this; decide based on this value whether or not it is "black and white".
- **Look for colored areas:** Search for colored areas and take only the values of colored pixels to decide whether or not it is "black and white". If most of the colored values are gray (or close to gray/taking into account the chosen tolerance), the image will be considered black and white; otherwise it will be considered a color image. This method will detect images that are mainly black and white but with a small colored area.

##### ***Remarks***

- This Action works on all color spaces, on images, text and linear and radial shadings.
- Spot colors are always considered colored images, regardless of their name (e.g. even spot colors with the name 'black' will be considered colors).

##### ***Use Cases***

- In digital printing, to save on ink, black and white images are preferably printed using black ink only. This Action provides an extra check to distinguish between black and white images with minor color tints (safe to use black) and black and white images with colored areas that definitely need color ink.
- Black text or thin lines (coming from CMYK) can be safely remapped to black only, thanks to this Action, which allows to filter real black text from colored text. Example Action List:

```
select text
```

```
select black & white objects  
AND  
remap color <!-- target color black -->
```

### ***Examples***

The following image will be considered 'black and white' based on the average image calculation, but 'colored' based on the area calculation.



The image below is clearly 'black and white' and will be selected, regardless of the calculation method.



### 3.4.1.2. Select by blending color space

#### ***Belongs to***

- **Category:** Color; Page
- **Type:** Selections

#### ***What it does***

Makes a selection based on the blending color space.

You must set the required blending color space and the required luminosity softmask blending color (or select the option **Undefined**).

#### ***About blending color spaces***

When Adobe Acrobat interprets transparent objects and attempts to create a preview of the flattened artwork, it needs to do so using a single color space for all the items involved in the transparency group. This color space is called the **blending color space**.

The blending color space for soft masks (masks with soft transitions) is called the **luminosity softmask blending color space**. It is usually gray.

#### ***Related Actions***

- [Change blending color space](#) on page 103

- [Check if blending color space is defined](#) on page 308

### 3.4.1.3. Select by color space

**Belongs to**

- **Category:** Color
- **Type:** Selections

**What it does**

Selects line art (fill and/or stroke) and/or other objects according to their color space.

**Example**

To select all ICC line art, proceed as follows:

```
Select by color space
<!-- Options:
1. Select both Fill and stroke color space.
2. For both, select "ICC tagged". Optionally, indicate the preferred number of color
   components.
3. Make sure the checkbox under Other objects is cleared
-->
Log selection
```

### 3.4.1.4. Select by color space in PDF/X Output Intent

**Belongs to**

- **Category:** Color
- **Type:** Selections

**What it does**

Allows you to make a selection based on the color space in the PDF/X Output Intent.

As of PitStop 2022 you should make clear which Output Intents should be taken into account. Options are:

- Document Output Intents (before PDF/X-6)
- Effective Output Intents (since PDF/X-6)
- Document Output Intents (PDF/A-2)

You can choose one of the following color spaces:

- CMYK
- RGB
- Gray

- Unknown

### 3.4.1.5. Select by ICC tag subtype

**Belongs to**

- **Category:** Color
- **Type:** Selections

**What it does**

Allows to make a distinction between ICC-based RGB, ICC-based gray and ICC-based Lab.

[Select by color space in PDF/X Output Intent](#) and [Check color type](#) allow to make the distinction between DeviceRGB, DeviceCMYK and ICC-based color spaces, but they treat all ICC-Based spaces as a single group. This Action allows to make the distinction between ICC-based CMYK and ICC-based RGB objects.

[Check color type](#) allows you to make the distinction between DeviceRGB, DeviceCMYK and ICC-based color spaces, but it treats all ICC-Based spaces as a single group. This Action allows to make the distinction between ICC-based CMYK and ICC-based RGB objects.

**Related Actions**

- [Select by color space in PDF/X Output Intent](#) on page 425
- [Check color type](#) on page 301

### 3.4.1.6. Select by ink coverage (basic object check)

**Belongs to**

- **Category:** Color; Prepress
- **Type:** Selections

**What it does**

Makes a selection of all objects that meet your ink coverage criteria.

You can for example select objects only if the ink coverage is at least 300%.

When including images in this selection, the threshold will determine the minimum area in which the ink coverage criteria have to be met in order to be selected. E.g. when entering '0', even an image of which only 1 dot meets the ink coverage requirement will be selected.

**Related Actions**

[Check ink coverage \(basic object check\)](#) on page 309

### 3.4.1.7. Select by number of color plates

**Belongs to**

- **Category:** Color

- **Type:** Selections

**What it does**

Selects objects that occur on a certain number of color plates (separations). You can make the selection based on the object's fill and/or stroke.

**Example**

You could for example search for objects with 4 color plates (dark gray), and afterwards change gray to CMYK Black. This will reduce the number of plates from 4 plates to 1 plate.

```
Select by number of color plates <!-- Choose 4 -->  
Change Gray to CMYK Black <!-- Change Gray to CMYK Black on page 103 -->
```

**Related Actions**

[Check number of color plates \(basic object check\)](#) on page 310

### 3.4.1.8. Select by rendering intent

**Belongs to**

- **Category:** Color;Prepress
- **Type:** Selections

**What it does**

Selects color managed objects based on a particular rendering intent.

You can select paths, text, images, or all rendering objects, with one of the the following rendering intents:

- Absolute Colorimetric
- Relative Colorimetric
- Perceptual
- Saturation

**About rendering intents**

A rendering intent is a remapping method, allowing to remap colors so that they best match the intended use. 'Remapping' means that colors from one output device's color space are mapped to the color space of another device.

For more information and examples, refer to [the PitStop Pro Reference Guide on the Enfocus website](#) (See Chapter "Rendering intents to remap colors").

For more information and examples, refer to the PitStop Pro Reference Guide (See Chapter "Rendering intents to remap colors").

**Related Actions**

- [Change rendering intent](#) on page 104
- [Check rendering intent](#) on page 312
- [Remove rendering intent](#) on page 117

- [Select rendering objects](#) on page 452

### 3.4.1.9. Select by spot color suffix

#### ***Belongs to***

- **Category:** Color
- **Type:** Selections

#### ***What it does***

Selects objects with spot colors that use a spot color with either a known suffix or a known suffix which is not of a particular type.

You can find an overview of the available suffixes in the table below.

#### ***About spot color suffixes***

Suffixes represent the **apparent** color of the color when printed on different types of paper. For example, PANTONE 3258 **C** and PANTONE 3258 **U** refer to the same color, but when printed on coated, respectively uncoated paper, they will look different, although the same ink formula was used.

Besides C (coated), U (uncoated) and M (matte), in software color palettes, you can find suffixes that refer to on-screen simulations of how colors will look when printed on different paper types. For example, PANTONE 3258 CVU is an on-screen indication of how PANTONE 3258 will look like when printed on uncoated paper.

#### ***Suffix overview***

| Suffix | Meaning                                                                                           |
|--------|---------------------------------------------------------------------------------------------------|
| CV     | Computer video (electronic simulation)                                                            |
| CVC    | Computer video - coated                                                                           |
| CVU    | Computer video - uncoated                                                                         |
| CVS    | Process coated (old; now C)                                                                       |
| CVP    | Solid to process (old; now PC)                                                                    |
| C      | Coated paper                                                                                      |
| M      | Matte paper                                                                                       |
| U      | Uncoated paper                                                                                    |
| EC     | Euro process simulation, coated paper                                                             |
| PC     | Process simulation, coated paper                                                                  |
| CP     | Coated paper, process simulation (e.g. PANTONE 185 CP (used in PANTONE+ COLOR BRIDGE COATED))     |
| UP     | Uncoated paper, process simulation (e.g. PANTONE 185 UP (used in PANTONE+ COLOR BRIDGE UNCOATED)) |
| HC     | Hexachrome coated                                                                                 |
| TC     | TC Textile Cotton                                                                                 |



| Suffix | Meaning                    |
|--------|----------------------------|
| TCX    | Textile Cotton eXtended    |
| TP     | Textile Paper              |
| TPX    | TPX Textile Paper eXtended |
| XGC    | eXtended Gamut Coated      |

**Related Actions**

- [Check spot color suffix](#) on page 315
- [Change spot color suffix](#) on page 105

### 3.4.1.10. Select by tagged ICC Profile

**Belongs to**

- **Category:** Color
- **Type:** Selections

**What it does**

Allows you to select objects which have (not) been tagged with an ICC profile, or objects with a specific color space and a specific ICC profile.

You can distinguish between stroke and fill color, for example select objects of which the stroke color is ICC tagged.

**About ICC tagging**

Every input and output device reproduces color and grayscales in a slightly different way. As a result, the colors you see in a PDF file on your screen may not match the colors produced when you print the PDF to an output device.

ICC color profiles are used to avoid this. An ICC color profile is a mathematical description of the color space used by a specific device. In other words, the color profile describes how the colors produced by the device relate to the reference CIE LAB color space (a device-independent color space). As such, they allow you to set up a workflow in which all devices use color management to compensate for their individual color reproduction characteristics, based on the information in the ICC profiles.

**Related Actions**

- [Check ICC tagging](#) on page 305
- [Select by tagged ICC Profile](#) on page 429
- [Tag object with an ICC profile](#) on page 119
- [Check if ICC profile differs from ICC profile in PDF/X Output Intent](#) on page 307
- [Select objects of which ICC profile is equal to ICC profile in PDF/X output](#) on page 433
- [Check ICC profile version](#) on page 306

### 3.4.1.11. Select by tiling pattern

**Belongs to**

- **Category:** Color
- **Type:** Selections
- **Since version:** 2020

**What it does**

Allows you to select text, line art and/or image masks with a tiling pattern. You can select only colored or uncolored tiling patterns, or both.



**Note:** You should select at least one checkbox above the divider and one below the divider.

**Related Actions**

- [Check objects by tiling pattern](#) on page 311
- [Select tiling pattern contents according to parent object selection](#) on page 441

### 3.4.1.12. Select color

**Belongs to**

- **Category:** Color
- **Type:** Selections

**What it does**

Selects objects by their fill or stroke color, or both.

**How to proceed**

Define the colors you want to select as follows:

1. Select the appropriate checkbox, depending on what you want to define (Fill color or Stroke color).



**Note:** If both checkboxes are selected, objects that match both fill and stroke colors will be selected. This is equivalent to combining separate actions with the AND operator.

2. Select the appropriate color in one of the following ways:

- a. Select an object with the PitStop Select Objects tool  and use the icon to grab the fill or stroke color  (depending on what you're defining).
- b. Click the color picker icon  and select the appropriate color.
- c. Select the required color space:

- Device colors can be Gray, RGB or CMYK
  - Calibrated colors can be Gray or RGB
  - User Swatch (= user-defined colors)
3. Fine tune the color by moving the sliders.

### 3.4.1.13. Select color range

#### ***Belongs to***

- **Category:** Color
- **Type:** Selections

#### ***What it does***

Allows you to select objects with a specific color, by specifying the color range of the fill and/or stroke color.

The available options depend on the chosen color space:

- Gray, CMYK or RGB: **search in converted values of other color spaces** (If selected, the result of the conversion is calculated in advance.)
- Separations: You can decide to select either all spot colors or only the spot colors with a particular name. You can type the name or click the **Load Spot Color** button to select it.
- DeviceN process colors: **allow spot colors in DeviceN color space**



**Note:** This Action works on stencil masks (next to text and line art), but not on images.

#### ***Example***

To catch all gray objects (either fill or stroke) with a brightness between 0% and 40 %, and turn them into CMYK objects with 100% Cyan color, you can do the following:

```
Select gray fill or stroke color
<!-- This is the "Select color range" Action with the options Fill and Stroke
selected.
Select "Color space is gray", and in the Gray from field, enter values between 0% and
40% -->
Change fill and stroke color
<!-- This is the "Change color" Action with Fill and Stroke selected.
Select "Device CMYK" and set Cyan to 100% -->
```

### 3.4.1.14. Select default color spaces

#### ***Belongs to***

- **Category:** Color
- **Type:** Selections

#### ***What it does***

Allows you to select default color spaces or default color spaces that are not defined by PDF/X-3.

Default color spaces are defined on page level. They are used to systematically remap device-specific colors to device-independent colors.



**Note:** PitStop also provides an Action to [change default color spaces](#).

### 3.4.1.15. Select DeviceN with attributes

***Belongs to***

- **Category:** Color
- **Type:** Selections

***What it does***

Allows you to select the fill and/or stroke of DeviceN and/or NChannel objects.

You must specify which attributes must be present to select the object:

- Spot color definitions
- Process color mapping
- Mixing hints
- Solidities
- Printing order
- Dot gain

***Related Actions***

[Check DeviceN attributes](#) on page 301

### 3.4.1.16. Select gray

***Belongs to***

- **Category:** Color
- **Type:** Selections

***What it does***

Allows you to make a selection based on the gray color of the fill and/or stroke color of the objects in the PDF.

You can specify how much the actual gray in the document is allowed to deviate from "true" gray (i.e. gray which doesn't have tones of any other color; for RGB this means that the percentage of Red, Gray and Blue is the same; for CMYK, this holds for Cyan, Magenta and Yellow).

### 3.4.1.17. Select incorrectly defined process color spaces in DeviceN

***Belongs to***

- **Category:** Color

- **Type:** Selections

**What it does**

Allows you to select objects that use a DeviceN color space containing a process color space which does not match the PDF/X Output intent.

**Related Actions**

[Check DeviceN for process color spaces](#) on page 302

### 3.4.1.18. Select non-compliant Output Intent

**Belongs to**

- **Category:** Color
- **Type:** Selections

**What it does**

Selects the whole document if the Output Intent is:

- **Not compliant** with a particular PDF/X or PDF/A version, OR
- **Compliant** with a particular PDF/X or PDF/A version, **but the ICC profile or ICC characterization is not as specified.**

You can check the compliance with the following PDF/X versions:

- PDF/X-1a:2001
- PDF/X-3:2002
- PDF/X-1a:2003
- PDF/X-3:2003
- PDF/X-4
- PDF/X-4p
- PDF/X-6
- PDF/X-6p
- PDF/A-1
- PDF/A-2

### 3.4.1.19. Select objects of which ICC profile is equal to ICC profile in PDF/X output

**Belongs to**

- **Category:** Color
- **Type:** Selections

**What it does**

Selects objects of which the ICC profile is equal to the ICC profile in PDF/X output. Choose either fill, stroke or both.

**About ICC tagging**

Every input and output device reproduces color and grayscales in a slightly different way. As a result, the colors you see in a PDF file on your screen may not match the colors produced when you print the PDF to an output device.

ICC color profiles are used to avoid this. An ICC color profile is a mathematical description of the color space used by a specific device. In other words, the color profile describes how the colors produced by the device relate to the reference CIE LAB color space (a device-independent color space). As such, they allow you to set up a workflow in which all devices use color management to compensate for their individual color reproduction characteristics, based on the information in the ICC profiles.

**Related Actions**

- [Remove ICC tag](#) on page 116
- [Select by tagged ICC Profile](#) on page 429
- [Check ICC tagging](#) on page 305
- [Check if ICC profile differs from ICC profile in PDF/X Output Intent](#) on page 307
- [Tag object with an ICC profile](#) on page 119
- [Check ICC profile version](#) on page 306

### 3.4.1.20. Select page by gray surface

**Belongs to**

- **Category:** Color
- **Type:** Selections
- **Since version:** 13

**What it does**

Selects gray pages in a PDF based on the total surface (%) of colored content on that page.

You can configure the following attributes:

- How big the non-gray area should be, e.g. less than 90% should be non-gray
- Whether or not a deviation from gray is allowed, e.g. if only "pure" gray should be selected, choose 0% as deviation.
- Which of the page boxes defines a page.

**Use cases:**

- Use this Action in combination with [Log selection](#) to detect whether a PDF should be printed in color or in black and white.
- Use this Action in combination with [Convert color](#) to select gray pages and convert the colors to grayscale (to save ink).

**Example**

The following Action List selects the pages in your PDF that have almost no colored content (less than 5% of the page - the page being defined by the trim box). There is a small tolerance allowed, meaning that colors that are "almost gray" are also considered "gray".

```
Select page by gray surface
    <!-- Select page if non-gray surface is less than 5% of the total
page area -->
```

```
<!-- Ignore color that deviates less than 3% from gray -->
<!-- Page area is defined by the trim box -->
```

**Related Actions**

- [Select gray](#) on page 432
- [Select page by ink coverage \(non-Black only\)](#) on page 435

### 3.4.1.21. Select page by ink coverage (non-Black only)

**Belongs to**

- **Category:** Color
- **Type:** Selections
- **Since version:** 13

**What it does**

Selects gray pages in a PDF.

This Action detects the ink coverage of color content (CMY and spot colors) in a page and selects the pages for which the maximum ink coverage of each non-black separation is below a particular percentage (as defined in the Action). You can ignore small non-gray areas (e.g. a company logo) and limit the check to an area inside a particular page box as required.

**Use cases:**

- Use this Action in combination with [Log selection](#) to detect whether a PDF should be printed in color or in black and white.
- Use this Action in combination with [Convert color](#) to select gray pages and convert the colors to grayscale (to save ink).

**Example**

The following Action List selects all pages with CMY or spot color values lower than 5%. These pages may have a very small colored area (< 5 cm) or colors outside the trimbox.

```
Select gray page <!-- Select page if ink coverage of each non-Black separation is less
than 5% -->
<!-- Ignore non-gray areas smaller than 5 cm -->
<!-- Only check inside the trim box -->
```

**Related Actions**

- [Check ink coverage \(total page check\)](#) on page 309 : checks the ink coverage of *all* colors (including black)
- [Select page by gray surface](#) on page 434

### 3.4.1.22. Select process colorant

**Belongs to**

- **Category:** Color

- **Type:** Selections
- **Since version:** 2020

**What it does**

Selects the colorant(s) of your choice (Cyan, Magenta, Yellow, Black).

It's typically used with [Add trace path](#) (to draw a path around the selected process colors) or with [Check ink coverage \(total page check\)](#) (to check the ink coverage of one or more process colors).

**Examples****Example 1:**

Using the following Action List, you can draw a path based on the selected colorants (CMY in this example).

```
Select process colorant (CMY on) - channels on which the Action will work
Select all - objects that will be used to trace the path
Trace path (Use colorant selection on) - draws the path based on the selected
colorants
```

**Example 2:**

```
Select process colorant
Check ink coverage (total page check)
```

**Related Actions**

- [Add trace path](#) on page 89
- [Check ink coverage \(total page check\)](#) on page 309

### 3.4.1.23. Select required color set

**Belongs to**

- **Category:** Color
- **Type:** Selections
- **Since version:** 2023 update 1

**What it does**

Selects objects by color by excluding a certain color, for example select all objects that do not have a certain tint of green.

**How to proceed**

Define the color set to be excluded:

1. To exclude 100% black objects, select **Black**.



**Note:** If only black should be excluded in the PDF, **only** select the **Black** checkbox. Do not add any other color.

2. To add another color that should be excluded:
  - a. Click **New**. A new entry will appear in the text box.



- b. To allow a spot color (optionally), select the **Spot color** checkbox and type the name of the spot color in the text field. You should define a CMYK equivalent too (see next step). The name of the spot color will be shown in the text box.
  - c. Enter the required values for CMYK (expressed in %) in the fields below the New/Remove button. Your changes will be shown in the text box.
3. If slight color deviations are allowed, enter a value in **Maximum ... % of color deviation of each channel**. The default value is 0.01%.
4. If images with a certain color should be selected, select that color from the **Images must use only** list.

**Related Actions**

- [Check required color set](#) on page 313

### 3.4.1.24. Select shading objects

**Belongs to**

- **Category:** Color
- **Type:** Selections

**What it does**

Selects all shading objects.

Shadings represent complex mathematical functions. That's why certain output devices may not be able to correctly interpret them. Shadings can also cause problems during color conversions.



**Note:** As of PitStop 7, shadings can be color converted.

**Related Actions**

- [Convert shading color space to solid color](#) on page 108

### 3.4.1.25. Select spot color

**Belongs to**

- **Category:** Color
- **Type:** Selections

**What it does**

Allows you to select either all spot colors in a PDF file, or one or more particular colors, based on their names.

**Note:**

- From version 12 update 2 onwards, you can use regular expressions to define the spot color name.
- From version 13 update 1 onwards, there is an extra option to select a spot color based on a list of names. This new option is useful if different spot color names refer to the

same color, so you can easily run a fix on objects with differently named spot colors. It also allows you to select different spot colors in one go.

- From version 2018 onwards, you can select spot colors by a Pantone Library.

### **How to proceed**

In the attributes of the Select spot color Action, proceed as follows:

**1.** Select the appropriate option from the list:

- If you choose **Select all spot colors**, no other options have to be set.
- If you choose **Select Spot Color by PANTONE color library**, you should select the library of your choice from another list that is displayed.

You can further reduce your selection based on the alternate color values:

- Ignore the alternate color values
- Select only colors with correct alternate color values
- Select only colors with wrong alternate color values
- If you choose one of the other options, you have to specify the name of the spot color(s) that have to be selected. Proceed with step 2.

**2.** Enter the name of the spot color(s) concerned:

- In case of **Select spot color by regular expression**, you can use regular expressions. PitStop supports Boost Regular Expressions. For an overview of the options, refer to [http://www.boost.org/doc/libs/1\\_55\\_0/libs/regex/doc/html/boost\\_regex/syntax/perl\\_syntax.html](http://www.boost.org/doc/libs/1_55_0/libs/regex/doc/html/boost_regex/syntax/perl_syntax.html).


- In case of **Select spot color by name** or **Select spot color by name from list**, you can simply type the name of the spot color(s) concerned or use the color picker  or the

Grab color button . Note that, in case of a list, you must enter the names one by one, each on a separate line. It is for example not possible to select two colors in the

document, and select them in one go, using the Grab color button . Instead, you must select the first color, grab it, then select the second color, and grab it and so on.

**3.** If the spot color should be selected regardless of its case (upper or lower case letters), select the **Ignore case** checkbox.

### **Example**

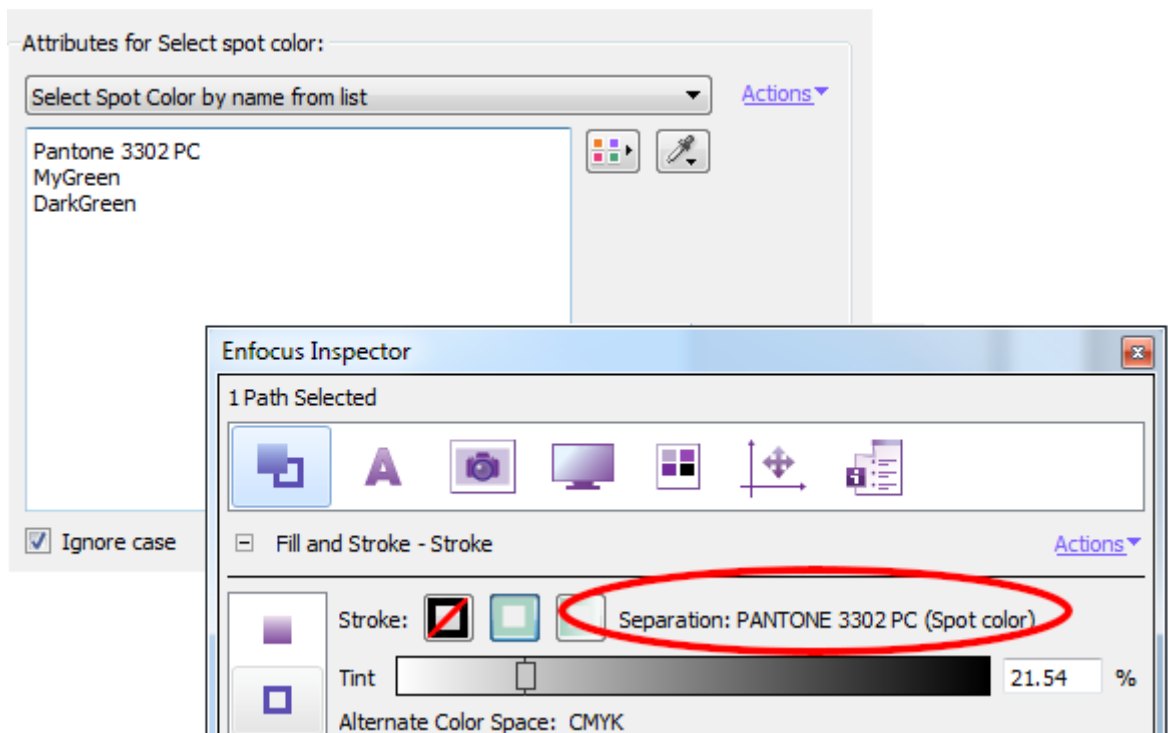

In this example, PitStop will search for three different spot color names (Pantone 3302 PC, MyGreen, DarkGreen, not taking into account the case of the names), which may (or may not) refer to the same color. Suppose the document contains a spot color called "PANTONE 3302 PC", then it will be found and selected.

#### **Related Actions**

- [Check spot color by name](#) on page 314
- [Check spot color by PANTONE library](#) on page 314

### 3.4.1.26. Select spot color by alternate color space

#### **Belongs to**

- **Category:** Color
- **Type:** Selections

#### **What it does**

Selects spot colors based on their alternate color space.

For example, select a spot color if its alternate color space is ICC tagged RGB or Device RGB.

#### **Example**

To convert a spot color's alternate color space to another color space, for example CMYK, proceed as follows:

```
Select spot color by alternate color space <!-- select the appropriate alternate color space(s) -->
```

```
Convert alternate color space to CMYK <!-- (See Convert alternate color space to CMYK
on page 106) -->
```

### 3.4.1.27. Select spot color by alternate values

#### ***Belongs to***

- **Category:** Color
- **Type:** Selections
- **Since Version:** 25.07

#### ***What it does***

Selects spot colors based on their alternate values. You can choose whether to check the fill, stroke or both of the selected objects.



**Note:** The alternate values may vary with changes in brightness, but the spot color itself remains unchanged. Therefore, you must enter the color's **alternate values at 100% tint** to ensure accuracy.

You can find a spot color's alternate values in one of the following ways:

- Using the *Color Picker* button  or the *Grab color* button . Just make sure to select the object concerned with the PitStop selection tool. The alternative values will be filled in automatically (at 100% tint).
- Using the Color Picker in the PitStop Color Panel
- Using the Enfocus Inspector (but note that the shown values may not be the values at 100% tint!)



#### ***DeviceN colors***

**Include spot color definitions from DeviceN spaces** is selected by default, but can be cleared to exclude DeviceN colors. Note that we advise using the Color Picker to find the alternate values of DeviceN colors, because in the Enfocus Inspector the alternate values of the *full deviceN color space* are shown, instead of the alternate values of the spot colors *inside* the DeviceN color space.

#### ***Example***

The color of the selected object in the screenshot below is PANTONE Yellow C. The brightness of the color is 79.03%. You can see this in the Enfocus Inspector. However, these are not the values you need to enter in the attributes of this Action.

When you want to configure the Action, you better click the *Color Picker* button  or the *Grab color* button . In both cases, the correct values at 100% tint are filled in automatically.

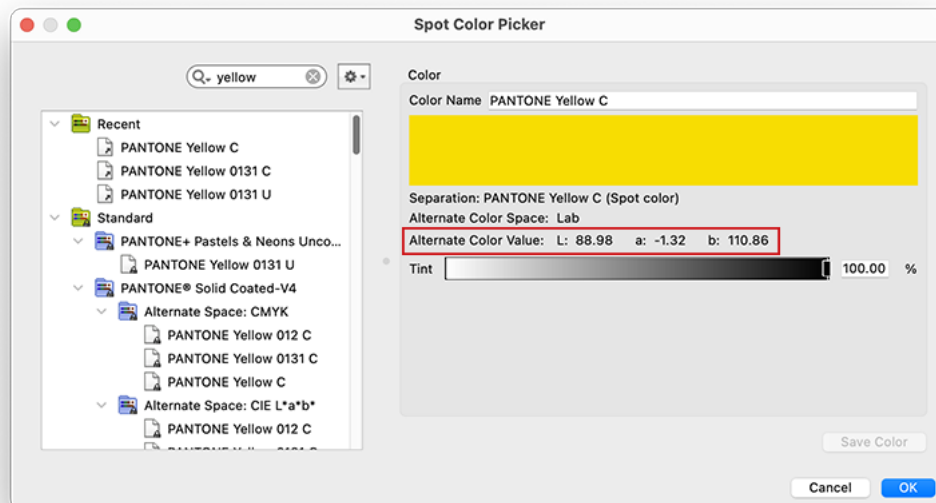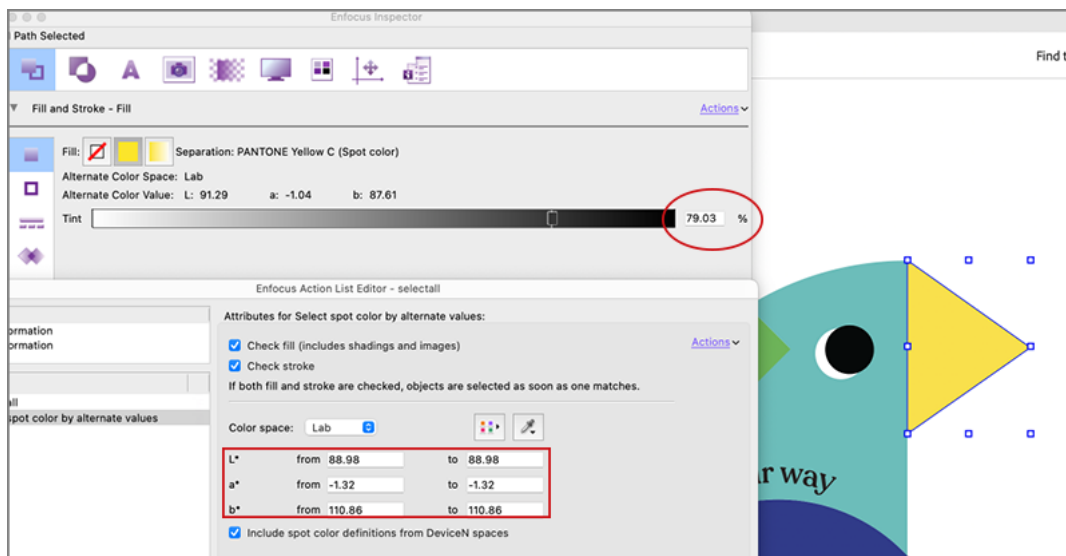

### 3.4.1.28. Select tiling pattern contents according to parent object selection

#### **Belongs to**

- **Category:** Color
- **Type:** Selections
- **Since version:** 2020

#### **What it does**

Allows you to select the tiling pattern content depending on whether or not the parent object (e.g. text or line art) is selected.

There are two options:

- Select the tiling pattern content if the parent object is selected.
- Select everything except the tiling pattern content of parent objects that are not selected.

### 3.4.1.29. Select undefined DeviceN colorants

#### ***Belongs to***

- **Category:** Color
- **Type:** Selections

#### ***What it does***

Selects objects which use a DeviceN color space (including NChannel) that contains spot colors that are not defined in the colorants dictionary.

#### ***About the DeviceN color space***

The DeviceN color space is defined as a list of names. These names can refer to the process colors (CMYK, RGB or Gray) or spot colors. Spot colors can have an alternate in CMYK for output devices that do not recognize their name, or they can just be a name without color definition. If the color is just a name (for example: "Silver" or "MySpot"), it cannot be used on other devices.

#### ***Checking the colorants dictionary***

You can use the Enfocus PitStop Inspector to check whether a particular spot color has been defined in the colorants dictionary. Proceed as follows:

1. Select an object with the color you want to check (using the Enfocus Select Object Tool .
2. Click  to display the Enfocus Inspector and select  > . Next to the Fill icons, you will see "DeviceN (Spot + process colors). Below you will see the number of components and their names.
3. Click the **Actions** link (in the top right corner) and select **Color Picker**.
4. In the left part of the Color Picker dialog, navigate to the **Document Spot Colors** folder. This folder contains all spot colors used in the document (not only the ones used for the selected object).
5. Select the spot color you want to check. If the color is just a color name, without a color definition, the Alternate Color Space is Gray.

**Related Actions**

[Check DeviceN colorants](#) on page 302

## 3.4.2. Document

---

### 3.4.2.1. Select by document encoding

**Belongs to**

- **Category:** Doc
- **Type:** Selections

**What it does**

Selects a document based on its encoding (binary or ASCII).

**About document encoding**

ASCII encoding was formerly required to ensure that PDF files could be safely transported via e-mail or the Internet. However, most e-mail software in use today handles non-ASCII documents normally, eliminating the need to ASCII-encode your document.

**ASCII versus Binary encoding**

ASCII encoding may increase the file size, but allows you to edit the file manually.

Binary encoding makes the file smaller, but does not allow you to edit the file manually.

**Related Actions**

- [Check data format](#) on page 321
- [Change document encoding](#) on page 120

### 3.4.2.2. Select document

**Belongs to**

- **Category:** Doc
- **Type:** Selections

**What it does**

Allows you to select the whole document.

### 3.4.3. General

---

#### 3.4.3.1. Select clipping objects

**Belongs to**

- **Category:** General
- **Type:** Selections

**What it does**

Selects clipping objects, i.e. objects of which the shape masks other artwork. Only areas inside the clipping objects are visible.

You could use this Action to select clip text of which you want to change the font.

**Related Actions**

[Select objects that are completely clipped away](#) on page 496

#### 3.4.3.2. Select embedded PostScript fragments

**Belongs to**

- **Category:** General
- **Type:** Selections

**What it does**

Selects all fragments of embedded PostScript in the PDF document.

Embedded PostScript fragments do not show up in the screen preview, but could change the appearance of the printed document. They are generally undesirable in a print production environment.

**Related Actions**

- [Check for embedded PostScript fragments](#) on page 329
- [Remove PostScript](#) on page 140

#### 3.4.3.3. Select form contents according to form selection

**Belongs to**

- **Category:** General
- **Type:** Selections



**What it does**

Allows you to select or deselect the content of selected forms.

Forms are rectangular frames in a PDF which contain objects, for example an image or a placed PDF.

For more information, refer to [the PitStop Pro Reference Guide on the Enfocus website](#) (See Chapter "Editing forms").

**Related Actions**

[Select forms](#) on page 446

### 3.4.3.4. Select form if content is selected


**Belongs to**

- **Category:** General
- **Type:** Selections

**What it does**

Allows you to select forms based on selected objects. Note that by selecting the forms, the objects themselves are no longer selected.

You can choose whether or not to select nested forms, i.e. forms included inside other forms. For example, in the example below, the object is part of Form1 and Form2.

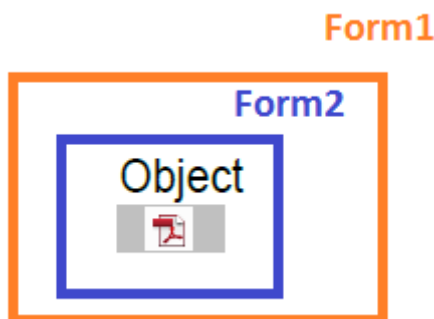

- If **Also selected nested forms** is cleared, only Form1 (= highest level) will be selected.
- If **Also selected nested forms** is selected, both forms will be selected.

**About forms**

Forms are rectangular frames in a PDF, which contain objects, for example an image or a placed PDF.

For more information about forms, refer to [the PitStop Pro Reference Guide on the Enfocus website](#) (See Chapter "Editing forms").

**Example**

The following example Action List consists of 2 Actions:

- The first Action selects all objects inside the art box.
- The second Action selects all forms of which the objects are selected by the first Action, and deselects the objects. Forms inside another form are not selected.

```
Select objects inside or outside region on page 495 <!-- select the art box -->  
Select form if content is selected <!-- clear the option Also select nested forms -->
```

**Related Actions**

- [Select forms](#) on page 446
- [Select form contents according to form selection](#) on page 444

### 3.4.3.5. Select forms

**Belongs to**

- **Category:** General
- **Type:** Selections

**What it does**

Allows you to select all forms in a PDF document.

Forms are rectangular frames in a PDF which contain objects, for example an image or a placed PDF.

For more information, refer to [the PitStop Pro Reference Guide on the Enfocus website](#) (See Chapter "Editing forms").

For more information, refer to the PitStop Pro Reference Guide (See Chapter "Editing forms").

**Example**

To select all forms and log them as an error:

```
Select forms  
Log selection <!-- enter "Forms were found in this document" and select "Log as error"  
at the bottom -->
```

**Related Actions**

- [Log selection](#) on page 335
- [Select form contents according to form selection](#) on page 444

### 3.4.3.6. Select invisible objects without fill and stroke

**Belongs to**

- **Category:** General
- **Type:** Selections

**What it does**

Selects objects that have no fill or stroke color associated with them. Even though these objects are not visible in the document, you might want to remove them.



---

**Note:** This Action only works on vector art (paths) and text without fill and stroke.

---

**Related Actions**

- [Select objects that use neither stroke nor fill](#) on page 458 (same functionality)
- [Check for invisible objects without fill and stroke](#) on page 330
- [Remove invisible objects without fill and stroke](#) on page 277

### 3.4.3.7. Select objects that have a clipping path

**Belongs to**

- **Category:** General
- **Type:** Selections

**What it does**

Selects objects of which the shape (partly) masks other artwork. Only areas inside the clipping objects are visible.

**Related Actions**

- [Select clipping objects](#) on page 444
- [Select objects that are completely clipped away](#) on page 496

### 3.4.3.8. Select parent content object

**Belongs to**

- **Category:** General
- **Type:** Selections

**What it does**

Allows you to select parent content objects, for example the page the object belongs to.

### 3.4.3.9. Select tiling pattern contents according to parent object selection

**Belongs to**

- **Category:** Color
- **Type:** Selections

- **Since version:** 2020

**What it does**

Allows you to select the tiling pattern content depending on whether or not the parent object (e.g. text or line art) is selected.

There are two options:

- Select the tiling pattern content if the parent object is selected.
- Select everything except the tiling pattern content of parent objects that are not selected.

### 3.4.3.10. Select XObjects

**Belongs to**

- **Category:** General
- **Type:** Selections

**What it does**

Selects any XObject in the PDF file.

XObjects are PostScript objects, such as background images, that are defined only once in a PDF file, but used several times (e.g. on several pages). Using XObjects can speed up printing but requires extra printer memory.

XObjects are supported as of PDF 1.4.

**Example**

To log the presence of XObjects, use:

```
Select XObjects  
Log Selection
```

**Related Actions**

[Check for reference Xobjects](#) on page 331

## 3.4.4. Image

---

### 3.4.4.1. Select by alternate images

**Belongs to**

- **Category:** Image
- **Type:** Selections

**What it does**

Selects either **all images with alternates** or **all images with alternates that are default for printing**.

An alternate can be a high resolution version of an image that is used in the PDF to preview the image on screen. If you want to make sure that the correct image is set to print, choose **all images with alternates that are default for printing**.

**Related Actions**

- [Add alternate images](#) on page 141
- [Check for alternate images](#) on page 336
- [Remove alternate images](#) on page 146

### 3.4.4.2. Select by image resolution

**Belongs to**

- **Category:** Image
- **Type:** Selections

**What it does**

Makes a selection of images based on their resolution, for example all images with a resolution between 320 and 400 ppi.

You can select all images, or limit your selection to color or gray scale images, or to monocolored images only.



**Note:** This Action checks for the **effective** resolution; if the image has been resized, this is the resolution after scaling.

**Related Actions**

[Check resolution](#) on page 341

### 3.4.4.3. Select by image size

**Belongs to**

- **Category:** Image
- **Type:** Selections

**What it does**

Allows you to select images by their width or height (expressed in pixels).

You can for example select images with a width or height equal to (or more or less than) 64 pixels.

### 3.4.4.4. Select image by filter type

**Belongs to**

- **Category:** Image

- **Type:** Selections

**What it does**

Allows you to select images according to the compression type they use.

You can choose one or more of the following filters:

- ASCII hex
- CCITT
- ZIP
- RunLength
- JPEG 2000
- ASCII 85
- JPEG
- LZW
- JBIG2

Optionally, you can also include soft-mask images (of the chosen filter types) in your selection (i.e. the images that mask an image). These are not included by default.

### 3.4.4.5. Select images

**Belongs to**

- **Category:** Image
- **Type:** Selections

**What it does**

Selects all the images in a PDF document.

**Example**

The following selects everything in a PDF except for the images:

```
Select all
Select images
NOT
AND
```

### 3.4.4.6. Select images with OPI info

**Belongs to**

- **Category:** Image
- **Type:** Selections

**What it does**

Selects all the images in a PDF document that contain OPI (Open Prepress Interface) information.

OPI images are treated special as they are assumed to be preview images. They will for example not be preflighted as other images would be.

**About OPI**

OPI (Open Prepress Interfaces) replaces high resolution images with "preview" images; low resolution substitutes which are stored in the PDF, together with the path to the high resolution images. This facilitates data storage and data transfer of PDFs with a large number of images.

**Example**

The following finds any such images and logs them as a caution:

```
Select images with OPI info
Log selection <!-- In the field, type your message (ex. 'Images with OPI comments were
found in this PDF'), then select Log as warning at the bottom -->
```

**Related Actions**

- [Check OPI path](#) on page 340
- [Check OPI type](#) on page 340
- [Gather OPI information](#) on page 418
- [Remove OPI](#) on page 146
- [Change OPI info](#) on page 144

### 3.4.4.7. Select image type

**Belongs to**

- **Category:** Image
- **Type:** Selections

**What it does**

Allows you to select a particular type of images.

You can select one of the following image types:

- 1-Bit images
- Grayscale images
- Color images
- Stencil mask
- Indexed images

**Example**

The following will convert color images to Grayscale but will not alter Black & White images:

```
Select image type <!-- In the popup, select Color -->
Convert color <!-- In the popup, select Grayscale -->
```

### 3.4.4.8. Select inline image syntax

**Belongs to**

- **Category:** Image; PDF 2.0

- **Type:** Selections
- **New since:** PitStop 2022

**What it does**

Selects images based on the presence of an L key.

The L key specifies the length of the image data and allows users to skip inline images if required.

You can select images...

- Without an L key
- With an L key
- With an invalid L key

Note that PDF 2.0 allows (but does not impose) the presence of an L key, but if it's present, it must match the actual inline image data length.

**Related Actions**

- [Check inline image syntax](#)
- [Change inline image syntax](#) on page 144

### 3.4.4.9. Select page by number of images

**Belongs to**

- **Category:** Image
- **Type:** Selections
- **Since:** 2020

**What it does**

Selects all pages that contain a particular number of images.

You could for example select all pages with less than 4 images.

**Related Actions**

- [Check number of images on page](#) on page 339

### 3.4.4.10. Select rendering objects

**Belongs to**

- **Category:** LineArt;Text;Image
- **Type:** Selections

**What it does**

Selects all objects with a rendering intent.



This includes paths, text and images with any of the following rendering intents:

- Absolute Colorimetric
- Relative Colorimetric
- Perceptual
- Saturation



**Note:** This Action does not allow you to make a selection based on **one particular** rendering intent. To select objects by **one** of the listed rendering intents, use [Select by rendering intent](#) on page 427.

#### **About rendering intents**

A rendering intent is a remapping method, allowing to remap colors so that they best match the intended use. 'Remapping' means that colors from one output device's color space are mapped to the color space of another device.

For more information and examples, refer to [the PitStop Pro Reference Guide on the Enfocus website](#) (See Chapter "Rendering intents to remap colors").

For more information and examples, refer to the PitStop Pro Reference Guide (See Chapter "Rendering intents to remap colors").

#### **Related Actions**

- [Change rendering intent](#) on page 104
- [Check rendering intent](#) on page 312
- [Remove rendering intent](#) on page 117
- [Select by rendering intent](#) on page 427

### 3.4.4.11. Select single image page images

#### **Belongs to**

- **Category:** Image
- **Type:** Selections

#### **What it does**

Selects single image page images, i.e. images that cover the entire page.

## 3.4.5. Layers

---

### 3.4.5.1. Select layers

#### **Belongs to**

- **Category:** Layers
- **Type:** Selections

- **Since version:** 12 update 3

**What it does**

Selects ALL layers in a PDF document.

**Related Actions**

[Select layers by name](#) on page 454

### 3.4.5.2. Select layers by print state

**Belongs to**

- **Category:** Layers
- **Type:** Selections
- **Since Version:** 2018

**What it does**

Allows you to select all layers with a particular print state.

Print state options are:

- Always prints
- Prints when visible
- Never prints

**Example**

To change the print state 'Always prints' to 'Prints when visible', you could use the following Action List.

```
Select layers by print state <!-- with the option Print: Always prints -->  
Change layer print state      <!-- with the option Print: Prints when visible -->
```

**Related Actions**

- [Change layer print state](#) on page 150
- [Check layer print state](#) on page 342

### 3.4.5.3. Select layers by name

**Belongs to**

- **Category:** Layers
- **Type:** Selections
- **Since version:** 12 update 3

**What it does**

Allows you to select layers with a particular layer name.



**Note:** You can use regular expressions to define the layer name (if you select **Equals/Does not equal** as operator method).

### Example

To select "Layer1" and "Layer3" but not e.g. "Layer2", "Layer12" or any other layer, choose the following attributes:

```
Select layers where name equals [13] <!-- to exclude e.g. Layer2 and Layer12 -->
Select Match case <!-- to exclude e.g. layer1 -->
Select Use regular expressions <!-- to make sure [13] is considered a regular
expression instead of a string -->
```

## 3.4.5.4. Select objects in layers by layer properties

### Belongs to

- **Category:** Layers
- **Type:** Selections

### What it does

Allows you to select content based on the layer properties of the layer it's placed on.

You can select content that is:

- **Optional:** placed on a layer
- **Not optional:** not placed on a layer
- **By default visible:** visible when the document is first opened (applies to both layered and "normal" content)
- **By default invisible:** invisible when the document is first opened
- **Visible:** set to "visible" e.g. by the user or by an application such as PitStop (regardless of the initial visibility state)
- **Invisible:** set to "invisible" e.g. by the user or by an application such as PitStop (regardless of the initial visibility state)

### Example

The following Action List allows you to select layered content that is by default visible. Normal content (that is visible by default) is not selected.

```
Select objects in layers by layer properties <!-- Choose "Select content that is
optional" -->
Select objects in layers by layer properties <!-- Choose "Select content that is
visible" -->
AND <!-- This operator makes sure that only content is selected that is optional and
visible at the same time -->
```

### Related Actions

- [Change layer properties](#) on page 150

- [Select objects in layers by name](#) on page 456

### 3.4.5.5. Select objects in layers by name

#### **Belongs to**

- **Category:** Layers
- **Type:** Selections

#### **What it does**

Allows you to select objects inside layers with a certain name.

#### **How to proceed**

1. Select whether the layer name should (not) be equal to or (not) contain the value you specify.
2. Optionally, enable **Match case** or **Use regular expressions**.



**Note:** The option **Use regular expression** is available as of PitStop 12 update 2, if you select **equals** or **does not equal**. This option allows you to define the layer name using a regular expression (e.g Layer[1-3] will match the following layer names: Layer1, Layer2 and Layer3).

#### **Related Actions**

- [Select objects in selected layers](#) on page 456
- [Select objects in layers by layer properties](#) on page 455

### 3.4.5.6. Select objects in selected layers

#### **Belongs to**

- **Category:** Layers
- **Type:** Selections
- **Since version:** 12 update 3

#### **What it does**

Selects objects in the layer(s) selected by another Action in the same Action List.

#### **Example**

To select the objects on **all** layers of the PDF, create the following Action List:

```
Select layers <!-- Select layers on page 453 -->
Select objects in selected layers
```

#### **Related Actions**

- [Select objects in layers by name](#) on page 456

- [Select objects in layers by layer properties](#) on page 455

## 3.4.6. Line Art

---

### 3.4.6.1. Select by line weight

***Belongs to***

- **Category:** Line Art
- **Type:** Selections

***What it does***

Selects objects with a particular line weight.

For example, select objects with line weight *less than 0.0123* inch.

***Related Actions***

- [Normalize line weight](#) on page 133
- [Select by line weight](#) on page 457
- [Check line weight](#) on page 346

### 3.4.6.2. Select closed paths

***Belongs to***

- **Category:** Line Art
- **Type:** Selections
- **Since Version:** 2018

***What it does***

Selects the closed paths in a file.

*Use case:* To be able to manipulate the contents of a file based on the dieline (closed paths), you may select the dieline from within a PDF file containing other paths of the same color and width.

***Related Actions***

- [Select subpaths](#) on page 462

### 3.4.6.3. Select line art

***Belongs to***

- **Category:** Line Art

- **Type:** Selections

**What it does**

Allows you to select objects that are drawn as line art (i.e. vector and not raster).

### 3.4.6.4. Select line art by total number of nodes

**Belongs to**

- **Category:** Line Art
- **Type:** Selections
- **Since Version:** 2019

**What it does**

Selects paths based on the number of nodes. The number of nodes can be counted based on compound paths or subpaths.

This Action can be useful in combination with [Select closed paths](#) on page 457 or with [Rasterize selection](#) on page 138.

**Related Actions**

- [Select page by total number of nodes](#) on page 460

### 3.4.6.5. Select objects that use neither stroke nor fill

**Belongs to**

- **Category:** LineArt;Text
- **Type:** Selections

**What it does**

Selects vector or path objects that contain no stroke or fill color value in a PDF.

**Related Actions**

[Select invisible objects without fill and stroke](#) on page 446 (same functionality)

### 3.4.6.6. Select objects with negative dash pattern phase


**Belongs to**

- **Category:** LineArt
- **Type:** Selections
- **Since version:** 13

**What it does**

Select documents that have a dash pattern phase with a negative value.

The dash pattern phase specifies the distance into the dash pattern to start the dash. Negative values may not be supported by the RIP.

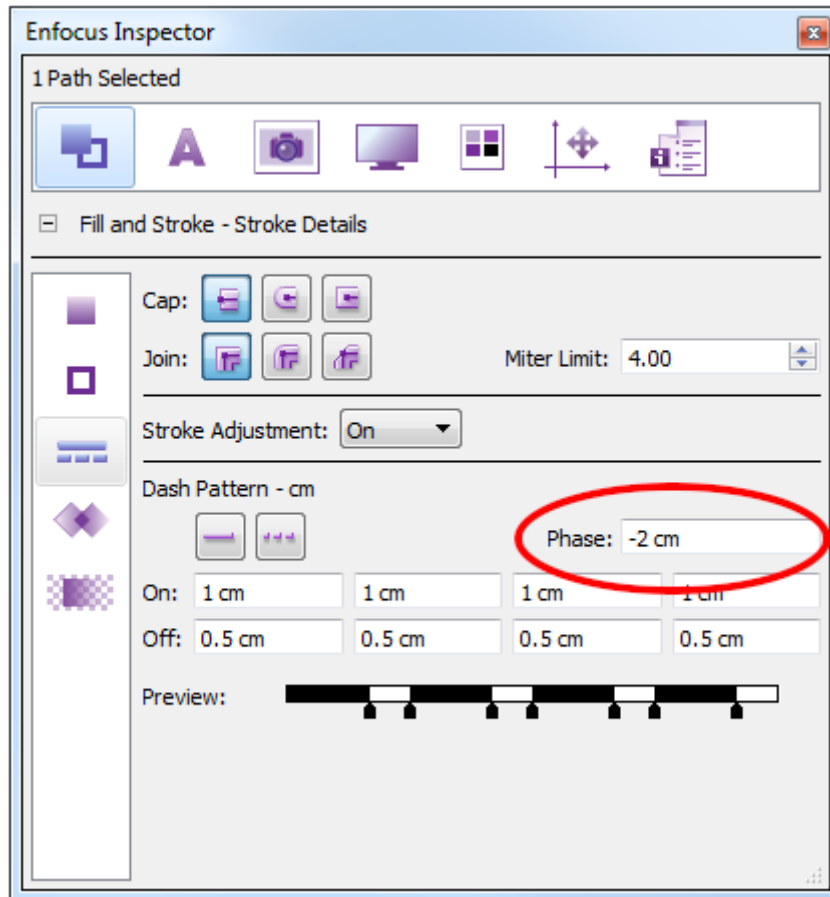**Related Actions**

- [Check for objects with negative dash pattern phase](#) on page 345
- [Fix negative dash pattern phase](#) on page 169

### 3.4.6.7. Select page by number of paths

**Belongs to**

- **Category:** Line Art
- **Type:** Selections

**What it does**

Allows you to make a selection based on the number of paths on a page.

You could for example select all pages with less than 4 pages.

**Related Actions**

[Check number of paths on page](#) on page 347

### 3.4.6.8. Select page by total number of nodes

**Belongs to**

- **Category:** Line Art
- **Type:** Selections
- **Since version:** 13 update 1

**What it does**

Selects pages based on the number of nodes present on that page. You can set the threshold (e.g. less than/more than (...) e.g. 10.000 nodes) as required. This Action is useful to select (and afterwards change) complex pages with lots of points, which may take a considerable amount of time to rip and therefore may cause a production bottleneck. A common way of handling this issue is to select the offending pages and convert them to bitmaps.



**Note:** The new default Action List "Find complex pages (over 5,000 nodes) and rasterize them at 600 dpi" includes this functionality.

**Related Actions**

- [Check total number of nodes on page](#) on page 348
- [Select line art by total number of nodes](#) on page 458

### 3.4.6.9. Select paths by fill type

**Belongs to**

- **Category:** LineArt
- **Type:** Selections
- **Since version:** 2023 update 1

**What it does**

Selects paths based on their fill type:

- Paths without fill
- Paths with Non-Zero Winding fill
- Paths with Even-odd fill

**About the fill type**

The fill type is an attribute of polygons and loops: compound paths with intersecting lines. To determine whether a point is part of the shape, two different rules can be applied:

- The **Non-Zero Winding** rule (or standard rule). This rule supposes that you draw a line from a point inside the shape to the outside of the shape, without passing through a vertex. You must now count the number of times edges wind around the point inside the shape, in a counter-clockwise direction:



- For every edge that crosses the line from the point inside the shape in one direction, add 1 to the winding number.
- For every edge that crosses the line in the opposite direction, subtract 1.

If the winding number is not equal to zero, the shape area to which the point belongs, is filled. For more information, refer to <http://www.wikipedia.org/wiki/nonzero-rule>.

- The **Even-odd rule**: This rule also supposes that you draw a line between a point inside the shape outline and a point outside its outline.
  - If that line crosses the line of the shape an odd number of times, the shape area to which the point belongs, is filled.
  - If the number of crossings is even, the area is not filled.

#### Checking the fill type of line art

To see which rule is applied, check the object's fill attributes:

1. Select the object, using the Enfocus Select tool .
2. Click  to display the Enfocus Inspector and select  > .
3. At the bottom, check which button is selected:
  - If  **Fill** is selected, the **Non-zero Winding rule** applies.
  - If  **Eofill** is selected, the **Even-odd** rule applies.

#### Related Actions

- [Change fill type](#) on page 159

## 3.4.6.10. Select rendering objects

#### Belongs to

- **Category:** LineArt;Text;Image
- **Type:** Selections

#### What it does

Selects all objects with a rendering intent.

This includes paths, text and images with any of the following rendering intents:

- Absolute Colorimetric
- Relative Colorimetric
- Perceptual
- Saturation



**Note:** This Action does not allow you to make a selection based on **one particular** rendering intent. To select objects by **one** of the listed rendering intents, use [Select by rendering intent](#) on page 427.

**About rendering intents**

A rendering intent is a remapping method, allowing to remap colors so that they best match the intended use. 'Remapping' means that colors from one output device's color space are mapped to the color space of another device.

For more information and examples, refer to [the PitStop Pro Reference Guide on the Enfocus website](#) (See Chapter "Rendering intents to remap colors").

For more information and examples, refer to the PitStop Pro Reference Guide (See Chapter "Rendering intents to remap colors").

**Related Actions**

- [Change rendering intent](#) on page 104
- [Check rendering intent](#) on page 312
- [Remove rendering intent](#) on page 117
- [Select by rendering intent](#) on page 427

### 3.4.6.11. Select subpaths

**Belongs to**

- **Category:** Line Art
- **Type:** Selections

**What it does**

Selects the subpaths if the entire path is selected.

**About subpaths**

A path is considered the combination of the path itself which represents most graphic state properties such as color, line-weight, etc. and the subpaths which represent the lines. For example, a doughnut is a single path with a single fill and stroke color, which consists of two subpaths (=two circles).

**Related Actions**

- [Combine subpaths](#) on page 162
- [Split in subpaths](#) on page 176

### 3.4.6.12. Select thin objects

**Belongs to**

- **Category:** Line Art
- **Type:** Selections

**What it does**

Allows you to select objects based on the maximum thickness of the fill or stroke.

If desired, you can indicate that for objects of which stroke and fill have the same color, the width of the fill and stroke should be added together.

This Action is typically used to select and afterwards remove thin white lines that may be visible on small screens (e.g. on an iPad screen).

#### **Example**

If you choose the following options:

```
Select objects with width of Filled rectangle  
smaller than 0.0353 cm  
Calculate whole thickness when stroke and fill have the same color <!-- selected -->
```

Following objects will be included in the selection:

- Objects with different stroke and fill color, must have a **fill** smaller than 0.0353 cm.
- Objects with the same stroke and fill color, must have a **fill** and **stroke** (added together) smaller than 0.0353 cm.

#### **Related Actions**

[Check thin objects](#) on page 347

## 3.4.7. Metadata

---

### 3.4.7.1. Select annotations

#### **Belongs to**

- **Category:** Metadata
- **Type:** Selections

#### **What it does**

Selects annotations of a particular type in a PDF document.

#### **Example**

To delete all annotations of the type "Movie" and "Sound" in a PDF, configure the following Action List:

```
Select annotations <!-- select Movie and Sound -->  
Remove selection
```

### 3.4.7.2. Select annotations appearance streams contents according to annotation selection

#### **Belongs to**

- **Category:** Metadata
- **Type:** Selections

**What it does**

Allows you to select content based on the selected annotations.

**About annotation appearance streams**

An appearance stream determines the visual appearance of an annotation (e.g. borders, colors,...). Different from [Select annotations](#) on page 463 (which only selects the annotation **content**), this Action allows you to also include the appearance stream in your selection, so that other actions can be applied to it. You could for example check for RGB objects only inside appearance streams.

This Action has two options:

- **Select the annotation content if the annotation is selected:** If the annotation is selected, all the PDF objects in the appearance stream will be selected too.
- **Select everything except the annotation content of annotations that are not selected:** This is the inverse of the first option; everything in the PDF is selected, except for the objects inside appearance streams of unselected annotations.

**Example**

To select all annotations of the type "Text" and change their color, configure the following Action List:

```
Select annotations <!-- select Text only - See Select annotations on page 463 -->
Select annotations' appearance streams contents according to annotation selection <!--
choose first option -->
Change color <!-- Pick the desired fill/stroke color - See Change color on page 102 -->
```

To select and change the color of the whole document, including text annotations but excluding video, sound, ... configure the following Action List:

```
Select annotations <!-- select Text only - See Select annotations on page 463-->
Select annotations' appearance streams contents according to annotation selection <!--
choose the second option -->
Change color <!-- Pick the desired fill/stroke color - See Change color on page 102 -->
```

### 3.4.7.3. Select annotations by print setting

**Belongs to**

- **Category:** Metadata
- **Type:** Selections

**What it does**

Selects annotations based on their print setting.

**Example**

To select all printing annotations and remove them

```
Select annotations by print setting <!--Option: Select annotations if set to print -->
Remove selection
```

To select all printing annotations and set them to non-printing

```
Select annotations by print setting <!-- Option: Select annotations if set to print -->
Change annotations' print setting <!-- Option: Set annotation to Non-Printing -->
```

See also: [Change annotations print setting](#) on page 178

### 3.4.7.4. Select by binding

#### **Belongs to**

- **Category:** Metadata
- **Type:** Selections

#### **What it does**

Allows the selection of a PDF based on its binding (left-edge or right-edge binding).

Most European language documents are bound on the left.



**Note:** To check a document's binding, in Adobe Acrobat, go to **File > Properties** and switch to the **Advanced** tab. The document's binding property (Left Edge or Right Edge) is displayed under Reading Options.

#### **Related Actions**

- [Check binding](#) on page 350
- [Change binding](#) on page 179

### 3.4.7.5. Select by document info

#### **Belongs to**

- **Category:** Metadata
- **Type:** Selections

#### **What it does**

Allows you to make selections based on document info, such as the title, subject, author, keywords, producer or creator of the PDF. You can specify where the information must be taken from, and what the expected value is.



**Note:** From version 12 update 2 onwards, you can use regular expressions to define the value in the **Compare with** field (if you select **Equals/Does not equal** as operator method).

#### **Example**

Suppose you want to select a document of which the author is Anne Banks. It doesn't matter where this information is taken from.

Attributes:

- Document info: author
- Read value from: any metadata location



**Note:** If you select **Both metadata locations**, the name of the author will be searched for in both the XMP metadata stream and the info dictionary; if you select **Most recent metadata location**, only the most recently changed metadata location will be checked.

- Operator method: equals
- Compare with: Anne Banks

If you are not sure about the spelling of the name *Anne* (spelled Ann or Anne?), you could select the **Use regular expressions** checkbox and enter "Ann(e)? Banks" in the **Compare with** field.

#### **Related Actions**

- [Change document info](#) on page 179
- [Check document info](#) on page 352

### 3.4.7.6. Select by PDF version

#### **Belongs to**

- **Category:** Metadata, PDF 2.0
- **Type:** Selections

#### **What it does**

Allows you to make a selection based on the PDF's Acrobat or PDF version.

The Acrobat version is the sum of the two numbers that make up the PDF version, for example: PDF 1.4 = Acrobat 5. This is not true anymore for PDF 2.0, as from this version onwards there is no link anymore between the Acrobat and the PDF version.



**Note:** As of PitStop 2020, you can select a PDF 1.7 by its extension level (Adobe Extension 1, 3, 5, 6 or 8). For more details concerning the extensions, refer to [https://www.adobe.com/devnet/pdf/pdf\\_reference.html](https://www.adobe.com/devnet/pdf/pdf_reference.html).

#### **Example**

To select PDFs with Acrobat version higher than 7.0, proceed as follows:

```
Select by PDF version <!-- options: Acrobat version must be more than 7.0 -->
```

#### **Related Actions**

- [Change PDF version](#) on page 183
- [Check PDF/Acrobat compatibility](#) on page 362

### 3.4.7.7. Select by trapped flag

#### **Belongs to**

- **Category:** Metadata

- **Type:** Selections

**What it does**

Allows the selection of a PDF based on the value of the trapped flag.

**About trapping**

The trapped flag indicates whether or not a file has been "trapped", i.e. has been corrected for slight color misregistrations. The trapped flag must be defined in PDF/X documents.

The flag can be set to:

- **True:** the document has been trapped, or the creator of the document has decided that it should not be trapped.
- **False:** the document has not been trapped
- **Unknown:** it's not known whether or not the document has been trapped. Note that this status should be avoided.

The trapped flag is stored in the info dictionary and/or in the XMP metadata stream, but the data can be inconsistent; that's why you must indicate where the trapped flag must be taken from, e.g. from the most recent metadata location.

**Related Actions**

- [Check document trapped flag](#) on page 354
- [Select by trapped flag](#) on page 466
- [Check Trapnets for PDF/X](#) on page 365

### 3.4.7.8. Select document if XMP file identifiers are not present

**Belongs to**

- **Category:** Metadata
- **Type:** Selections

**What it does**

Selects document if XMP file identifiers are not present.

**Related Actions**

- [Set XMP file identifiers](#) on page 194
- [Check file identifiers in document XMP metadata](#) on page 322

### 3.4.7.9. Select document if document XMP metadata contains invalid types

**Belongs to**

- **Category:** Metadata
- **Type:** Selections

**What it does**

Selects the document if metadata streams defined in the PDF do not conform to the XMP schema.

**About XMP metadata streams**

There are two metadata locations in a PDF file:

- The **info dictionary** contains information about the file, such as the title, the author, the creation date ... and is visible through the file's Document properties. It's not in XML format.
- The **XMP metadata stream** also contains information about the file, but this information is represented as XMP metadata - XMP referring to Adobe's labeling technology **E**xtensible **M**etadata **P**latform. All information in the info dictionary is also represented in the XMP metadata stream dictionary, in the form of XMP properties.

Inconsistencies may occur when only one of the metadata locations has been updated.

**Related Actions**

[Check if document XMP metadata types are valid](#) on page 360

### 3.4.7.10. Select external hyperlink annotations

**Belongs to**

- **Category:** Metadata
- **Type:** Selections

**What it does**

Selects annotations with external links to other files, applications and/or web Pages embedded in a PDF document.



**Tip:** You can check the validity of the links with [Check external hyperlink annotations](#) on page 355.

### 3.4.7.11. Select if document XMP contains an invalid name space prefix

**Belongs to**

- **Category:** Metadata
- **Type:** Selections

**What it does**

Selects if document XMP contains an invalid namespace prefix.

**About XMP metadata**

XMP metadata is descriptive information about the file embedded in the PDF, for example the name of the author, keywords, copyright information... XMP refers to labeling technology that



is used, i.e. Adobe's Extensible Metadata Platform. You can view the XMP metadata in a file's Document Properties in Acrobat (Click the Additional Metadata button, then select Advanced).

#### **Related Actions**

[Check if date is present in document XMP metadata](#) on page 358

[Check file identifiers in document XMP metadata](#) on page 322

### 3.4.7.12. Select if document metadata is inconsistent

#### **Belongs to**

- **Category:** Metadata
- **Type:** Selections

#### **What it does**

Selects if document metadata is inconsistent, i.e. if the metadata values are not identical in the different metadata locations.

#### **How it works**

There are two metadata locations in a PDF file:

- The **info dictionary** contains information about the file, such as the title, the author, the creation date ... and is visible through the file's Document properties. It's not in XML format.
- The **XMP metadata stream** also contains information about the file, but this information is represented as XMP metadata - XMP referring to Adobe's labeling technology **Extensible Metadata Platform**. All information in the info dictionary is also represented in the XMP metadata stream dictionary, in the form of XMP properties.

Inconsistencies may occur when only one of the metadata locations has been updated.

#### **Extra checks**

Optionally you can make the selection only if metadata in one location (selected from the list) is also present in the other location; if all metadata should be present in both locations, select **any metadata location**.

If multiple creators should not be considered an inconsistency, select the **Allow multiple creators** checkbox.

#### **Related Actions**

- [Check if document metadata is consistent](#) on page 359
- [Make document metadata consistent](#) on page 188

### 3.4.7.13. Use flags to select annotation

#### **Belongs to**

- **Category:** Metadata
- **Type:** Selections
- **New since:** PitStop 2022

**What it does**

Selects annotations based on the flag they have.

You can select the flags of your choice and indicate whether or not the flags should be enabled.

Following flags can be selected:

- Invisible
- Print
- NoRotate
- ReadOnly
- ToggleNoView
- Hidden
- NoZoom
- NoView
- Locked
- LockedContents

**Related Actions**

- [Check annotation flags settings](#) on page 348

## 3.4.8. Operators

---

### 3.4.8.1. AND

**Belongs to**

- **Category:** Operators
- **Type:** Selections

**What it does**

AND is a logical operator. This means it is used to select a single object with more than one attribute.

**Example**

To select text that was Helvetica AND size 12 pt, use:

```
Select Font Helvetica
Select Text if Point Size = 12.00 pt
AND
```



**Note:** AND is NOT used to select two different objects!

For example, **the following is incorrect** because a font cannot be both Helvetica and Arial:

```
Select Font Helvetica
Select Font Arial
AND
```

### 3.4.8.2. Duplicate top of selection stack

**Belongs to**

- **Category:** Operator
- **Type:** Selections

**What it does**

Duplicate top of selection stack is a logical operator. It is used to **duplicate** the top of the current Action list stack. It's typically combined with the [Remove top of selection stack](#) ("delete") operator.

**For internal use only**

Both "Duplicate top of selection stack" and [Remove top of selection stack](#) are only used internally by PitStop.

When running a Preflight Profile, PitStop turns this Profile into an Action List; the more checks and fixes there are in the Preflight Profile, the longer and more elaborate its Action List representation. In order to avoid having to perform complex selections multiple times, PitStop optimizes the internal Action List by duplicating these selections when they are needed multiple times.

### 3.4.8.3. Group Actions

**Belongs to**

- **Category:** Operator
- **Type:** Selections

**What it does**

Allows you to group several Actions within an Action List.

This Action is useful to organize and document your Action List.



**Note:** Instead of using the Group Actions Action, you can as well right-click an Action in the Action List and select **Make Group** from the context menu.


**How to proceed**

1. Double-click **Group Actions** to add it to the Action List.
2. Specify a meaningful name for your Action group and enter a description.
3. Move **Group Actions** to the desired position. You can drag and drop it, or use the options in the context menu (**Move Up**, **Move Down**).
4. Add the required Actions to your Action List and drag them to your group.

**Example**

The screenshot below shows the **Add my Printer Marks and Enlarge** Action List (by default provided with PitStop). This Action List contains 3 Action groups (preceded by an icon:  if the group is expanded;  if the group is collapsed):

- The **Registration marks** group contains the different Actions required to add registration marks to the top, bottom, left and right of the page.
- The **Color bars** group contains the Actions to create two color bars.
- The **Trim marks** group contains the Actions to set the trim marks (using [Add object](#) on page 77).

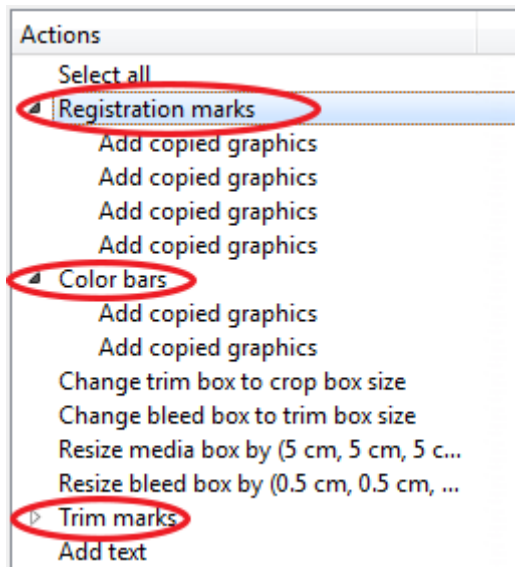

### 3.4.8.4. NOT

#### ***Belongs to***

- **Category:** Operators
- **Type:** Selections

#### ***What it does***

NOT is a logical operator. It is used to exclude objects according to their attributes.

#### ***Example***

To select all the text in a document that was not Arial, you need to exclude Arial from your selection.

```
Select Text
Select Font Arial
NOT <!-- NOT only applies to the immediately preceding item in the list of selections
-->
```

AND

### 3.4.8.5. OR

**Belongs to**

- **Category:** Operator
- **Type:** Selections

**What it does**

OR is a logical operator. It is used to select objects that share attributes.

**Example**

To select all text that is either Helvetica or Arial, use the following:

```
Select Font Helvetica  
Select Font Arial  
OR
```



**Note:** Do not use OR to exclude objects!

For example, the following will select all 12pt AND 14pt fonts:

```
Select Text if point size = 12.00 pt  
Select Text if point size = 14.00 pt  
OR
```

### 3.4.8.6. Remove top of selection stack

**Belongs to**

- **Category:** Operator
- **Type:** Selections

**What it does**

**Deletes** the top of the current Action list stack. It's typically combined with the [Duplicate top of selection stack](#) operator.

**For internal use only**

Both "Remove top of selection stack" and [Duplicate top of selection stack](#) are only used internally by PitStop.

When running a Preflight Profile, PitStop turns this Profile into an Action List; the more checks and fixes there are in the Preflight Profile, the longer and more elaborate its Action List representation. In order to avoid having to perform complex selections multiple times, PitStop optimizes the internal Action List by duplicating these selections when they are needed multiple times.

### 3.4.8.7. Restore selection

**Belongs to**

- **Category:** Operators
- **Type:** Selections
- **Since version:** 13

**What it does**

Restores a previously saved selection, so that it can be re-used in the Action List.

The selection must have been saved using the [Save selection](#) on page 476 Action; if this is the case, you will find it in the **Restore selection from list**.

If the selection is no longer available (for example because it has been removed from the Action List), you will get a warning: "Restoring unknown selection".

**Example**

Suppose you have a document with both CMYK and RGB objects. The following Action List allows you to:

- Select all CMYK objects
- Save this selection (i.e. all CMYK objects in the PDF) and name it "CMYK objects"
- Convert all CMYK objects to RGB
- Select all objects in the document
- Apply a curve on all RGB objects
- Restore the original selection (i.e. all objects that were originally in CMYK)

```
Select by color space <!-- Select by color space on page 425 Select CMYK -->
Save selection <!-- Type "As CMYK objects" -->
Convert to RGB objects <!-- Convert color on page 106 -->
Select all <!-- Select all on page 477 -->
Apply RGB curve Select by color space on page 425
Restore selection <!-- From the list, select "CMYK objects" -->
```

**Related Actions**

[Save selection](#) on page 476

### 3.4.8.8. ROLL

**Belongs to**

- **Category:** Operators
- **Type:** Selections
- **Since version:** 13 update 2

**What it does**

Allows you to change the order of the selections in the stack.

You must set:

- The *number of selections* to be taken into account, for example "3" if you want to change the order of the 3 last selections preceding the ROLL operator.
- The *distance*, i.e. the number of positions to move the items in the stack. If distance is set to "1", all selections in the stack move up one position. The selection on top moves down to the bottom of the stack.

Just like the other operators, ROLL must be placed after the selections in the Action List. The affected selections will be highlighted with a green indicator. Refer to [Using operators in Action Lists](#) on page 40.

#### **For advanced use only**

This Action may be used in advanced and complex Action Lists by users who are familiar with the ROLL operator in PostScript (which has the same functionality).

#### **Example**

Suppose you have a document with text, line art and images.

The following Action List results in a stack with the text segments at the bottom and images at the top.


```
Select text segments
Select line art
Select images
```

With Roll added (number of selection set to 3 and distance to 1), images will move to the bottom of the stack, line art to the top and images will be inbetween.

```
Select text segments
Select line art
Select images
Roll                                <!-- Selection set to 3, distance is 1 -->
```



**Tip:** You can test this by adding Log selections to your Action List and checking the result in the Enfocus Navigator as shown in the screenshot below.

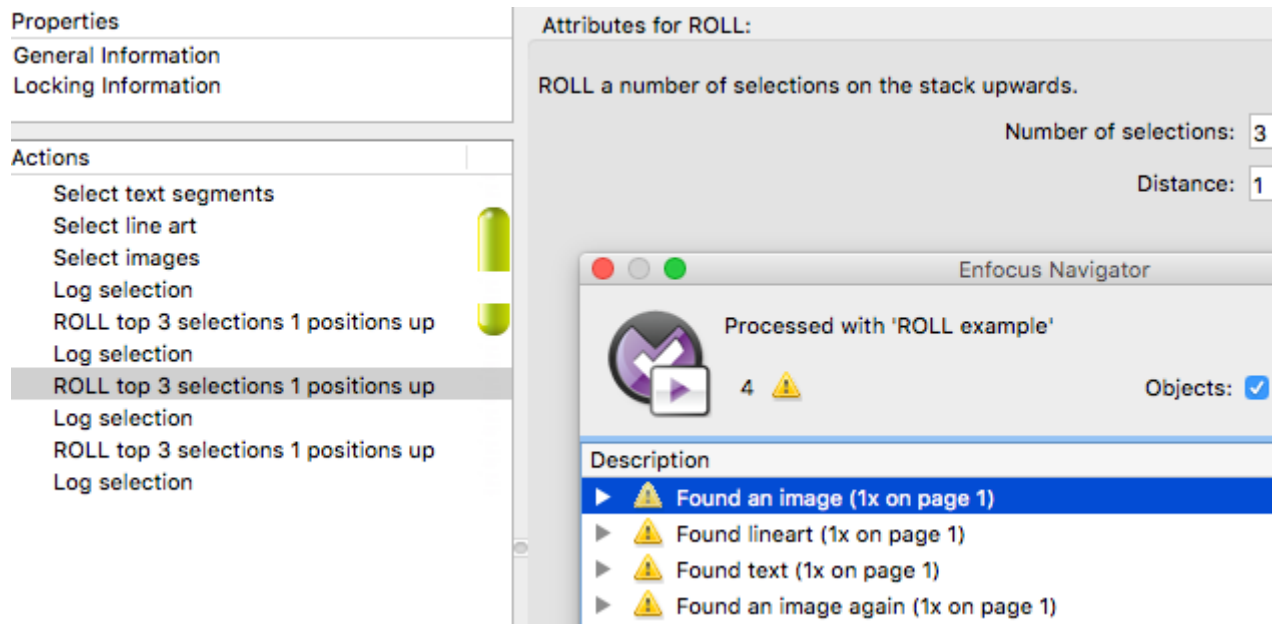

### 3.4.8.9. Save selection

#### ***Belongs to***

- **Category:** Operators
- **Type:** Selections
- **Since version:** 13

#### ***What it does***

Preserves the currently selected objects (line art, text, docs... = whatever is selectable in a PDF) for later use in the same Action List.

You should choose a name for your saved selection, for example "Save selection as: CMYK objects".

#### ***Remark***

**This Action does not preserve the saved Actions, only the resulting selection.** For example, if you have selected all text and save this selection, you can use [Restore selection](#) on page 474 to re-use this text later on in the Action List. However, if you added text later (after saving the selection), the added text will not be included in the saved selection.

#### ***Example***

Suppose you have a document with both CMYK and RGB objects. The following Action List allows you to:

- Select all CMYK objects
- Save this selection (i.e. all CMYK objects in the PDF) and name it "CMYK objects"
- Convert all CMYK objects to RGB
- Select all objects in the document
- Apply a curve on all RGB objects



- Restore the original selection (i.e. all objects that were originally in CMYK)

```
Select by color space <!-- Select by color space on page 425 Select CMYK -->
Save selection <!-- Type "As CMYK objects" -->
Convert to RGB objects <!-- Convert color on page 106 -->
Select all <!-- Select all on page 477 -->
Apply RGB curve Select by color space on page 425
Restore selection <!-- From the list, select "CMYK objects" -->
```

#### **Related Actions**

[Restore selection](#) on page 474

### 3.4.8.10. Select all

#### **Belongs to**

- **Category:** Operator
- **Type:** Selections

#### **What it does**

Allows you to select every object in a PDF document.

#### **Example**

To delete every object in a PDF:

```
Select all
Remove selection
```

#### **Remark**

Note that objects that are clipped away (hence are invisible) are selected as well. If you don't want this, we recommend removing them first. You can use [Select objects that are completely clipped away](#) on page 496 and [Remove selection](#) on page 278 to do so.

### 3.4.8.11. Select last added objects

#### **Belongs to**

- **Category:** Operator
- **Type:** Selections

#### **What it does**

Selects the objects that were added recently (in the same Action List).

This Action must be preceded by an Action of the type "Add".

**Example**

The following Action List will first add graphics to the PDF. The added graphics will then be selected and used by the third Action.

```
Add copied graphics <!-- Add copied graphics on page 76 -->
Select last added objects
Check XY scaling difference <!-- Check XY scaling difference on page 392 -->
```

## 3.4.9. Packaging

---

### 3.4.9.1. Select Esko barcode

**Belongs to**

- **Category:** Packaging
- **Type:** Selections
- **Since Version:** 13 update 2

**What it does**

Allows you to select Esko barcodes (both the new ArtPro Plus barcodes as well as the old XMP ones).

As of PitStop 25.07, the EAN-13 Iceland Foods barcode is also in the list.



**Note:** The selection is made based on the metadata attached to the barcode. If the metadata is absent, the Action won't be able to select the barcode.

**Related Actions**

- [Select Esko barcode type](#) on page 478
- [Check Esko barcode value](#) on page 368
- [Check Esko barcode type](#) on page 368
- [Add barcode](#) on page 68

### 3.4.9.2. Select Esko barcode type

**Belongs to**

- **Category:** Packaging
- **Type:** Selections
- **Since Version:** 13 update 2

**What it does**

Allows you to select Esko barcodes by type (chosen from a list).

As of PitStop 25.07, the EAN-13 Iceland Foods barcode is also in the list.

**Related Actions**

- [Select Esko barcode](#) on page 478
- [Check Esko barcode type](#) on page 368
- [Check Esko barcode value](#) on page 368
- [Add barcode](#) on page 68

### 3.4.9.3. Select layers by processing steps - ISO 19593-1

**Belongs to**

- **Application:** PitStop Pro
- **Category:** Packaging
- **Type:** Selections
- **Since Version:** 13 update 2

**What it does**

Allows you to select layers based on the layer's processing steps information. Processing steps metadata is defined by ISO standard 19593-1. For more information, refer to [the website of ISO \(International Organization for Standardization\)](#).

Note that you can select layers based on the presence of any processing steps metadata (regardless of the processing step type), or restrict your selection to the layers that contain a particular processing steps group. If the group consists of different processing step types, you can further limit your selection to a specific type (**Restrict to processing steps type** checkbox).

Supported groups:

- Structural
- Dimensions
- Braille
- Legend
- Positions
- White
- Varnish

You can as well define a custom group and custom step types. To do so, enter the appropriate name in the text box.

**Related Actions**

- [Check processing steps - ISO 19593-1](#) on page 369
- [Change layer processing steps - ISO 19593-1](#) on page 197
- [Remove processing steps - ISO 19593-1](#) on page 277

### 3.4.9.4. Select spot colors from Esko Normalized PDF XMP

**Belongs to**

- **Category:** Packaging
- **Type:** Selections
- **Since Version:** 13 update 2

**What it does**

Allows you to select spot colors based on the metadata attached to ESKO Normalized PDF files.

There are three categories of metadata to choose from: **Ink book**, **Printing method** and **Ink attribute**. If properties from different categories are selected, they are combined in the selection.

## 3.4.10. Page

---

### 3.4.10.1. Select by blending color space

**Belongs to**

- **Category:** Color; Page
- **Type:** Selections

**What it does**

Makes a selection based on the blending color space.

You must set the required blending color space and the required luminosity softmask blending color (or select the option **Undefined**).

**About blending color spaces**

When Adobe Acrobat interprets transparent objects and attempts to create a preview of the flattened artwork, it needs to do so using a single color space for all the items involved in the transparency group. This color space is called the **blending color space**.

The blending color space for soft masks (masks with soft transitions) is called the **luminosity softmask blending color space**. It is usually gray.

**Related Actions**

- [Change blending color space](#) on page 103
- [Check if blending color space is defined](#) on page 308

### 3.4.10.2. Select by media box origin

**Belongs to**

- **Category:** Page
- **Type:** Selections

**What it does**

Allows you to select pages of which the lower left corner is not located at coordinates 0,0.

The media box is the largest page box and defines the size of the physical medium on which the page will be printed or displayed. Some applications don't give the lower left 0,0 coordinates, but for example 100,100, which will cause problems when preflighting the file.

**Related Actions**

- [Check media box origin](#) on page 376
- [Move media box to 0.0](#) on page 211

### 3.4.10.3. Select by page orientation

**Belongs to**

- **Category:** Page
- **Type:** Selections

**What it does**

Allows you to select pages by orientation.

Choose either Portrait, Landscape, Same orientation or Most used orientation to select all pages with this orientation, and select the page box the orientation must be based on.

**Related Actions**

- [Change page orientation](#) on page 208
- [Check page orientation](#) on page 379

### 3.4.10.4. Select by page rotation angle

**Belongs to**

- **Category:** Page; Position and Size
- **Type:** Selections

**What it does**

Selects pages with a certain rotation angle.

You can choose a rotation angle of -90°, 0°, 90°, or 180° (clockwise).

**Related Actions**

- [Check page rotation angle](#) on page 379
- [Apply page rotation](#) on page 200

### 3.4.10.5. Select by page size

**Belongs to**

- **Category:** Page
- **Type:** Selections

**What it does**

Allows you to select pages based on the size of one of the page boxes.

You can for example select pages with a trim box of 21x29 cm.

The precision indicates how much the actual size is allowed to differ from the specified size. A precision of 0 means that no deviation is allowed: the size needs to match exactly the entered values.

#### **Related Actions**

[Check page size](#) on page 380

### 3.4.10.6. Select color bars

#### **Belongs to**

- **Category:** Page
- **Type:** Selections

#### **What it does**

Allows you to select color bars with a certain color patch border and patch size.

Color bars (also called color control bars or color control strips) are small squares of color representing CMYK inks and tints of gray, that are used by press operators to control ink density, dot gain, print contrast, ...



**Note:** PitStop provides an Action List to add color bars.

#### **Example**

You could combine this Action with another Action to, for example, delete all color bars at once:

```
Select color bars
Remove selection <!-- Remove selection on page 278 -->
```

### 3.4.10.7. Select empty pages

#### **Belongs to**

- **Category:** Page
- **Type:** Selections

#### **What it does**

Selects pages in a PDF document that contain no objects.

You can specify that elements outside of a specific page box should be ignored and/or visually empty pages (paper-white and invisible (fully transparent) objects).

**Related Actions**

- [Check for empty pages](#) on page 370
- [Remove empty page](#) on page 215

### 3.4.10.8. Select objects close to the page edge

**Belongs to**

- **Category:** Page
- **Type:** Selections

**What it does**

Selects objects close to the page edge.

You must specify the distance to the trim box and the distance into the bleed.

Optionally, you can choose to treat subpaths of compound paths individually. In that case, each of the subpaths will be selected separately.

See also:

- [Check if object is close to the page edge](#) on page 373
- [Change objects that are close to the page edge](#) on page 205

### 3.4.10.9. Select objects if page is selected

**Belongs to**

- **Category:** Page
- **Type:** Selections

**What it does**

Allows you to select all objects on the selected page(s).

### 3.4.10.10. Select page by its page box properties

**Belongs to**

- **Category:** Page
- **Type:** Selections

**What it does**

Allows you to select a number of pages based on one of the following criteria:

- Whether or not a certain page box is defined.
- The fact that the crop or art box differs from the trim box.
- The fact that a certain page box lies (partially) outside of the media box.
- The fact that the size of the bleed box is not sufficient compared to the trim or crop box.

This allows you to detect pages of which the page boxes are not well defined.

### 3.4.10.11. Select page if content is selected

***Belongs to***

- **Category:** Page
- **Type:** Selections

***What it does***

Allows you to select a page if the content is selected.

You can select or both the page object and the entire page content.

***How to proceed***

1. Specify **what** you want to select:
  - The page object only, or
  - Both the page object and the entire page content.
2. Specify on what **condition** you want to select it, for example if more than one objects are selected.

### 3.4.10.12. Select pages

***Belongs to***

- **Category:** Page
- **Type:** Selections

***What it does***


Allows you to select a particular page, a set of pages, or a page range, for example the first or last page of a PDF, all odd pages, pages from 1 to 5, ...

You can also make a selection based on the *number of pages* in the PDF, for example: Select if number of pages is not a multiple of 10.


***New options added in 13 update 1***

- **Rn notation** allowed in page range selection. If you want to add pages starting from the end of the PDF, you can use this notation in the **Page range** text box. R1 refers to the last page (= 1 page from the end), R2 refers to the last but one (= 2 pages from the end), ...



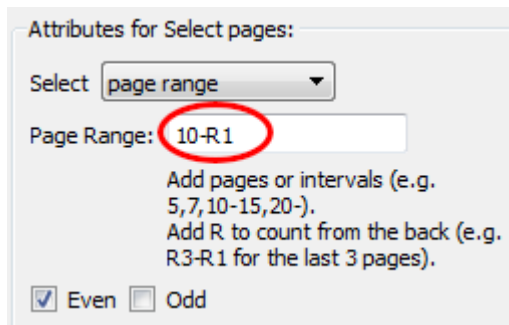

- **Extra option to select every Nth page**, e.g. every second page in the PDF in the first 20 pages of the PDF.

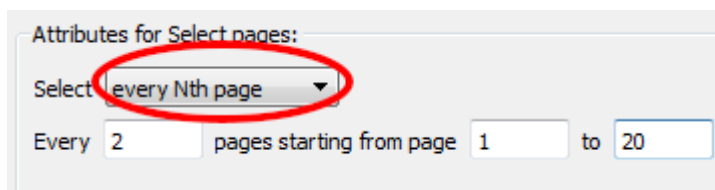

#### Example

To select every page but the first page of a PDF, and then add a copied graphic to that page, proceed as follows:

```
Select all pages <!-- Choose: Select all pages, Even and Odd -->
Select first page <!-- Choose: Select first page, Even and Odd -->
NOT
AND
Add copied graphics <!-- See Add copied graphics on page 76 -->
```

### 3.4.10.13. Select pages with bookmarks

#### Belongs to

- **Category:** Page
- **Type:** Selections
- **Since Version:** 24.03

#### What it does

Selects pages based on the bookmarks in the PDF.

You can define the name of the bookmark, or specify a list of comma-separated names of bookmarks, or even use regular expressions. If the case of the entered names should be taken into account, you can select the **Case sensitive** checkbox.

#### Use case

Based on the selection, you can add inserts into the document, for example dividers between the chapters or add the end of a chapter, etc.

**Related Actions**

- [Check bookmarks](#) on page 351
- [Add bookmarks](#)
- [Remove bookmarks](#)

### 3.4.10.14. Select pages with page label

**Belongs to**

- **Category:** Page
- **Type:** Selections
- **Since Version:** 2019

**What it does**

Selects pages based on their label. You can enter the label or (a combination of) properties, such as the label prefix, the number style or the page range (odd, even, page numbers).

**Related Actions**

- [Change page labels](#) on page 207
- [Remove page labels](#) on page 216

### 3.4.10.15. Select objects with PieceInfo

**Belongs to**

- **Category:** Page
- **Type:** Selections

**What it does**

Searches for objects containing PieceInfo.

This can for example apply to pages coming from Illustrator, containing Illustrator PieceInfo. If a PDF contains PieceInfo, it was saved with editing capabilities from applications such as Illustrator, which may be lost if you edit the PDF with another application.

Removing PieceInfo will make the file smaller, but it won't be possible anymore to import the document in Illustrator.

**Related Actions**

- [Remove metadata](#) on page 192

### 3.4.10.16. Select pages with transparent objects

**Belongs to**

- **Category:** Page

- **Type:** Selections

**What it does**

Selects pages containing transparency.

**About transparency in PDF**

Transparency can cause some problems if you view documents in Adobe Acrobat 4.0 or earlier: transparent objects can be rendered incorrectly.

A transparent layer can also cause problems when you transpose the PostScript code of your PDF document to the halftone information of your printer (the 'ripping').

A typical example is saving graphics with transparent elements as PDF compatible with Acrobat 5.0 in Adobe Illustrator 9.0 or Adobe InDesign 2.0. In Adobe Acrobat 4.0, transparent objects in your PDF document are displayed and printed opaque, but transparency is not removed. If you open the same PDF document in Adobe Acrobat 5.x, the transparent objects will look (and print) fine again.

It can be useful to make the distinction between spot colors and CMYK colors when checking the transparency settings in your documents, because different rules govern the overprinting of spot colors.

**Related Actions**

- [Check for transparent objects](#) on page 399
- [Remove transparency](#) on page 274
- [Select transparent objects](#) on page 504
- [Change transparency](#) on page 265

### 3.4.10.17. Select registration marks

**Belongs to**

- **Category:** Page
- **Type:** Selections

**What it does**

Allows you to select potential registration marks with a certain color.

**How to proceed**

Specify the potential color of the registration marks, by choosing one or more of the following:

- 400% CMYK
- Separation All (registration)
- 100% black
- A specific color

In case of a specific color, do one of the following:

- Select a color space from the list and use the sliders to select the appropriate color.

- Click  and select the appropriate color.
- Select an object with the Enfocus Selection tool and click  to grab the fill or stroke color from the selection.

**Related Actions**

[Add registration marks](#) on page 84

### 3.4.10.18. Select trim marks

**Belongs to**

- **Category:** Page
- **Type:** Selections

**What it does**

Allows you to select potential trim or bleed marks with a certain color.

**How to proceed**


1. Indicate which marks you want to select: trim marks, bleed marks or both.
2. To help PitStop detect the trim marks, specify the potential color of the marks, by choosing one or more of the following:
  - 400% CMYK
  - Separation All (registration)
  - 100% black
  - A specific color

In case of a specific color, do one of the following:

  - Select a color space from the list and use the sliders to select the appropriate color.
  - Click  and select the appropriate color.
  - Select an object with the Enfocus Selection tool and click  to grab the fill or stroke color from the selection.
3. If desired, specify how much the marks are allowed to deviate from the expected position:
  - The unit is the unit set in the PitStop Preferences (Units & Guides category), for example: cm or pt
  - The maximum value is 2.7 pt; if you enter a higher value, it is automatically reset to 2.7 pt or an equivalent value, if you're using a different unit.

**Example**

In the image below, the red marks are detected as trim marks, although the position of the vertical marks in the top and bottom left corner is not as expected (they are not exactly on one vertical line). In this case, the deviation (= difference between the position of both marks) is less than the specified threshold.

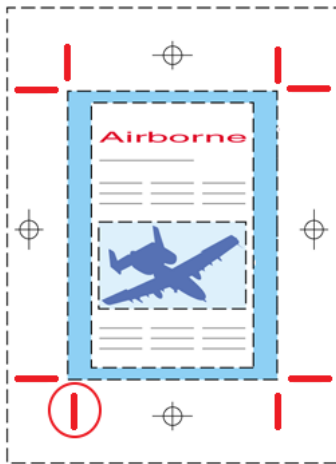**Remark**

A filled path with 3 lines is accepted as a trim mark if:

- The color is as specified in the attributes of this Action.
- It has no dash pattern.
- The 4 points of the 3 lines are a rectangle.
- The path is closed.
- The width is between 0.1 and 2 pt.
- The length is between 8 and 40 pt.

**Related Actions**

- [Use trim marks to set page box](#) on page 224
- [Check if trim marks match page box](#) on page 374

## 3.4.11. PDF 2.0

---

### 3.4.11.1. Select black point compensation

**Belongs to**


- **Category:** PDF 2.0
- **Type:** Selections
- **New since:** PitStop 2022

**What it does**

Selects objects based on the presence of black point compensation (regardless of its value) or based on a particular value (On, Off, or Default).

The black point compensation option is a feature of Adobe Photoshop to address color conversion problems caused by differences between the darkest level of black achievable on one device and the darkest level of black achievable on another.

Note that the black point compensation attribute of a selected object can be found in the Enfocus Inspector, on the **Prepress - General** tab. Possible values are On, Off or Default. When no blackpoint compensation is set (or when multiple objects with different black point compensation values are selected), you'll see a dash.

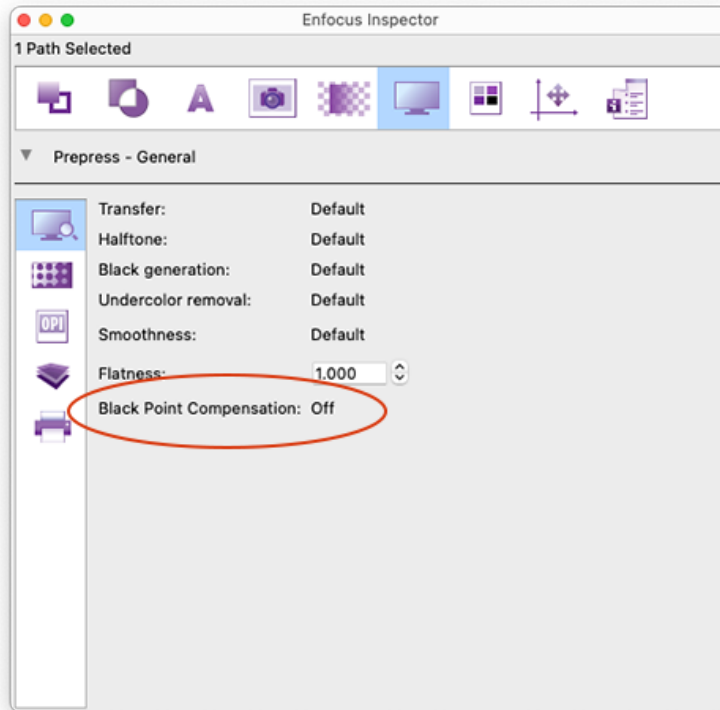

#### **Related Actions**

- [Check black point compensation](#) on page 381
- [Remove black point compensation](#) on page 232
- [Set black point compensation](#) on page 235

### 3.4.11.2. Select by halftone origin

#### **Belongs to**

- **Category:** PDF 2.0
- **Type:** Selections
- **New since:** PitStop 2022

#### **What it does**

Selects objects either with or without default HTO (halftone origin) values, or with particular HTO values.

PDF 2.0 allows specifying the halftone origin, whereas in earlier versions, the HTO value had to be 'Default' (= not specified).

**Related Actions**

- [Check halftone origin](#) on page 385
- [Change halftone origin](#) on page 226
- [Set default halftone origin](#) on page 236

### 3.4.11.3. Select by PDF version

**Belongs to**

- **Category:** Metadata, PDF 2.0
- **Type:** Selections

**What it does**

Allows you to make a selection based on the PDF's Acrobat or PDF version.

The Acrobat version is the sum of the two numbers that make up the PDF version, for example: PDF 1.4 = Acrobat 5. This is not true anymore for PDF 2.0, as from this version onwards there is no link anymore between the Acrobat and the PDF version.



**Note:** As of PitStop 2020, you can select a PDF 1.7 by its extension level (Adobe Extension 1, 3, 5, 6 or 8). For more details concerning the extensions, refer to [https://www.adobe.com/devnet/pdf/pdf\\_reference.html](https://www.adobe.com/devnet/pdf/pdf_reference.html).

**Example**

To select PDFs with Acrobat version higher than 7.0, proceed as follows:

```
Select by PDF version <!-- options: Acrobat version must be more than 7.0 -->
```

**Related Actions**

- [Change PDF version](#) on page 183
- [Check PDF/Acrobat compatibility](#) on page 362

### 3.4.11.4. Select inline image syntax

**Belongs to**

- **Category:** Image; PDF 2.0
- **Type:** Selections
- **New since:** PitStop 2022

**What it does**

Selects images based on the presence of an L key.

The L key specifies the length of the image data and allows users to skip inline images if required.

You can select images...

- Without an L key

- With an L key
- With an invalid L key

Note that PDF 2.0 allows (but does not impose) the presence of an L key, but if it's present, it must match the actual inline image data length.

#### **Related Actions**

- [Check inline image syntax](#)
- [Change inline image syntax](#) on page 144

## 3.4.12. Position and size

---

### 3.4.12.1. Select by intersecting bounding boxes

#### **Belongs to**

- **Category:** Position and Size
- **Type:** Selections

#### **What it does**

Selects the objects defined by a first selection, that overlap the objects defined by a second selection (within the same Action List).

In order to define the first and second selection, this Action needs to be preceded by 2 other selection Actions.

#### **Example**

Suppose you have two magenta filled line art objects and two yellow filled line art objects. One of the two magenta objects physically overlaps 1 of the 2 yellow objects; that's the object you want to select and log.

To do so, proceed as follows:

```
Select color <!-- settings: Fill - CMYK - 100% M -->
Select color <!-- settings: Fill - CMYK - 100% Y -->
Select by intersecting bounding boxes
Log selection <!-- Choose user-defined text, for example: Magenta objects overlapping
yellow objects have been found -->
```

### 3.4.12.2. Select by page rotation angle

#### **Belongs to**

- **Category:** Page; Position and Size
- **Type:** Selections

#### **What it does**

Selects pages with a certain rotation angle.



You can choose a rotation angle of -90°, 0°, 90°, or 180° (clockwise).

**Related Actions**

- [Check page rotation angle](#) on page 379
- [Apply page rotation](#) on page 200

### 3.4.12.3. Select concealed objects

**Belongs to**

- **Category:** Position and Size
- **Type:** Selections
- **Since Version:** 2017

**What it does**

Selects completely hidden objects that do not affect the visual appearance of the PDF, such as redundant objects that were left behind on a hidden layer or original cropped content that is of no use.

Hidden objects can increase the file size, add to the file complexity and they may produce false hits during preflight. Therefore, you may want to use this Action to select these unneeded objects and ignore or remove them before preflighting the document.

Note that there are different options to determine whether or not an object is visible; you have the choice whether or not to take into account the objects on other layers, or you can limit the scope by adding another select Action.

**Example**

The following Action List can be used to remove all objects that are not needed to render or print a PDF.

```
Select concealed objects
Remove selection
```

**Related Actions**

- [Select visible objects](#) on page 499

### 3.4.12.4. Select inside or outside contour

**Belongs to**

- **Category:** Position and Size
- **Type:** Selections
- **Since version:** 13 update 1

**What it does**

Selects objects using the area defined by the current selection. This Action is useful to select objects only within a defined shape, such as a Dieline or a Cutter Guide.

There are several options. You can select:

- The objects inside or outside the contour.
- The objects inside or outside the contour or overlapping contour.
- The objects completely covering the area inside the contour.

Note that this Action must be preceded by a Select Action in the same Action List (for example a Select spot color or a Select objects on layer Action). You can use any "select" Action you want, e.g. select by layer, by color, by line weight and you can use even operators (AND, OR) as required, but remember that only the **basic shape of the selected line art objects** will contribute to the contour!

### Remarks

- *Clipping* is taken into account when determining whether an object lies inside or outside the contour. For example, if an image is partly outside the contour, but this part is clipped, it's considered to be completely inside the contour. The clipping paths are not logged.
- As of PitStop 2022 update 1, in case of complex shapes, the non-zero winding rule (in the Inspector: Fill) is used to determine what lies inside the contour. For more information, refer to the [PDF Reference \(figure 7.9\)](#). This change is done to apply with the latest PDF specifications. In older versions of PitStop (2022 and earlier), the even-odd rule was applied. In the example below, the image on the left shows how PitStop 2022 interpreted the contour (the part in the middle will be cut out), the image on the right shows how PitStop 2022 update 1 will draw it.



- The line art that is used to determine the contour area (through the preceding "select" Action) is not selected by "Select inside contour"; only the objects (images, shadings - which may have exactly the same shape as selected the line art) in that area will be part of the selection. This is illustrated in example 2 and 3.
- You can even select objects inside or outside a non-closed contour or one with gaps using the **Ignore gaps in contour if smaller than ...** checkbox.
- Annotation objects are logged too.
- It's also possible to use text as a contour.

### Example 1

This Action List logs all images inside the contour formed by all line art on the Cutting layer:

```
Select by layer "Cutting"
Select inside contour
Select images
Select AND
Log selection
```

**Example 2**

This Action List moves all elements belonging to the barcode to a separate layer. Note that the technical contour around the barcode is not moved!

```
Select spot color "Barcode area"
Select inside contour
Move to layer "Barcode"
```

**Example 3**

This Action List converts the color of all objects with spot color "Content area" to CMYK. The "content area" spot color itself is (obviously) not touched.

```
Select spot color "Content area"
Select inside contour
Convert selection to CMYK
```

**Related Action**

- [Close gaps in contours](#) on page 198

### 3.4.12.5. Select objects inside or outside region

**Belongs to**

- **Category:** Position and Size
- **Type:** Selections

**What it does**

Makes a selection across pages defined by a user-defined area or by PDF page boxes.

This is useful to select (and afterwards remove or move) objects that lay outside the trim box, hence will not be printed.

**How to proceed**

1. Define the area inside or outside which the objects should be selected. Choose on of the following options:
  - **Define the region relative to the lower left of the media box:** You can manually enter the values of the X and Y axis (the anchor point) and the height and with (the size) of the area, or grab them by clicking the icon . Note that you can grab them from a selection or from a page box.
  - **Use (one of the page boxes):** You can choose one of the page boxes, the printing area or either the art or trim box, depending on what's defined (option **the art box (if defined) or trim box**).
  - **Use region relative to page box:** You can specify the exact location of the area to check, for example "place the center left of the region relative to the center right of the bleed box with a particular offset, height and width".
2. Indicate which objects relative to the defined area should be selected, for example the objects inside or overlapping the region.

3. Indicate whether or not annotations and clipping paths should be included in the selection.
4. If applicable, choose whether or not to take into account page rotation and scaling factor.

**Example**

To select any objects that lay outside of the trim box and delete them, you could use the following:

```
Select objects inside or outside region <!-- Select "Use trim box" and "Select objects
outside region" -->
Remove selection
```

### 3.4.12.6. Select objects that are completely clipped away

**Belongs to**

- **Category:** Position and Size
- **Type:** Selections

**What it does**

Allows you to select objects that are hidden ("clipped away") by other objects of which the shape masks the artwork.

Optionally, you can include invisible objects that belong to this form.

**Related Actions**

[Select clipping objects](#) on page 444

### 3.4.12.7. Select overlapping objects

**Belongs to**

- **Category:** Position and Size
- **Type:** Selections
- **Since Version:** 2017

**What it does**

Selects objects based on their relationship with other objects they interact with, i.e. objects that (at least partly) lay on top of, or below other objects.

There are four options:

- The first option allows you to select objects that (at least partly) *overlap* any object on the page.
- The second option allows you to select object that (at least partly) *are overlapped* by any other object on the page
- The third option allows you to select objects that (at least partly) *are on top of other objects selected earlier* in the same Action List.
- The third option allows you to select objects that (at least partly) *are below other objects selected earlier* in the same Action List.

This Action is included in a number of default Action Lists:

- Find Images without an overlapping Varnish
- Check for Black Text sitting on Dark Color (does not include images)
- Check for White Text sitting on Light Color (does not include images)

**Example**

The following Action List will remove all objects that are on top of the text in your PDF:

```
Select text
Select overlapping objects (third option selected)
Remove selection
```

### 3.4.12.8. Select rotated objects

**Belongs to**

- **Category:** Position and Size
- **Type:** Selections
- **Since Version:** PitStop 2022

**What it does**

Selects objects that are rotated.


Objects can have been rotated by page layout applications such as QuarkXPress, and this may cause problems for (older) RIPs.

You can specify the required level of rotation, for example 'objects that are rotated more than 2 degrees', optionally combined with two extra options:


- **Interpret all angles as rotations between 0 and 45 degrees from vertical or horizontal:** This option allows you to find small rotations in either direction. To decide whether or not an object is rotated, the measured angle is converted to an interval [0,45] degrees compared to the nearest horizontal or vertical page edge. As a consequence, a rotation of 88 degrees is converted to 2 (90-88) and a rotation of 271 degrees is converted to 1 (271-270). When checking for rotations smaller than 4 degrees, both rotations will be selected, whereas for example a rotation of 290 degrees (converted to 20 => 290-270) won't be selected. See example 1 below.
- **Ignore objects that are aligned vertically or horizontally:** This option allows you to exclude objects that are aligned exactly 0, 90, 180 or 270 degrees to the page edges. Such objects (rotated a multiple of 90 degrees) do not look rotated, so in most cases they should not be selected. See example 2 below.

**Example 1**

Suppose you have a PDF file with the following 4 rotated objects. You want to select and remove the objects that have a rotation angle of less than 4 degrees.

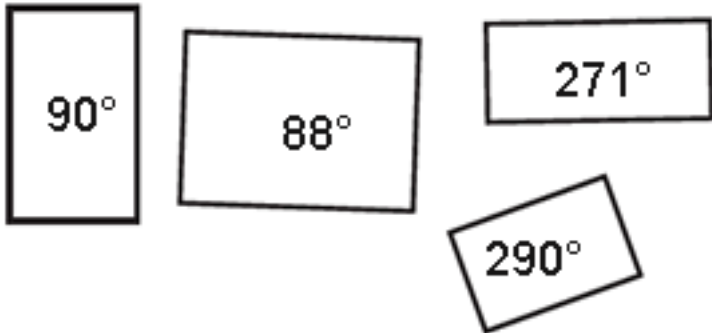


In the example below, all angles are interpreted as rotations between 0 and 45 degrees from vertical to horizontal (first option). The first three objects are selected and removed because they all have a rotation angle of less than 4 degrees from the nearest vertical or horizontal page edge (as explained higher).

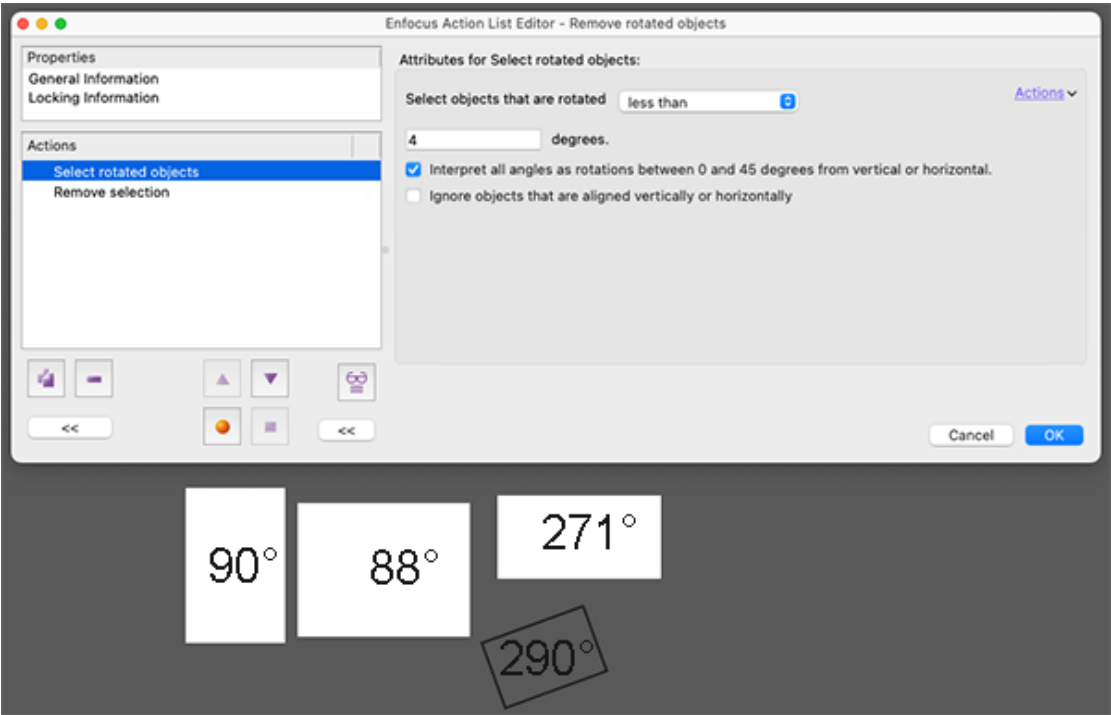

**Example 2**

When the **Ignore objects that are aligned vertically or horizontally** checkbox is selected, the object that has a rotation angle of 90° is no longer selected nor removed.

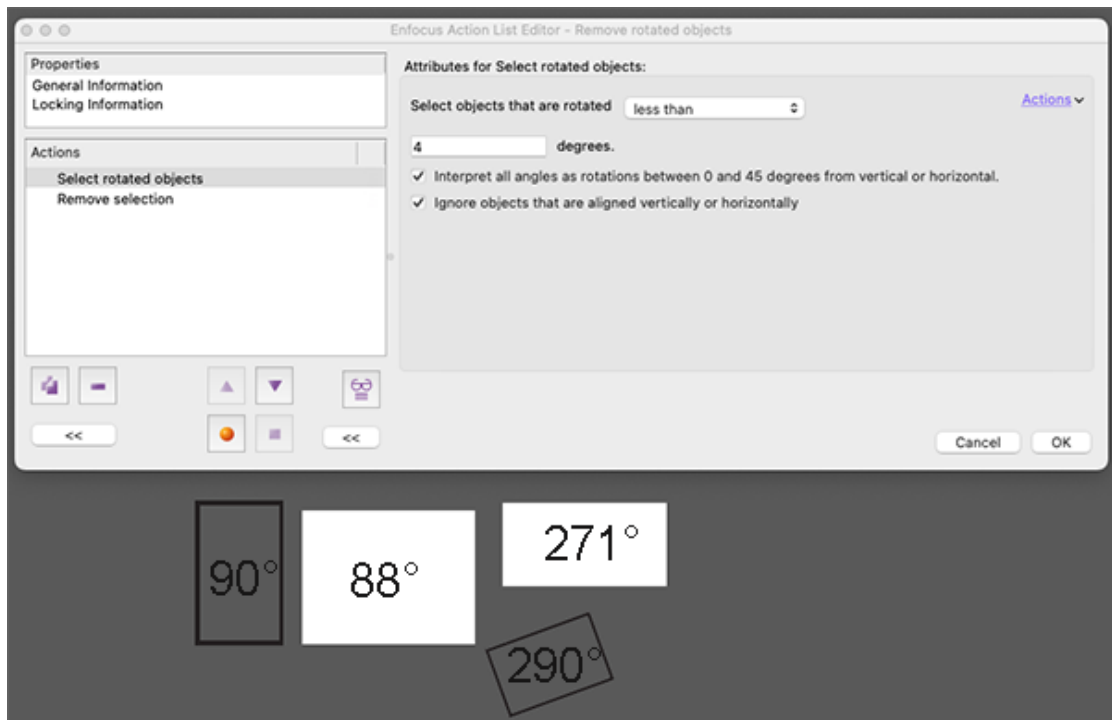

#### **Related Actions**

- [Check for rotated objects](#) on page 389

### 3.4.12.9. Select size

#### **Belongs to**

- **Category:** Position/Size
- **Type:** Selections

#### **What it does**

Allows you to select any object in a PDF of which the height or width is less than, equal to, or greater than a certain size.

You can choose whether or not to take into account page rotation and scaling factor.

### 3.4.12.10. Select visible objects

#### **Belongs to**

- **Category:** Position and Size
- **Type:** Selections
- **Since Version:** 2017

**What it does**

Selects all objects that are needed to render and print a PDF and that affect the visual appearance of the PDF.



**Note:** This Action only takes into account the transparency of the objects, not the colors.

This Action can be useful to separate visible from invisible content, or to make sure that preflight checks are only applied to visible content, as it doesn't make sense to check and fix objects that are invisible. Note that PitStop comes with a default Restricting Action List created using this Action; you can use it in conjunction with a Preflight Profile to check only the elements needed to render the file, and ignore the rest.

To determine whether or not an object is visible, you can take into account the objects on other layers, or you can limit the scope by adding another select Action.

**Related Actions**

[Select concealed objects](#) on page 493

## 3.4.13. Prepress

---

### 3.4.13.1. Select by blend modes

**Belongs to**

- **Category:** Prepress
- **Type:** Selections

**What it does**

Allows you to select objects with or without one or more specific blend modes.

Blend modes determine how colors on different layers blend with each other. For more information about blend modes, visit the Adobe website (<http://www.adobe.com>) or refer to the Help or documentation of your design application (Adobe InDesign, QuarkXPress, ...)

**Related Actions**

- [Check for non-standard blend modes](#) on page 403
- [Remove alternative blend modes](#) on page 230

### 3.4.13.2. Select by graphic state attributes

**Belongs to**

- **Category:** Prepress
- **Type:** Selections

**What it does**

Allows you to select objects based on their graphic state attributes.



You can select one of the following object types:

- Objects with non-PDF/X-1 compliant halftone info
- Objects with transfer function info
- Objects with halftone info
- None

#### **Viewing the graphic state attributes of an object**

Proceed as follows:

1. Select the object, using the PitStop Select Objects tool .
2. Click  to display the Enfocus Inspector.
3. Select  (**Prepress**) >  (General) or  (**H**alftone).

#### **Related Actions**

- [Check for non-PDF/X compliant halftone](#) on page 403
- [Check for custom transfer function](#) on page 402

### 3.4.13.3. Select by ink coverage (basic object check)

#### **Belongs to**

- **Category:** Color; Prepress
- **Type:** Selections

#### **What it does**

Makes a selection of all objects that meet your ink coverage criteria.

You can for example select objects only if the ink coverage is at least 300%.

When including images in this selection, the threshold will determine the minimum area in which the ink coverage criteria have to be met in order to be selected. E.g. when entering '0', even an image of which only 1 dot meets the ink coverage requirement will be selected.

#### **Related Actions**

[Check ink coverage \(basic object check\)](#) on page 309

### 3.4.13.4. Select by overprint

#### **Belongs to**

- **Category:** Prepress
- **Type:** Selections

#### **What it does**

Selects objects based on the overprint mode of their fill and/or stroke.

**How to proceed**

Proceed as follows:

1. To select objects based on their fill/stroke overprint, select the corresponding checkbox. For example, to select object based on the overprint mode of their stroke, select **Stroke overprint**.
2. Indicate whether overprint must be enabled or disabled for the options selected in step 1, by clicking the buttons.
  -  Overprint is off.
  -  Overprint is on.



**Tip:** Check the Actions field, to see if the Action is configured appropriately. For example, if you selected the Stroke overprint checkbox and clicked the button next to it, the name of the Action should change into "Select if stroke overprint is off."

**Related Actions**

- [Check if object is set to overprint](#) on page 401
- [Change overprint](#) on page 263

### 3.4.13.5. Select by overprint mode

**Belongs to**

- **Category:** Prepress
- **Type:** Selections

**What it does**

Allows you to select objects based on the overprint mode of their fill and/or stroke color.

**About overprint modes**

- In **Standard overprint mode** (OPM 0), the tint value 0 of one of the CMYK inks in the foreground object has a knockout effect on the color rendering of the underlying object. In other words, a foreground ink with a C, M, Y or K value of 0 % erases the corresponding background ink. Here, the “foreground inks win” principle applies.
- In **Illustrator overprint mode** (OPM 1), the tint value 0 is neutral: it is ignored (as if it were “not specified”) and has therefore no effect on the color rendering of the underlying object.

For more information and examples, refer to [the PitStop Pro Reference Guide on the Enfocus website](#).

For more information and examples, refer to the PitStop Pro Reference Guide.

**Related Actions**

- [Change overprint mode](#) on page 263

- [Check overprint mode](#) on page 404

### 3.4.13.6. Select by rendering intent

#### ***Belongs to***

- **Category:** Color;Prepress
- **Type:** Selections

#### ***What it does***

Selects color managed objects based on a particular rendering intent.

You can select paths, text, images, or all rendering objects, with one of the the following rendering intents:

- Absolute Colorimetric
- Relative Colorimetric
- Perceptual
- Saturation

#### ***About rendering intents***

A rendering intent is a remapping method, allowing to remap colors so that they best match the intended use. 'Remapping' means that colors from one output device's color space are mapped to the color space of another device.

For more information and examples, refer to [the PitStop Pro Reference Guide on the Enfocus website](#) (See Chapter "Rendering intents to remap colors").

For more information and examples, refer to the PitStop Pro Reference Guide (See Chapter "Rendering intents to remap colors").

#### ***Related Actions***

- [Change rendering intent](#) on page 104
- [Check rendering intent](#) on page 312
- [Remove rendering intent](#) on page 117
- [Select rendering objects](#) on page 452

### 3.4.13.7. Select flatness

#### ***Belongs to***

- **Category:** Prepress
- **Type:** Selections

#### ***What it does***

Allows you to select objects with a flatness setting equal to or higher/lower than a certain value.

The default setting to produce a smooth curve is 1. A value higher than 1 can produce a jaggy edge; lower than 1 can slow down the RIP.

**Example**

If the curves in a PDF are showing visible line segments, try the following to solve the problem:

```
Select flatness <!-- Option: Select objects with a flatness higher than 1.0 -->  
Change flatness <!-- Option: Change flatness to 1.00 -->
```

**Related Actions**

- [Check flatness](#) on page 399
- [Change flatness](#) on page 160

### 3.4.13.8. Select objects in areas with dense graphics

**Belongs to**

- **Category:** Prepress
- **Type:** Selections
- **Since version:** 2020

**What it does**

Detects and selects areas that have dense vector graphics (i.e. many line art or clip mask nodes).

Typically, the selection will then be rasterized to make the file less complex (and easier for the RIP to handle).

You should define the area to be detected (by entering the length of 1 side), and the minimum number of nodes in that area. Alternatively, PitStop can calculate the minimum number of nodes per area based on a selection in a document: to do so, select an area with many nodes and click **Grab settings**.

**Note:**

- The unit in which the length is expressed, depends on your user preferences (PitStop Preferences - Units & Guides category).
- Remember that the number of nodes (in the document or in a selected area) can also be found in the PitStop Inspector (on the Summary tab).

### 3.4.13.9. Select transparent objects

**Belongs to**

- **Category:** Prepress
- **Type:** Selections

**What it does**

Allows you to select transparent objects.

You can check the transparency of different elements, such as the fill or stroke, the blend modes, ... For the whole list of options, check the attributes of the Action in PitStop.

As of PitStop 25.07 it's possible to restrict the selection based on the transparency level (alpha value). That way, you can detect for example 0% alpha objects, or objects where the transparency is below a certain level.

You can select all transparent objects or restrict your selection to objects that have *all* or *at least one* of the following properties:

- Fill is set to overprint
- Stroke is set to overprint
- Graphic element uses a spot color



**Note:** When checking for transparency groups, pages will be selected if they have an explicit transparency group key (i.e. when "Page is transparency group" is selected in the transparency group properties in the Enfocus Inspector. For more information, refer to the PitStop Reference Guide).

### **About transparency in PDF**

Transparency can cause some problems if you view documents in Adobe Acrobat 4.0 or earlier: transparent objects can be rendered incorrectly.

A transparent layer can also cause problems when you transpose the PostScript code of your PDF document to the halftone information of your printer (the 'ripping').

A typical example is saving graphics with transparent elements as PDF compatible with Acrobat 5.0 in Adobe Illustrator 9.0 or Adobe InDesign 2.0. In Adobe Acrobat 4.0, transparent objects in your PDF document are displayed and printed opaque, but transparency is not removed. If you open the same PDF document in Adobe Acrobat 5.x, the transparent objects will look (and print) fine again.

It can be useful to make the distinction between spot colors and CMYK colors when checking the transparency settings in your documents, because different rules govern the overprinting of spot colors.

### **Related Actions**

- [Check for transparent objects](#) on page 399
- [Select pages with transparent objects](#) on page 486
- [Remove transparency](#) on page 274
- [Change transparency](#) on page 265

## **3.4.14. Text**

### **3.4.14.1. Select by inconsistent Type 3 font width information**

#### **Belongs to**

- **Category:** Text
- **Type:** Selections
- **New since:** PitStop 2022

**What it does**

Selects Type 3 fonts containing characters with a corrupt font width (Type 3 glyphs d0 or d1 values that are inconsistent with the font's widths array).

Type 3 fonts are usually wrongly converted SVG fonts, i.e. fonts that are used in Illustrator, Indesign, Photoshop, ... but that are not supported by the PDF specs and most RIPs, and therefore converted to Type 3. PitStop fixes this, so the font can be handled by most RIPs.

**Related Actions**

- [Check for inconsistent Type 3 font width information](#) on page 411
- [Fix inconsistent Type 3 font width information](#) on page 289

### 3.4.14.2. Select clipping and non-clipping text

**Belongs to**

- **Category:** Text
- **Type:** Selections

**What it does**

Selects all text segments, even if they have been clipped and are not visible anymore.



**Tip:** If you want to select non-clipping text only, you can use [Select text segments](#).

### 3.4.14.3. Select corrupt font widths

**Belongs to**

- **Category:** Text
- **Type:** Selections

**What it does**

Allows you to select all text with a corrupt font width.

By default, horizontal writing is checked, but you can also include vertical writing by selecting the **Also check metrics for vertical writing** checkbox.

Corrupt font widths may occur in a PDF, when "artificial" bold or italic was used instead of the "bold" or "italic" version of the font concerned. For example, if "Futura" is used in your PDF, the "Futura-Bold" and "Futura-Oblique" fonts should be used instead of applying bold and italics on the regular Futura font. Artificial font may cause problems when printing the PDF.

As of PitStop 2022, you can set a threshold in the **Tolerance** field. This value, expressed in 1/1000 em, specifies the maximum acceptable deviation of the standard font width. For example, if the tolerance is set to 5, a font width that deviates 5/1000 em (or less) from the normal font width will not be selected.

Some PDF standards allow font size deviations. For example, PDF/X-4 allows a deviation of 5 1/1000 em, PDF/X-6 allows a deviation of 1 1/1000 em ... This Action can be used to select font widths that do not comply with certain PDF/X versions.

**About the em as unit**

The unit used to set the tolerance is '1/1000 em'. 'em' is used because the size of an 'em' is relative to the size of the font: it denotes the point size. For example: 1 em in a 16-point typeface is 16 points, 1 em in an 8-point typeface is 8 points. As a consequence, if the tolerance is set to 1, the relative size is the same, but the absolute size differs depending on the font size.

The name 'em' comes from the width of the capital M in the typeface.

**Related Actions**

- [Check corrupt font widths](#) on page 406
- [Change corrupt font widths](#) on page 281

### 3.4.14.4. Select embedded fonts

**Belongs to**

- **Category:** Text
- **Type:** Selections

**What it does**

Allows you to select all embedded or unembedded fonts in a PDF document.

The selection of embedded fonts includes OpenType embedded fonts.

**About embedding fonts**

**Embedding fonts** in a PDF document means that every character of this font is copied and stored in the PDF document. This is useful if you create PDF documents to be displayed on different systems and to be printed on different devices: these are often systems that do not contain exactly the same fonts.

Embedding a font as a **subset** means that only those characters of the font that are actually used in the text are embedded. This reduces the file size by not including superfluous font information.

**About OpenType embedded fonts**

OpenType is an extension of the TrueType format that can contain TrueType and/or Type 1 font data. In PDF files it can only appear as an embedded font. It has been introduced in PDF 1.6.

**Related Actions**

- [Check font embedding](#) on page 408
- [Unembed font](#) on page 293
- [Check embedded font is OpenType](#) on page 407

### 3.4.14.5. Select fonts by license

**Belongs to**

- **Category:** Text
- **Type:** Selections

**What it does**

Allows you to select fonts that allow certain operations without obtaining permission from the font's owner.

These operations are:

- Embed
- Subset
- Outline
- Preview and print

**Related Actions**

[Check font license](#) on page 408

### 3.4.14.6. Select fonts by name

**Belongs to**

- **Category:** Text
- **Type:** Selections

**What it does**

Allows you to select all the fonts with a particular name.



**Note:** From version 12 update 2 onwards, you can use regular expressions to define the font name.

**Example**

To select all the Times, Arial, Helvetica and Courier fonts in a PDF, you could use the following sequence of Actions:

```
Select font Times
Select font Arial
OR
Select font Helvetica
OR
Select font Courier
OR
```

### 3.4.14.7. Select fonts by type

**Belongs to**

- **Category:** Text
- **Type:** Selections

**What it does**

Selects text using a particular font type.

You can select one of the following font types:



- TrueType
- Type1
- Type3
- Multiple Master
- Composite TT
- Composite T1
- Composite (all types)

**About types of fonts**

Refer to the [PitStop Pro Reference Guide](#) (Chapter: Types of fonts and their usage), available on the Enfocus website.

Refer to the PitStop Pro Reference Guide (Chapter: Types of fonts and their usage).

**Example**

For example, to unembed TrueType fonts without unembedding any other font types, do the following:

```
Select TrueType fonts
Unembed font <!-- See Unembed font on page 293 -->
```

**Related Actions**

[Check font type](#) on page 409

### 3.4.14.8. Select fonts that can be emulated

**Belongs to**

- **Category:** Text
- **Type:** Selections

**What it does**

Selects fonts that can be emulated.

Fonts that can be emulated are fonts that can be represented on screen, even if the font is unavailable on your system and even though it has not been embedded. If you are certain the document only needs to be viewed on screen, and will not be printed, fonts that can be emulated do not need to be embedded. This makes your PDF lighter, for example for distribution on the internet.

**Example**

To select fonts and then unembed them:

```
Select fonts that can be emulated
```

Unembed font <!-- See [Unembed font](#) on page 293 -->

### 3.4.14.9. Select non-PDF/X or PDF/A compliant TrueType fonts

***Belongs to***

- **Category:** Text
- **Type:** Selections

***What it does***

Allows you to select a TrueType font that is not compliant with a particular PDF/X or PDF/A version, for example a symbol font. Options are PDF/A-1, PDF/A-2, PDF/X-4 and PDF/X-6.

After this selection, you might want to remove or replace this font.

***About OpenType embedded fonts***

OpenType is an extension of the TrueType format that can contain TrueType and/or Type 1 font data. In PDF files it can only appear as an embedded font. It has been introduced in PDF 1.6.

***Related Actions***

- [Check if TrueType fonts are PDF/X compliant](#) on page 413
- [Make TrueType fonts PDF/X compliant](#) on page 291

### 3.4.14.10. Select objects that use neither stroke nor fill

***Belongs to***

- **Category:** LineArt;Text
- **Type:** Selections

***What it does***

Selects vector or path objects that contain no stroke or fill color value in a PDF.

***Related Actions***

[Select invisible objects without fill and stroke](#) on page 446 (same functionality)

### 3.4.14.11. Select OpenType embedded fonts

***Belongs to***

- **Category:** Text
- **Type:** Selections

***What it does***

Selects all embedded fonts that are OpenType, or alternatively, all embedded fonts that are not OpenType.

**About embedding fonts**

**Embedding fonts** in a PDF document means that every character of this font is copied and stored in the PDF document. This is useful if you create PDF documents to be displayed on different systems and to be printed on different devices: these are often systems that do not contain exactly the same fonts.

Embedding a font as a **subset** means that only those characters of the font that are actually used in the text are embedded. This reduces the file size by not including superfluous font information.

**About OpenType embedded fonts**

OpenType is an extension of the TrueType format that can contain TrueType and/or Type 1 font data. In PDF files it can only appear as an embedded font. It has been introduced in PDF 1.6.

**Example**

To search for all OpenType fonts and then unembed them, proceed as follows:

```
Select embedded fonts that are OpenType
Unembed font
```

**Related Actions**

- [Check embedded font is OpenType](#) on page 407
- [Unembed font](#) on page 293

## 3.4.14.12. Select rendering objects

**Belongs to**

- **Category:** LineArt;Text;Image
- **Type:** Selections

**What it does**

Selects all objects with a rendering intent.

This includes paths, text and images with any of the following rendering intents:

- Absolute Colorimetric
- Relative Colorimetric
- Perceptual
- Saturation



**Note:** This Action does not allow you to make a selection based on **one particular** rendering intent. To select objects by **one** of the listed rendering intents, use [Select by rendering intent](#) on page 427.

**About rendering intents**

A rendering intent is a remapping method, allowing to remap colors so that they best match the intended use. 'Remapping' means that colors from one output device's color space are mapped to the color space of another device.

For more information and examples, refer to [the PitStop Pro Reference Guide on the Enfocus website](#) (See Chapter "Rendering intents to remap colors").

For more information and examples, refer to the PitStop Pro Reference Guide (See Chapter "Rendering intents to remap colors").

**Related Actions**

- [Change rendering intent](#) on page 104
- [Check rendering intent](#) on page 312
- [Remove rendering intent](#) on page 117
- [Select by rendering intent](#) on page 427

### 3.4.14.13. Select standard 14 fonts

**Belongs to**

- **Category:** Text
- **Type:** Selections

**What it does**

Selects the standard 14 PostScript fonts.

The 14 fonts are automatically installed with Adobe Acrobat and embedded by default (since PDF 1.5).

**Example**

To save on file size, you could select these fonts and unembed them. Proceed as follows:

```
Select standard 14 fonts
Unembed font <!-- Unembed font on page 293-->
```

### 3.4.14.14. Select subset fonts

**Belongs to**

- **Category:** Text
- **Type:** Selections

**What it does**

Selects fonts that are subsetted.

If a font is subsetted, only the characters of the font that are actually used in the text are embedded in the document. This is done to keep a file as small as possible.

**Example**

If you have the original font on your system, you could choose the subsetted fonts and embed them completely for later editing. To do so, proceed as follows:

```
Select subset fonts
Embed font
```

**Related Actions**

- [Check font subsetting](#) on page 409
- [Check if a subset font contains a complete CharSet or CIDSet](#) on page 412

### 3.4.14.15. Select text by key phrase

**Belongs to**

- **Category:** Text
- **Type:** Selections

**What it does**

Allows you to select text objects containing a particular key word or phrase.

To take into account the case of the key phrase (uppercase/lowercase as entered in the text field), select the **Case sensitive** checkbox.



**Tip:** To only select a particular key word (and not the entire text object it belongs to), you could first split the text objects, using [Split in words](#) on page 293.

To specify a match pattern instead of a fixed string, select the **Use regular expressions** checkbox.



**Note:** PitStop supports Boost Regular Expressions. For more information, refer to [http://www.boost.org/doc/libs/1\\_47\\_0/libs/regex/doc/html/boost\\_regex/syntax/perl\\_syntax.html](http://www.boost.org/doc/libs/1_47_0/libs/regex/doc/html/boost_regex/syntax/perl_syntax.html).

**Example**

The below example expression matches every text containing “PitStop” or “Enfocus”.

|                                                                                                                                                     |                                                                                                                                                                                                                     |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Properties</b><br>General Information<br>Locking Information<br><hr/> <b>Actions</b><br>Select all<br>Select text containing (PitSt Enf)o(cus p) | <b>Attributes for Select text by key phrase:</b><br>Select text containing (PitSt Enf)o(cus p)<br><input checked="" type="checkbox"/> Case sensitive<br><input checked="" type="checkbox"/> Use regular expressions |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

### 3.4.14.16. Select text by point size

**Belongs to**

- **Category:** Text
- **Type:** Selections

**What it does**

Selects text in a font that is below, above or equal to a certain size (expressed in points).

This Action is useful to select text that is too small to print correctly.

### 3.4.14.17. Select text by x-height

**Belongs to**

- **Category:** Text
- **Type:** Selections

**What it does**

Select text by x-height allows you to select text by a font size expressed in x-height. The x-height refers to the distance between the baseline and the mean line in a typeface; this is typically the height of the letters x, u, v, w, and z. You can set a threshold for the text x-height expressed in points.

Note that this Action only can work if at least one of the characters to be measured (x, u, v, w or z) is available in the PDF.

### 3.4.14.18. Select text segments

**Belongs to**

- **Category:** Text
- **Type:** Selections

**What it does**

Selects all text objects in a PDF.



---

**Tip:** This Action does not select clipping text, which is not visible in the PDF. If you want to select clipping text as well, you can use [Select clipping and non-clipping text](#) on page 506.

---

### 3.4.14.19. Select text with missing glyphs in its font

**Belongs to**

- **Category:** Text
- **Type:** Selections
- **Since version:** 25.07

**What it does**

Searches the PDF document for fonts that don't have the character set required to display and print the used characters correctly and selects them.

Optionally, you can include in your check the glyphs that were removed by subsetting fonts.

You can then replace these fonts by embedded or subset fonts that do have all required glyphs and metrics.

**Related Actions**

[Check if font contains all glyphs and metrics for all characters used](#) on page 412

## 3.5. Settings

---

The following Actions allow you to change certain default settings, such as the image recompression, page boxes, color management, the number of decimal places, ...

### 3.5.1. Color

---

#### 3.5.1.1. Override color management settings

**Belongs to**

- **Category:** Color; General
- **Type:** Settings

**What it does**

Replaces any color management settings from the PDF Profile or general PitStop preferences with the settings defined here. These settings will be used when converting colors.

#### 3.5.1.2. Restore previous color management settings

**Belongs to**

- **Category:** Color; General
- **Type:** Settings

**What it does**

Allows you to revert to the previous color management settings (if you have changed them before, in the same Action List).

**Related Actions**

[Save color management settings](#) on page 515

#### 3.5.1.3. Save color management settings

**Belongs to**

- **Category:** Color; General

- **Type:** Settings

**What it does**

Allows you to save the current color management settings (changed in the Action List).

**Related Actions**

[Restore previous color management settings](#) on page 515

## 3.5.2. General

---

### 3.5.2.1. Override color management settings

**Belongs to**

- **Category:** Color; General
- **Type:** Settings

**What it does**

Replaces any color management settings from the PDF Profile or general PitStop preferences with the settings defined here. These settings will be used when converting colors.

### 3.5.2.2. Override default image recompression

**Belongs to**

- **Category:** General; Image
- **Type:** Settings

**What it does**

Overrides the default recompression quality setting (used by PitStop when changing images) with the one defined in this Action.

**How it works**

If PitStop is used to change images (e.g. to convert the color, to resample the image...), the images are decompressed first, then changed, and afterwards recompressed according to the default settings (maximum for JPEG, lossless for JPEG 2000). With these default settings, files may grow to an unacceptable size compared to the original input PDF file. In that case, you can use Override default image recompression to make the files smaller.

### 3.5.2.3. Override page box defaults

**Belongs to**

- **Category:** General; Page
- **Type:** Settings



**What it does**

Replaces the default order (Media > Crop > Art - Bleed - Trim) of the page boxes in a PDF document with the order defined in this Action.

### 3.5.2.4. Override rounding rules

**Belongs to**

- **Category:** General
- **Type:** Settings

**What it does**

Replaces the default rules used for comparing text size, line weight and/or coordinates to the ones set in this Action.

You have the choice to:

- Leave text size, line weight and/or coordinates unchanged
- Use the default rules, or
- Use decimals.

**Example**

PitStop applies a number of rounding rules when comparing the actual values in a PDF to the ones set in a check (Profile check or "check" Action). For example, if you want to check if the text point size is equal to 10 points, PitStop will give a warning if there is a difference of 0.1 point.

If you don't want to log such small differences, use this Action to overrule the default behavior. Example of such an Action List:

```
Select all
Override rounding rules <!-- Select: Text size: decimals 0 -->
Check if text point size is equal to 10.0 pt <-- Check text point size on page 414 -->
```

**Remark**

We recommend using points as measurement unit because in the background, PitStop Pro converts all the different measurement units (p, in, cm, mm) into points and applies the rounding rules to this value (with its decimals).

### 3.5.2.5. Restore previous color management settings

**Belongs to**

- **Category:** Color; General
- **Type:** Settings

**What it does**

Allows you to revert to the previous color management settings (if you have changed them before, in the same Action List).

**Related Actions**

[Save color management settings](#) on page 515

### 3.5.2.6. Save color management settings

**Belongs to**

- **Category:** Color; General
- **Type:** Settings

**What it does**

Allows you to save the current color management settings (changed in the Action List).

**Related Actions**

[Restore previous color management settings](#) on page 515

### 3.5.2.7. Split Action List


**Belongs to**

- **Category:** General
- **Type:** Settings
- **Since Version:** 2019

**What it does**


This Action changes the way the content of an Action List is processed:

- Without this Action/default behavior: All Actions are executed one after the other, page after page, until the end of the document. There is no way to get back to the beginning of the document, for example to copy something from the end of the document to the beginning.

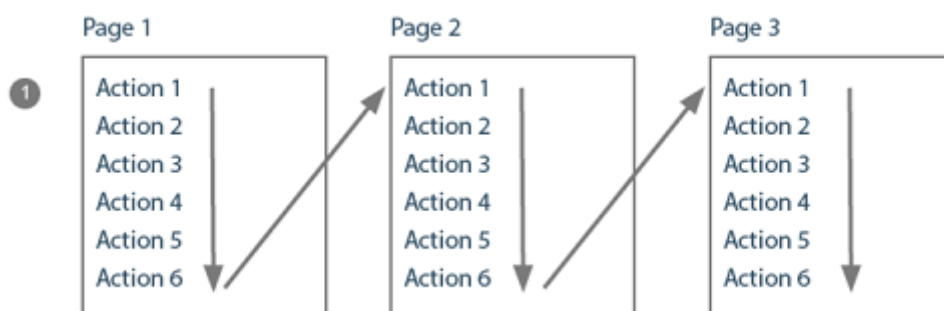

- With this Action:
  1. First all Actions **preceding** *Split Action List* are executed, one after the other, page after page, until the end of the document.
  2. Then the changes are saved. If anything is copied to the clipboard, it's preserved.

3. Next, the Actions **following** *Split Action List* are executed on the saved document, starting from the beginning of the document until the end or until another *Split Action List*. Note that after saving, the selection is lost, so a selection has to be made after *Split Action List*.

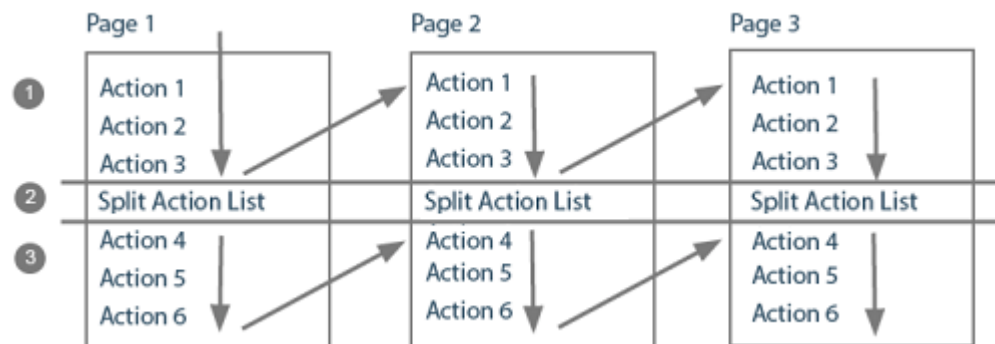

This approach makes it possible to go through a document multiple times.

### Example Action Lists

The following Action List copies the content of page 5 to page 2:

```
select page range          <!--Page range is "5" -->
copy content to clipboard  <!--Clipboard name e.g. content pg 5 -->
split Action List
select page range          <!--Select the target page: Page range is "2" -->
paste objects from clipboard <!--Clipboard name chosen higher -->
```

The following Action List splits pages and reorders them in one and the same Action List:

```
split pages in half        <!--To split the spreads -->
split Action List
select all                 <!--Make the selection -->
reorder pages              <!--Specify the new page order,
                           based on the split pages -->
```

### Related Actions

This Action is typically used to reorder split pages and to copy content backwards (from later pages to earlier pages). In that case, the following Actions may be useful:

- [Split pages in half](#) on page 224
- [Reorder pages](#) on page 217
- [Copy or cut objects to clipboard](#) on page 131
- [Paste objects from clipboard](#) on page 93

## 3.5.3. Image

### 3.5.3.1. Override default image recompression

#### Belongs to

- **Category:** General; Image

- **Type:** Settings

***What it does***

Overrides the default recompression quality setting (used by PitStop when changing images) with the one defined in this Action.

***How it works***

If PitStop is used to change images (e.g. to convert the color, to resample the image...), the images are decompressed first, then changed, and afterwards recompressed according to the default settings (maximum for JPEG, lossless for JPEG 2000). With these default settings, files may grow to an unacceptable size compared to the original input PDF file. In that case, you can use Override default image recompression to make the files smaller.

## 3.5.4. Page

---

### 3.5.4.1. Override page box defaults

***Belongs to***

- **Category:** General; Page
- **Type:** Settings

***What it does***

Replaces the default order (Media > Crop > Art - Bleed - Trim) of the page boxes in a PDF document with the order defined in this Action.

## 4. Actions sorted per Category

---

### 4.1. Add

---

#### 4.1.1. Changes

---

##### 4.1.1.1. Add background

**Belongs to**

- **Category:** Add
- **Type:** Changes

**What it does**

Adds a background to the selection that preceeds this Action in your Action List.

You can choose a color for the background and define a size (size of one of the page boxes or the same size as the bounding box of all objects).

##### 4.1.1.2. Add barcode

**Belongs to**

- **Category:** Add
- **Type:** Changes
- **Since version:** 2018

**What it does**

Adds the barcode of your choice. You can select the barcode you need from a list of common barcode types, choose the color of the back- and foreground and specify the position.

**Tabs**

| Tabs    |                                                                                                                                                                                                                                                          |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Barcode | <ul style="list-style-type: none"><li>• <b>Type:</b> Select the barcode you want to add. We support over 120 barcode types.</li><li>• <b>Value:</b> Enter the numeric value and/or a document variable by clicking the <b>Variable</b> button.</li></ul> |

| Tabs     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|          | <p>The <b>Variable</b> button gives access to a list of predefined variables, such as %Current Document Name%, %Document Title%, %Page Number%, ...(for the full list, see below). The current value is shown at the bottom of the dialog. Note that this list of variables is also available in the <a href="#">Add object</a> Action and the <a href="#">Change document info</a> Action.</p> <p>If a check digit is needed, you can either enter it yourself or leave it blank and let PitStop add it.</p> <hr/> <div data-bbox="486 555 555 622" data-label="Image"></div> <p><b>Note:</b> Values are verified when the Action List is executed, there is no check during the configuration of the Action.</p> <hr/> <ul style="list-style-type: none"> <li>• <b>Translate escape characters:</b> If selected, barcodes that support escape sequences can be used. For example, if this option is enabled, "\n" is considered an escape character instead of a plain string. For more information, refer to the documentation of your barcode library.</li> <li>• <b>Ignore check digit(s):</b> If selected, the check digit is not verified.</li> <li>• <b>Width reduction:</b> Width reduction compensates for 'dot gain': printed material looking darker than intended. In case of barcodes, it means that the bars are enlarged and the gaps reduced. To correct the barcode width, you can either enter an absolute value (e.g. 1 mm) or a relative value (e.g. 5%).</li> <li>• <b>Font name and size:</b> Select the font and the font size of your choice. The chosen font will be used for the numeric values below the bars. Note that the numeric values may not be readable if you select a bar code font.</li> <li>• <b>Group barcode objects:</b> If selected (default), the barcode and the numeric value are grouped, so they can be handled (e.g. moved, changed,...) as one object.</li> </ul> |
| Color    | <ul style="list-style-type: none"> <li>• Choose the <b>foreground</b> color. The default color is black.</li> <li>• Select a <b>background</b> as required and pick a background color.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Position | <ul style="list-style-type: none"> <li>• There are two options to specify the position and size of the barcode: <ul style="list-style-type: none"> <li>• <b>Use selection bounding box:</b> if selected, the barcode will be placed on the bounding box of an object in the PDF that is selected. The size of the selected object determines how big the barcode will be.</li> <li>• <b>Specify position and size:</b> Size and position can be defined independently from each other.</li> </ul> <p>The absolute position is set by entering the X and Y coordinates.</p> <p>The relative position is determined by the distance and position relative to one of the page boxes.</p> <p>The size is set by entering the width and the height. If the lock icon looks closed, any changes you make to one of the dimensions changes the other dimension proportionally.</p> </li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

| Tabs        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|             | <ul style="list-style-type: none"> <li>You can use the default <b>quiet zone</b> (= default for the chosen Action) or you can determine the dimensions. The lock icon can be used to make sure proportions are kept if changes are made afterwards.</li> <li>Barcodes can be <b>rotated</b> as required. Rotation angles are 90°, 270° and 360°.</li> </ul>                                                                                                                                                                                                                                                            |
| Data matrix | <p>Only available if the chosen barcode type is Data Matrix.</p> <p>Options:</p> <ul style="list-style-type: none"> <li><b>Square</b> or <b>Rectangle</b></li> <li><b>Size:</b> Choose one of the predefined sizes or 'Automatically Detect'.</li> </ul> <div data-bbox="486 689 555 763">  </div> <p><b>Note:</b> The list of predefined sizes depends on the length of the barcode (= the value on the Barcode tab). If 'Automatically Detect' is chosen, the barcode will get the size that best fits the length of the value.</p> |



**Note:** This Action supports variables in most fields.

### Document variables - Overview

This is the full list of the predefined variables that can be inserted via the **Variable** button on the Barcode tab:

- %Current Document Name%
- %Full Document Path%
- %Time%
- %UTC Time%
- %Date%
- %UTC Date%
- %User Company%
- %User Name%
- %Page Number%



**Note:** You can use the page number as it is, or increment or decrement it (so always add up or subtract a certain number). To decrement, you need to add a minus sign. For example, if the page number is '12' and you enter '-3', the value of the variable will be '9'. If you enter '3', the value of the variable will be '15'. You can also add leading zeros by defining the minimum number of digits. For example, if Total digits is set to '3', '9' will become '009' and '15' will become '015'.

- %Page Count% = total number of pages



**Note:** You can add leading zeros by defining the minimum number of digits. For example, if Total digits is set to '3', '9' will become '009' and '15' will become '015'.

- %Document Title%
- %Page Box Dimensions%



**Note:** You need to indicate which page box should be considered. For example, if you select Media Box from the Page Box list, the value of the variable will be the

dimensions of the media box, for example: 210 x 297 mm (the unit depends on the unit specified in the PitStop Pro preferences).

- %Page Box Width%




**Note:** You need to indicate which page box should be considered. For example, if you select Art Box from the Page Box list, the value of the variable will be the width of the art box, for example: 210 mm (the unit depends on the unit specified in the PitStop Pro preferences).

- %Page Box Height%



**Note:** You need to indicate which page box should be considered. For example, if you select Bleed Box from the Page Box list, the value of the variable will be the height of the bleed box, for example: 210 mm (the unit depends on the unit specified in the PitStop Pro preferences).

Below is an example of the Use Variable dialog.

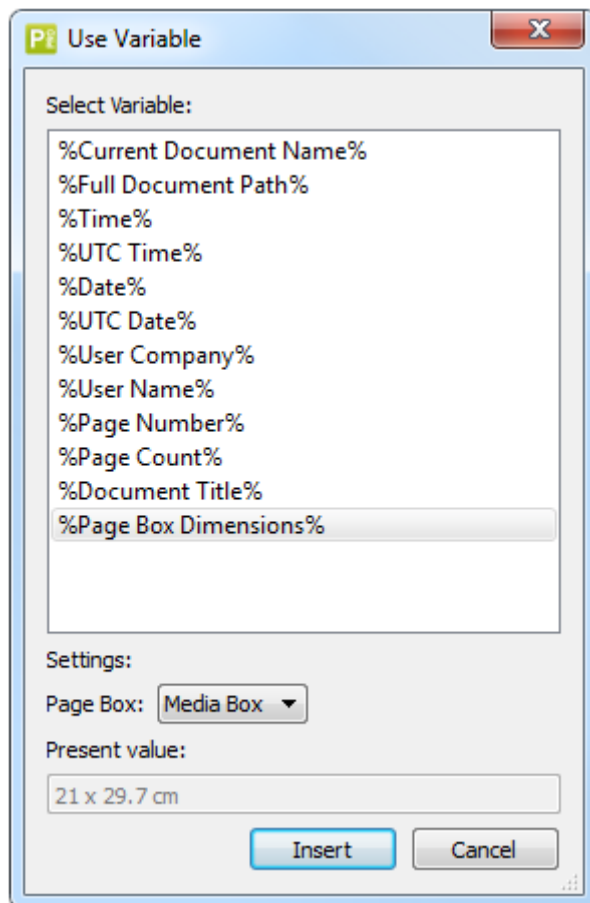

### Standard Action Lists

PitStop 2018 comes with a number of default Action Lists for generating barcodes.

Some of these Action Lists make use of smart variables; to that end a new Variable Set was added to PitStop 2018 (Smart Preflight Variable Set - PitStop Pro v1.3).



If you're not familiar with Smart Preflight, we recommend taking a short elearning course on Smart Preflight, available on the Enfocus website (<https://www.enfocus.com/learn>), or check out the [PitStop Reference Guide](#), which has a chapter on Smart Preflight too.

#### **Related Actions**

- [Check Esko barcode value](#) on page 368
- [Check Esko barcode type](#) on page 368
- [Select Esko barcode](#) on page 478
- [Select Esko barcode type](#) on page 478

### 4.1.1.3. Add bookmarks

#### **Belongs to**

- **Category:** Add
- **Type:** Changes
- **Since version:** 24.03

#### **What it does**

Adds a bookmark to every selected page in your document.

#### **How to proceed**

1. Make sure to add an Action to your Action List to select the pages that should get a bookmark.
2. In the Add bookmarks Action, enter the name of the bookmark in the Bookmark field. You can use text, document variables (by clicking the Variables button) or enable variables from a variable set through the Actions menu (Enable Variable Names).
3. If the document already contains bookmarks, and you want to use these as a parent, enter the name of the parent bookmark, so PitStop knows where to put the new bookmarks. Also here, you can use text, document variables or variables from a variable set.



**Note:** If multiple parent bookmarks are found, the new bookmarks will be added to the **first** parent bookmark.

4. If wanted, you can log the result of this Action, and in case of an error, distinguish between a critical and a non-critical failure.
5. Run the Action List and check the Bookmarks tab in Acrobat.

#### **Document variables - Overview**

This is the full list of the predefined variables that become available by clicking the Variables button:

- %Current Document Name%
- %Full Document Path%
- %Time%
- %UTC Time%
- %Date%

- %UTC Date%
- %User Company%
- %User Name%
- %Page Number%

**Note:**

- You can use the page number as it is, or increment or decrement it (so always add up or subtract a certain number). To decrement, you need to add a minus sign. For example, if the page number is '12' and you enter '-3', the value of the variable will be '9'. If you enter '3', the value of the variable will be '15'. You can also add leading zeros by defining the minimum number of digits. For example, if Total digits is set to '3', '9' will become '009' and '15' will become '015'.
- **Specifically for Add bookmarks:** If you add new bookmarks to a multi-page document, PitStop will start incrementing or decrementing from the first bookmark/page, preserving the order and numbering of subsequent pages.

- %Page Label%



**Note:** This document variable is **only available in the Add bookmarks Action!**

- %Page Count% = total number of pages



**Note:** You can add leading zeros by defining the minimum number of digits. For example, if Total digits is set to '3', '9' will become '009' and '15' will become '015'.

- %Document Title%
- %Page Box Dimensions%



**Note:** You need to indicate which page box should be considered. For example, if you select Media Box from the Page Box list, the value of the variable will be the dimensions of the media box, for example: 210 x 297 mm (the unit depends on the unit specified in the PitStop Pro preferences).

- %Page Box Width%



**Note:** You need to indicate which page box should be considered. For example, if you select Art Box from the Page Box list, the value of the variable will be the width of the art box, for example: 210 mm (the unit depends on the unit specified in the PitStop Pro preferences).


- %Page Box Height%



**Note:** You need to indicate which page box should be considered. For example, if you select Bleed Box from the Page Box list, the value of the variable will be the height of the bleed box, for example: 210 mm (the unit depends on the unit specified in the PitStop Pro preferences).

**Example**

In the example below, the document already had bookmarks, that were based on the page numbers (Page\_1, Page\_2, etc.). The Action List added new bookmarks below the existing ones, based on the page labels (PageLabel1, PageLabel2, etc.).

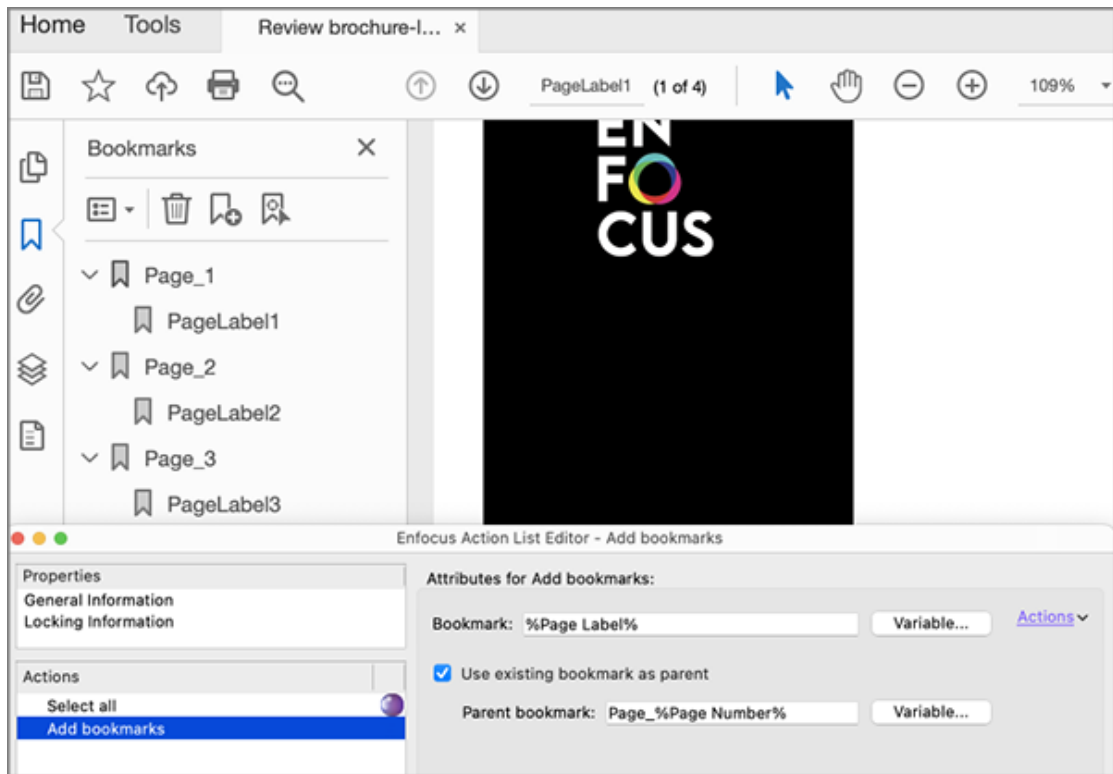

#### Related Actions

- [Check bookmarks](#)
- [Select pages with bookmarks](#)
- [Remove bookmarks](#)

### 4.1.1.4. Add color bar

#### Belongs to

- **Category:** Add
- **Type:** Changes
- **Since version:** 12 update 3

#### What it does

Adds color patches to your PDF document. The color patches are individually created for each page and show all separations including any spot colors.

#### How to proceed

1. On the **Color Patches** tab, indicate how many tint values per separation you want to add. By default, a 100% tint of the color is added.
  - To change a value, double-click it in the **Tint values (%)** box and type an alternative value.
  - To add another value, click  and enter the required value.

- To remove a value, select it and click .
- 2. Enter the required size of the color patches, i.e. the preferred height or width. This depends on the device you're using.
- 3. Select the preferred options:
  - **Repeat color patches:** The color patches are repeated till the end of the line (= right border of the page box). If this checkbox is cleared, each tint value of each color is added only once.
  - **Don't add process colors (C, M, Y, K):** For process colors no color patches are added.
  - **Don't add if tint is 0%:** If a color is defined but not used in the PDF, no color patch will be added.
- 4. Switch to the **Position** tab.
- 5. Determine the position of the color bar relative to one of the page boxes. You can specify the edge (top, bottom, left, right), the position on the edge (left, right, center) and the distance between the page box and the color bar.

### Examples

**Example 1:** This document contains two spot colors, which are each added once, in 2 tint values (100% + 50%). Chosen position: relative to the top of the trim box (blue line), in the center. Process colors are not added.



**Example 2:** Same options as in the first example, but with **Repeat color patches** enabled.



**Example 3:** This is an example where the tint value of the color patches is 100%. The position of the color bar is defined relative to the bleed box, and it's placed in the bottom right corner (Edge: right, Position on edge: bottom).



### 4.1.1.5. Add copied graphics

**Belongs to**

- **Category:** Add
- **Type:** Changes

**What it does**

Copies graphic elements and positions them on the page. The graphics can be rotated and scaled, and put in the foreground or background. You can place them at any position on the page and use the "repeat" feature to more precisely position the graphic.

**How to proceed**

1. Select the graphic(s) from a file or by making a selection. Do one of the following:
  - Select **Use file** and select the PDF file concerned. Next, enter the number of the page you want to use. The total number of pages is mentioned in brackets.
  - Select the graphic you want to copy in your PDF using the PitStop Select Objects tool  and select **Use grabbed graphics**. Click **Grab Selection**. The selected graphic is shown in the field below the button. If the graphic should be rotated, specify a rotation angle, e.g. 45. If the graphic should be made larger or smaller, change the scale value from 100% to e.g. 90%.



**Note:** For all options, variables can be used if needed.

2. Switch to the different tabs and select the appropriate options.

**Tabs**

| Tabs       | On this tab, do the following:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Graphics   | Select the graphics you want to copy (either elements you selected in the PDF or a page of a particular PDF).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Attributes | <p>Determine if the graphic should be pasted in the foreground or in the background.</p> <p>Select or clear the <b>Use page rotation</b> and <b>Use page scaling factor</b> checkbox:</p> <ul style="list-style-type: none"><li>• To take into account page rotation and/or scaling factor, select this checkbox. The Action will be applied to the actual position of the page content.</li><li>• To ignore page rotation and/or scaling factor, clear this checkbox. The Action will be applied to the original position of the page content (i.e. BEFORE applying page rotation and/or scaling factor).</li></ul> |

| Tabs     | On this tab, do the following:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|          | <p>Enable <b>Share graphics between copies</b> to add the copied graphic as a shared form XObject. This means that the graphic is defined only once, but used several times, on several pages. This is an easy way to reduce the file size.</p> <hr/> <p> <b>Note:</b> Only use this option if you're sure that all instances/ occurrences of the graphic will remain the same (as is the case with a logo), because changing one graphic will change them all.</p> <hr/>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Region   | <p>Determine the region where the copied graphics should (or should not) be placed, relative to the page box of your choice. Margins can easily be set by grabbing the offsets from a selected area (use the Grab Offsets button ).</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Repeat   | <p>If the graphics should be placed more than once on a page, change <b>No repeat</b> to:</p> <ul style="list-style-type: none"> <li>• <b>Distribute/Repeat fixed number of graphic elements</b> if you want to determine how often they should be pasted (e.g. 6 times horizontally, 4 times vertically)</li> <li>• <b>Distribute/Repeat graphic elements in region</b> if you want PitStop to fill the region (specified on the Region tab).</li> </ul> <p>If you want PitStop to divide the copied graphics evenly across the defined region, choose "distribute" rather than "repeat". In case of "Distribute graphic elements in region", you can choose the maximum or minimum distance between the copied graphics.</p> <p>If you choose "repeat", you should define the exact distance between the copied graphics yourself.</p> <p>The distance can be between the bounding boxes of the copied graphic (choose: <b>Between edges</b>) or from center to center (choose: <b>Between centers</b>).</p> <hr/> <p> <b>Note:</b> Remember that you can use Smart Preflight variables to define the distances.</p> <hr/> |
| Position | <p>Indicate how the graphic elements should be positioned relative to the chosen region. Note that, when adding multiple copies, the same corner should be used to position the graphic elements in the region.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

#### 4.1.1.6. Add object

##### *Belongs to*

- **Category:** Add
- **Type:** Changes

**What it does**

Inserts a chosen object (a line, a rectangle, an ellipse or a text) and positions it relative to one of the page boxes. This can be useful to add information to be trimmed off later.



**Note:** If you're inserting text, you can make use of predefined variables, such as the name of the document, the author, the page number, page count, the page box dimensions, ...See the list of document variables below. Note that you can also use EOL characters to insert a new line, and also variables that include an EOL character are supported.

The **Fill** and **Stroke** tabs allow you to define the color of the objects you are inserting.

**Add rectangle**

When adding a rectangle, you can choose different corner styles, e.g. rounded corners, chamfered corners or inverted corners. You can also determine the radius (only positive values are accepted).


This option is useful for customers who want to automatically generate cutter guides or dielines for labels based on a PDF page box such as the trim box. See also the Action Lists based on this Action, which make a dieline in an overprinting spot color based on the trim box.

**Example**

To add the width and height of the media box to your document, proceed as follows:


1. In the attributes for the Add object Action, on the **Object and position** tab, choose **Add text in foreground**.
2. Click the **Variable** button.
3. Select **%Page Box Dimensions%**.
4. Select the page box of which you want to insert the dimensions, in this example **Media Box**. The current value is shown.
5. Click **Insert**.
6. Select a font and a font size and determine where the text must be inserted in the document, for example in the center of the media box with a particular offset.
7. Specify whether or not to take into account page rotation and page scaling factor if applicable.

Below is an example of the dialog that allows you to insert predefined text variables.

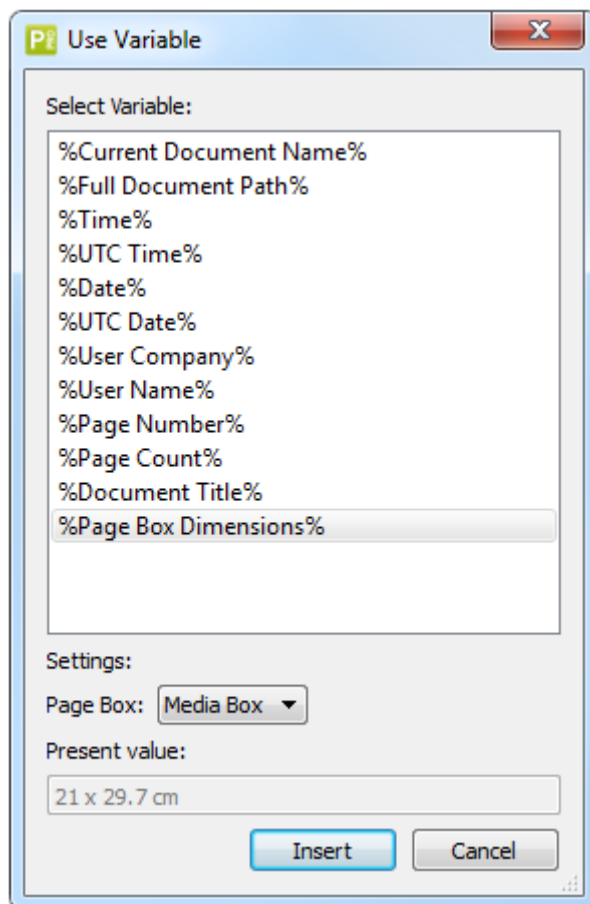

### Document variables - Overview

When you select 'text' on the Object and Position tab, the Variable button becomes available, which gives access to a list of predefined variables.

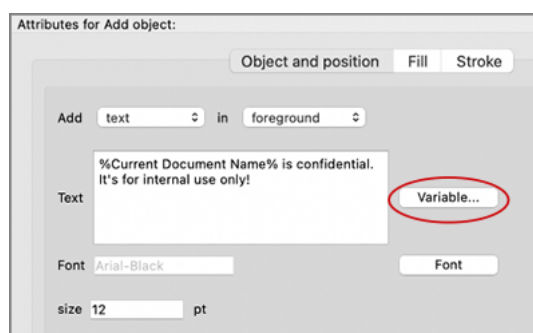

This is the full list of the predefined variables:

- %Current Document Name%
- %Full Document Path%
- %Time%
- %UTC Time%
- %Date%
- %UTC Date%



- %User Company%
- %User Name%
- %Page Number%



**Note:** You can use the page number as it is, or increment or decrement it (so always add up or subtract a certain number). To decrement, you need to add a minus sign. For example, if the page number is '12' and you enter '-3', the value of the variable will be '9'. If you enter '3', the value of the variable will be '15'. You can also add leading zeros by defining the minimum number of digits. For example, if Total digits is set to '3', '9' will become '009' and '15' will become '015'.

- %Page Count% = total number of pages



**Note:** You can add leading zeros by defining the minimum number of digits. For example, if Total digits is set to '3', '9' will become '009' and '15' will become '015'.

- %Document Title%
- %Page Box Dimensions%



**Note:** You need to indicate which page box should be considered. For example, if you select Media Box from the Page Box list, the value of the variable will be the dimensions of the media box, for example: 210 x 297 mm (the unit depends on the unit specified in the PitStop Pro preferences).

- %Page Box Width%



**Note:** You need to indicate which page box should be considered. For example, if you select Art Box from the Page Box list, the value of the variable will be the width of the art box, for example: 210 mm (the unit depends on the unit specified in the PitStop Pro preferences).

- %Page Box Height%



**Note:** You need to indicate which page box should be considered. For example, if you select Bleed Box from the Page Box list, the value of the variable will be the height of the bleed box, for example: 210 mm (the unit depends on the unit specified in the PitStop Pro preferences).

#### 4.1.1.7. Add page box marks

##### ***Belongs to***

- **Category:** Add
- **Type:** Changes

**What it does**

Allows you to add trim marks and/or bleed marks to your document in the style of your preference (InDesign or QuarkXPress).

## 4.1.1.8. Add page number

**Belongs to**

- **Category:** Add
- **Type:** Changes

**What it does**

Adds page numbers (including section and chapter numbers) to a PDF.



**Note:** The Global Change **Add Page Number** provides the same functionality.

**How it works**

You must first create a sample piece of text, which will be used to determine the format and style used for page numbering (font, color, size etc):

- If you want to add a page number only, the sample should only be a number, e.g. "3".
- If you want to add a page number with more information (for example: include the word "Page" and the total number of pages) add this to the sample, e.g. "Page 1 of 10".

The text strings (including spaces and punctuation) in this sample will be used as they are. For the numbers in this sample, you should indicate which one refers to the page number, hence should be considered a variable. For example, if your sample is "Page 1 of 10", "1" refers to the page number (Page %pagenr% of 10) and will be different on each page. "10" will not be changed, as it is not possible to use variables for other information than page numbers.

**How to proceed**

1. Create an example piece of text.
2. Select the sample by using the PitStop Select Objects tool .
3. In the attributes of the Action, click the **Grab Sample from Selection** button.

The sample text appears in the Sample field.

4. Specify the position of the page numbers relative to the text and one of the page boxes. You can use a default offset, manually enter offset values or grab the document's offset values.
5. To start numbering on a different page than the first page of the document, enter the page number. For example, if you want to start numbering after the table of contents, for example on the third page of the document, enter "3". Note that you can also use a variable for this (added in PitStop 2020).
6. By default, the pages are numbered consecutively based on all pages of the PDF. However, if you want to base the page numbering on a selection of pages, select **For generating page number sequence, use: Selected pages**.

**Example:**

```
Select pages <!-- page range 1-3, only odd pages -->
Add page number
```

Output in case of PDF pages (default):

- Page 1: numbered 1, page 2: not numbered, **page 3: numbered 3**

Output in case of Selected pages:

- Page 1: numbered 1, page 2: not numbered, **page 3 numbered 2**

7. If your sample text contains numbers, the **Variable number sequence** list is activated. This list allows you to indicate which number should be considered a variable (indicated by "%pagenr %").

For example, if your sample text is "Page 2, Section 1", you will have three options:

- "Page 2, Section 1" will insert "Page 2, Section 1" on every page.
- "Page %pagenr%, Section 1" will insert "Page 1, Section 1" on page 1, "Page 2, Section 1" ... (Section 1 will not change)
- "Page 2, Section %pagenr%" will insert "Page 2, Section 1" on page 1, "Page 2, Section 2" ... (Page 2 will not change)

8. Switch to the **Options** tab and select the appropriate checkbox:

- **Remove any overlapping text** will remove existing page numbers.
- **Only number pages that already have a number** will not add page numbers to pages that currently don't have any.
- **Add white background** ensures that the page numbers are visible, even if the PDF has a dark background.

#### 4.1.1.9. Add pages

##### ***Belongs to***

- **Category:** Add; Page
- **Type:** Changes

##### ***What it does***

Allows you to insert either empty pages or pages from a particular PDF file (by embedding the file or by using the file path (optionally specified by a variable)).

You can choose the number of pages to add, the location of the new pages in the PDF ...

As of PitStop 2019, you can insert pages before or after a selection you made earlier in your Action List. You could for example select all pages with a certain string and insert empty pages based on this selection. See also the example Action List below.

##### ***"R[number]" notation***

If you want to add pages starting from the end of the PDF, you can use the "R[number]" notation in the **Before pages/After pages** text box. R1 refers to the last page (= 1 page from the end), R2 refers to the last but one (= 2 pages from the end), ... This allows you for example to add a backup interleaved page to every page in the PDF.

Attributes for Add pages:

☒ Insert empty pages  
☐ Insert pages from document

---

Insert Empty Pages:

☐ Exact number of pages: 1  
☒ Until  pages

---

Location: ☒ Before pages

☐ After pages

☐ Before last page  
☐ After last page

☐ Before every  pages starting from page  to

☐ After every  pages starting from page  to

☐ Before selected pages  
☐ After selected pages

**Example Action List**

Suppose you have a mixed landscape/portrait document and you want to insert an empty page after every landscape page. That's possible with the following Action List.

```
Select all
Select by page orientation <!-- select if page orientation = landscape -->
Add pages <!-- select "insert empty pages" and "after selected pages" -->
```

#### 4.1.1.10. Add pages with extracted content to document

**Belongs to**

- **Category:** Add
- **Type:** Changes
- **Since version:** 24.11

**What it does**

Allows you to separate cut lines and embellishments (typically Scodix separations, such as foiling, embossing, debossing, varnishing, and spot UV coating) from other page objects. The selected objects are copied and moved to a separate page. This allows the printing device to handle each part separately, improving the efficiency and accuracy of the printing process.



**Note:**


- Line art is preserved as it is, it's not converted to an image.
- Clipping paths of selected objects are always copied, even if they are not selected.

**Example Action List**


To move a cut line with spot color 'CUTTER' to a new page, create the following Action List:

```
Select spot color by name ('CUTTER')
Add pages with extracted content to document (after source page + add a page label
(%Page label% %Colorant Name%))
Remove selection
```

The following screenshot shows that the color of the cut line is 'CUTTER' in this example.

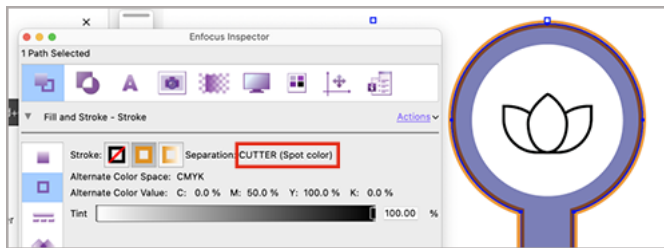

The resulting document has an extra page: the original page now contains all content without the cut line; the extra page contains the cut line only. Note the page label of the inserted page.

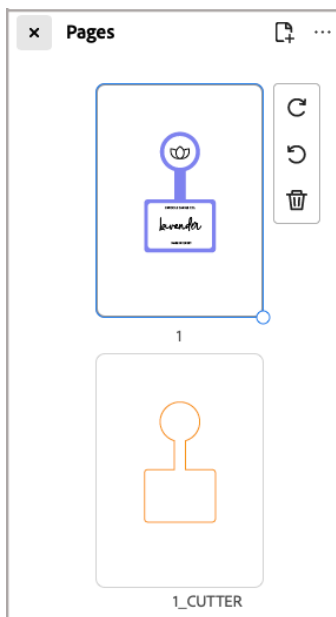

#### 4.1.1.11. Add registration marks

**Belongs to**

- **Category:** Add
- **Type:** Changes

**What it does**

Allows you to add registration marks to your document in the style of your preference (InDesign or QuarkXPress).

Registration marks ensure that the different separations in a color document are properly aligned.

**Related Actions**

[Select registration marks](#) on page 487

## 4.1.1.12. Add separation names

**Belongs to**

- **Category:** Add
- **Type:** Changes
- **Since version:** 12 update 2

**What it does**

Allows the names of color separations to be generated and positioned within a PDF file. The separation names are individually created for each page and show all separations including any spot colors.

You have several options. You can specify:

- *How* the separation names should be displayed (stacked (i.e. one per line), inline (*reflow*) or all on top of each other (*on same location* - useful for color plates); in color or with color patches, rotated, ...). You can also determine the font and the font size.
- *Where* exactly they should be placed on the page (position of the color names relative to a page box).
- Whether or not *process colors* and *separations with 0% tint* should be displayed.
- If you have chosen to add color patches, whether or not they should have a border (*Add stroke on color patches*).

**Examples**

- Example 1: Layout: **Stack** and Color: **Separation names in black + color patches** are selected.

■ Cyan  
■ Magenta  
■ Yellow  
■ Black

- Example 2: Layout: **Overflow** and Color: **Separation names in black + color patches** are selected. The color patches have a border, because **Add stroke on color patches** is enabled.

■ Cyan ■ Magenta ■ Yellow ■ Black

- Example 3: Layout: **Overflow** and Color: **Separation names in color** are selected.

Cyan Magenta Yellow Black

4.1.1.13. Add separation pages to document

*Belongs to*

- **Category:** Add
- **Type:** Changes
- **Since version:** 24.11

*What it does*

Adds one page per for each separation. Each added separation page is actually a single image which is a render of the original input. You can choose the resolution of the generated images and the compression filter.

Separating colors in a PDF is useful to ensure that each color is printed accurately and consistently. By separating the colors, printers can create individual plates for each color, which helps in achieving precise color registration and alignment during the printing process. Another reason is to optimize the printing process itself. Some printing devices and finishing equipment struggle to process heavy files or complex color information. By separating the colors, the files become lighter and easier to handle, which can improve the efficiency and speed of the printing process



**Note:** This Action works on a selection. You can add separation pages for all pages of the document ("Select all") or only for some of it (e.g. only one particular page, only pages with spot colors). See the examples below.

Note that the source pages are always preserved. That is because the page may contain RGB or spot colors that you want to keep.

*Attributes*

| Attribute                            | Description                                                                                                                                                                                                                                               |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Insert generated separation pages    | The generated pages are inserted at the position of your choice: <ul style="list-style-type: none"><li>• After the source page</li><li>• Before the source page</li><li>• At the beginning of the document</li><li>• At the end of the document</li></ul> |
| Resolution (ppi) of generated bitmap | Resolution in ppi of the generated image.                                                                                                                                                                                                                 |
| Compression                          | Compression filter: <ul style="list-style-type: none"><li>• JPEG</li><li>• JPEG 2000</li><li>• ZIP</li><li>• None</li></ul>                                                                                                                               |

| Attribute                               | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                         | In case of JPEG or JPEG 2000, you should also select the quality.                                                                                                                                                                                                                                                                                                                                                                                                                |
| Use anti-aliasing                       | Enable anti-aliasing to reduce visual distortions when representing high-resolution images at a lower resolution.                                                                                                                                                                                                                                                                                                                                                                |
| Generate all separations in grayscale   | <p>When enabled, all separations (including spot colors) are converted to black and white. This makes it easier to inspect effects, such as knock-outs, especially with light colors.</p> <div>  <p><b>Note:</b> We recommend using the option to add page labels (e.g. with the colorant name), so you know which separation is displayed, as you cannot recognize it by its color.</p> </div> |
| Blend spot colors into CMYK separations | Enable this option to convert spot colorants to CMYK and then add them to each separation. That way, you can see what the document will look like on a CMYK press. Note that the original page is not changed.                                                                                                                                                                                                                                                                   |
| Add a page label                        | <p>Enable this option to add a page label to the new pages. This is useful to know where the new pages come from.</p> <p>You can enter any string and one or more of the following variables:</p> <ul style="list-style-type: none"> <li>• %Page Label%</li> <li>• %Page Number%</li> <li>• %Page Count%</li> </ul> <p>For example: <i>%Colorant Name% separation of page %Page Number%</i> may result in a page label like: <i>Pantone 360 C separation of page 3.</i></p>      |



**Note:** When you add separation pages to a document, the **Undo** stack in PitStop is cleared. That means that changes, including previous changes to the order of the pages, the numbering of pages, etc. cannot be undone anymore through the Enfocus Undo option; you can only use the revert option in Acrobat to restore the original document if needed.

### Example 1

#### Action List:


```
Select all // so processing based on the complete document
Add separation pages to document // "Insert generated image" set to:
"At the end of the document"
```

#### Result:

In this example, the original document had only 1 page. PitStop detected 4 separations on that page, so 4 separation pages (one per separation) were inserted at the end of the document,



resulting in a 5-page document. Note that you can browse the separation pages using the Enfocus Navigator as shown in the screenshot.

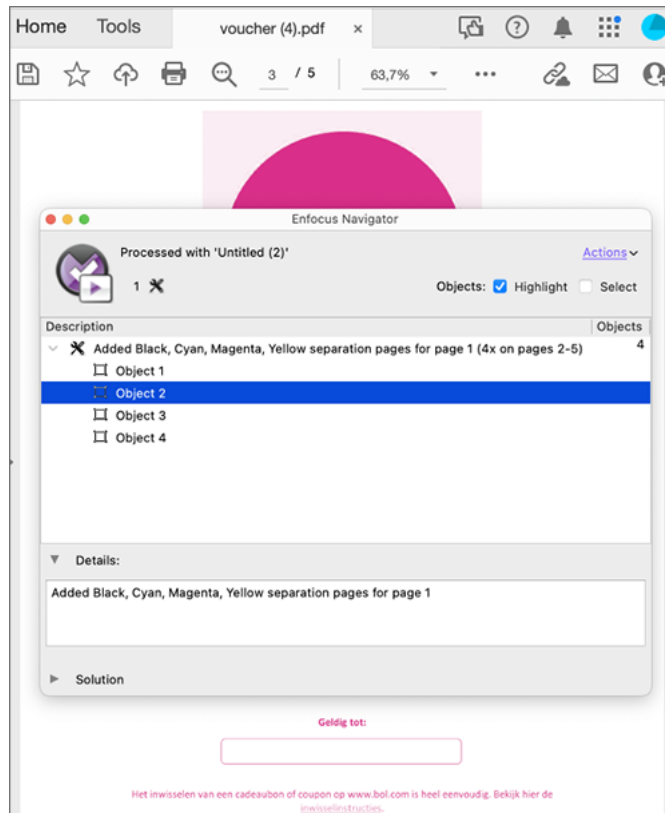

## Example 2


### Action List:

```
Select by page orientation // landscape
Add separation pages to document // "Insert generated image" set to:
    "After the selected page"
```

### Result:

In this example, the original file had 12 pages, but only one with landscape orientation: page 6.

On page 6, PitStop detected 5 separations (CMYK + 1 process color), so after the selected page, 5 extra pages were inserted (7-8-9-10-11), resulting in a 17-page document.

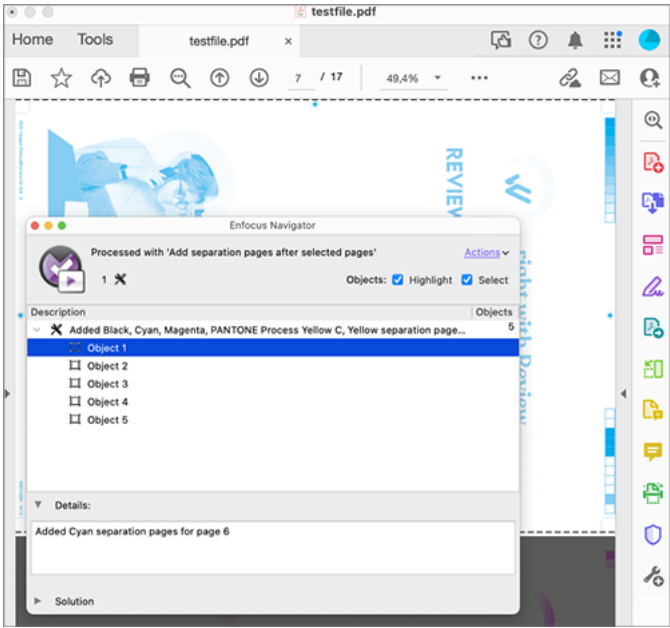

4.1.1.14. Add trace path

*Belongs to*

- **Category:** Add
- **Type:** Changes
- **Since version:** 2020

*What it does*

Generates a path or shape by tracing objects in a PDF.

This Action generates a path around everything that's not white, which enables creating vector elements to be used as cutter guides or shapes for embossing.



**Note:** This Action is also available as an option in the Inspector Line Art tab (with exception of the Use colorant selection option, which is not available through the Inspector).

*Attributes*

| Attribute             | Description                                                                                                                                                                                                     |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Scan resolution (ppi) | Default value is 300.<br><br>Increasing this value will slow down processing but improve accuracy (and vice versa).                                                                                             |
| White threshold       | Default value is 10%. This is the best value to filter out tiny pixels that are artefacts.<br><br>To change this threshold, drag the slider to right or to the left or enter the value of your choice manually. |

| Attribute                                       | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                 | Increasing the white threshold may result in light gray parts being included in the selection.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Curve optimization                              | <p>Default value is 20%.</p> <p>If you lower this value, more selection points will be taken into account to draw the curve, making the curve more accurate but less fluent.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Ignore white holes                              | <p>This option allows you to include or ignore white shapes (i.e. paths fully inside another path). If included, the white holes are cut out.</p> <p>This option is useful when making white underprints for printing on transparent substrates.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Invert trace path, use <page box> as outer edge | This option allows you to invert the created path, using the page box of your choice as an outer boundary.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Only add trace paths larger than ...            | This option allows you to remove paths that are smaller than a specified size, i.e. paths of which the width and height of the bounding box are smaller than the entered value.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Only add largest trace path                     | This option allows you to remove all smaller paths, to keep only the largest one.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Use colorant selection                          | <p>This option allows you to let the Action only trace the selected channels (e.g. only CMY), ignoring the others (e.g. K).</p> <p>This option requires two preceding "select" Actions; the first one to select the <i>channel</i>s that need to be traced, the second to select the <i>objects</i> that need to be traced.</p> <p><b>Example Action List 1</b> (path based on process colors, in this example: CMY):</p> <pre>select process colorants (CMY on) select all trace path (Use colorant selection on)</pre> <p><b>Example Action List 2</b> (path based on text segments in a particular spot color, in this example: PANTONE 3507 C):</p> <pre>select spot color PANTONE 3507 C select text segments trace path (Use colorant selection on)</pre> <p><b>Example Action List 3</b> (draws a path around magenta and PANTONE 3507 C + works on text and line art)</p> |

| Attribute | Description                                                                                                                                                                                                        |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|           | <div>Actions</div> <div>Select process colorant</div> <div>Select spot color PANTONE 3507 C</div> <div>OR</div> <div>Select line art</div> <div>Select text segments</div> <div>OR</div> <div>Add trace path</div> |

**Examples**  
Suppose you're running this Action on the below image. The generated trace path depends on the chosen options.



| Attributes                               | Result                                                                                                                                                                                          |
|------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Default values, no extra options enabled | The same balloon illustration as before, but with black trace paths overlaid on the balloons. The paths follow the outlines of the balloons, showing the result of the 'Add trace path' action. |

| Attributes                                                                                                                                                      | Result                                                                               |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| Default values, ignore white holes                                                                                                                              |    |
| Default values, ignore white holes, only add largest trace path; as a result, the single balloon is not traced anymore.                                         |   |
| Default values, ignore white holes, resolution of 72 ppi (iso 300)                                                                                              |  |
| Default values, ignore white holes, resolution of 72 ppi (iso 300), no extra curve optimization (selected version, so you can clearly see the selection points) |  |

| Attributes                                                                                                                                                                                                        | Result                                                                             |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| Default values, ignore white holes, resolution of 72 ppi (iso 300), with increased curve optimization (selected version, so you can see that now there are fewer selection points, resulting in a smoother curve) |  |

4.1.1.15. Paste objects from clipboard

**Belongs to**

- **Category:** Add, General, Operators
- **Type:** Changes
- **Since Version:** 13 update 1

**What it does**

Allows you to paste objects from the clipboard to one or more selected pages. You can paste them multiple times (with fixed distances or distributed across a distance) as required and indicate where they should be placed.

This Action must be preceded by a "copy/cut "Action (that moves the objects to the clipboard) and a "select" Action (that indicates where the objects should be pasted) in the same Action List.

If there are several "copy/cut" Actions in the Action List, you may want to give each of the clipboards an appropriate name, to make sure the different objects are pasted on the correct pages.

**How to proceed?**

1. Create a new Action List.
2. Add a select Action that select the objects you want to cut/copy-and-paste.
3. Add a [Copy or cut objects to clipboard](#) on page 131 Action to your Action List and set the attributes (select Cut or Copy and type an appropriate name).
4. Add a [Select pages](#) on page 484 Action to indicate the pages on which the selection should be pasted (if not yet selected in step 2 -if you added "Select all" in step 2, step 4 is redundant).
5. Add a *Paste objects from clipboard* Action and select the name of the clipboard (as entered in step 2). Switch to the different tabs to define the region and the position of the copied objects (see table below).



**Note:** Action Lists are executed page after page. As a consequence, you can only paste objects to the following pages. For example, if you copy an object that is present on page 3, you can paste it on page 3, 4, 5, ... but not on page 1 or 2.

### Tabs

| Tabs       | On this tab, do the following:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Graphics   | <p>Select the clipboard that contains the objects to be pasted.</p> <p>Determine whether or not the clipboard should be cleared after the object was pasted. This option determines what happens if there are no objects to be copied (= if the select Action in step 2 of the above procedure results in an empty selection).</p> <ul style="list-style-type: none"> <li>• If checked, the clipboard will be empty, so nothing will be pasted.</li> <li>• If cleared, the clipboard will still contain content from the previous page and that content will be pasted.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Attributes | <p>Determine if the objects should be pasted in the foreground or in the background of the document.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Region     | <p>Determine the region where the objects should be moved to. The region is defined based on the page box of your choice and you can define margins within that page box, by grabbing the offsets from a selected area (using the <b>Grab position</b> button ).</p> <p>You can also specify a specific area the objects should not be placed in, also based on a page box and with the option to set margins.</p> <hr/> <p> <b>Note:</b> The settings on this tab are only used if <b>Move graphic elements</b> is selected on the Position tab. If this is not the case, the original location of the graphic elements is preserved.</p> <hr/>                                                                                                                                                                                                                                                                                                                                                                                                     |
| Repeat     | <p>If the objects should be pasted more than once on a page, change <b>No repeat</b> to:</p> <ul style="list-style-type: none"> <li>• <b>Distribute/Repeat fixed number of graphic elements</b> if you want to determine how often the copied objects should be pasted (e.g. 6 times horizontally, 4 times vertically)</li> <li>• <b>Distribute/Repeat graphic elements in region</b> if you want PitStop to fill the region (specified on the Region tab).</li> </ul> <p>If you want PitStop to divide the pasted objects evenly across the defined region, choose "distribute" rather than "repeat". In case of "Distribute graphic elements in region", you can choose the maximum or minimum distance between the pasted objects.</p> <p>If you choose "repeat", you should define the exact distance between the pasted objects yourself.</p> <p>The distance can be between the bounding boxes of the pasted objects (choose: <b>Between edges</b>) or from center to center (choose: <b>Between centers</b>).</p> <hr/> <p> <b>Note:</b> Remember that you can use Smart Preflight variables to define the distances.</p> <hr/> |
| Position   | <p>If the selected objects should be moved, select <b>Move graphic elements</b>. Indicate how the objects should be positioned relative to the chosen</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

| Tabs | On this tab, do the following:                                                                                                 |
|------|--------------------------------------------------------------------------------------------------------------------------------|
|      | region. Note that, when adding multiple copies, the same corner should be used to position the graphic elements in the region. |

**Related Action**

- [Copy or cut objects to clipboard](#) on page 131
- [Add copied graphics](#) on page 76

#### 4.1.1.16. Put selection in form

**Belongs to**

- **Category:** Add
- **Type:** Changes

**What it does**

Allows you to gather all selected objects in a form (a so-called XObject form).

Forms are rectangular frames in a PDF document that contain objects. The way in which you edit these forms and the objects inside them is different from regular objects in a PDF document. For example, you can select a regular object and move it to a random position on the page in your PDF document. Objects in forms can only be moved inside the form and thus, you can use the form to crop the object.

Note that you can use PitStop's Edit Form tool in order to edit the form and the objects it contains.

## 4.2. Color

---

### 4.2.1. Changes

---

#### 4.2.1.1. Add default color spaces for color spaces that are not compliant to the Output Intent

**Belongs to**

- **Category:** Color
- **Type:** Changes

**What it does**

If you are using an Output Intent that does not support a certain color space, you can use this Action to replace it with another color space that does comply.

You can select an alternative color space for Gray, RGB, and/or CMYK.



The following PDF/X and PDF/A standards are supported:

- PDF/X-1a:2001
- PDF/X-3:2002
- PDF/X-1a:2003
- PDF/X-3:2003
- PDF/X-4
- PDF/X-4p
- PDF/X-6
- PDF/X-6p
- PDF/A-1
- PDF/A-2

#### 4.2.1.2. Apply CMYK curve


***Belongs to***

- **Category:** Color
- **Type:** Changes
- **Since version:** 12 update 2

***What it does***

This Action allows color curves to be applied to selected CMYK objects, either on all four channels, or on individual C, M, Y, or K channels.

Curves can be created by adding points, and dragging them to the preferred position, or by entering values in the **Input** and **Output** field below the curve.

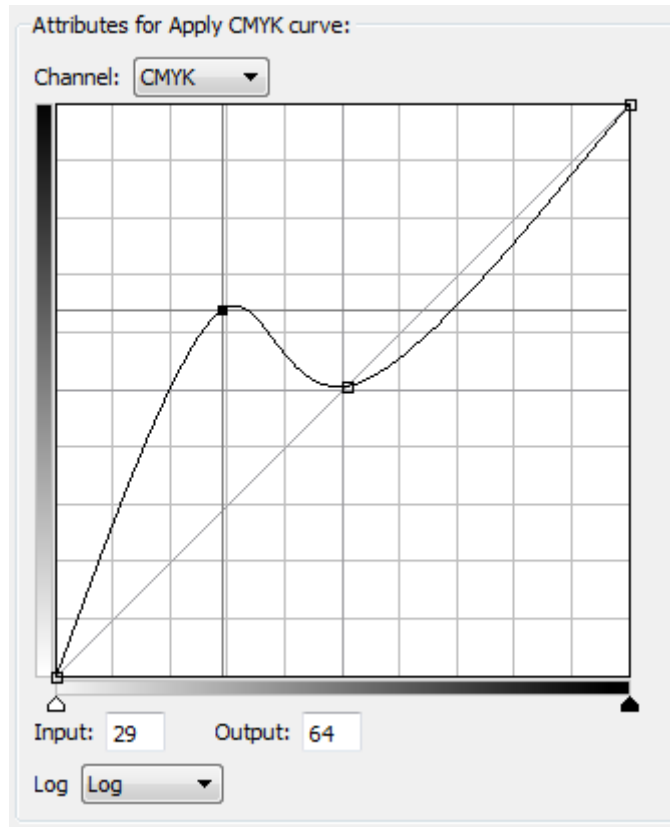**Example**

### 4.2.1.3. Apply color curve

**Belongs to**

- **Application:** PitStop Pro
- **Category:** Color
- **Type:** Changes
- **Since version:** 12 update 2

**What it does**

This Action allows color curves to be applied on separations of selected objects.

The default separations are C, M, Y, K, and Other (= all other separations in the file except for CMYK), but you can also add a curve for another spot color or varnish separation, which will be used if that color appears in the processed file.


Curves can be created by adding points, and dragging them to the preferred position, or by entering values in the **Input** and **Output** field below the curve.



**Note:** Apply color curve is also available as a Global Change!

**Example**

The + button allows you to add a curve for an additional color.

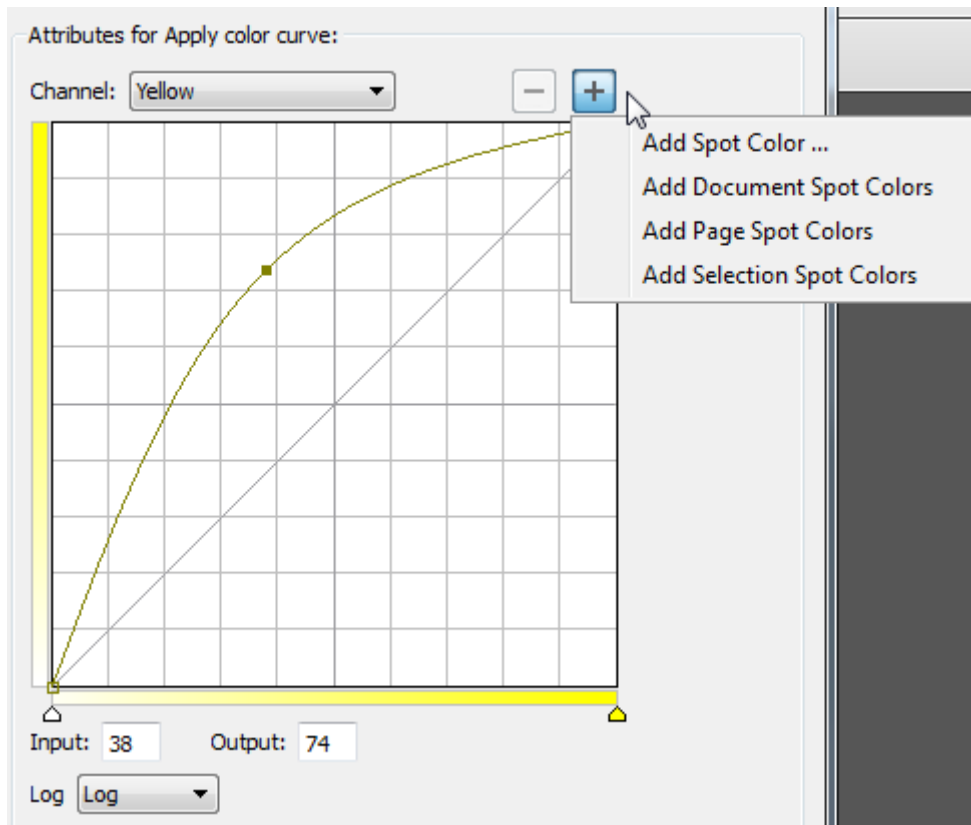

#### 4.2.1.4. Apply DeviceLink

##### ***Belongs to***

- **Category:** Color
- **Type:** Changes

##### ***What it does***

Allows you to convert the color of the selected objects to Gray, CMYK or RGB using a device link profile (instead of an ICC profile).

DeviceLink profiles are device specific profiles, converting colors from one color space to another, without converting to LAB or any other device independent color space in between.

You can browse for a local DeviceLink profile or you can select one from the list; PitStop includes 40 DeviceLink profiles for CMYK-CMYK conversions and ink coverage reduction.

Note that you can convert only the stroke or fill of the objects, or both.



**Note:** If the objects concerned are tagged with an ICC profile, it must be removed first, before you can apply a DeviceLink profile. To do so, you can use [Tag object with an ICC](#)

[profile](#), with the ICC profile set to **None**. Alternatively, you can use the PitStop Inspector (**Fill and Stroke** tab, ICC profile (at the bottom of the tab) set to None).

---

### 4.2.1.5. Apply Gray curve


***Belongs to***

- **Application:** PitStop Pro
- **Category:** Color
- **Type:** Changes
- **Since version:** 12 update 2

***What it does***

This Action allows a curve to be applied to selected Gray objects.

Curves can be created by adding points, and dragging them to the preferred position, or by entering values in the **Input** and **Output** field below the curve.

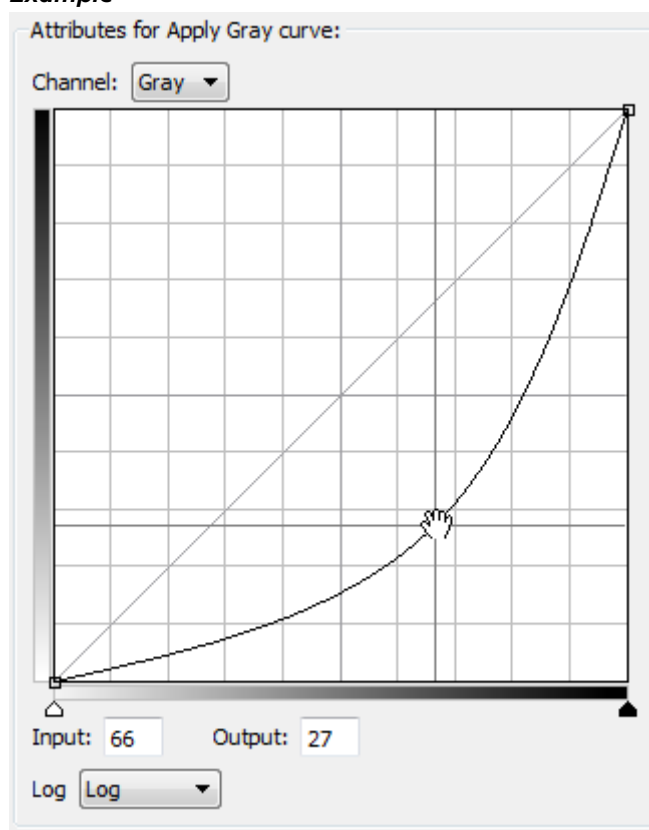**Example**

#### 4.2.1.6. Apply Lab curve


**Belongs to**

- **Category:** Color
- **Type:** Changes
- **Since version:** 12 update 2

**What it does**

This Action allows color curves to be applied to selected Lab objects on individual lightness, a, or b channels.

Curves can be created by adding points, and dragging them to the preferred position, or by entering values in the **Input** and **Output** field below the curve.

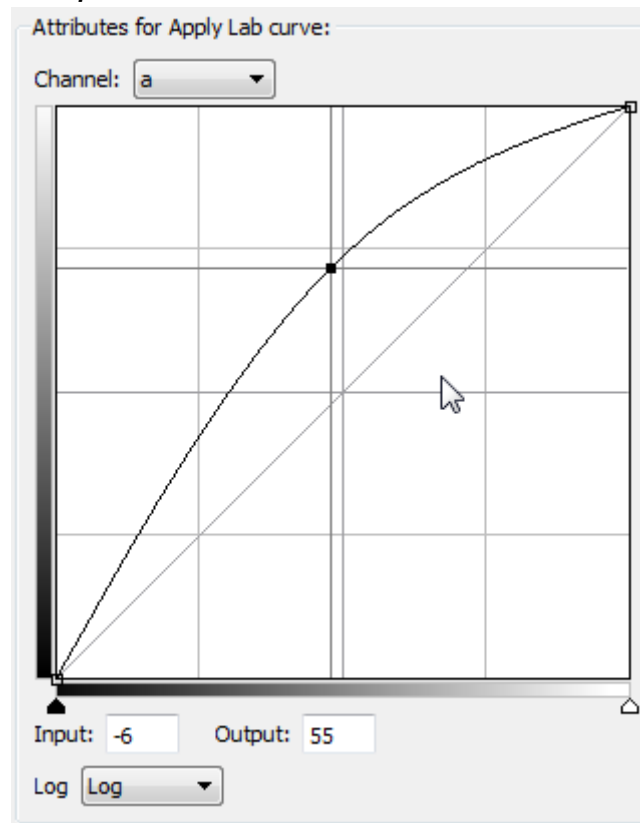**Example**

### 4.2.1.7. Apply RGB curve

**Belongs to**


- **Category:** Color
- **Type:** Changes
- **Since version:** 12 update 2

**What it does**

This Action allows color curves to be applied to selected RGB objects, either on all three channels, or on individual R, G, or B channels.

Curves can be created by adding points, and dragging them to the preferred position, or by entering values in the **Input** and **Output** field below the curve.

**Example**

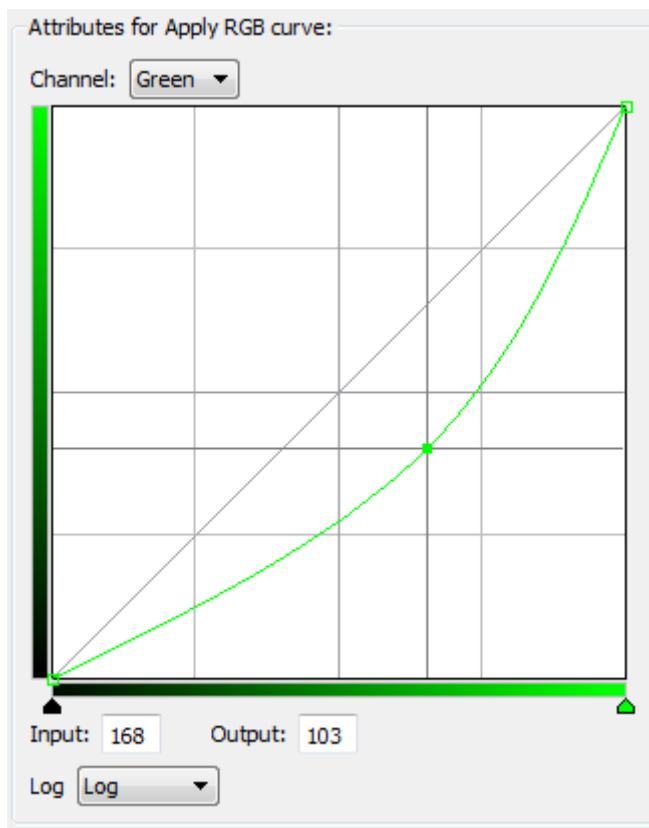

#### 4.2.1.8. Apply transfer function

##### ***Belongs to***

- **Category:** Prepress;Text;LineArt;Color;Image
- **Type:** Changes

##### ***What it does***

Adds a transfer function to paths, text, images or all these types of objects. You can exclude spot colors or apply the transfer function on tint values or alternate values only.

Transfer functions are used for creative purposes, artistic effect and to correct the characteristics of a specific, maybe poorly calibrated, output device. For example, a file that is intended for output on a particular image setter may contain transfer functions that compensate for the dot gain inherent to that printer.



**Note:** Transfer functions are not allowed in PDF/X compliant documents.

##### ***Related Actions***

- [Check for custom transfer function](#) on page 402

- [Remove custom transfer function](#) on page 271

### 4.2.1.9. Change color

**Belongs to**

- **Category:** Color
- **Type:** Changes

**What it does**

Allows you to change the fill and/or stroke colors in a PDF.

**How to proceed**

Define the target colors as follows:

1. Select the appropriate checkbox, depending on what you want to change (Fill color or Stroke color).
2. Select the appropriate target color in one of the following ways:
  - a. Select an object with the PitStop Select Objects tool  and use the icon to grab the fill or stroke color  (depending on what you're defining).
  - b. Click the color picker icon  and select the appropriate color.
  - c. Select the required color space:
    - Device colors can be Gray, RGB or CMYK
    - Calibrated colors can be Gray or RGB
    - User Swatch (= user-defined colors)
3. Fine tune the color by moving the sliders.

**Related Actions**

[Match fill and stroke colors](#) on page 110

### 4.2.1.10. Change default color spaces

**Belongs to**

- **Category:** Color
- **Type:** Changes



**What it does**

Allows you to set the default color spaces for Gray, RGB and CMYK objects in a PDF. These spaces are chosen from the list of available profiles (or you can browse for profiles on your system) and can be applied to all objects or only to objects with absent color spaces.

#### 4.2.1.11. Change Gray to CMYK Black

**Belongs to**

- **Application:** PitStop Pro
- **Category:** Color
- **Type:** Changes

**What it does**

Remaps the device grayscale color space to the device CMYK color space, keeping overprint.

#### 4.2.1.12. Change blending color space

**Belongs to**

- **Category:** Color; Page
- **Type:** Changes

**What it does**

Allows to change the blending color space and/or the luminosity softmask blending color space (if defined in the PDF document).

You can:

- Change the color to CMYK, gray or RGB, or
- Remove the blending color space, by selecting "none" from the first list, or
- Leave one of the color spaces unchanged, by selecting **Do not change**.

**About blending color spaces**

When Adobe Acrobat interprets transparent objects and attempts to create a preview of the flattened artwork, it needs to do so using a single color space for all the items involved in the transparency group. This color space is called the **blending color space**.

The blending color space for soft masks (masks with soft transitions) is called the **luminosity softmask blending color space**. It is usually gray.

**Related Actions**

- [Check if blending color space is defined](#) on page 308

- [Select by blending color space](#) on page 424

#### 4.2.1.13. Change rendering intent

**Belongs to**

- **Category:** Prepress;Color
- **Type:** Changes

**What it does**

Modifies the rendering intent of an object to one of the following:

- Absolute Colorimetric
- Relative Colorimetric
- Perceptual
- Saturation

**About rendering intents**

A rendering intent is a remapping method, allowing to remap colors so that they best match the intended use. 'Remapping' means that colors from one output device's color space are mapped to the color space of another device.

For more information and examples, refer to [the PitStop Pro Reference Guide on the Enfocus website](#) (See Chapter "Rendering intents to remap colors").

For more information and examples, refer to the PitStop Pro Reference Guide (See Chapter "Rendering intents to remap colors").

**Related Actions**

- [Select by rendering intent](#) on page 427
- [Check rendering intent](#) on page 312
- [Remove rendering intent](#) on page 117

#### 4.2.1.14. Change Output Intent

**Belongs to**

- **Category:** Color; Metadata
- **Type:** Changes

**What it does**

Changes a PDF's Output Intent to comply with a particular PDF/X or PDF/A version, using a particular ICC profile and/or ICC characterization.

Note that you can change the document Output Intent or the page level Output Intent.

**Related Actions**

[Check Output Intent](#) on page 312

## 4.2.1.15. Change spot color suffix

### ***Belongs to***

- **Category:** Color
- **Type:** Changes

### ***What it does***

Either modifies a selected spot color's suffix to one of the suffixes in the table below or removes any known spot color suffix.

This allows you to use the latest Pantone naming conventions when checking and correcting Pantone suffixes.

### ***About spot color suffixes***

Suffixes represent the **apparent** color of the color when printed on different types of paper. For example, PANTONE 3258 **C** and PANTONE 3258 **U** refer to the same color, but when printed on coated, respectively uncoated paper, they will look different, although the same ink formula was used.

Besides C (coated), U (uncoated) and M (matte), in software color palettes, you can find suffixes that refer to on-screen simulations of how colors will look when printed on different paper types. For example, PANTONE 3258 CVU is an on-screen indication of how PANTONE 3258 will look like when printed on uncoated paper.

### ***Suffix overview***

| Suffix | Meaning                                                                                           |
|--------|---------------------------------------------------------------------------------------------------|
| CV     | Computer video (electronic simulation)                                                            |
| CVC    | Computer video - coated                                                                           |
| CVU    | Computer video - uncoated                                                                         |
| CVS    | Process coated (old; now C)                                                                       |
| CVP    | Solid to process (old; now PC)                                                                    |
| C      | Coated paper                                                                                      |
| M      | Matte paper                                                                                       |
| U      | Uncoated paper                                                                                    |
| EC     | Euro process simulation, coated paper                                                             |
| PC     | Process simulation, coated paper                                                                  |
| CP     | Coated paper, process simulation (e.g. PANTONE 185 CP (used in PANTONE+ COLOR BRIDGE COATED))     |
| UP     | Uncoated paper, process simulation (e.g. PANTONE 185 UP (used in PANTONE+ COLOR BRIDGE UNCOATED)) |
| HC     | Hexachrome coated                                                                                 |
| TC     | TC Textile Cotton                                                                                 |

| Suffix | Meaning                    |
|--------|----------------------------|
| TCX    | Textile Cotton eXtended    |
| TP     | Textile Paper              |
| TPX    | TPX Textile Paper eXtended |
| XGC    | eXtended Gamut Coated      |

**Related Actions**

- [Select by spot color suffix](#) on page 428
- [Check spot color suffix](#) on page 315

## 4.2.1.16. Convert alternate color space to CMYK

**Belongs to**

- **Category:** Color
- **Type:** Changes

**What it does**

Changes the alternate color space for a spot to CMYK.

If you want to change all alternate color spaces except for gray, select the **Do not convert if alternate color space is gray** checkbox.

**About alternate color spaces**

The alternate color space is used as a 'backup' color space when the original spot color is not available on a specific output device, and when converting the spot color into CMYK. If this alternate color space is defined as anything other than CMYK or plain gray, the output results may not be up to standards.

## 4.2.1.17. Convert color

**Belongs to**

- **Category:** Color
- **Type:** Changes

**What it does**

Changes the color space of an object to gray, RGB, CMYK or a given spot color.

You can convert the fill and/or stroke color as required.

#### 4.2.1.18. Convert color to shading color space

***Belongs to***

- **Category:** Color
- **Type:** Changes

***What it does***

Converts the colors in a PDF to their shading counterparts.

#### 4.2.1.19. Convert images to indexed color space

***Belongs to***

- **Category:** Color;Image
- **Type:** Changes

***What it does***

Changes the color of images to the indexed color space.

***About the indexed color space***

The indexed color space uses no more than 256 colors, and is as such particularly suited for use in Web applications. Images are typically converted to indexed color mode in order to **decrease their file sizes**. When an image is converted to indexed color, a color lookup table is created, in which the colors that were used in the image are stored and indexed. Using an indexed color table lets you reduce the file size of an image while maintaining the visual quality that you need.

#### 4.2.1.20. Convert indexed color space to base color space

***Belongs to***

- **Category:** Color
- **Type:** Changes

***What it does***

Changes the indexed color space back to the original colors.

***About the indexed color space***

The indexed color space uses no more than 256 colors, and is as such particularly suited for use in Web applications. Images are typically converted to indexed color mode in order to **decrease their file sizes**. When an image is converted to indexed color, a color lookup table is created, in which the colors that were used in the image are stored and indexed. Using an indexed color table lets you reduce the file size of an image while maintaining the visual quality that you need.

#### 4.2.1.21. Convert process to DeviceN

**Belongs to**

- **Category:** Color
- **Type:** Changes

**What it does**

Converts all instances of device CMYK to DeviceN.

You must indicate what is most important to you:

- Reducing the number of color plates to a minimum, or
- Keeping the overprint settings

#### 4.2.1.22. Convert shading color space to solid color

**Belongs to**

- **Category:** Color
- **Type:** Changes

**What it does**

Converts shading colors ("gradients") in the corresponding solid colors. You can convert the fill, the stroke or both as required.

Shadings represent complex mathematical functions. That's why certain output devices may not be able to correctly interpret them. Shadings can also cause problems during color conversions.

**Related Actions**

[Select shading objects](#) on page 437

#### 4.2.1.23. Convert spot color to equivalent CMYK color

**Belongs to**

- **Category:** Color
- **Type:** Changes

**What it does**

Changes the color of a spot color object to its CMYK equivalents (for example to save on ink).

You can do this for all spot colors, or only for spot colors of which the alternate color is CMYK or Gray (less risk of getting small color variations).

#### 4.2.1.24. Create varnish

***Belongs to***

- **Category:** Color
- **Type:** Changes

***What it does***

Creates a varnish on top of the selected object.

This varnish is a user-defined spot color with the same shape of the selected object.

***How to proceed?***

Enter a name to recognize this spot color by, and indicate whether or not you wish to set it to overprint.

#### 4.2.1.25. Fix missing DeviceN colorants

***Belongs to***

- **Category:** Color
- **Type:** Changes
- **Since version:** 13

***What it does***

Adds missing DeviceN colorants to the colorants dictionary.

PitStop searches in the processed document for a real separation space that matches the missing colorant space by name. If such a color space is not found in the document, PitStop can derive the missing colorant space from the DeviceN tint function. If you want this, select **If the colorant cannot be found in the processed document, generate colorant from DeviceN alternate and tint transform**.

You may use this Action to make your file PDF/X-4 compliant.

***Related Actions***

[Check DeviceN colorants](#) on page 302

#### 4.2.1.26. Make DeviceN without NChannel information

***Belongs to***

- **Category:** Color
- **Type:** Changes

**What it does**

Converts the color space to DeviceN without NChannel information.

**About NChannel**

NChannel is an extension of the DeviceN color space, a multi-component, device-dependent color space. NChannel color spaces give applications greater flexibility when representing colors that are not available on a target device.

NChannel is supported from PDF 1.6 (Acrobat 7.x) onwards. If you are opening a PDF in an earlier version of Adobe Acrobat, colors can print or display incorrectly.

**About converting NChannel to DeviceN**

This Action will convert NChannel to DeviceN, so the object looks as it will be printed when using devices not supporting PDF 1.6 features.

Note that there are three options. You can convert the color space to:

- **DeviceN**
- **NChannel with regular DeviceN color information only**
- **NChannel with color information additional to regular DeviceN**



---

**Note:** This Action will have no visual effect if all colors are available on the target device.

---

PitStop provides an Action List with the same functionality: Convert NChannel Color Space to DeviceN

**Related Actions**

- [Check for NChannel colors with non-trivial process dictionary](#) on page 303
- [Select DeviceN with attributes](#) on page 432

## 4.2.1.27. Match fill and stroke colors

**Belongs to**

- **Category:** Color; LineArt
- **Type:** Changes
- **Since version:** 12 update 3

**What it does**

Changes the stroke color to match the fill color or vice versa.

**Use case**

Suppose you want to print very small text. To improve the readability, you convert the text to outlines and add a stroke. However, the stroke color is black by default. This may not be desired, e.g. if your text is in color. In that case, you can run this Action with the option **Change the stroke color to match the fill color**.



**Related Actions**

[Change color](#) on page 102

## 4.2.1.28. Normalize PANTONE library names

**Belongs to**

- **Category:** Color
- **Type:** Changes
- **Since version:** 2018

**What it does**

Allows you to rename old or faulty PANTONE spot color names to match the new, correct naming conventions.

You can choose one or more of the following methods:

- **Replace PMS with PANTONE:** PMS stands for *Pantone Matching System* and was used in the past. Using this method, the old color name *PMS Yellow C* will become *PANTONE Yellow C*.
- **Fix upper/lower case mismatches:**
  - **Only make PANTONE name upper case:** "PANTONE" is not always spelled correctly. Using this method, you can fix this part of the color names. For example, *Pantone Yellow C* will be changed to *PANTONE Yellow C*.
  - **Fix all mismatches:** If selected, all mismatches will be fixed, for example *Pantone yellow C* will be changed to *PANTONE Yellow C*.
- **Add suffix if not present: <suffix of your choice>:** If suffixes are missing, you can tell PitStop which suffix to add. Note that only the current suffixes can be selected; old suffixes are not in the list.
- **Remove extra spaces:** Removes redundant spaces in PANTONE library names.



**Note:** This option does not remove spaces in incorrect names, unless they have been corrected by one of the other normalization methods. For example, "Pantone Yellow C" will only be changed into "PANTONE Yellow C" if both "Make PANTONE uppercase" and "Remove extra spaces" are selected.

- **Add missing spaces:** Adds a space after the name PANTONE (if it's missing), and/or before the suffix (C, U, CP, UP) (if it's missing).

PitStop checks if the normalization method results in an existing PANTONE color. If that is the case, the color name is changed.

If no replacement is found, for example because the spot color name in the document is unknown/incorrect or no PANTONE Spot color, you will get a warning. This is also the case if renaming a colorant in the DeviceN space would result in a duplicate (as it's not possible to have twice the same name in a DeviceN space).

**Related Actions**

- [Check spot color by PANTONE library](#) on page 314
- [Select spot color](#) on page 437

- [Change spot color suffix](#) on page 105

#### 4.2.1.29. Remap all PANTONE library colors

##### ***Belongs to***

- **Category:** Color
- **Type:** Changes
- **Since version:** 2018

##### ***What it does***

Remaps all colors to the PANTONE library of your choice, changing not only the suffix, but also the alternate color space to a different PANTONE definition (CMYK to Lab).

Choices are for example PANTONE+CMYK coated, PANTONE+CMYK uncoated, PANTONE+Color Bridge Coated, ...

This Action is useful to resolve issues with naming conventions.

##### ***Related Actions***

- [Check spot color by PANTONE library](#) on page 314
- [Remap PANTONE library colors](#) on page 115
- [Normalize PANTONE library names](#) on page 111

#### 4.2.1.30. Remap alternate color space to CMYK

##### ***Belongs to***

- **Category:** Color
- **Type:** Changes

##### ***What it does***

Remaps the alternate color spaces of the chosen spot colors to the preferred CMYK values.

##### ***How to proceed***

- To add the spot colors of which you want to remap the alternate color space, do one of the following:
  - To select the desired spot color from the list of spot colors (Spot color picker)
    - Click .
    - Select the preferred spot color and click **OK**. The selected color is shown in the table, with the corresponding CMYK values.
  - To define a new spot color
    - Click the **Add New Color** button.
    - In the table, in the first column (Name), replace "Color name" with the name of the new spot color.

- To select the desired spot color from the Spot library picker
  1. Click the **Add Colors** button.
  2. Select the preferred spot color and click **OK**. The selected color is shown in the table, with the corresponding CMYK values.
- 2. Add or change the CMYK values as required.
- 3. To remove colors from the table
  - Use the **Remove All** button, or
  - Select a color and click  to remove only the selected color.

### 4.2.1.31. Remap color

#### *Belongs to*

- **Category:** Color
- **Type:** Changes

#### *What it does*

Remap color is a complex but powerful Action that allows the remapping of colors from one color space to another.

For each color in the document you can specify whether or not you want to map it to another color (by means of "remapping rules"), and whether or not the overprint settings should change.



#### **Note:**

- Use the **Analyze page** or **Analyze document** buttons to get an overview of the colors in the document being processed.
- To change a remapping rule, click **Change** and make the required changes; to add a new one, click **Add**.
- Keep in mind that the order of the rules is important. You can change the order by selecting a rule and clicking **Up** or **Down**. The rules are evaluated from top to bottom. Every matching rule is executed, until a matching rule is found that is set to Keep for both To and Overprint. In that case, no further rules are evaluated (see also example 2 below).
- You can remap colors, color spaces, color ranges and channels.
- This Action works on text, line art, shadings, and stencil masks. It also works on images if you remap a color *space*, but not if you remap a color or a color range (as an image typically consists of a variety of colors).

#### ***New as of PitStop 2022***

When mapping Device Gray to Device CMYK, you can now disable color management by selecting the **Force gray to keep same intensity** checkbox. That way, the gray value will only be mapped to the black component of the CMYK color space. In other words, the Gray brightness becomes equivalent K screen value.

Example: 30% gray will be remapped to 70% K, instead of a mix of C, M, Y and K.

### Example 1

Suppose you have a CMYK PDF that you want to print in a single spot color, MySpot.cv.

#### To remap all the colors to this spot:

1. Under Attributes for Remap color, select the row that mentions **All other** and click **Change**.
2. In the **Color Remap Rule** popup, under **To:**, select **Color**.
3. Select the repository color MySpot.cv. You should have specified this color earlier in PitStop.
4. Select the desired overprint setting:
  - **Keep** the overprint settings as they are, do not change.
  - Enable overprint: **On**
  - Disable overprint: **Off**
5. Click **OK**.

To remap everything except, for example, 100% black text and objects to the selected target color MySpot.cv, you need a slightly more elaborated action:

1. Click **Add**.
2. Under **Remap**, select **Color** and **Device CMYK**.
3. Set the values to: C 0% M 0% Y 0% K 100%.
4. Under **To:**, select **Keep**.
5. Select the desired overprint setting.
6. Click **OK**.
7. Select **Add**.
8. In the **Color Remap Rule** popup, under **Remap**, select **Device CMYK**.
9. Under **To:**, select **Color**.
10. Select the repository color MySpot.cv. You should have specified this color earlier in PitStop.
11. Click **OK**.

The above Actions must be performed in the correct order. Under **Attributes for Remap color**, you should have three lines:

- The rule for "keep 100% Black" at the top
- Then the rule for "remap to MySpot.cv"
- "All other" at the bottom

### Example 2

Suppose your document contains a rectangle in CMYK (100K).

When running the below Action, the rectangle won't be remapped: it will remain 100K, because of the first rule (= keep the color space). As a consequence, the other rules won't be checked anymore.

If the first rule would be removed (or placed at the bottom), the color of the rectangle would be remapped from 100K to 100C.

Attributes for Remap color:

| From       | To         | Overprint |
|------------|------------|-----------|
| CMYK space | Keep       | Keep      |
| CMYK color | CMYK color | Keep      |
| All other  | Keep       | Keep      |

4.2.1.32. Remap PANTONE library colors

*Belongs to*

- **Category:** Color
- **Type:** Changes
- **Since version:** 2018

*What it does*

Remaps colors in a PANTONE Library, switching from coated to uncoated, or from CMYK to Lab, and vice versa.

Attributes for Remap PANTONE library colors:

Remap library

✓

PANTONE+ CMYK (Coated to Uncoated)

PANTONE+ CMYK (Uncoated to Coated)

PANTONE+ Color Bridge (Coated to Uncoated)

PANTONE+ Color Bridge (Uncoated to Coated)

PANTONE+ Pastels & Neons (Coated to Uncoated)

PANTONE+ Pastels & Neons (Uncoated to Coated)

PANTONE+ Solid-V3 (Coated CMYK to Uncoated CMYK)

PANTONE+ Solid-V3 (Uncoated CMYK to Coated CMYK)

PANTONE+ Solid-V3 (Coated Lab to Uncoated Lab)

PANTONE+ Solid-V3 (Uncoated Lab to Coated Lab)

PANTONE+ Solid-V3 (Coated CMYK to Uncoated Lab)

PANTONE+ Solid-V3 (Uncoated CMYK to Coated Lab)

PANTONE+ Solid-V3 (Coated Lab to Uncoated CMYK)

PANTONE+ Solid-V3 (Uncoated Lab to Coated CMYK)

PANTONE+ Solid-V3 (Coated CMYK to Coated Lab)

PANTONE+ Solid-V3 (Coated Lab to Coated CMYK)

PANTONE+ Solid-V3 (Uncoated CMYK to Uncoated Lab)

PANTONE+ Solid-V3 (Uncoated Lab to Uncoated CMYK)

*Related Actions*

- [Check spot color by PANTONE library](#) on page 314
- [Remap all PANTONE library colors](#) on page 112
- [Normalize PANTONE library names](#) on page 111

### 4.2.1.33. Remap spot color

**Belongs to**

- **Category:** Color
- **Type:** Changes

**What it does**

Allows you to remap all spot colors in a document, or one particular spot color to:

- Gray
- The color's CMYK equivalent
- A custom CMYK equivalent
- Another spot color

You can apply the Action to either the fill or stroke color, or to both.

**Note:**

- From version 12 update 2 onwards, you can use regular expressions to define the color that should be remapped.
- From version 2021 onwards, you can use variables to define the CMYK values.

### 4.2.1.34. Remove ICC tag

**Belongs to**

- **Category:** Color
- **Type:** Changes

**What it does**

Removes the ICC tags either from the selected objects or from the whole document (if no selection is defined). You can remove the ICC tags from fill and/or stroke colors as required.

**About ICC tagging**

Every input and output device reproduces color and grayscales in a slightly different way. As a result, the colors you see in a PDF file on your screen may not match the colors produced when you print the PDF to an output device.

ICC color profiles are used to avoid this. An ICC color profile is a mathematical description of the color space used by a specific device. In other words, the color profile describes how the colors produced by the device relate to the reference CIE LAB color space (a device-independent color space). As such, they allow you to set up a workflow in which all devices use color management to compensate for their individual color reproduction characteristics, based on the information in the ICC profiles.

In some workflows, e.g. without color management, ICC profiles are unwanted and may cause inconsistent color reproduction. In that case, you can use this Action to remove the ICC tags.

**Related Actions**

- [Check ICC tagging](#) on page 305
- [Select by tagged ICC Profile](#) on page 429
- [Tag object with an ICC profile](#) on page 119
- [Check if ICC profile differs from ICC profile in PDF/X Output Intent](#) on page 307
- [Select objects of which ICC profile is equal to ICC profile in PDF/X output](#) on page 433
- [Check ICC profile version](#) on page 306

## 4.2.1.35. Remove rendering intent

**Belongs to**

- **Category:** Color; Prepress
- **Type:** Changes

**What it does**

Strips rendering intents from color managed objects in a PDF.

**About rendering intents**

A rendering intent is a remapping method, allowing to remap colors so that they best match the intended use. 'Remapping' means that colors from one output device's color space are mapped to the color space of another device.

For more information and examples, refer to [the PitStop Pro Reference Guide on the Enfocus website](#) (See Chapter "Rendering intents to remap colors").

For more information and examples, refer to the PitStop Pro Reference Guide(See Chapter "Rendering intents to remap colors").

**Related Actions**

- [Select by rendering intent](#) on page 427
- [Check rendering intent](#) on page 312
- [Change rendering intent](#) on page 104

## 4.2.1.36. Rename spot color

**Belongs to**

- **Category:** Color
- **Type:** Changes

**What it does**

Allows you to change the name of spot colors in a document.



**Note:** You can use regular expressions to define the source and target color. This is useful to rename variants of the same color, e.g. to rename "Varnish0", "Varnish1",

"Varnish23" (i.e. "Varnish" followed by one or more digits) to "Varnish" (without any digits). To do so, build a rule that renames "Varnish([0-9])+" to "Varnish".

### How to proceed

In the attributes of the Rename spot color Action, do the following:

1. In the left part (under **From**), enter the name of the spot color that should be renamed.




#### Note:

- You can type the name (and optionally use regular expressions), select the color through the spot color database, or you can grab the color from a selection (using the PitStop selection tool). You can also use variables.
- If applicable, select the **Use regular expressions** checkbox.

2. In the right part (under **To**), enter a new new name for the selected spot color.
3. To create another rule (i.e. to rename another spot color), click the + button and repeat steps 2 and 3.

### Important:

- The rules are executed one after the other.
- A blank From field means that all colors that are not renamed by previous rules in this Action will be renamed by this rule. For example, if there is only one rule and the From field is empty, all selected spot colors will be renamed according to that rule. In the example below, it means that all spot colors will get the name 'SPOT'. Be careful when using this!



### Example



The first rule will rename *Pantone* to *Separation* in spot color names like Pantone 101 UP (which will then become Separation 101 UP).

The second rule will rename all other spot colors to *OtherSpotColor*.

## 4.2.1.37. Snap color to color set

### Belongs to

- **Category:** Color
- **Type:** Changes



**What it does**

Allows you to remap any colors that vary a little from your desired colors back to the desired color. This Action can also remap images to Black or CMYK.

Snap color to color set can be useful to keep tight control over the range of colors in a document.

**How to proceed**

Define the color set to which the colors in the PDF must be changed as follows:

1. To remap variants of black to 100% black, select **Black**.



**Note:** If you want to remap **all colors** in your document to black, **only** select the **Black** checkbox. Do not add any other color.

2. To add another color the colors in the document should be remapped to if they are close to it:
  - a. Click **New**. A new entry appears in the text box.
  - b. If you want to use a spot color (optionally), select the **Spot color** checkbox and type the name of the spot color in the text field. You should define a CMYK equivalent too (see next step). The name of the spot color is shown in the text box.
  - c. Enter the required values for CMYK (expressed in %) in the fields below the New/Remove button. Your changes are shown in the text box.
3. If slight color deviations are allowed, enter a value in **Maximum ... % of color deviation of each channel**. The default value is 0.01%.
4. From the **Map images to** list, select the preferred color space for images. You can choose between black, CMYK, and (if applicable) the spot color(s) defined in the previous step.

## 4.2.1.38. Tag object with an ICC profile

**Belongs to**

- **Category:** Color
- **Type:** Changes

**What it does**

Tags objects with a Gray, RGB, CMYK or Lab color space with a chosen ICC profile.

You can only tag the stroke or fill color or both. If an object is tagged already, the ICC tag will not be modified, unless you select the **Change ICC profile if object is already tagged** checkbox.

**About ICC tagging**

Every input and output device reproduces color and grayscales in a slightly different way. As a result, the colors you see in a PDF file on your screen may not match the colors produced when you print the PDF to an output device.

ICC color profiles are used to avoid this. An ICC color profile is a mathematical description of the color space used by a specific device. In other words, the color profile describes how the colors produced by the device relate to the reference CIE LAB color space (a device-independent color space). As such, they allow you to set up a workflow in which all devices use color management to compensate for their individual color reproduction characteristics, based on the information in the ICC profiles.

**Related Actions**

- [Remove ICC tag](#) on page 116
- [Select by tagged ICC Profile](#) on page 429
- [Check ICC tagging](#) on page 305
- [Check if ICC profile differs from ICC profile in PDF/X Output Intent](#) on page 307
- [Select objects of which ICC profile is equal to ICC profile in PDF/X output](#) on page 433
- [Check ICC profile version](#) on page 306

## 4.2.2. Checks

---

### 4.2.2.1. Check bleed

**Belongs to**

- **Category:** Prepress
- **Type:** Checks
- **Since version:** 2020

**What it does**

Allows you to check if bleed is missing. You should indicate the areas to be checked, that is the region(s) between the left, right, top or bottom corner of the trim box and the bleed box.

You should also specify where the bleed should start (= distance from the inside of the trim box).

Optionally you can enable the **Mirror margins according to page binding** checkbox and set a **white threshold for white** (by moving the slider or entering a value (in %)). The threshold for white makes sure that a color that is "almost white" (and looks white when printed) is considered white.

New as of PitStop 2021 is the slider to increase or decrease the **detection sensitivity**. A high bleed edge sensitivity will report missing bleed for e.g. tapered objects (because of the small gaps between them). A lower sensitivity value won't. The default value (which usually gives the best results) is 30%.



**Note:** When upgrading from older PitStop versions, existing Check bleed Actions get a detection sensitivity of 100%, because that best matches the old behavior.

The last option (**Ignore missing bleed smaller than**) allows you to ignore extremely small areas.

**Note:**

- This is a page-based, pixel-based check: it doesn't look at individual objects, but it renders the whole page and checks the pixels.
- Text objects that cross the trim box but don't reach the bleed box do not trigger bleed errors.


**Important remark:** The document must have a *valid trim and bleed box*. This is required for PitStop to know where the bleed should start and how big it should be.

**Example**

Example file with page boxes (media, bleed, trim box) shown:



When 'Highlight' is enabled in the Enfocus Navigator, the white areas show where bleed is missing:

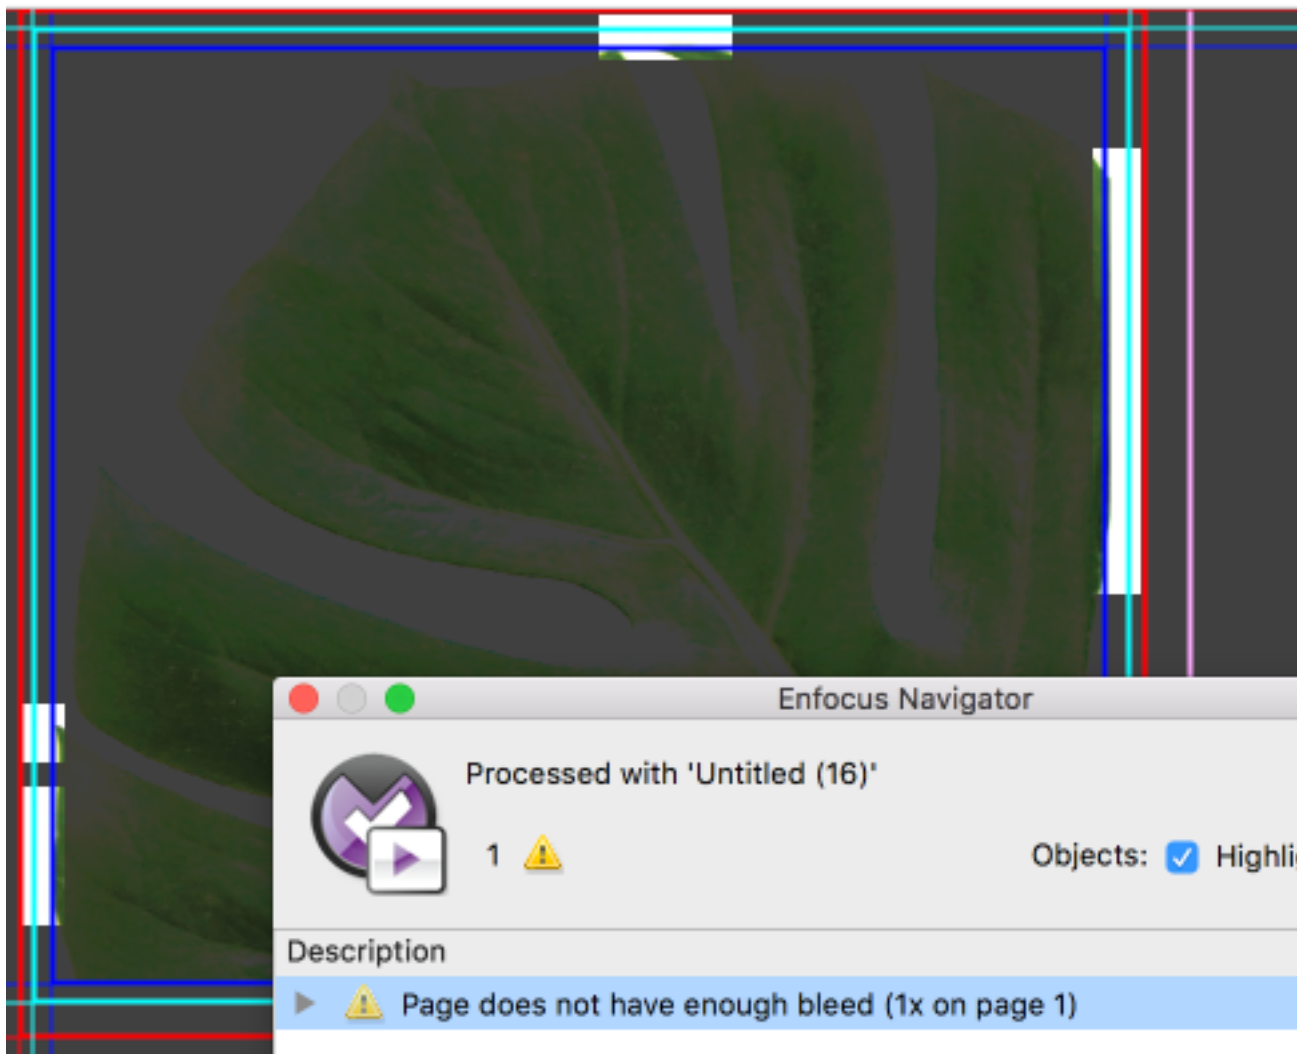

### **Remark about the corners**

By default, corners are checked for bleed if one of the touching sides is being checked. For example, if only the left side of the page should be checked, the upper and bottom left corner of the page will also be included in the bleed check.

There is one exception: if the Action is configured to NOT check the *inner* sides and the check depends on page binding (**Mirror margins according to page binding** selected), the inner corners (the bleed areas of the top and bottom that extend into the inner side) are NOT checked. This is not needed, because in that case, the corners are cut off anyway, so there's no need to check them.

### **Example: Checking bleed on a saddle-stitched (bound) book**

If you only need to have bleed on the outer edges of your document:

1. Enable **Mirror margins according to page binding**. This changes the options left/right to inner/outer.

2. Disable the "Inner" option so the check will not include the binding edge. Note that it will depend on the page binding setting of the document and page index of the checked page if the inner edge means the 'left' or 'right' edge (for that page).

**Attributes for Check bleed:**

Check bleed between these trim box edges and the bleed box:

☐ Inner

☒ Outer

☒ Top

☒ Bottom

---

Bleed must start at this distance from the inside of the trim box:


Inner

Outer

Top

Bottom

☒ Mirror margins according to page binding.



#### Related Actions

- [Check bleed around contour](#) on page 297
- [Check bleed contours](#) on page 300
- [Add bleed](#) on page 255
- [Add bleed around contour](#) on page 258

### 4.2.2.2. Check bleed around contour

#### Belongs to

- **Category:** Prepress
- **Type:** Checks
- **Since version:** 2021

#### What it does

Allows you to check if bleed is missing around a contour (typically a dieline or a cut line).

Note that this Action only works on *selected* line art that is not filled. The contour must be closed and it must be a compound path of at least 3 nodes. You must also indicate the color of the contour.



**Tip:** If the line art you want to check is not a closed or compound path, you can use [Close path](#) on page 162 and/or [Combine subpaths](#) on page 162 to create one.

Note that text objects that cross the trim box but don't reach the bleed box do not trigger bleed errors.



Attributes

| Attribute                               | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Bleed offset                            | The desired amount of bleed (starting from the contour).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Use different offset for inner contours | Optionally, if you want a different bleed distance value for the outside and inside of a compound shape, you can select this checkbox and enter the value of your choice for the inner contours.                                                                                                                                                                                                                                                                                                                                               |
| Trim area margin                        | Indicates how close/far from the trim area the bleed check should start.                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| White threshold                         | The threshold for white makes sure that a color that is "almost white" (and looks white when printed) is considered white. The default value is 10%.                                                                                                                                                                                                                                                                                                                                                                                           |
| Ignore missing bleed smaller than       | This option allows you to ignore extremely small objects, like jpeg artefacts.                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Overlay color                           | <p>The color used to highlight where bleed is missing (when viewing the result of the Action List through the Navigator).</p> <p>You could use this option to distinguish between 'missing bleed' (critical error, highlighted in red) and 'not enough bleed' (not critical, highlighted in orange). To get this, you need to add two instances of this Action to your Action List; one with the minimal bleed value (e.g. 2 mm) and red as overlay color, and one with the preferred bleed value (e.g. 4 mm) and orange as overlay color.</p> |

Example Action List

```
Select line art
Select spot color <!-- color of the contour -->
AND
Check bleed around contour
```

Example 1

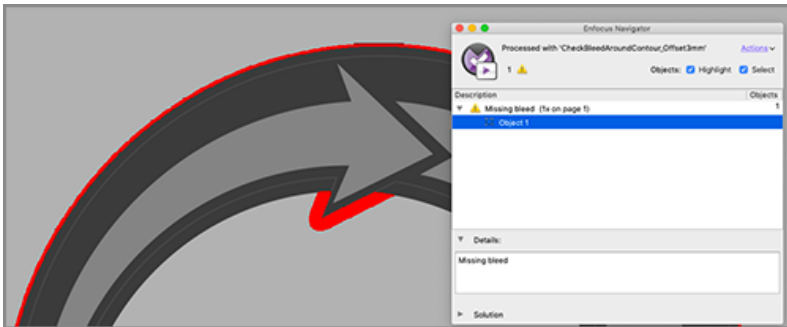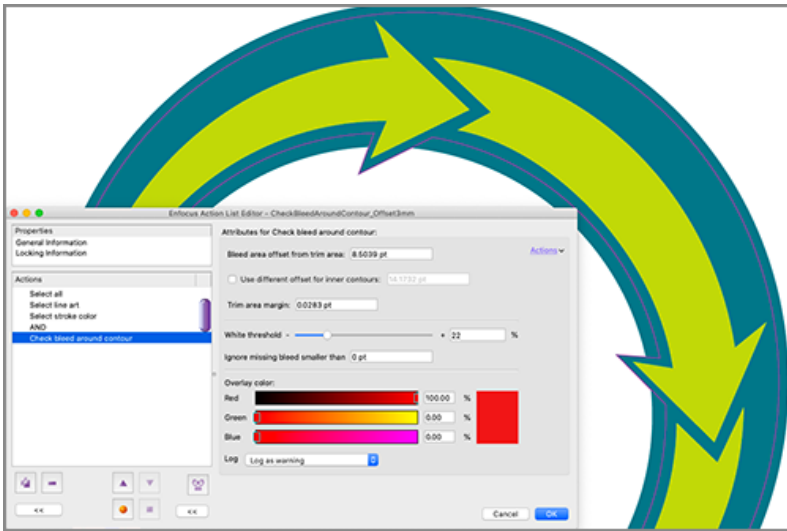

**Example 2**

This Action also works with irregular shapes. Both internal and external missing bleed are highlighted in red (= the chosen overlay color).



**Related Actions**

- [Check bleed](#) on page 294
- [Check bleed contours](#) on page 300
- [Add bleed](#) on page 255

### 4.2.2.3. Check bleed contours

**Belongs to**

- **Category:** Prepress
- **Type:** Checks
- **Since version:** 2021


**What it does**

Allows you to check if bleed contours (typically dielines or cut lines) overlap. That way you can detect if there are objects that come too close to each other. That may for example happen when several different files are merged into one document.

Note that this Action only works on selected line art that is not filled. The contour must be closed and it must be a compound path of at least 3 nodes.



**Tip:** If the line art you want to check is not a closed or compound path, you can use [Close path](#) on page 162 and/or [Combine subpaths](#) on page 162 to create one.

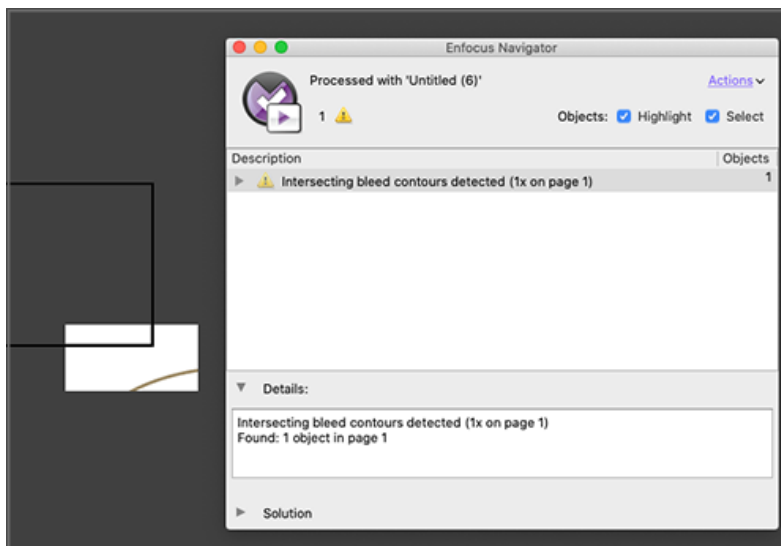**Example****Related Actions**

- [Check bleed](#) on page 294
- [Check bleed around contour](#) on page 297
- [Add bleed](#) on page 255



#### 4.2.2.4. Check color type

***Belongs to***

- **Category:** Color
- **Type:** Checks

***What it does***

Checks if a particular color space is used for particular objects.

For example, check if the **device-specific color space** is used for **text and line-art**.

You can ignore process colors in DeviceN color spaces, as required. (It may not be required to check for the presence of process colors, as they are by default available on the printer.)

In case of ICC Profile Colors, you can either check for all types or for one particular ICC space (ICC based gray, ICC based RGB, ICC based CMYK or ICC based Lab).

#### 4.2.2.5. Check default color spaces

***Belongs to***

- **Category:** Color
- **Type:** Checks

***What it does***

Checks whether default color spaces are used and whether or not they are PDF/X-3 compliant.

#### 4.2.2.6. Check DeviceN attributes

***Belongs to***

- **Category:** Color
- **Type:** Checks

***What it does***

Checks if the PDF's color space is DeviceN or NChannel with a particular attribute.

You can check the following attributes:

- Spot color definitions
- Process color mapping
- Mixing hints
- Solidities
- Printing order
- Dot gain

**Related Actions**

[Select DeviceN with attributes](#) on page 432

## 4.2.2.7. Check DeviceN colorants

**Belongs to**

- **Category:** Color
- **Type:** Checks

**What it does**

Checks if the non-process colors used in the DeviceN color space are defined in the colorants dictionary, so that they can be used on other devices.

**About the DeviceN color space**

The DeviceN color space is defined as a list of names. These names can refer to the process colors (CMYK, RGB or Gray) or spot colors. Spot colors can have an alternate in CMYK for output devices that do not recognize their name, or they can just be a name without color definition. If the color is just a name (for example: "Silver" or "MySpot"), it cannot be used on other devices.

**Checking the colorants dictionary**

You can use the Enfocus PitStop Inspector to check whether a particular spot color has been defined in the colorants dictionary. The colorants dictionary describes the colorants used in the DeviceN color space. Proceed as follows:

1. Select an object with the color you want to check (using the Enfocus Select Object Tool .
2. Click  to display the Enfocus Inspector and select  > . Next to the Fill icons, you will see "DeviceN (Spot + process colors)". Below you will see the number of components and their names.
3. Click the **Actions** link (in the top right corner) and select **Color Picker**.
4. In the left part of the Color Picker dialog, navigate to the **Document Spot Colors** folder. This folder contains all spot colors used in the document (not only the ones used for the selected object).
5. Select the spot color you want to check. If the color is just a color name, without a color definition, the Alternate Color Space is Gray.

**Related Actions**

[Select undefined DeviceN colorants](#) on page 442

## 4.2.2.8. Check DeviceN for process color spaces

**Belongs to**

- **Category:** Color
- **Type:** Checks

**What it does**

Checks whether the DeviceN process color space matches the PDF/X Output Intent color space, i.e. whether the DeviceN color space contains only process colors.

**About the DeviceN color space**

The DeviceN color space is defined as a list of names. These names can refer to the process colors (CMYK, RGB or Gray) or spot colors. Spot colors can have an alternate in CMYK for output devices that do not recognize their name, or they can just be a name without color definition. If the color is just a name (for example: "Silver" or "MySpot"), it cannot be used on other devices.

## 4.2.2.9. Check for NChannel colors with non-trivial process dictionary

**Belongs to**

- **Category:** Color
- **Type:** Checks

**What it does**

Checks whether the PDF contains NChannel colors with non-trivial process dictionary.

**About NChannel**

NChannel is an extension of the DeviceN color space, a multi-component, device-dependent color space. NChannel color spaces give applications greater flexibility when representing colors that are not available on a target device.

NChannel is supported from PDF 1.6 (Acrobat 7.x) onwards. If you are opening a PDF in an earlier version of Adobe Acrobat, colors can print or display incorrectly.

**About process dictionaries**

NChannel requires a process dictionary which maps the names used in the colorants list to device colors. This allows giving aliases for process colors.

A "trivial" process dictionary uses aliases that are easy to understand, e.g. maps "Cyan" to the process color "Cyan".

A "non-trivial" process dictionary would use custom aliases, such as "My Process color".

**Related Actions**

- [Make DeviceN without NChannel information](#) on page 109
- [Select DeviceN with attributes](#) on page 432

## 4.2.2.10. Check for pre-separated pages

**Belongs to**

- **Category:** Color; Page
- **Type:** Checks

**What it does**

Checks if the PDF document contains any pages that already have been separated.

A pre-separated PDF contains pages that have been separated into their CMYK components. In offset printing each of these colors is printed with a separate plate. This means that each page in a PDF document is separated into its four constituent colors: cyan, magenta, yellow and black. For example, a pre-separated PDF file for a two-page CMYK print job, results in a PDF file with 8 pages.

This separation process is usually carried out by the RIP, and not in the source PDF document.

## 4.2.2.11. Check for solids and tints

**Belongs to**

- **Category:** Color; Page
- **Type:** Checks

**What it does**


Checks if the PDF document contains any colors that have a tint below or above a set threshold.

The threshold is set in the **Effective solidness threshold** field. The default is 100%.

It's also possible to define a threshold for considering a colorant as a tint, by selecting the **Ignore tints that cover a surface area below** checkbox and entering a value of your choice (in ppm). You can take into account the printable surface area, the surface area of the own channel, or the surface area of all channels. This option is useful to avoid that colorants on pages with for example only 1 non-solid pixel in the rendered page would be marked as a tint.

**Example**

In this example, the threshold was set to 90%.

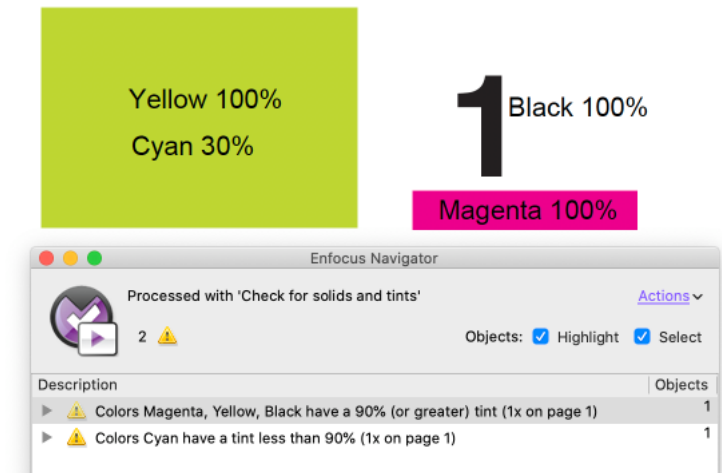

#### 4.2.2.12. Check for spot color ambiguity

##### ***Belongs to***

- **Category:** Color
- **Type:** Checks

##### ***What it does***

Searches for ambiguous spot colors. Spot colors are considered ambiguous if the name of the spot color refers to more than one set of color values.

You can set a number of options, to make the check less strict. You can also include a check on DeviceN color spaces.

#### 4.2.2.13. Check ICC tagging

##### ***Belongs to***

- **Category:** Color
- **Type:** Checks

##### ***What it does***

Checks objects to see whether or not they are ICC tagged or tagged with a particular ICC profile in a particular color space. You can check if the fill and/or stroke of the objects are ICC tagged.

##### ***About ICC tagging***

Every input and output device reproduces color and grayscales in a slightly different way. As a result, the colors you see in a PDF file on your screen may not match the colors produced when you print the PDF to an output device.

ICC color profiles are used to avoid this. An ICC color profile is a mathematical description of the color space used by a specific device. In other words, the color profile describes how the colors produced by the device relate to the reference CIE LAB color space (a device-independent color

space). As such, they allow you to set up a workflow in which all devices use color management to compensate for their individual color reproduction characteristics, based on the information in the ICC profiles.

**Related Actions**

- [Remove ICC tag](#) on page 116
- [Select by tagged ICC Profile](#) on page 429
- [Tag object with an ICC profile](#) on page 119
- [Check if ICC profile differs from ICC profile in PDF/X Output Intent](#) on page 307
- [Select objects of which ICC profile is equal to ICC profile in PDF/X output](#) on page 433
- [Check ICC profile version](#) on page 306

#### 4.2.2.14. Check ICC profile version

**Belongs to**

- **Category:** Color
- **Type:** Checks

**What it does**

Checks if the ICC profile version is equal to or lower than a particular version number.

**About ICC tagging**

Every input and output device reproduces color and grayscales in a slightly different way. As a result, the colors you see in a PDF file on your screen may not match the colors produced when you print the PDF to an output device.

ICC color profiles are used to avoid this. An ICC color profile is a mathematical description of the color space used by a specific device. In other words, the color profile describes how the colors produced by the device relate to the reference CIE LAB color space (a device-independent color space). As such, they allow you to set up a workflow in which all devices use color management to compensate for their individual color reproduction characteristics, based on the information in the ICC profiles.

**Related Actions**

- [Remove ICC tag](#) on page 116
- [Select by tagged ICC Profile](#) on page 429
- [Check ICC tagging](#) on page 305
- [Check if ICC profile differs from ICC profile in PDF/X Output Intent](#) on page 307
- [Select objects of which ICC profile is equal to ICC profile in PDF/X output](#) on page 433
- [Tag object with an ICC profile](#) on page 119

#### 4.2.2.15. Check if DeviceN printing order is consistent

**Belongs to**

- **Category:** Color
- **Type:** Checks

**What it does**

Check whether the DeviceN printing order is consistent and whether all colorants are defined in the DeviceN printing order.

## 4.2.2.16. Check if ICC profile differs from ICC profile in PDF/X Output Intent

**Belongs to**

- **Category:** Color
- **Type:** Checks

**What it does**

Checks whether the fill and/or stroke ICC profile differs from the ICC profile in the PDF/X Output Intent.

As of PitStop 2022, it's possible to compare the ICC profile either with the document Output Intents or with the effective Output Intents. The effective Output Intent is the intent that is actually used. For example, if different Output Intents are applied on different levels (document/page/object), the most specific one is applied.

You can either check the ICC profile of the fill or the stroke, or both.

**About ICC tagging**

Every input and output device reproduces color and grayscales in a slightly different way. As a result, the colors you see in a PDF file on your screen may not match the colors produced when you print the PDF to an output device.

ICC color profiles are used to avoid this. An ICC color profile is a mathematical description of the color space used by a specific device. In other words, the color profile describes how the colors produced by the device relate to the reference CIE LAB color space (a device-independent color space). As such, they allow you to set up a workflow in which all devices use color management to compensate for their individual color reproduction characteristics, based on the information in the ICC profiles.

**About PDF/X Output Intents**

Output intents specify the intended printing process and paper type as described by a corresponding ICC profile. The PDF/X Output Intents are defined by the Ghent Workgroup; only printer profiles are allowed as Output Intents, whereas PDF/A also allows monitor profiles.

Output intents are generally specified by the print service provider, but there are also a number of standard Output Intents available, which can be found in the Enfocus Output Intent Panel. For more information, refer to the PitStop Reference Guide.

Note that as of PDF 2.0 it is possible to define Output Intents on page level, whereas before, only document Output Intents were allowed.

**Related Actions**

- [Remove ICC tag](#) on page 116
- [Select by tagged ICC Profile](#) on page 429

- [Check ICC tagging](#) on page 305
- [Tag object with an ICC profile](#) on page 119
- [Select objects of which ICC profile is equal to ICC profile in PDF/X output](#) on page 433
- [Check ICC profile version](#) on page 306

#### 4.2.2.17. Check if blending color space is defined

##### ***Belongs to***

- **Category:** Color; Page
- **Type:** Checks

##### ***What it does***

Checks if the page blending color space has been defined in the PDF document.

You must set the required blending color space and the required luminosity softmask blending color.

##### ***About blending color spaces***

When Adobe Acrobat interprets transparent objects and attempts to create a preview of the flattened artwork, it needs to do so using a single color space for all the items involved in the transparency group. This color space is called the **blending color space**.

The **page blending color space** is the blending color space assigned to a page; it is used when individual artwork does not have a blending color space.

The blending color space for soft masks (masks with soft transitions) is called the **luminosity softmask blending color space**. It is usually gray.

##### ***Related Actions***

- [Change blending color space](#) on page 103
- [Select by blending color space](#) on page 424

#### 4.2.2.18. Check if solidities of DeviceN colorants are consistent

##### ***Belongs to***

- **Category:** Color
- **Type:** Checks

##### ***What it does***

Check if solidities of DeviceN colorants are consistent.

Solidity refers to how spot colors are shown on screen. 100% solidity means that the colors are completely opaque on screen in areas where it is printed at 100% ink density. This Action checks if the solidities are the same for all colors in the DeviceN color space.



#### 4.2.2.19. Check if the color spaces used match the blend colorspace

**Belongs to**

- **Category:** Color
- **Type:** Checks

**What it does**

Checks if the color spaces used in the PDF match the blend colorspace.

#### 4.2.2.20. Check ink coverage (basic object check)

**Belongs to**

- **Category:** Color;Prepress
- **Type:** Checks

**What it does**

Checks the total CMYK ink coverage of the color of the **objects** in the PDF.

You can for example check if the ink coverage is at least 300%.

When including images in the ink coverage check, the threshold will determine the minimum area in which the ink coverage has to be exceeded before reporting an error or warning. For example, when entering '0', even 1 dot exceeding the maximum ink coverage will be reported.

**Related Actions**

[Select by ink coverage \(basic object check\)](#) on page 426

#### 4.2.2.21. Check ink coverage (total page check)

**Belongs to**

- **Category:** Color;Prepress
- **Type:** Checks

**What it does**

Allows you to check the CMYK ink coverage either of all colors combined or per separation on a page (inside a particular page box).

You can for example check if the ink coverage in the media box is at least 300%.

In case of a separation-based check, you may exclude separations with 0% ink coverage (i.e. empty areas without content).

It's also possible to ignore small areas, for example areas smaller than 1 inch.

#### 4.2.2.22. Check number of color plates (basic object check)

***Belongs to***

- **Category:** Color
- **Type:** Checks
- **Since Version:** 13 update 2

***What it does***

Checks if the PDF contains *objects* that occur on a certain number of color plates (separations). You can check the object's fill and/or stroke as required.

***Related Actions***

- [Select by number of color plates](#) on page 426
- [Check number of separations \(total page check\)](#) on page 310 (checks everything on a page)

#### 4.2.2.23. Check number of separations (total page check)

***Belongs to***

- **Category:** Color
- **Type:** Checks

***What it does***

Checks the number of separations that occur in a PDF file. You can set a precise number (e.g. 5 separations) or a range (e.g. less than 5) and choose whether or not to exclude certain colors (e.g. CMYK plates, spot color All ...). You can also use regular expressions to indicate which separations should not be counted.



**Note:** From PitStop 2019 onwards, you can exclude C, M, Y and K separately. This is useful when checking black and white jobs, or jobs that have K and a spot color.

You can check the number of separations for the complete document, or for each page separately. The new page-based option allows you to work with a selection, so you can check specific pages, page ranges or other page based selections, for example, you could check if every even page has two color separations.

Note that this option is also useful if you want to know on which page an issue occurs, because the page number is mentioned in the Preflight Report and in the Navigator.

***Checking ICC tagged objects***

ICC tagging is a way to specify colors independent from the output device: objects are tagged with an ICC profile that contains the transformation from the object's color to a device-independent color. When outputting this on a specific device, that device-independent color is in turn converted to the output device's color space.

Because this conversion depends on the output device, and because it will rarely (if ever) result in less than 4 color plates being used, checking the number of separations on an ICC tagged object will always result in 4 separations.

For example, if you have a black (100% K) ICC tagged object, the number of separations reported by this Action will be 4 (C, M, Y, K) instead of 1 (only K) because some ink will be used on all plates in order to reproduce the color correctly.

#### **Related Actions**

- [Check number of color plates \(basic object check\)](#) on page 310 (checks the fill and/or stroke of objects)

### 4.2.2.24. Check number of spot colors

#### **Belongs to**

- **Category:** Color
- **Type:** Checks

#### **What it does**

Checks the number of spot colors in a document.

You must enter the number of spot colors the document must have.

If you select the option **Spot colors whose names differ only by their suffix are counted as one**, spot colors with the same name but with a different suffix (e.g. PANTONE 3258 C, PANTONE 3258 U, PANTONE 3258 M) are counted as one color instead of different (3 in this example) colors. For more information about suffixes, refer to [Change spot color suffix](#) on page 105.

Note that spot color "All" is also counted. This spot color appears on all printing plates (hence the name) and is used for registration and printer marks that lie outside the trim and bleed boxes.

#### **Related Actions**

- [Check number of separations \(total page check\)](#) on page 310 (this Action has an option to not count Spot Color All)

### 4.2.2.25. Check objects by tiling pattern

#### **Belongs to**

- **Category:** Color
- **Type:** Checks
- **Since version:** 2020

#### **What it does**

Allows you to check for tiling patterns in the fill or stroke of text and line art, or in the fill of image masks. You can search for colored or uncolored tiling patterns or both.



---

**Note:** You should select at least one checkbox above the divider and one below the divider.

---

**Related Actions**

- [Select by tiling pattern](#) on page 430
- [Select tiling pattern contents according to parent object selection](#) on page 441

## 4.2.2.26. Check Output Intent

**Belongs to**

- **Category:** Color
- **Type:** Checks

**What it does**

Checks if the desired color management Output Intent is used on page or document level. Note that the document can only have one Output Intent, whereas different pages in the document can have different Output Intents.

You can check for compliance with a particular PDF/X version and/or check if a particular ICC profile or ICC characterization is used.

**Related Actions**

[Change Output Intent](#) on page 104

## 4.2.2.27. Check rendering intent

**Belongs to**

- **Category:** Color; Prepress
- **Type:** Checks

**What it does**

Allows you to check the rendering intent of particular objects (Paths, Text, Paths or Text, Images, or all Rendering objects) in a PDF.

You can check whether or not they use rendering, and if they do, which type:

- Absolute Colorimetric
- Relative Colorimetric
- Perceptual
- Saturation

**About rendering intents**

A rendering intent is a remapping method, allowing to remap colors so that they best match the intended use. 'Remapping' means that colors from one output device's color space are mapped to the color space of another device.

For more information, refer to the chapter "Rendering intents to remap colors" in [the PitStop Pro Reference Guide on the Enfocus website](#).

For more information, refer to the chapter "Rendering intents to remap colors" in the PitStop Pro Reference Guide.

**Related Actions**

- [Select by rendering intent](#) on page 427
- [Change rendering intent](#) on page 104
- [Remove rendering intent](#) on page 117

## 4.2.2.28. Check required color set

**Belongs to**

- **Category:** Color
- **Type:** Checks

**What it does**

Checks for a restrictive range of tints in a PDF.

**How to proceed**

Define the color set to be checked:

1. To allow the use of 100% black, select **Black**.



**Note:** If only black is allowed in the PDF, **only** select the **Black** checkbox. Do not add any other color.

2. To add another color that is allowed in the PDF:
  - a. Click **New**. A new entry will appear in the text box.
  - b. To allow a spot color (optionally), select the **Spot color** checkbox and type the name of the spot color in the text field. You should define a CMYK equivalent too (see next step). The name of the spot color will be shown in the text box.
  - c. Enter the required values for CMYK (expressed in %) in the fields below the New/Remove button. Your changes will be shown in the text box.
3. If slight color deviations are allowed, enter a value in **Maximum ... % of color deviation of each channel**. The default value is 0.01%.
4. If only one color should be used for images, select that color from the **Images must use only** list.

**Related Actions**

- [Snap color to color set](#) on page 118
- [Select required color set](#) on page 436

## 4.2.2.29. Check spot color by alternate color space

**Belongs to**

- **Category:** Color
- **Type:** Checks

**What it does**

Searches for spot colors with an alternate color space definition.

You can search for the following alternate color spaces:

- Device CMYK
- Device gray
- Device RGB
- ICC tagged gray
- ICC tagged RGB
- ICC tagged CMYK
- ICC tagged Lab
- Calibrated gray
- Calibrated RGB
- Lab

## 4.2.2.30. Check spot color by name

**Belongs to**

- **Category:** Color
- **Type:** Checks

**What it does**

Checks if one or more particular spot colors are present in the document.

**Note:**

- From version 12 update 2 onwards, you can use regular expressions to define the spot color name.
- From version 13 update 1 onwards, there is an extra option to search for spot color(s) based on a list of names. This new option is useful if different spot color names refer to the same color. It also allows you to check for different spot colors in one go.

**How to proceed**

In the attributes of the Check spot color Action, proceed as follows:

1. Select the appropriate option from the list:
  - If you choose **Check all spot colors**, no other options have to be set.
  - If you choose one of the other options, you have to specify the name of the spot color(s) that have to be checked. Proceed with step 2.
2. Enter the name of the spot color(s) concerned:
  - In case of **Check spot color by regular expression**, you can use regular expressions. PitStop supports Boost Regular Expressions. For an overview of the options, refer to [http://www.boost.org/doc/libs/1\\_55\\_0/libs/regex/doc/html/boost\\_regex/syntax/perl\\_syntax.html](http://www.boost.org/doc/libs/1_55_0/libs/regex/doc/html/boost_regex/syntax/perl_syntax.html).
  - In case of **Check spot color by name** or **Check spot color by name from list**, you can simply type the name of the spot color(s) concerned or use the color picker  or the

Grab color button . Note that, in case of a list, you must enter the names one by one, each on a separate line. It is for example not possible to select two colors in the

document, and select them in one go, using the Grab color button . Instead, you must select the first color, grab it, then select the second color, and grab it and so on.

3. If the case of the spot color name (upper or lower case letters) does not matter, select the **Ignore case** checkbox.

#### **Related Actions**

[Select spot color](#) on page 437

### 4.2.2.31. Check spot color by PANTONE library

#### **Belongs to**

- **Category:** Color
- **Type:** Checks
- **Since Version:** 2018

#### **What it does**

Checks if the spot colors in the PDF are (are not) part of the selected PANTONE library.

The PANTONE libraries are by default installed with PitStop Pro and PitStop Server.

Extra options are:

- **Ignore non PANTONE spot color names** (to only consider the color type and to ignore differences with respect to the subcategory)
- **Check alternate color values** (to take into account the CMYK/LAB values)

#### **Use case**

You can use this Action to identify any "strange" colors of which you do not know how to print them.

#### **Related Actions**

- [Normalize PANTONE library names](#) on page 111
- [Select spot color](#) on page 437

### 4.2.2.32. Check spot color suffix

#### **Belongs to**

- **Category:** Color
- **Type:** Checks

#### **What it does**

Checks whether the spot colors in the PDF have a given suffix. It's also possible to check for unknown suffixes.

You can find an overview of the available suffixes in the table below.

### About spot color suffixes

Suffixes represent the **apparent** color of the color when printed on different types of paper. For example, PANTONE 3258 **C** and PANTONE 3258 **U** refer to the same color, but when printed on coated, respectively uncoated paper, they will look different, although the same ink formula was used.

Besides C (coated), U (uncoated) and M (matte), in software color palettes, you can find suffixes that refer to on-screen simulations of how colors will look when printed on different paper types. For example, PANTONE 3258 CVU is an on-screen indication of how PANTONE 3258 will look like when printed on uncoated paper.

### Suffix overview

| Suffix | Meaning                                                                                           |
|--------|---------------------------------------------------------------------------------------------------|
| CV     | Computer video (electronic simulation)                                                            |
| CVC    | Computer video - coated                                                                           |
| CVU    | Computer video - uncoated                                                                         |
| CVS    | Process coated (old; now C)                                                                       |
| CVP    | Solid to process (old; now PC)                                                                    |
| C      | Coated paper                                                                                      |
| M      | Matte paper                                                                                       |
| U      | Uncoated paper                                                                                    |
| EC     | Euro process simulation, coated paper                                                             |
| PC     | Process simulation, coated paper                                                                  |
| CP     | Coated paper, process simulation (e.g. PANTONE 185 CP (used in PANTONE+ COLOR BRIDGE COATED))     |
| UP     | Uncoated paper, process simulation (e.g. PANTONE 185 UP (used in PANTONE+ COLOR BRIDGE UNCOATED)) |
| HC     | Hexachrome coated                                                                                 |
| TC     | TC Textile Cotton                                                                                 |
| TCX    | Textile Cotton eXtended                                                                           |
| TP     | Textile Paper                                                                                     |
| TPX    | TPX Textile Paper eXtended                                                                        |
| XGC    | eXtended Gamut Coated                                                                             |

### Related Actions

- [Select by spot color suffix](#) on page 428



- [Change spot color suffix](#) on page 105

4.2.2.33. Check usage of device color spaces for PDF/X

**Belongs to**

- **Category:** Color
- **Type:** Checks
- **New since:**PitStop 2022

**What it does**

Checks whether the device color space maps to the document Output Intent for the chosen PDF/X version (PDF/X-4 or PDF/X-6).

4.2.2.34. Compare gamuts

**Belongs to**

- **Category:** Color
- **Type:** Checks
- **New since:** 25.03

**What it does**

Renders pages with two different output profiles, calculates the color differences, and stores the result in a heatmap that shows the distance from the threshold through colors.

This Action is typically used to check how colors would look if printed using a different output profile. This is useful to identify potential color conversion issues before they occur, ensuring color accuracy and consistency.



**Note:** This option is also available in the Enfocus Inspector (Prepress > Compare gamuts).

**Attributes**

| Attributes                          | Meaning                                                                                                                                                                                 |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Reference Output Profile            | Click the list to select the appropriate profile from the list or from your computer.<br><br>Once selected, you can click the info icon for an overview of the ICC profile information. |
| Output intent overrides the profile | Select this checkbox if the output intent - if there is one, either on document or page level - should override the selected reference profile.                                         |
| Target Output Profile               | Click the list to select the appropriate profile from the list or from your computer.                                                                                                   |

| Attributes              | Meaning                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                         | Once selected, you can click the info icon for an overview of the ICC profile information.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Spot Color Policy       | <p>As colors can only be compared in the process color space, determine how spot colors should be handled:</p> <ul style="list-style-type: none"> <li>• <b>Only use the process color space, ignoring spot colors:</b> Render the page as if all spot colors were removed from the PDF. For example, a spot color overprinting CMYK will have no effect; knockout will result in white.</li> </ul> <hr/> <p> <b>Note:</b> This option is useful if you have the exact spot colors on your printing press, or if they are technical colors which will never be printed.</p> <hr/> <ul style="list-style-type: none"> <li>• <b>Combine the process color space and the spot colors:</b> Blend the spot colors into the process color space and after that check the color differences.</li> </ul> <hr/> <p> <b>Note:</b> This option is useful if you don't have the spot colors on your press, so they must be converted (probably to CMYK), and hence the gamut compare Action can be used to check the color difference different profiles would give when doing so. Note that this Action indicates the difference between the reference CMYK and the target CMYK, after spot conversion. It is NOT the difference between the pure spot and its CMYK conversion.</p> <hr/> |
| Color Difference Metric | <p>A color difference metric determines how the color differences are calculated. Different metrics exist, which may lead to slightly different results. See all <a href="https://en.wikipedia.org/wiki/Color_difference">https://en.wikipedia.org/wiki/Color_difference</a>.</p> <p>Choose the metric of your choice:</p> <ul style="list-style-type: none"> <li>• Delta E (CIE 1976)</li> <li>• Delta E (CIE 1994)</li> <li>• Delta E (CIE 2000) (default)</li> <li>• CMC l:c</li> <li>• BFD</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

| Attributes                 | Meaning                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Color Difference Threshold | <p>Determine the threshold.</p> <ul style="list-style-type: none"> <li>• 0 = No difference allowed</li> <li>• 1 = Slight difference allowed, just noticeable for the human eye.</li> <li>• 2 = Some more difference allowed</li> <li>• 3 = Acceptable difference allowed for printing (default)</li> <li>• 4 and more ... = More difference allowed</li> </ul> <p>Only if the threshold is exceeded, the difference is logged and a heatmap is generated.</p>                                                                            |
| Ignore areas smaller than  | <p>Sometimes a color difference exceeding the threshold only occurs in a very small area. To avoid that such differences have a big impact, you can filter them out.</p> <div>  <p><b>Note:</b> This option does not have an impact on how the heatmap looks. It only determines whether or not the color difference is logged.</p> </div> <p>Determine the size of the areas with color differences exceeding the threshold, for example: 1 point.</p> |

### Heatmap

If the color difference exceeds the set threshold, a heatmap is shown. The colors indicate the distance from the threshold: the darker the color, the more difference. Colors go from yellow and orange to red, purple, and blue.

White means no difference. Gray is a desaturated transparent view of the document.



**Note:** The heatmap is also shown in Annotated Reports.

### Example



**Note:** The heatmap is visible when *Objects: Highlight* is enabled in the Enfocus Navigator as shown in the screenshot below.



## 4.2.3. Informs

---

### 4.2.3.1. Gather color information

***Belongs to***

- **Category:** Color
- **Type:** Informs

***What it does***

Collects information about the color spaces used in a PDF and presents it in the log.

### 4.2.3.2. Gather ink information

***Belongs to***

- **Category:** Color
- **Type:** Informs

***What it does***

Calculates the amount of each color separation needed to print a page, and a complete document, i.e. how much of each page is actually covered by each ink.

This Action reports the result in % of the page size and also as inch<sup>2</sup>, cm<sup>2</sup> or mm<sup>2</sup> depending on your unit preferences. The ink usage report is also included as part of the Preflight Profile editor, so it can be generated within a Preflight Report by checking the **Inks** checkbox (at the bottom of the General section in the Preflight Profile editor). This check is off by default (because the calculation is time consuming).

## 4.2.4. Selections

---

### 4.2.4.1. Select black & white objects

***Belongs to***

- **Category:** Color
- **Type:** Selections
- **Since Version:** 2018

***What it does***

Selects black and white images.

You can set a tolerance (an allowed deviation from '100% gray', default tolerance is '3') and tell PitStop how to determine what black and white is:

- **Calculate image average:** Take the color value of each pixel of the image (color and gray values) and calculate the average of this; decide based on this value whether or not it is "black and white".
- **Look for colored areas:** Search for colored areas and take only the values of colored pixels to decide whether or not it is "black and white". If most of the colored values are gray (or close to gray/taking into account the chosen tolerance), the image will be considered black and white; otherwise it will be considered a color image. This method will detect images that are mainly black and white but with a small colored area.

***Remarks***

- This Action works on all color spaces, on images, text and linear and radial shadings.
- Spot colors are always considered colored images, regardless of their name (e.g. even spot colors with the name 'black' will be considered colors).

***Use Cases***

- In digital printing, to save on ink, black and white images are preferably printed using black ink only. This Action provides an extra check to distinguish between black and white images with minor color tints (safe to use black) and black and white images with colored areas that definitely need color ink.
- Black text or thin lines (coming from CMYK) can be safely remapped to black only, thanks to this Action, which allows to filter real black text from colored text. Example Action List:

```
select text
select black & white objects
AND
remap color <!-- target color black -->
```

***Examples***

The following image will be considered 'black and white' based on the average image calculation, but 'colored' based on the area calculation.



The image below is clearly 'black and white' and will be selected, regardless of the calculation method.



#### 4.2.4.2. Select by blending color space

***Belongs to***

- **Category:** Color; Page
- **Type:** Selections

***What it does***

Makes a selection based on the blending color space.

You must set the required blending color space and the required luminosity softmask blending color (or select the option **Undefined**).

**About blending color spaces**

When Adobe Acrobat interprets transparent objects and attempts to create a preview of the flattened artwork, it needs to do so using a single color space for all the items involved in the transparency group. This color space is called the **blending color space**.

The blending color space for soft masks (masks with soft transitions) is called the **luminosity softmask blending color space**. It is usually gray.

**Related Actions**

- [Change blending color space](#) on page 103
- [Check if blending color space is defined](#) on page 308

### 4.2.4.3. Select by color space

**Belongs to**

- **Category:** Color
- **Type:** Selections

**What it does**

Selects line art (fill and/or stroke) and/or other objects according to their color space.

**Example**

To select all ICC line art, proceed as follows:

```
Select by color space
<!-- Options:
1. Select both Fill and stroke color space.
2. For both, select "ICC tagged". Optionally, indicate the preferred number of color
   components.
3. Make sure the checkbox under Other objects is cleared
-->
Log selection
```

### 4.2.4.4. Select by color space in PDF/X Output Intent

**Belongs to**

- **Category:** Color
- **Type:** Selections

**What it does**

Allows you to make a selection based on the color space in the PDF/X Output Intent.

As of PitStop 2022 you should make clear which Output Intents should be taken into account. Options are:

- Document Output Intents (before PDF/X-6)
- Effective Output Intents (since PDF/X-6)

- Document Output Intents (PDF/A-2)

You can choose one of the following color spaces:

- CMYK
- RGB
- Gray
- Unknown

#### 4.2.4.5. Select by ICC tag subtype

***Belongs to***

- **Category:** Color
- **Type:** Selections

***What it does***

Allows to make a distinction between ICC-based RGB, ICC-based gray and ICC-based Lab.

[Select by color space in PDF/X Output Intent](#) and [Check color type](#) allow to make the distinction between DeviceRGB, DeviceCMYK and ICC-based color spaces, but they treat all ICC-Based spaces as a single group. This Action allows to make the distinction between ICC-based CMYK and ICC-based RGB objects.

[Check color type](#) allows you to make the distinction between DeviceRGB, DeviceCMYK and ICC-based color spaces, but it treats all ICC-Based spaces as a single group. This Action allows to make the distinction between ICC-based CMYK and ICC-based RGB objects.

***Related Actions***

- [Select by color space in PDF/X Output Intent](#) on page 425
- [Check color type](#) on page 301

#### 4.2.4.6. Select by ink coverage (basic object check)

***Belongs to***

- **Category:** Color; Prepress
- **Type:** Selections

***What it does***

Makes a selection of all objects that meet your ink coverage criteria.

You can for example select objects only if the ink coverage is at least 300%.

When including images in this selection, the threshold will determine the minimum area in which the ink coverage criteria have to be met in order to be selected. E.g. when entering '0', even an image of which only 1 dot meets the ink coverage requirement will be selected.

***Related Actions***

[Check ink coverage \(basic object check\)](#) on page 309



#### 4.2.4.7. Select by number of color plates

**Belongs to**

- **Category:** Color
- **Type:** Selections

**What it does**

Selects objects that occur on a certain number of color plates (separations). You can make the selection based on the object's fill and/or stroke.

**Example**

You could for example search for objects with 4 color plates (dark gray), and afterwards change gray to CMYK Black. This will reduce the number of plates from 4 plates to 1 plate.

```
Select by number of color plates <!-- Choose 4 -->  
Change Gray to CMYK Black <!-- Change Gray to CMYK Black on page 103 -->
```

**Related Actions**

[Check number of color plates \(basic object check\)](#) on page 310

#### 4.2.4.8. Select by rendering intent

**Belongs to**

- **Category:** Color;Prepress
- **Type:** Selections

**What it does**

Selects color managed objects based on a particular rendering intent.

You can select paths, text, images, or all rendering objects, with one of the the following rendering intents:

- Absolute Colorimetric
- Relative Colorimetric
- Perceptual
- Saturation

**About rendering intents**

A rendering intent is a remapping method, allowing to remap colors so that they best match the intended use. 'Remapping' means that colors from one output device's color space are mapped to the color space of another device.

For more information and examples, refer to [the PitStop Pro Reference Guide on the Enfocus website](#) (See Chapter "Rendering intents to remap colors").

For more information and examples, refer to the PitStop Pro Reference Guide (See Chapter "Rendering intents to remap colors").

#### **Related Actions**

- [Change rendering intent](#) on page 104
- [Check rendering intent](#) on page 312
- [Remove rendering intent](#) on page 117
- [Select rendering objects](#) on page 452

### 4.2.4.9. Select by spot color suffix

#### **Belongs to**

- **Category:** Color
- **Type:** Selections

#### **What it does**

Selects objects with spot colors that use a spot color with either a known suffix or a known suffix which is not of a particular type.

You can find an overview of the available suffixes in the table below.

#### **About spot color suffixes**

Suffixes represent the **apparent** color of the color when printed on different types of paper. For example, PANTONE 3258 **C** and PANTONE 3258 **U** refer to the same color, but when printed on coated, respectively uncoated paper, they will look different, although the same ink formula was used.

Besides C (coated), U (uncoated) and M (matte), in software color palettes, you can find suffixes that refer to on-screen simulations of how colors will look when printed on different paper types. For example, PANTONE 3258 CVU is an on-screen indication of how PANTONE 3258 will look like when printed on uncoated paper.

#### **Suffix overview**

| Suffix | Meaning                                |
|--------|----------------------------------------|
| CV     | Computer video (electronic simulation) |
| CVC    | Computer video - coated                |
| CVU    | Computer video - uncoated              |
| CVS    | Process coated (old; now C)            |
| CVP    | Solid to process (old; now PC)         |
| C      | Coated paper                           |
| M      | Matte paper                            |
| U      | Uncoated paper                         |
| EC     | Euro process simulation, coated paper  |
| PC     | Process simulation, coated paper       |

| Suffix | Meaning                                                                                           |
|--------|---------------------------------------------------------------------------------------------------|
| CP     | Coated paper, process simulation (e.g. PANTONE 185 CP (used in PANTONE+ COLOR BRIDGE COATED))     |
| UP     | Uncoated paper, process simulation (e.g. PANTONE 185 UP (used in PANTONE+ COLOR BRIDGE UNCOATED)) |
| HC     | Hexachrome coated                                                                                 |
| TC     | TC Textile Cotton                                                                                 |
| TCX    | Textile Cotton eXtended                                                                           |
| TP     | Textile Paper                                                                                     |
| TPX    | TPX Textile Paper eXtended                                                                        |
| XGC    | eXtended Gamut Coated                                                                             |

**Related Actions**

- [Check spot color suffix](#) on page 315
- [Change spot color suffix](#) on page 105

## 4.2.4.10. Select by tagged ICC Profile

**Belongs to**

- **Category:** Color
- **Type:** Selections

**What it does**

Allows you to select objects which have (not) been tagged with an ICC profile, or objects with a specific color space and a specific ICC profile.

You can distinguish between stroke and fill color, for example select objects of which the stroke color is ICC tagged.

**About ICC tagging**

Every input and output device reproduces color and grayscales in a slightly different way. As a result, the colors you see in a PDF file on your screen may not match the colors produced when you print the PDF to an output device.

ICC color profiles are used to avoid this. An ICC color profile is a mathematical description of the color space used by a specific device. In other words, the color profile describes how the colors produced by the device relate to the reference CIE LAB color space (a device-independent color space). As such, they allow you to set up a workflow in which all devices use color management to compensate for their individual color reproduction characteristics, based on the information in the ICC profiles.

**Related Actions**

- [Check ICC tagging](#) on page 305
- [Select by tagged ICC Profile](#) on page 429
- [Tag object with an ICC profile](#) on page 119

- [Check if ICC profile differs from ICC profile in PDF/X Output Intent](#) on page 307
- [Select objects of which ICC profile is equal to ICC profile in PDF/X output](#) on page 433
- [Check ICC profile version](#) on page 306

#### 4.2.4.11. Select by tiling pattern

##### **Belongs to**

- **Category:** Color
- **Type:** Selections
- **Since version:** 2020

##### **What it does**

Allows you to select text, line art and/or image masks with a tiling pattern. You can select only colored or uncolored tiling patterns, or both.



**Note:** You should select at least one checkbox above the divider and one below the divider.

##### **Related Actions**

- [Check objects by tiling pattern](#) on page 311
- [Select tiling pattern contents according to parent object selection](#) on page 441

#### 4.2.4.12. Select color

##### **Belongs to**

- **Category:** Color
- **Type:** Selections

##### **What it does**

Selects objects by their fill or stroke color, or both.

##### **How to proceed**

Define the colors you want to select as follows:

1. Select the appropriate checkbox, depending on what you want to define (Fill color or Stroke color).



**Note:** If both checkboxes are selected, objects that match both fill and stroke colors will be selected. This is equivalent to combining separate actions with the AND operator.

2. Select the appropriate color in one of the following ways:

- a. Select an object with the PitStop Select Objects tool  and use the icon to grab the fill or stroke color  (depending on what you're defining).
- b. Click the color picker icon  and select the appropriate color.

- c. Select the required color space:
  - Device colors can be Gray, RGB or CMYK
  - Calibrated colors can be Gray or RGB
  - User Swatch (= user-defined colors)
- 3. Fine tune the color by moving the sliders.

#### 4.2.4.13. Select color range

##### ***Belongs to***

- **Category:** Color
- **Type:** Selections

##### ***What it does***

Allows you to select objects with a specific color, by specifying the color range of the fill and/or stroke color.

The available options depend on the chosen color space:

- Gray, CMYK or RGB: **search in converted values of other color spaces** (If selected, the result of the conversion is calculated in advance.)
- Separations: You can decide to select either all spot colors or only the spot colors with a particular name. You can type the name or click the **Load Spot Color** button to select it.
- DeviceN process colors: **allow spot colors in DeviceN color space**



**Note:** This Action works on stencil masks (next to text and line art), but not on images.

##### ***Example***

To catch all gray objects (either fill or stroke) with a brightness between 0% and 40 %, and turn them into CMYK objects with 100% Cyan color, you can do the following:

```
Select gray fill or stroke color
<!-- This is the "Select color range" Action with the options Fill and Stroke
selected.
Select "Color space is gray", and in the Gray from field, enter values between 0% and
40% -->
Change fill and stroke color
<!-- This is the "Change color" Action with Fill and Stroke selected.
Select "Device CMYK" and set Cyan to 100% -->
```

#### 4.2.4.14. Select default color spaces

##### ***Belongs to***

- **Category:** Color
- **Type:** Selections

##### ***What it does***

Allows you to select default color spaces or default color spaces that are not defined by PDF/X-3.

Default color spaces are defined on page level. They are used to systematically remap device-specific colors to device-independent colors.



**Note:** PitStop also provides an Action to [change default color spaces](#).

#### 4.2.4.15. Select DeviceN with attributes

***Belongs to***

- **Category:** Color
- **Type:** Selections

***What it does***

Allows you to select the fill and/or stroke of DeviceN and/or NChannel objects.

You must specify which attributes must be present to select the object:

- Spot color definitions
- Process color mapping
- Mixing hints
- Solidities
- Printing order
- Dot gain

***Related Actions***

[Check DeviceN attributes](#) on page 301

#### 4.2.4.16. Select gray

***Belongs to***

- **Category:** Color
- **Type:** Selections

***What it does***

Allows you to make a selection based on the gray color of the fill and/or stroke color of the objects in the PDF.

You can specify how much the actual gray in the document is allowed to deviate from "true" gray (i.e. gray which doesn't have tones of any other color; for RGB this means that the percentage of Red, Gray and Blue is the same; for CMYK, this holds for Cyan, Magenta and Yellow).

#### 4.2.4.17. Select incorrectly defined process color spaces in DeviceN

***Belongs to***

- **Category:** Color

- **Type:** Selections

**What it does**

Allows you to select objects that use a DeviceN color space containing a process color space which does not match the PDF/X Output intent.

**Related Actions**

[Check DeviceN for process color spaces](#) on page 302

## 4.2.4.18. Select non-compliant Output Intent

**Belongs to**

- **Category:** Color
- **Type:** Selections

**What it does**

Selects the whole document if the Output Intent is:

- **Not compliant** with a particular PDF/X or PDF/A version, OR
- **Compliant** with a particular PDF/X or PDF/A version, **but the ICC profile or ICC characterization is not as specified.**

You can check the compliance with the following PDF/X versions:

- PDF/X-1a:2001
- PDF/X-3:2002
- PDF/X-1a:2003
- PDF/X-3:2003
- PDF/X-4
- PDF/X-4p
- PDF/X-6
- PDF/X-6p
- PDF/A-1
- PDF/A-2

## 4.2.4.19. Select objects of which ICC profile is equal to ICC profile in PDF/X output

**Belongs to**

- **Category:** Color
- **Type:** Selections

**What it does**

Selects objects of which the ICC profile is equal to the ICC profile in PDF/X output. Choose either fill, stroke or both.

**About ICC tagging**

Every input and output device reproduces color and grayscales in a slightly different way. As a result, the colors you see in a PDF file on your screen may not match the colors produced when you print the PDF to an output device.

ICC color profiles are used to avoid this. An ICC color profile is a mathematical description of the color space used by a specific device. In other words, the color profile describes how the colors produced by the device relate to the reference CIE LAB color space (a device-independent color space). As such, they allow you to set up a workflow in which all devices use color management to compensate for their individual color reproduction characteristics, based on the information in the ICC profiles.

**Related Actions**

- [Remove ICC tag](#) on page 116
- [Select by tagged ICC Profile](#) on page 429
- [Check ICC tagging](#) on page 305
- [Check if ICC profile differs from ICC profile in PDF/X Output Intent](#) on page 307
- [Tag object with an ICC profile](#) on page 119
- [Check ICC profile version](#) on page 306

## 4.2.4.20. Select page by gray surface

**Belongs to**

- **Category:** Color
- **Type:** Selections
- **Since version:** 13

**What it does**

Selects gray pages in a PDF based on the total surface (%) of colored content on that page.

You can configure the following attributes:

- How big the non-gray area should be, e.g. less than 90% should be non-gray
- Whether or not a deviation from gray is allowed, e.g. if only "pure" gray should be selected, choose 0% as deviation.
- Which of the page boxes defines a page.

**Use cases:**

- Use this Action in combination with [Log selection](#) to detect whether a PDF should be printed in color or in black and white.
- Use this Action in combination with [Convert color](#) to select gray pages and convert the colors to grayscale (to save ink).

**Example**

The following Action List selects the pages in your PDF that have almost no colored content (less than 5% of the page - the page being defined by the trim box). There is a small tolerance allowed, meaning that colors that are "almost gray" are also considered "gray".

```
Select page by gray surface
    <!-- Select page if non-gray surface is less than 5% of the total
page area -->
```



```
<!-- Ignore color that deviates less than 3% from gray -->
<!-- Page area is defined by the trim box -->
```

**Related Actions**

- [Select gray](#) on page 432
- [Select page by ink coverage \(non-Black only\)](#) on page 435

## 4.2.4.21. Select page by ink coverage (non-Black only)

**Belongs to**

- **Category:** Color
- **Type:** Selections
- **Since version:** 13

**What it does**

Selects gray pages in a PDF.

This Action detects the ink coverage of color content (CMY and spot colors) in a page and selects the pages for which the maximum ink coverage of each non-black separation is below a particular percentage (as defined in the Action). You can ignore small non-gray areas (e.g. a company logo) and limit the check to an area inside a particular page box as required.

**Use cases:**

- Use this Action in combination with [Log selection](#) to detect whether a PDF should be printed in color or in black and white.
- Use this Action in combination with [Convert color](#) to select gray pages and convert the colors to grayscale (to save ink).

**Example**

The following Action List selects all pages with CMY or spot color values lower than 5%. These pages may have a very small colored area (< 5 cm) or colors outside the trimbox.

```
Select gray page <!-- Select page if ink coverage of each non-Black separation is less
than 5% -->
<!-- Ignore non-gray areas smaller than 5 cm -->
<!-- Only check inside the trim box -->
```

**Related Actions**

- [Check ink coverage \(total page check\)](#) on page 309 : checks the ink coverage of *all* colors (including black)
- [Select page by gray surface](#) on page 434

## 4.2.4.22. Select process colorant

**Belongs to**

- **Category:** Color

- **Type:** Selections
- **Since version:** 2020

**What it does**

Selects the colorant(s) of your choice (Cyan, Magenta, Yellow, Black).

It's typically used with [Add trace path](#) (to draw a path around the selected process colors) or with [Check ink coverage \(total page check\)](#) (to check the ink coverage of one or more process colors).

**Examples****Example 1:**

Using the following Action List, you can draw a path based on the selected colorants (CMY in this example).

```
Select process colorant (CMY on) - channels on which the Action will work
Select all - objects that will be used to trace the path
Trace path (Use colorant selection on) - draws the path based on the selected
colorants
```

**Example 2:**

```
Select process colorant
Check ink coverage (total page check)
```

**Related Actions**

- [Add trace path](#) on page 89
- [Check ink coverage \(total page check\)](#) on page 309

## 4.2.4.23. Select required color set

**Belongs to**

- **Category:** Color
- **Type:** Selections
- **Since version:** 2023 update 1

**What it does**

Selects objects by color by excluding a certain color, for example select all objects that do not have a certain tint of green.

**How to proceed**

Define the color set to be excluded:

1. To exclude 100% black objects, select **Black**.



**Note:** If only black should be excluded in the PDF, **only** select the **Black** checkbox. Do not add any other color.

2. To add another color that should be excluded:
  - a. Click **New**. A new entry will appear in the text box.

- b. To allow a spot color (optionally), select the **Spot color** checkbox and type the name of the spot color in the text field. You should define a CMYK equivalent too (see next step). The name of the spot color will be shown in the text box.
  - c. Enter the required values for CMYK (expressed in %) in the fields below the New/Remove button. Your changes will be shown in the text box.
3. If slight color deviations are allowed, enter a value in **Maximum ... % of color deviation of each channel**. The default value is 0.01%.
4. If images with a certain color should be selected, select that color from the **Images must use only** list.

**Related Actions**

- [Check required color set](#) on page 313

#### 4.2.4.24. Select shading objects

**Belongs to**

- **Category:** Color
- **Type:** Selections

**What it does**

Selects all shading objects.

Shadings represent complex mathematical functions. That's why certain output devices may not be able to correctly interpret them. Shadings can also cause problems during color conversions.



**Note:** As of PitStop 7, shadings can be color converted.

**Related Actions**

- [Convert shading color space to solid color](#) on page 108

#### 4.2.4.25. Select spot color

**Belongs to**

- **Category:** Color
- **Type:** Selections

**What it does**

Allows you to select either all spot colors in a PDF file, or one or more particular colors, based on their names.

**Note:**

- From version 12 update 2 onwards, you can use regular expressions to define the spot color name.
- From version 13 update 1 onwards, there is an extra option to select a spot color based on a list of names. This new option is useful if different spot color names refer to the

same color, so you can easily run a fix on objects with differently named spot colors. It also allows you to select different spot colors in one go.

- From version 2018 onwards, you can select spot colors by a Pantone Library.

### **How to proceed**

In the attributes of the Select spot color Action, proceed as follows:

**1.** Select the appropriate option from the list:

- If you choose **Select all spot colors**, no other options have to be set.
- If you choose **Select Spot Color by PANTONE color library**, you should select the library of your choice from another list that is displayed.

You can further reduce your selection based on the alternate color values:

- Ignore the alternate color values
- Select only colors with correct alternate color values
- Select only colors with wrong alternate color values
- If you choose one of the other options, you have to specify the name of the spot color(s) that have to be selected. Proceed with step 2.

**2.** Enter the name of the spot color(s) concerned:

- In case of **Select spot color by regular expression**, you can use regular expressions. PitStop supports Boost Regular Expressions. For an overview of the options, refer to [http://www.boost.org/doc/libs/1\\_55\\_0/libs/regex/doc/html/boost\\_regex/syntax/perl\\_syntax.html](http://www.boost.org/doc/libs/1_55_0/libs/regex/doc/html/boost_regex/syntax/perl_syntax.html).


- In case of **Select spot color by name** or **Select spot color by name from list**, you can simply type the name of the spot color(s) concerned or use the color picker  or the

Grab color button . Note that, in case of a list, you must enter the names one by one, each on a separate line. It is for example not possible to select two colors in the

document, and select them in one go, using the Grab color button . Instead, you must select the first color, grab it, then select the second color, and grab it and so on.

**3.** If the spot color should be selected regardless of its case (upper or lower case letters), select the **Ignore case** checkbox.

### **Example**

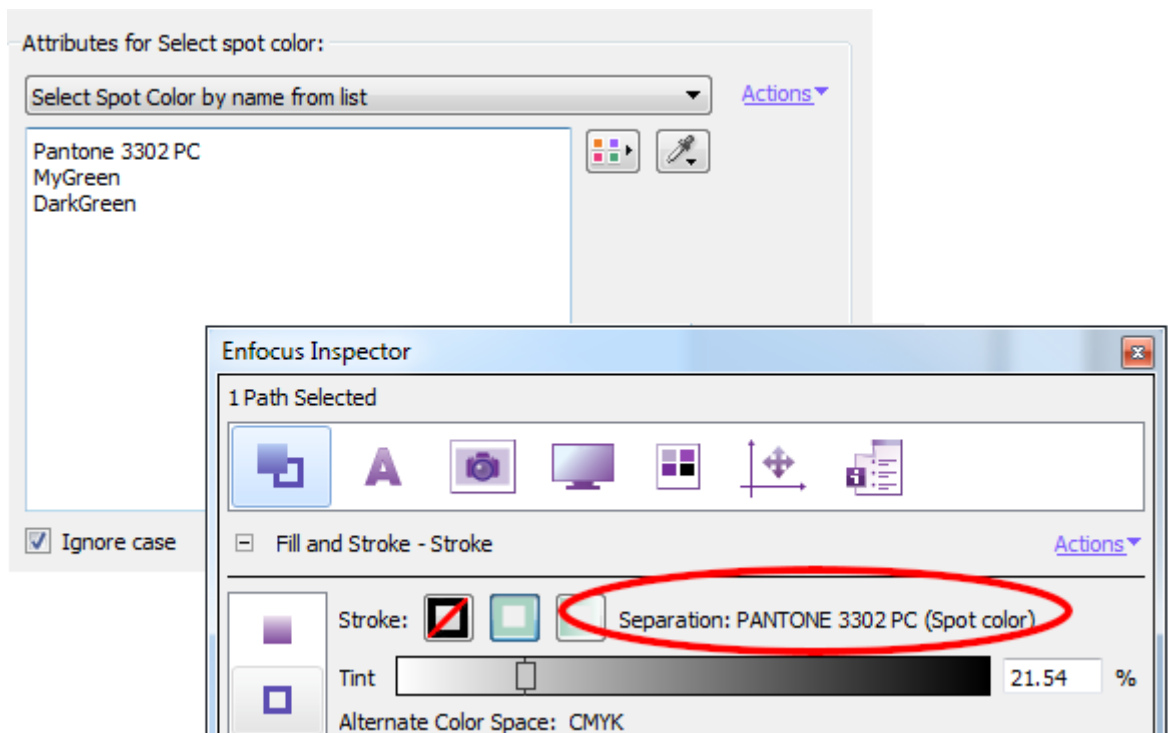

In this example, PitStop will search for three different spot color names (Pantone 3302 PC, MyGreen, DarkGreen, not taking into account the case of the names), which may (or may not) refer to the same color. Suppose the document contains a spot color called "PANTONE 3302 PC", then it will be found and selected.

#### **Related Actions**

- [Check spot color by name](#) on page 314
- [Check spot color by PANTONE library](#) on page 314

## 4.2.4.26. Select spot color by alternate color space

#### **Belongs to**

- **Category:** Color
- **Type:** Selections

#### **What it does**

Selects spot colors based on their alternate color space.

For example, select a spot color if its alternate color space is ICC tagged RGB or Device RGB.

#### **Example**

To convert a spot color's alternate color space to another color space, for example CMYK, proceed as follows:

```
Select spot color by alternate color space <!-- select the appropriate alternate color space(s) -->
```

```
Convert alternate color space to CMYK <!-- (See Convert alternate color space to CMYK
on page 106) -->
```

#### 4.2.4.27. Select spot color by alternate values

##### **Belongs to**

- **Category:** Color
- **Type:** Selections
- **Since Version:** 25.07

##### **What it does**

Selects spot colors based on their alternate values. You can choose whether to check the fill, stroke or both of the selected objects.



**Note:** The alternate values may vary with changes in brightness, but the spot color itself remains unchanged. Therefore, you must enter the color's **alternate values at 100% tint** to ensure accuracy.

You can find a spot color's alternate values in one of the following ways:

- Using the *Color Picker* button  or the *Grab color* button . Just make sure to select the object concerned with the PitStop selection tool. The alternative values will be filled in automatically (at 100% tint).
- Using the Color Picker in the PitStop Color Panel
- Using the Enfocus Inspector (but note that the shown values may not be the values at 100% tint!)



##### **DeviceN colors**

**Include spot color definitions from DeviceN spaces** is selected by default, but can be cleared to exclude DeviceN colors. Note that we advise using the Color Picker to find the alternate values of DeviceN colors, because in the Enfocus Inspector the alternate values of the *full deviceN color space* are shown, instead of the alternate values of the spot colors *inside* the DeviceN color space.

##### **Example**

The color of the selected object in the screenshot below is PANTONE Yellow C. The brightness of the color is 79.03%. You can see this in the Enfocus Inspector. However, these are not the values you need to enter in the attributes of this Action.

When you want to configure the Action, you better click the *Color Picker* button  or the *Grab color* button . In both cases, the correct values at 100% tint are filled in automatically.

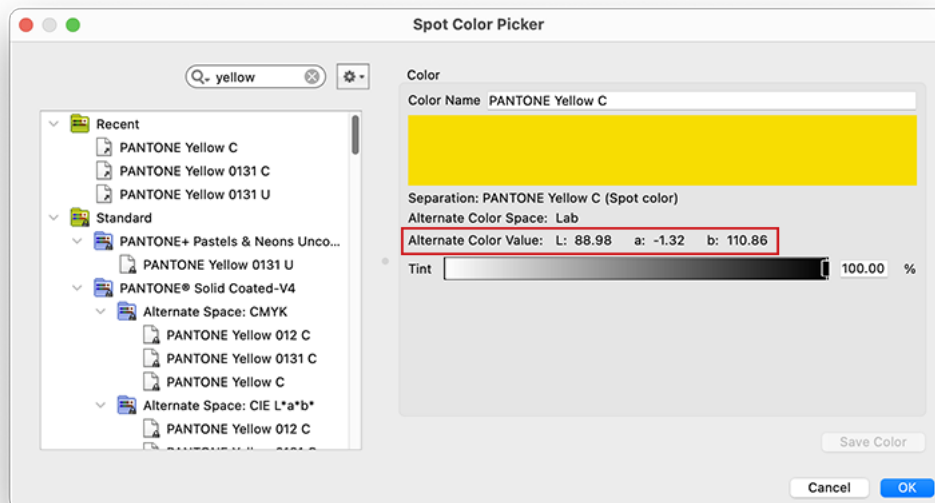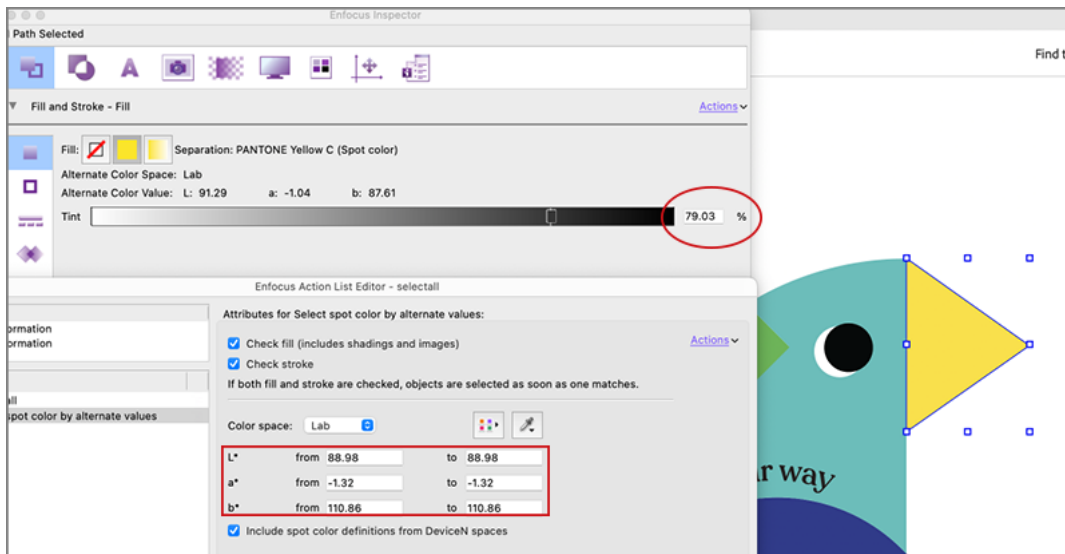

#### 4.2.4.28. Select tiling pattern contents according to parent object selection

**Belongs to**

- **Category:** Color
- **Type:** Selections
- **Since version:** 2020

**What it does**

Allows you to select the tiling pattern content depending on whether or not the parent object (e.g. text or line art) is selected.

There are two options:

- Select the tiling pattern content if the parent object is selected.
- Select everything except the tiling pattern content of parent objects that are not selected.

## 4.2.4.29. Select undefined DeviceN colorants

### ***Belongs to***

- **Category:** Color
- **Type:** Selections

### ***What it does***

Selects objects which use a DeviceN color space (including NChannel) that contains spot colors that are not defined in the colorants dictionary.

### ***About the DeviceN color space***

The DeviceN color space is defined as a list of names. These names can refer to the process colors (CMYK, RGB or Gray) or spot colors. Spot colors can have an alternate in CMYK for output devices that do not recognize their name, or they can just be a name without color definition. If the color is just a name (for example: "Silver" or "MySpot"), it cannot be used on other devices.

### ***Checking the colorants dictionary***

You can use the Enfocus PitStop Inspector to check whether a particular spot color has been defined in the colorants dictionary. Proceed as follows:

1. Select an object with the color you want to check (using the Enfocus Select Object Tool .
2. Click  to display the Enfocus Inspector and select  > . Next to the Fill icons, you will see "DeviceN (Spot + process colors)". Below you will see the number of components and their names.
3. Click the **Actions** link (in the top right corner) and select **Color Picker**.
4. In the left part of the Color Picker dialog, navigate to the **Document Spot Colors** folder. This folder contains all spot colors used in the document (not only the ones used for the selected object).
5. Select the spot color you want to check. If the color is just a color name, without a color definition, the Alternate Color Space is Gray.



**Related Actions**

[Check DeviceN colorants](#) on page 302

## 4.2.5. Settings

---

### 4.2.5.1. Override color management settings

**Belongs to**

- **Category:** Color; General
- **Type:** Settings

**What it does**

Replaces any color management settings from the PDF Profile or general PitStop preferences with the settings defined here. These settings will be used when converting colors.

### 4.2.5.2. Restore previous color management settings

**Belongs to**

- **Category:** Color; General
- **Type:** Settings

**What it does**

Allows you to revert to the previous color management settings (if you have changed them before, in the same Action List).

**Related Actions**

[Save color management settings](#) on page 515

### 4.2.5.3. Save color management settings

**Belongs to**

- **Category:** Color; General
- **Type:** Settings

**What it does**

Allows you to save the current color management settings (changed in the Action List).

**Related Actions**

[Restore previous color management settings](#) on page 515

## 4.3. Document

---

### 4.3.1. Changes

---

#### 4.3.1.1. Add unique document IDs

***Belongs to***

- **Category:** Document
- **Type:** Changes

***What it does***

Adds a unique document ID (generated at random) to your document.

***Related Actions***

[Check document unique IDs](#) on page 322

#### 4.3.1.2. Change document encoding

***Belongs to***

- **Category:** Document
- **Type:** Changes

***What it does***

Changes the PDF encoding to binary or ASCII.

***About document encoding***

ASCII encoding was formerly required to ensure that PDF files could be safely transported via e-mail or the Internet. However, most e-mail software in use today handles non-ASCII documents normally, eliminating the need to ASCII-encode your document.

***ASCII versus Binary encoding***

ASCII encoding may increase the file size, but allows you to edit the file manually.

Binary encoding makes the file smaller, but does not allow you to edit the file manually.

***Related Actions***

- [Check data format](#) on page 321
- [Select by document encoding](#) on page 443

### 4.3.1.3. Change initial view

#### **Belongs to**

- **Category:** Document
- **Type:** Changes
- **Since version:** 12 update 2

#### **What it does**

Allows the initial view settings of a PDF to be set or adjusted. The initial view is the way the PDF appears when it is opened in Adobe Acrobat or Adobe Reader (also when it is opened within a browser).

You can make a lot of changes, for example choose a particular page layout or magnification level, turn on or off certain window options, hide application toolbars or window controls ...



**Note:** The attributes for this Action, correspond to the Initial View options in Adobe Acrobat (See **File > Properties**, select the **Initial View** tab). If you do not change the attributes, these settings will be used. For a detailed overview of the meaning of each option, refer to the [Adobe help files](#).

Attributes for Change initial view:

[Actions ▼](#)

**Layout and Magnification**

Navigation tab: Don't change ▼

Page layout: Don't change ▼

Magnification: Don't change ▼

Open to page: Don't change

**Window Options**

Resize window to initial page: Don't change ▼

Center window on screen: Don't change ▼

Open in Full Screen mode: Don't change ▼

Show: Don't change ▼

**User Interface Options**

Menu bar: Don't change ▼

Tool bars: Don't change ▼

Window controls: Don't change ▼

Log Log ▼

#### 4.3.1.4. Change PDF text string encoding

**Belongs to**

- **Category:** Document, PDF 2.0
- **Type:** Changes
- **Since version:** 2020

**What it does**

Allows you to change the text encoding of a PDF to comply with a particular PDF version.

Choices are compatibility with the current document version, with PDF 1.7 (PDFDocEncoding or UTF-16BE) or with PDF 2.0 (ASCII or UTF-8).



**Note:** The changes you make using this Action will only affect newly saved content: earlier saved content is not touched.

**Related Actions**

- [Change inline image syntax](#) on page 144

#### 4.3.1.5. Impose document

**Belongs to**

- **Category:** Document
- **Type:** Changes
- **Since version:** 2021

**What it does**

Allows you to arrange the pages of the document so that once the printed signature sheets are folded and trimmed, the pages appear in the correct order.

**Note:**

- This Action expects that the number of pages of the input document is a multiple of 4. If that is not the case, empty pages will be added. For example, if the input PDF has 18 pages, 2 empty pages will be added. The imposed file will have 20 sheets in total (of which two are empty).
- If there are pages of different size, the sheet size is based on the largest page size.

**Important remark**

If you want to make changes to the resulting imposed document (for example add bleed), you can do so in the same Action List on condition that the additional Actions are preceded by a [Split Action List](#) Action.

**Attributes**

| Attribute                      | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Layout tab</b>              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Clip source page to <page box> | Determines what part of the source page should be visible on the imposed result. By default, this is the bleed box.                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Spread type                    | <p>Determines the order in which the pages will be arranged.</p> <p>Options:</p> <ul style="list-style-type: none"> <li>• <b>Printer:</b> Pages are arranged in such a way that when the document is <i>printed</i>, trimmed and assembled, the pages appear consecutively.</li> <li>• <b>Reader:</b> Pages are arranged in consecutive order, like when you <i>read</i> a book.</li> </ul>                                                                                                                                                                        |
| Binding edge                   | <p>Options:</p> <ul style="list-style-type: none"> <li>• <b>Get from document</b> (default)</li> <li>• <b>Left</b></li> <li>• <b>Right</b></li> </ul> <p>This option allows handling documents that have content in right-to-left script (like Arabic).</p>                                                                                                                                                                                                                                                                                                        |
| <b>Finishing tab</b>           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Gutter width ...               | Width of the space or margin between the pages on the resulting sheets. This value applies to all pages of the document.                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Limit bleed into gutter to ... | <p>Maximum amount of bleed allowed in the margin between the pages on the resulting sheets. If no limit is set, the entire gutter is used.</p> <p>This option can be useful to avoid issues with milling and gluing.</p> <hr/> <div>  <p><b>Note:</b></p> <ul style="list-style-type: none"> <li>• The maximum amount of bleed in the gutter area is limited to 1/2 of the gutter size.</li> <li>• If the gutter width is 0, this option is grayed out.</li> </ul> </div> <hr/> |
| Define sheet size manually     | <p>Allows you to determine the size of (the media box of) the imposed document. This can be useful if you want to add space for the printing marks, colorbars, gripper edge, etc.</p> <hr/> <div>  <p><b>Note:</b> The source pages are not automatically scaled to make them fit nicely on the new sheet size. If needed, you can run the <a href="#">Scale to fit page size</a> Action to do that (before imposing the document).</p> </div> <hr/>                            |

| Attribute                                   | Description                                                                                                                                                                                                                                                              |
|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Marks tab                                   |                                                                                                                                                                                                                                                                          |
| Insert print marks (trim, gutter, and fold) | <div><div>Puts print marks on the sheets.</div><div><div><b>Note:</b> If there were print marks on the original sheets, they are removed (regardless of this option).</div></div></div> |

Example

- Input file: A PDF file with 6 pages (1-6).
- Resulting printer spread (4 sheets):



- Resulting reader spread (4 sheets):



4.3.1.6. Make viewer preferences PDF/X compliant

Belongs to

- **Category:** Document
- **Type:** Changes

What it does

Allows you to change the viewer preferences of the PDF document, to make them PDF/X compliant.

PDF/X-1a:2003 and PDF/X-3:2003 require the view area, view clip, print area and print clip to be set to the media (or bleed) box.

As of PitStop 2022 it's also possible to remove the viewer preferences (all or only the one(s) of your choice).

**Related Actions**

[Check PDF/X viewer preferences](#) on page 327

### 4.3.1.7. Optimize document structure

**Belongs to**

- **Category:** Document
- **Type:** Changes

**What it does**

Guarantees that the underlying document structure of your PDF is efficient, for example by improving the compression of the document as required.

### 4.3.1.8. Optimize stream compression

**Belongs to**

- **Category:** Document
- **Type:** Changes
- **Since:** 25.07

**What it does**

Ensures that all content streams are efficiently compressed. This may reduce the file size of a document.

### 4.3.1.9. Overlay PDF

**Belongs to**

- **Category:** Document
- **Type:** Changes
- **Since:** 2020

**What it does**

Enables you to use a PDF as overlay or underlay in another document.

**Note:**

- This Action provides the same functionality as the Place PDF tool (part of the PitStop Edit toolset) in PitStop Pro.
- There's also an Overlay PDF app that can be used in a Switch workflow. It's available for download on the [Enfocus Appstore](#).

## Tabs

| Tabs   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source | <p>The <b>Source File</b> is the file that will be added to the currently opened PDF. It will be placed on top of the current PDF, unless you have selected the <b>Put source page content behind target page content</b> checkbox on the Misc tab.</p> <p>You should specify the source file via the <b>PDF file path</b>, which refers to the location of the PDF. You can browse to the PDF file or you can enter the file path, optionally using variables.</p> <p><b>Use page box</b> allows you to set the page box that you want to use.</p> <p>Finally, you should choose the preferred behavior (<b>Repetition Policy</b>) in case the added PDF file has fewer pages than the target PDF file. There are three options:</p> <ul style="list-style-type: none"> <li>• <b>Stop overlaying after last source page is used</b> (default option): if selected, the last page(s) of the target document won't have an overlay.</li> <li>• <b>Repeat last page</b>: the last page of the source file will be used as overlay for the last page(s) of the target document (until all pages have an overlay).</li> <li>• <b>Repeat all pages</b>: PitStop will add overlay pages, starting again from the beginning of the source file until all pages have an overlay.</li> </ul> |
| Target | <p>The <b>Target Area</b> indicates where the overlay should be placed. You can enter the coordinates of the area (manually, or grab from a selection), or you can specify the target page box.</p> <p>The <b>Scaling options</b> allow you to specify how the page should be scaled, if the added PDF file has a different page size than the target file. Options are:</p> <ul style="list-style-type: none"> <li>• Do not scale</li> <li>• Scale to fit, preserving aspect ratio</li> <li>• Fit width / fit height, preserving aspect ratio</li> <li>• Scale to fill, preserving aspect ratio (scales the source page enough to fit the larger dimension of the target page while preserving the source page's aspect ratio)</li> </ul> <p>You can also determine how the source content should be <b>aligned</b> to the target area (center, top, bottom, upper left, right, ...)</p>                                                                                                                                                                                                                                                                                                                                                                                           |
| Misc   | <p>On this tab, you have three options:</p> <ul style="list-style-type: none"> <li>• <b>Change the opacity</b> of the source by moving the slider to the left. The default is 100% opacity.</li> <li>• <b>Put source page content behind target page content</b> to have an underlay instead of an overlay.</li> <li>• <b>Place as isolated transparency group</b> to avoid that objects in the transparency group are affected by objects underneath.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |



| Tabs |                                                                                                                                                                                                                                                                                                                           |
|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|      | The content of the source page is put in a form. By default this form is a non-isolated transparency group, meaning that overprint, knock-out, ... will have an affect. If you don't want this, so if you want to preserve the initial view of the added PDF, you should enable this checkbox. For an example, see below. |

Remark




**Note:** The target page content for both overlays and underlays includes the content generated by previous runs of the Action. This is important in the case of underlays where, for an Action list with multiple underlays, the drawing order of the content generated by the instances of this Action is the reverse of the order in which the Actions themselves appear in the Action List.

Example:

The following Action List is run on a cover page which only contains a title in white. Both Actions have **Put source page content behind target page content** enabled.


```
Overlay PDF      (source file: PDF with an image of green clover, 80% opaque)
Overlay PDF      (source file: PDF with an image of roses, 100% opaque)
```

The result is a PDF with an image of roses in the background and the green clover on top of it.

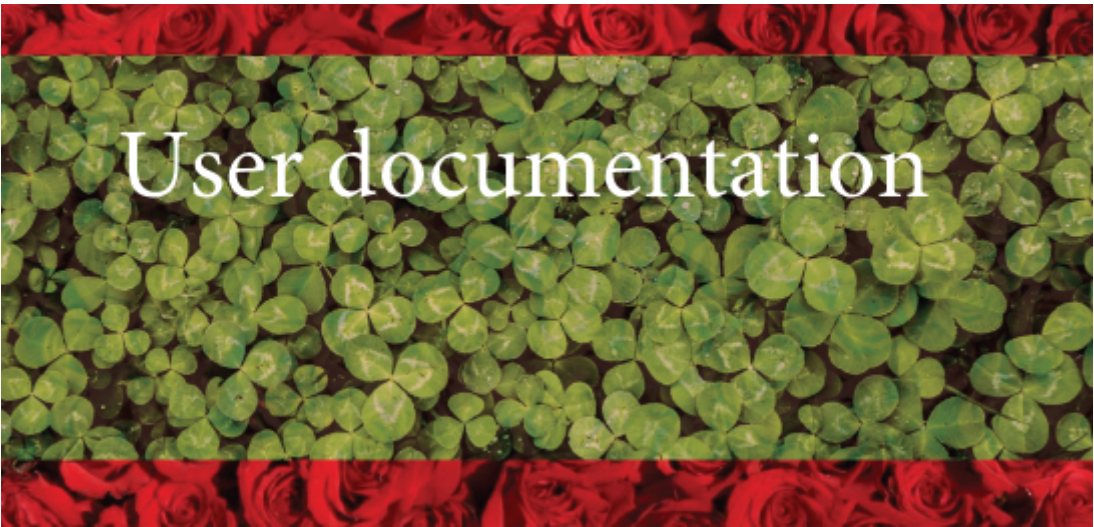


Example of the "Place as isolated transparency group" option


In this example, the added PDF contains the following CMYK objects:

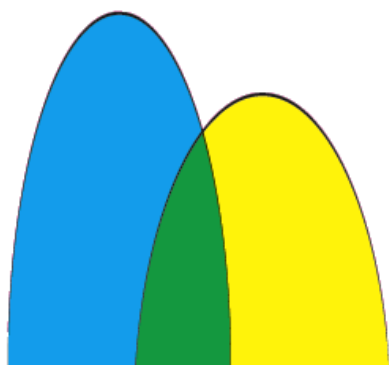

Below you can see how the result will look when the added PDF is placed on a magenta background. This is the default situation, so with **Place as isolated transparency group** unchecked. There is interaction with the magenta background, so the objects in the added PDF now look different than in the original PDF.

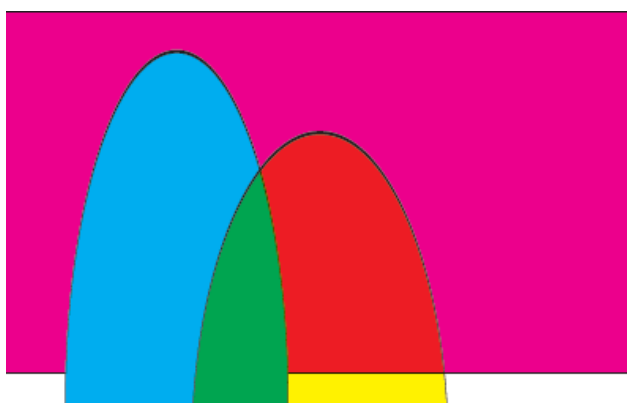

However, if the same PDF is added, but with **Place as isolated transparency group** selected in the Overlay PDF Action, there is no interaction with the magenta background, and the objects look the same as in the original PDF.

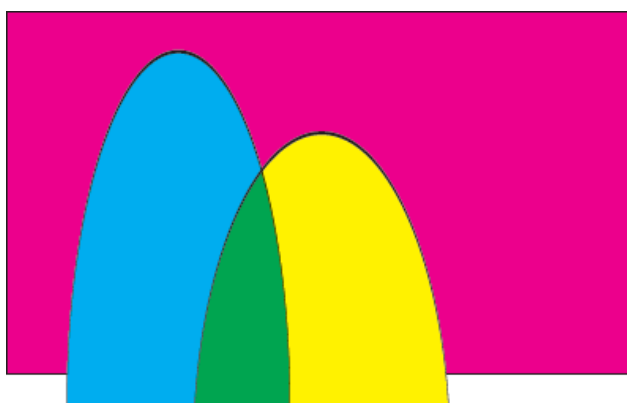

#### 4.3.1.10. Remove alternate presentations

*Belongs to*

- **Category:** Document

- **Type:** Changes
- **Since:** 2022

**What it does**

Removes the AlternatePresentations entry from the name dictionary of the selected document.  
This is a fix for PDF/X-6, as PDF/X-6 does not allow alternate presentations.

4.3.1.11. Reorder pages

**Belongs to**

- **Category:** Page; Document
- **Type:** Changes
- **Since Version:** 2017

**What it does**

Allows you to change the order of the pages in a document.  
There are three preconfigured options:

- Reverse pages (first page becomes last etc)
- Swap first and last page
- Swap even and odd pages

When you select one of these options, you can immediately see the new page order in the Preview section at the bottom of the pane.

Apart from that, you can configure for each individual page what the new page number should be. To do so, you should select 'Custom' from the list of options and enter the page numbers in the preferred order (one by one, or using the notation explained in the GUI).



**Note:**

- Any 'forgotten' pages (not listed in the custom order), will be added at the end.
- If a page is by accident listed twice, the first occurrence counts.

By default, page labels are re-ordered together with the pages, unless you clear the **Move page labels** checkbox.

**Examples**

In the table below you can find some examples. Remember that you can enter any combination you want; you're warned about syntax errors and you can preview the page order for a document of up to 1000 pages.

| Notation                      | Meaning                                                                                                           |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------|
| One single page number<br>5   | Put this page first, then add the other pages without changing the order.<br><b>5, 1, 2, 3, 4, 6, 7, 8, 9, 10</b> |
| R followed by one page number | Put this page counting from the back first, then add the other pages without changing the page order.             |

| Notation                                                             | Meaning                                                                                                                                                                                                               |
|----------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| R5                                                                   | 6, 1, 2, 3, 4, 5, 7, 8, 9, 10                                                                                                                                                                                         |
| One single page number followed by three dots<br>5...                | Put this page first, add the following pages till the end of the document, finally add the missing pages (all without changing the page order).<br>5, 6, 7, 8, 9, 10, 1, 2, 3, 4                                      |
| R number followed by three dots<br>R5...<br>R1...                    | Put this page counting from the back first, then put the following pages counting from the back of the document, finally add the other pages (7-10)<br>6, 5, 4, 3, 2, 1, 7, 8, 9, 10<br>10, 9, 8, 7, 6, 5, 4, 3, 2, 1 |
| (number, number) ...<br>(2,1)...<br>(6,5)...                         | Swap the pages in between the brackets and do the same for the rest of the document. Other pages are added at the end.<br>2, 1, 4, 3, 6, 5, 8, 7, 10, 9<br>6, 5, 8, 7, 10, 9, 1, 2, 3, 4                              |
| R number (number-number) number (number, number)<br>R1 (3-6) 2 (8,7) | Put the last page first (10), then a page range (pages 3 to 6), then a particular page (2), then swap even and odd pages (swap 8 and 7), add leftover pages (1, 9).<br>10, 3, 4, 5, 6, 2, 8, 7, 1, 9                  |

#### Use case

When receiving PDFs in spreads, after having split the pages and added marks and bleeds, page 1 (which is actually the back cover) should be moved to the last page. Using this Action, that's very easy.

#### Remark

Due to a refresh issue in Adobe Acrobat, sometimes the page order seems not to be changed after successfully running the Action. Saving and reopening the document may solve the issue.

## 4.3.2. Checks

### 4.3.2.1. Check access control

#### Belongs to

- **Category:** Doc
- **Type:** Checks

#### What it does

Checks whether the document is protected in any way, for example with passwords, certificate IDs or file permission settings.

As of PitStop 2022, this Action has a number of attributes. You can now either check for the presence of a permission dictionary or for the presence of certain permission types (UR, UR3, DocMDP, DocMDP with a Signature references dictionary containing DigestLocation, DigestMethod or DigestValue).

Note that this check is useful to check for PDF/X-6 compliance (which allows UR3 and DocMDP).

#### 4.3.2.2. Check Certified PDF state

**Belongs to**

- **Category:** Doc
- **Type:** Checks

**What it does**

Checks the Enfocus Certified PDF status of a PDF.

You can log whether

1. The Certified Preflight Profile matches a particular Profile. You can select a Profile from the database on your computer or from your disk/network (which hasn't been imported yet in PitStop).
2. The PDF being checked is Preflighted or Preflighted without errors.
3. All saved sessions or only the last saved session must be valid.



---

**Note:** A session is invalid if it refers to changes made by an external program.

---

For more information, refer to the chapter "Working with Certified PDF documents" in [the PitStop Pro Reference Guide on the Enfocus website](#).

For more information, refer to the chapter "Working with Certified PDF documents" in the PitStop Pro Reference Guide.

**Related Actions**

See also [Remove Certified PDF workflow information](#) on page 275

#### 4.3.2.3. Check contents compression

**Belongs to**

- **Category:** Doc
- **Type:** Checks

**What it does**

Checks if the PDF contains streams that are not compressed with some content compression method (CCITT, Flate, DCT or JBIG2). Compression allows you to make the file smaller.

#### 4.3.2.4. Check data format

**Belongs to**

- **Category:** Doc
- **Type:** Checks

**What it does**

Checks if the data format of a PDF is either Binary (=non-ASCII) or ASCII.

ASCII-encoding increases the file size, but allows files to be sent through older network protocols that cannot handle non-alphanumeric characters.

**ASCII versus Binary encoding**

ASCII encoding may increase the file size, but allows you to edit the file manually.

Binary encoding makes the file smaller, but does not allow you to edit the file manually.

**Related Actions**

- [Select by document encoding](#) on page 443
- [Change document encoding](#) on page 120

#### 4.3.2.5. Check document unique IDs

**Belongs to**

- **Category:** Doc
- **Type:** Changes

**What it does**

Allows you to check if the PDF has a unique document ID.

**Related Actions**

[Add unique document IDs](#) on page 120

#### 4.3.2.6. Check file identifiers in document XMP metadata

**Belongs to**

- **Category:** Doc
- **Type:** Checks

**What it does**

Checks the PDF for missing file identifiers in the document metadata, for example: VersionID, DocumentID or RenditionClass.

**About XMP metadata**

XMP metadata is descriptive information about the file embedded in the PDF, for example the name of the author, keywords, copyright information... XMP refers to labeling technology that is used, i.e. Adobe's Extensible Metadata Platform. You can view the XMP metadata in a file's Document Properties in Acrobat (Click the **Additional Metadata** button, then select **Advanced**).

**Related Actions**

- [Check presence of document metadata stream](#) on page 364
- [Check if date is present in document XMP metadata](#) on page 358
- [Set XMP file identifiers](#) on page 194

### 4.3.2.7. Check for alternate presentations

**Belongs to**

- **Category:** Doc
- **Type:** Checks

**What it does**

Checks whether the PDF contains alternate presentations.

This mechanism is used for slideshow displays and is therefore not desired in a print document.

### 4.3.2.8. Check for garbage after the PDF End-Of-File marker %%EOF

**Belongs to**

- **Category:** Doc
- **Type:** Checks

**What it does**

Checks whether the PDF contains undesired characters after the end-of-file marker EOF.

If this is the case, the PDF is malformed. The last line of a PDF should only contain the EOF marker.

To solve this problem, you can do one of the following:

- Open the PDF in Adobe Acrobat and save it (using **File > Save As**).
- Process the PDF with PitStop Server (with the option **Full Save** enabled).

**Related Actions**

[Check for unreadable data in front of the PDF header signature](#) on page 323

### 4.3.2.9. Check for file structure problems

**Belongs to**

- **Category:** Doc

- **Type:** Checks

**What it does**

Checks whether the structure of the PDF conforms to the file structure as defined by the PDF specification of your choice.

Options are:

- PDF/A-1
- PDF/A-2
- PDF/X-6

#### 4.3.2.10. Check for unreadable data in front of the PDF header signature

**Belongs to**

- **Category:** Doc
- **Type:** Checks

**What it does**

Checks for unreadable data in front of the PDF header signature.

**Related Actions**

[Check for garbage after the PDF End-Of-File marker %%EOF](#) on page 323

#### 4.3.2.11. Check if compression filters are PDF/X compliant

**Belongs to**

- **Category:** Doc
- **Type:** Checks

**What it does**

Checks whether compression filters used in the PDF are compliant with a specific PDF/X version.

Select the desired PDF/X version:

- PDF/X-1a:2001
- PDF/X-3:2002
- PDF/X-1a:2003
- PDF/X-3:2003
- PDF/X-4
- PDF/X-4p
- PDF/X-6
- PDF/X-6p
- PDF/A-1
- PDF/A-2



#### 4.3.2.12. Check if document does not need repair

***Belongs to***

- **Category:** Doc
- **Type:** Checks

***What it does***

Checks whether a PDF is damaged and needs to be repaired when it is opened.

A PDF file can be damaged, for example, if you downloaded it from the Internet and the file transfer was incomplete.

If a PDF is damaged, you can try to redistill it or save it in Adobe Acrobat, using **File > Save as**. If this doesn't solve the problem, you will have to recreate the PDF from the source file, or download it again (if the problem was caused by a corrupt download).

#### 4.3.2.13. Check if document has enough high-ASCII bytes in the PDF header

***Belongs to***

- **Category:** Doc
- **Type:** Checks

***What it does***

Checks if the PDF header contains at least 4 high-ASCII bytes in the PDF header.

There are three checkboxes:

- **Check header has at least 4 high-ASCII bytes**
- **Check for single EOL character after version header**
- **Check version header format**

The PDF specs require that there should be 4 contiguous high-ASCII bytes in the PDF header, so to check the compliance with the PDF specs, the first checkbox should be selected.

The PDF/A specs require that the 4 contiguous high-ASCII bytes in the PDF header should be the first bytes immediately after the header line, so to check the compliance with PDF/A, checkbox 1 and checkbox 2 should be selected.

For PDF/A-2 and PDF/X-6, all three checkboxes should be selected.

For a check for PDF/A-1, only the first checkbox should be selected.

#### 4.3.2.14. Check if document is optimized for Fast Web View

***Belongs to***

- **Category:** Doc
- **Type:** Checks

**What it does**

Verifies if the document is optimized for the Web.

A document that has been optimized for the Web often has a significantly smaller file size. This is achieved by replacing images that occur more than once in the document with pointers to the first instance of these images. Also, the PDF document is restructured to allow page-at-a-time downloading over the Internet: only the page viewed by the user is downloaded, thus avoiding long loading times for larger PDF documents.

### 4.3.2.15. Check if document requires PostScript LanguageLevel 3

**Belongs to**

- **Category:** Doc
- **Type:** Checks

**What it does**

Checks a PDF to see if it contains PostScript Level 3-specific features such as transparency or smooth shadings.

**About Adobe PostScript**

Adobe PostScript is a page describing language developed by Adobe in 1985. The language has changed over the years, resulting in different versions:

- Adobe PostScript Level 1: first, original version.
- Adobe PostScript Level 2: enhanced version; added support for different page sizes and better color printing.
- Adobe PostScript LanguageLevel 3: improved handling of graphics, supports more fonts, and speeds up printing.

For more information, refer to <http://www.adobe.com/products/postscript/pdfs/PLRM.pdf>.

### 4.3.2.16. Check number of pages

**Belongs to**

- **Category:** Page;Doc
- **Type:** Checks

**What it does**

Checks the number of pages in a PDF.

You can for example check if there are less/more than x page(s), or if the PDF contains an odd/even number of pages ...

### 4.3.2.17. Check object compression

***Belongs to***

- **Category:** Doc
- **Type:** Checks

***What it does***

Checks the compression of the PDF structure (possible as of PDF 1.5).

You can also check if the compression is compliant with PDF/X.

***About object compression***

In a PDF, objects have content streams that define (a part of) the object. These content streams can be compressed in order to create smaller files, so this is mostly used if a PDF is to be put on a website. As older RIPS may have problems with this compression, this Action allows you to check if the PDF contains such compressed streams, which you can afterwards remove if required.

***Related Actions***

- [Remove object compression](#) on page 277
- [Check optimal compression](#) on page 334

### 4.3.2.18. Check objects by tiling pattern

***Belongs to***

- **Category:** Color
- **Type:** Checks
- **Since version:** 2020

***What it does***

Allows you to check for tiling patterns in the fill or stroke of text and line art, or in the fill of image masks. You can search for colored or uncolored tiling patterns or both.



---

**Note:** You should select at least one checkbox above the divider and one below the divider.

---

***Related Actions***

- [Select by tiling pattern](#) on page 430

- [Select tiling pattern contents according to parent object selection](#) on page 441

#### 4.3.2.19. Check PDF text string encoding

**Belongs to**

- **Category:** Document, PDF 2.0
- **Type:** Checks
- **New since:** PitStop 2022

**What it does**

Allows you to check if the text encoding of a PDF complies with a particular PDF version. Choices are compatibility with the current document version, with PDF 1.7 (PDFDocEncoding or UTF-16BE) or with PDF 2.0 (ASCII or UTF-8).

**Related Actions**

- [Change PDF text string encoding](#) on page 122

#### 4.3.2.20. Check PDF/X viewer preferences

**Belongs to**

- **Category:** Doc
- **Type:** Checks

**What it does**

Checks if the PDF document complies with the viewer preferences as required by the PDF/X specifications.

PDF/X-1a:2001 and PDF/X-3:2002 have no special viewer requirements.

PDF/X-1a:2003, PDF/X-3:2003, PDF/X-4 and PDF/X-4p require the view area, view clip, print area and print clip to be set to the media (or bleed) box. If set to the bleed box, PDF/X-3:2003 requires that at least one page has a bleed box, whereas PDF/X-4(p) requires that all pages have a bleed box.

PDF/X-6 and PDF/X-6p do not allow a view area, view clip, print area or print clip.

**Related Actions**

[Make viewer preferences PDF/X compliant](#) on page 124

### 4.3.3. Informs

---

#### 4.3.3.1. Gather filters information

**Belongs to**

- **Category:** Doc
- **Type:** Informs

**What it does**

Collects information about:

- The data format of the file (ASCII/binary)
- Whether or not compression is used
- The compression filters (if any), for example: ZIP, JPEG, LZW, ...

This information is presented in the Preflight Report under **General File Information > Compression**.

**Related Actions**

[Check data format](#) on page 321

[Check contents compression](#) on page 321

#### 4.3.3.2. Gather Output Intent information

**Belongs to**

- **Category:** Doc
- **Type:** Informs

**What it does**

Collects information about the Output Intents used in a PDF document and presents it in the log.

In the report, you can find the following information (if Output Intents are used):

- ICC profile or ICC characterization name
- Registry name

- Additional information

## 4.3.4. Selections

---

### 4.3.4.1. Select by document encoding

***Belongs to***

- **Category:** Doc
- **Type:** Selections

***What it does***

Selects a document based on its encoding (binary or ASCII).

***About document encoding***

ASCII encoding was formerly required to ensure that PDF files could be safely transported via e-mail or the Internet. However, most e-mail software in use today handles non-ASCII documents normally, eliminating the need to ASCII-encode your document.

***ASCII versus Binary encoding***

ASCII encoding may increase the file size, but allows you to edit the file manually.

Binary encoding makes the file smaller, but does not allow you to edit the file manually.

***Related Actions***

- [Check data format](#) on page 321
- [Change document encoding](#) on page 120

### 4.3.4.2. Select document

***Belongs to***

- **Category:** Doc
- **Type:** Selections

***What it does***

Allows you to select the whole document.

## 4.4. General

---

### 4.4.1. Changes

---

#### 4.4.1.1. Change object order

***Belongs to***

- **Category:** General
- **Type:** Changes

***What it does***

Changes the layer position of an object in a PDF.

You can choose to move the object forwards, backwards, to the front, or to the back depending on where you want your object to appear in the layer stack.

#### 4.4.1.2. Copy attributes of selected objects

***Belongs to***

- **Category:** General
- **Type:** Changes
- **Since Version:** 25.07

***What it does***

Allows you to copy the attributes of the selected objects to a clipboard. You should give the clipboard a name (by default: Untitled 1), to avoid confusion when copy-and-pasting different selections in one Action List. You can use up to 1,000 clipboards if you wish, however it is important to realize that these clipboards are not saved; they are only used while the Action List in which they are used is run.

This Action should be preceded by a selection (i.e. to select the object you want to copy the attributes from) and followed by [Paste attributes to selected objects](#) in the same Action List. You cannot copy attributes to a clipboard in one Action List and then paste them within another Action List.

***How to proceed?***

1. Create a new Action List.
2. Add a select Action that select the objects of which you want to copy the attributes.
3. Add a [Copy attributes of selected objects](#) Action to your Action List and enter a name for the clipboard to which the attributes will be copied.
4. Add an Action to select the objects that should get the attributes that are copied to the clipboard.
5. Add a [Paste attributes to selected objects](#) Action and determine which attributes should be pasted to the selected objects.

**Example Action List**

The following Action List copies the attributes of the purple colored line art to a clipboard (CLIP1) and pastes the fill color attribute to all other line art and to all text.

```
Select fill color -- purple
Select line art
AND
copy attributes of selected objects to clipboard CLIP1
Select line art
Paste attributes from CLIP1 -- select Fill - Fill color
Select text segments
Paste attributes from CLIP1 -- select Fill - Fill color
```

**Before:****After:**





### 4.4.1.3. Copy or cut objects to clipboard

#### ***Belongs to***

- **Category:** General, Operators
- **Type:** Changes
- **Since Version:** 13 update 1

#### ***What it does***

Allows you to cut or copy the selected objects to a clipboard. You should give the clipboard a name (by default: Untitled 1), to avoid confusion when copy-and-pasting different selections in one Action List. You can use up to 1,000 clipboards if you wish, however it is important to realize that these clipboards are not saved; they are only used while the Action List in which they are used is run.

This Action should be preceded by a selection (i.e. to select the object you want to cut or copy) and followed by [Paste objects from clipboard](#) on page 93 in the same Action List. You cannot cut or copy something to a clipboard in one Action List and then paste it within another Action List.

#### ***How to proceed?***

1. Create a new Action List.
2. Add a select Action that select the objects you want to cut or copy.
3. Add a *Cut or copy objects to clipboard* Action to your Action List and set the attributes (select Cut or Copy and type an appropriate name).
4. Add a [Select pages](#) on page 484 Action to indicate the pages on which the selection should be pasted (if not yet selected in step 1, e.g. if you added "Select all" in step 1).
5. Add a [Paste objects from clipboard](#) on page 93 Action and set the attributes on the different tabs (e.g. to define the position of the pasted objects).



#### **Note:**

- Action Lists are executed page after page. As a consequence, you can only paste objects to the following pages. For example, if you copy an object that is present on page 3, you can paste it on page 3, 4, 5, ... but not on page 1 or 2.
- If there is nothing to select to cut or copy (i.e. the select Action of step 2 in the above procedure result in an empty selection), the content of the clipboard is not overwritten

with an "empty" set of objects! The previous content (if any) is preserved and will be pasted once more. If you do not want this, you can select the **Clear clipboard after paste** checkbox in the attributes of [Paste objects from clipboard](#) on page 93 Action.

---

**Related Action**

- [Paste objects from clipboard](#) on page 93

#### 4.4.1.4. Flatten forms

**Belongs to**

- **Category:** General
- **Type:** Changes
- **Since Version:** 2023 update 1

**What it does**

Flattens forms into the page or parent content.



**Note:** Forms will not be flattened when there are transparency side effects, like overprint or knockout, because that would change how the file looks. See the example below.

---

Note that using forms, you can reference objects instead of storing them multiple times in a document. Hence, flattening forms may increase file size and memory consumption, especially when this Action is run on complex files.


**About forms**

Forms are rectangular frames in a PDF which contain objects, for example an image or a placed PDF. Forms do not have a fill or stroke, but they can have transparency settings that determine how the objects inside the form look (e.g. a knockout setting).

For more information, refer to [the PitStop Pro Reference Guide on the Enfocus website](#) (See Chapter "Editing forms").

**Example**

The example below is an example of a form that is a transparency group. The Flatten forms Action does not work on this type of forms.

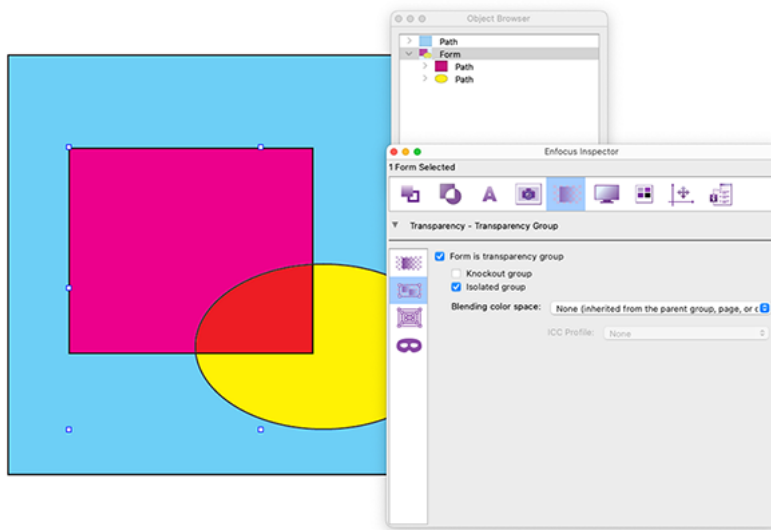

#### 4.4.1.5. Normalize line weight

##### ***Belongs to***

- **Category:** General; LineArt; Position and size
- **Type:** Changes

##### ***What it does***

Normalizes paths where a transformation matrix caused distortions, by removing the distortion, giving the path a uniform line weight equal to the average reported in the Inspector. The Action also works on sheared paths.

##### ***Related Actions***

- [Change line weight](#) on page 161
- [Select by line weight](#) on page 457
- [Check line weight](#) on page 346

#### 4.4.1.6. Paste attributes to selected objects

##### ***Belongs to***

- **Category:** General
- **Type:** Changes
- **Since Version:** 25.07

##### ***What it does***

Allows you to paste attributes from the clipboard to the selected objects. You should specify which attributes should be pasted.

This Action must be preceded by a *Copy pasted attributes to selected objects* Action (that copies the attributes to the clipboard) and a "select" Action (that indicates to which objects the attributes should be pasted) in the same Action List.

If there are several "copy attributes" Actions in the Action List, you may want to give each of the clipboards an appropriate name, to make sure the different attributes are pasted to the correct objects.

### Attributes

By default, all checkboxes in all categories are selected. There are 6 categories: Line Art, Text, Stroke, Fill, Prepress and Transparency.


To collapse or expand a category, single-click the category concerned.

To select/clear all checkboxes inside a category in one go, double-click the category concerned. As a result, if ...

- All checkboxes are selected, they will all be cleared.
- All checkboxes are cleared, they will all be selected.
- Some checkboxes are cleared and some are selected, they will all be selected.



**Note:** If a variable is associated with an item in a category, the checkbox changes into a blue box with a white dash and it cannot be selected or cleared anymore, hence double-clicking the category has no effect on such items.



### How to proceed?

1. Create a new Action List.
2. Add a select Action that select the objects of which you want to copy the attributes.
3. Add a *Copy attributes of selected objects* Action to your Action List and enter a name for the clipboard to which the attributes will be copied.
4. Add an Action to select the objects that should get the attributes that are copied to the clipboard.
5. Add a *Paste attributes to selected objects* Action and determine which attributes should be pasted to the selected objects.

### Example Action List

The following Action List copies the attributes of the purple colored line art to a clipboard (CLIP1) and pastes the fill color attribute to all other line art and to all text.

```
Select fill color -- purple
Select line art
AND
copy attributes of selected objects to clipboard CLIP1
Select line art
Paste attributes from CLIP1 -- select Fill - Fill color
Select text segments
Paste attributes from CLIP1 -- select Fill - Fill color
```

**Before:**



**After:**



#### 4.4.1.7. Paste objects from clipboard

***Belongs to***

- **Category:** Add, General, Operators
- **Type:** Changes
- **Since Version:** 13 update 1

***What it does***

Allows you to paste objects from the clipboard to one or more selected pages. You can paste them multiple times (with fixed distances or distributed across a distance) as required and indicate where they should be placed.

This Action must be preceded by a "copy/cut" Action (that moves the objects to the clipboard) and a "select" Action (that indicates where the objects should be pasted) in the same Action List.

If there are several "copy/cut" Actions in the Action List, you may want to give each of the clipboards an appropriate name, to make sure the different objects are pasted on the correct pages.

### How to proceed?

1. Create a new Action List.
2. Add a select Action that select the objects you want to cut/copy-and-paste.
3. Add a [Copy or cut objects to clipboard](#) on page 131 Action to your Action List and set the attributes (select Cut or Copy and type an appropriate name).
4. Add a [Select pages](#) on page 484 Action to indicate the pages on which the selection should be pasted (if not yet selected in step 2 -if you added "Select all" in step 2, step 4 is redundant).
5. Add a *Paste objects from clipboard* Action and select the name of the clipboard (as entered in step 2). Switch to the different tabs to define the region and the position of the copied objects (see table below).



**Note:** Action Lists are executed page after page. As a consequence, you can only paste objects to the following pages. For example, if you copy an object that is present on page 3, you can paste it on page 3, 4, 5, ... but not on page 1 or 2.

### Tabs

| Tabs       | On this tab, do the following:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Graphics   | <p>Select the clipboard that contains the objects to be pasted.</p> <p>Determine whether or not the clipboard should be cleared after the object was pasted. This option determines what happens if there are no objects to be copied (= if the select Action in step 2 of the above procedure results in an empty selection).</p> <ul style="list-style-type: none"> <li>• If checked, the clipboard will be empty, so nothing will be pasted.</li> <li>• If cleared, the clipboard will still contain content from the previous page and that content will be pasted.</li> </ul>                                                               |
| Attributes | Determine if the objects should be pasted in the foreground or in the background of the document.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Region     | <p>Determine the region where the objects should be moved to. The region is defined based on the page box of your choice and you can define margins within that page box, by grabbing the offsets from a selected area (using the <b>Grab position</b> button ).</p> <p>You can also specify a specific area the objects should not be placed in, also based on a page box and with the option to set margins.</p> <div> <p><b>Note:</b> The settings on this tab are only used if <b>Move graphic elements</b> is selected on the Position tab. If this is not the case, the original location of the graphic elements is preserved.</p> </div> |
| Repeat     | If the objects should be pasted more than once on a page, change <b>No repeat</b> to:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

| Tabs     | On this tab, do the following:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|          | <ul style="list-style-type: none"> <li>• <b>Distribute/Repeat fixed number of graphic elements</b> if you want to determine how often the copied objects should be pasted (e.g. 6 times horizontally, 4 times vertically)</li> <li>• <b>Distribute/Repeat graphic elements in region</b> if you want PitStop to fill the region (specified on the Region tab).</li> </ul> <p>If you want PitStop to divide the pasted objects evenly across the defined region, choose "distribute" rather than "repeat". In case of "Distribute graphic elements in region", you can choose the maximum or minimum distance between the pasted objects.</p> <p>If you choose "repeat", you should define the exact distance between the pasted objects yourself.</p> <p>The distance can be between the bounding boxes of the pasted objects (choose: <b>Between edges</b>) or from center to center (choose: <b>Between centers</b>).</p> <hr/> <div data-bbox="571 846 638 913"> </div> <div data-bbox="659 853 1390 913"> <p><b>Note:</b> Remember that you can use Smart Preflight variables to define the distances.</p> </div> <hr/> |
| Position | <p>If the selected objects should be moved, select <b>Move graphic elements</b>. Indicate how the objects should be positioned relative to the chosen region. Note that, when adding multiple copies, the same corner should be used to position the graphic elements in the region.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

#### Related Action

- [Copy or cut objects to clipboard](#) on page 131
- [Add copied graphics](#) on page 76

### 4.4.1.8. Rasterize page content, keeping text

#### Belongs to

- **Category:** General
- **Type:** Changes

#### What it does

Allows you to rasterize complex graphics in PDF, for example to reduce the rendering complexity for a file for viewing on the iPad.

You can set the resolution of the generated bitmap (ppi), the preferred compression (JPEG, JPEG 2000, ZIP, None), the required quality (maximum, high...), and decide whether or not to keep line art unchanged.

New since PitStop 13 update 2 is the option to turn off anti-aliasing. This is useful to avoid thin white lines that may appear when rasterizing images.

#### 4.4.1.9. Rasterize selection

##### ***Belongs to***

- **Category:** General
- **Type:** Changes
- **Since Version:** 2019

##### ***What it does***

Allows you to rasterize selected content.

Rasterizing objects means converting them to an image. This is typically done to reduce the complexity of a file to speed up processing.

Note that it may not be possible to convert multiple objects to one image: PitStop tries to create as few images as possible without changing how the file looks. To achieve this, it takes into account layers, color space, position of the objects etc. For example, rasterizing two objects with two different color spaces, will result in two images; objects on different layers will result in different images, and objects that do not overlap will only become one image if no other objects are inbetween (because this would change how the file looks).

Note that this functionality is also integrated in PitStop Pro (accessible through the menu bar (**PitStop Pro > Object > Rasterize selection**) or the context menu of a selection).

##### ***Options***

By default, rasterizing does not affect the way the objects look. However, in some cases it may be acceptable to have a slightly different look; in that case you may enable (some of) the advanced options (for example: conversion to a different color space). These options are marked with a warning icon to indicate that using them may change the appearance of the file.

| Option                                   | Choices                                                                                                                                                                                                                                                                                                                                  |
|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Resolution (ppi) of the generated bitmap | <p>Enter the value of your choice.</p> <div>  <p><b>Note:</b> Do not misuse this Action to change the resolution of an image; the result will be far better when using a dedicated Action like <a href="#">Resample image</a> on page 147.</p> </div> |
| Compression                              | <p>Choices are:</p> <ul style="list-style-type: none"> <li>• JPEG</li> <li>• JPEG 2000</li> <li>• ZIP</li> <li>• None</li> </ul>                                                                                                                                                                                                         |
| Quality                                  | <p>Choices are:</p> <ul style="list-style-type: none"> <li>• Minimum</li> <li>• Low</li> <li>• Medium</li> </ul>                                                                                                                                                                                                                         |



| Option                                                | Choices                                                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                       | <ul style="list-style-type: none"> <li>• High</li> <li>• Maximum</li> </ul>                                                                                                                                                                                                                                                                                                                                            |
| Use anti-aliasing                                     | <p>Select or clear the checkbox.</p> <p>Turning off anti-aliasing may be useful to avoid thin white lines that may appear when rasterizing images.</p>                                                                                                                                                                                                                                                                 |
| Convert new resulting image(s) to indexed color space | Select or clear the checkbox.                                                                                                                                                                                                                                                                                                                                                                                          |
| Blend to                                              | <p>This option allows specifying a color space conversion on the selected objects, which may slightly change the appearance of the document. Choices are:</p> <ul style="list-style-type: none"> <li>• Page blending space</li> <li>• Gray</li> <li>• RGB</li> <li>• CMYK</li> </ul>                                                                                                                                   |
| Ignore blend and overprint restrictions               | <p>Select or clear the checkbox.</p> <p>Normally, overprint and blend spaces are respected when creating a single, merged image. However, if this is not possible (because it might change the appearance), an error will be reported. In that case, you may decide to ignore the blend and overprint restrictions, especially if they do not offer much added value.</p>                                              |
| Ignore original layer structure                       | <p>Select or clear the checkbox.</p> <p>Normally, the layer structure is preserved and images remain on the same layer as the original object. If you enable this option, the layer structure and the layer properties are ignored, meaning that hidden layers and layers that do not print are also included in the new image. The new image will not be on any layer. The layers themselves will not be removed.</p> |
| Force into single image                               | <p>Select or clear the checkbox.</p> <p>If selected, all the above options are enabled in order to force the selected objects into one single image.</p>                                                                                                                                                                                                                                                               |
| Force into separate images                            | <p>Select or clear the checkbox.</p> <p>If selected, the selected objects will be rasterized and saved as separate images. This option is compatible with the <b>Blend to (color space)</b> option.</p>                                                                                                                                                                                                                |

| Option                                                         | Choices                                                                                                                                                                                                    |
|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Keep the original content and place the new resulting image(s) | Choices are: <ul style="list-style-type: none"><li>• at the front of the page</li><li>• at the back of the page</li><li>• in front of the original content</li><li>• behind the original content</li></ul> |

#### 4.4.1.10. Remove associated files

**Belongs to**

- **Category:** General, PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Removes associated files.

This fix can be used to make PDF files compliant with PDF 2.0.

**Related Actions**

- [Check for associated files](#) on page 329

#### 4.4.1.11. Remove file specification from streams

**Belongs to**

- **Category:** General
- **Type:** Changes

**What it does**

Removes links to embedded or external files from PDF streams.

PDF streams are holders of large amounts of data, such as image pixels, page contents, embedded fonts, etc. In some instances, the streams do not contain the data inside the PDF but point to embedded or even external files. This Action will remove the link to these files.

**Related Actions**

- [Check file specification keys](#) on page 328
- [Check for file specifications](#) on page 330

#### 4.4.1.12. Remove PostScript

**Belongs to**

- **Category:** General

- **Type:** Changes

**What it does**

Removes all fragments of embedded PostScript in a PDF document.

Embedded PostScript fragments do not show up in the screen preview, but could change the appearance of the printed document. They are generally undesirable in a print production environment.

**Related Actions**

See also

- [Check for embedded PostScript fragments](#) on page 329
- [Select embedded PostScript fragments](#) on page 444

### 4.4.1.13. Replace page content by bitmap

**Belongs to**

- **Category:** General
- **Type:** Changes

**What it does**

Converts the page content to a bitmap. You can choose the resolution of the generated bitmap (ppi), the compression method (JPEG, JPEG 2000, ZIP, none) and the quality level.

New since PitStop 13 update 2 is the option to turn off anti-aliasing. This is useful to avoid white lines in flattened PDF files.

Other options are:

- **Apply overprint** to take into account the overprint settings
- **Blend to ...** to specify a color space conversion, which may slightly change the appearance of the document. Choices are: the page blending space, Gray, RGB and CMYK.

## 4.4.2. Checks

---

### 4.4.2.1. Check encoding of name objects

**Belongs to**

- **Category:** General
- **Type:** Checks

**What it does**

Allows you to check if the encoding of font names, separation names or structure type names is UTF8.

This may not be the case if you receive PDFs from Japanese or Chinese designers.



---

**Note:** This Action verifies if the name *data* is valid UTF8 data. Note that this does not necessarily mean that the name actually is UTF8 encoded. It just checks if it would be a valid string when interpreted as UTF8.

---

#### 4.4.2.2. Check file specification keys

***Belongs to***

- **Category:** General
- **Type:** Checks

***What it does***

Searches the PDF for file specification keys.

PDF streams are holders of large amounts of data, such as image pixels, page contents, embedded fonts, etc. In some instances, the streams do not contain the data inside the PDF but point to embedded or even external files. This Action will search for this type of links and check if they contain either the required file specification keys or the PDF 2.0 specific keys.

***Related Actions***

- [Check for file specifications](#) on page 330
- [Remove file specification from streams](#) on page 140
- [Remove file specification keys](#) on page 233

#### 4.4.2.3. Check for associated files

***Belongs to***

- **Category:** General, PDF2.0
- **Type:** Checks
- **New since:** PitStop 2022

***What it does***

Checks if a PDF file contains associated files.

This is a PDF 2.0 feature. If you don't want PDF 2.0 features in your file, you can remove the associated files using a dedicated [Action](#).

For more information about associated files, refer to [PDF 2.0 Application Note 002: Associated Files](#).

**Related Actions**

- [Remove associated files](#) on page 140

#### 4.4.2.4. Check for embedded PostScript fragments

**Belongs to**

- **Category:** General
- **Type:** Checks

**What it does**

Searches for fragments of embedded PostScript in a PDF document.

Embedded PostScript fragments do not show up in the screen preview, but could change the appearance of the printed document. They are generally undesirable in a print production environment.

**Related Actions**

- [Select embedded PostScript fragments](#) on page 444
- [Remove PostScript](#) on page 140

#### 4.4.2.5. Check for external streams

**Belongs to**

- **Category:** General
- **Type:** Checks

**What it does**

Checks if the PDF contains links to external data.

#### 4.4.2.6. Check for file specifications

**Belongs to**

- **Category:** General
- **Type:** Checks

**What it does**

Checks if the PDF contains URLs or links to embedded or external files in PDF streams.

PDF streams are holders of large amounts of data, such as image pixels, page contents, embedded fonts, etc. In some instances, the streams do not contain the data inside the PDF but point to embedded or even external files, or to websites (URLs). This Action allows you to check if the PDF contains such links.

You can check for either URL or file specifications, and search for embedded, non-embedded, or both types of links.

**Related Actions**

- [Check file specification keys](#) on page 328
- [Remove file specification from streams](#) on page 140

#### 4.4.2.7. Check for invisible objects without fill and stroke

**Belongs to**

- **Category:** General
- **Type:** Checks

**What it does**

Searches the PDF document for any objects that have no fill or stroke color associated with them.



**Note:** This Action only works on vector art (paths) and text without fill and stroke.

Designers sometimes leave such objects in a document rather than deleting them.

**Related Actions**

- [Select invisible objects without fill and stroke](#) on page 446
- [Remove invisible objects without fill and stroke](#) on page 277

#### 4.4.2.8. Check for reference XObjects

**Belongs to**

- **Category:** General
- **Type:** Checks

**What it does**

Checks the PDF for the presence of XObjects.

XObjects are PostScript objects, such as background images, that are defined only once in a PDF file, but used several times (e.g. on several pages). Using XObjects can speed up printing but requires extra printer memory.

XObjects are supported as of PDF 1.4.

**Related Actions**

[Select XObjects](#) on page 448

#### 4.4.2.9. Check for unknown objects

**Belongs to**

- **Category:** General
- **Type:** Checks

**What it does**

Checks if the PDF contains unknown objects.

Unknown objects in this context are objects that are not defined in the PDF 1.3 standard. The PDF/X standards require all objects in the document to be “known”, or defined in the PDF 1.3 specification.

This avoids differences in output between older and newer RIPs, for example. Older RIPs may not be able to process certain objects, and produce blank pages, whereas a more recent RIP can deal with those objects correctly and will produce the intended output.

## 4.4.2.10. Check if visual content exists

**Belongs to**

- **Category:** General
- **Type:** Checks
- **Since:** 2020

**What it does**

Enables you to check if a group of graphical shapes (e.g. an embedded image, such as a logo or line art) is visible in the PDF document. You can either check if the group of shapes is found, not found or how many times it occurs.

Note that the Action is able to find rotated shapes, partially cropped images, bigger or smaller shapes and shapes that are more or less similar (depending on the configuration, see below).



**Note:** The Action can detect all types of shapes (vector, raster, pixels, ...) embedded in the PDF. External images and simple geometric shapes are not supported.

**How it works**

The page the Action is running on is rasterized in the background. This may take a while. When this is finished, PitStop scans the page and searches for control points that are similar to the ones in the shape you want to check and uses this information to detect them.

Simple geometric shapes are not supported, because they do not provide enough control points.

**Use cases**

- Automatic artwork replacement
- Checking for incorrect or wrongly placed logos
- Checking for missing or invisible logos
- Also useful for packshots (for example to find outdated or old images)

**How to proceed**

1. Select the group of shapes (e.g. a logo) you want to check using the PitStop Select Objects tool .
2. In the attributes of the Action, click the **Grab selection** button. The selected image will be shown in the field above the button. Note that, if the image is too large (+15 cm) or too small (-1 cm), you'll get a warning.

3. Enter a label (e.g. "PitStop logo"). This is a mandatory field. Note that the label is only used for logging purposes.
4. From the 'Log a message' list at the top, select the appropriate option:

*Log a message ...*

- for each visual object that was found
- if no visual object was found
- if amount of visual objects meets criteria (this option allows you to set a threshold, e.g. log a message if more than one logo is found).



**Note:** If you run the Action List with the above mentioned options, the check will include rotated shapes, shapes that are somewhat bigger and somewhat smaller and shapes that have a certain visual similarity. The attributes explained below allow you to make the check more precise.

5. Configure the following options as required:


| Attribute                         | Meaning                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Scan resolution (ppi)</b>      | <p>Default value is 300, the minimal value (to get a good result) is 72.</p> <p>To use the resolution of the visual object in the document, clear this field before grabbing the visual object. The current resolution will be entered automatically.</p> <p>Note that a higher resolution will slow down processing, but increase accuracy (as more control points will be checked), whereas a lower resolution will speed up processing but decrease accuracy.</p> <p>The optimal value also depends on the complexity of the visual object: a very complicated object will be difficult to track on a low resolution.</p> |
| <b>Restrict size</b>              | <p>Make sure to enter the largest side of the visual content in the first field.</p> <p>Note that (specifically in case of a rotated object) the Action considers the sides of the object, not of the bounding box.</p> <div>  <p><b>Note:</b> Take into account that there's an error margin; the actual reported shapes may be a bit smaller or larger.</p> </div>                                                                                                                                                                      |
| <b>Restrict rotation</b>          | <p>Make sure to set the rotation to 0 degrees if you don't want to report rotated content. In all other cases, enter the value of your choice. Note that you can enter a number of values (separated by a comma) or use a range (using a hyphen) or a combination.</p> <div>  <p><b>Note:</b> Take into account that there's an error margin of 2 or 3 degrees.</p> </div>                                                                                                                                                                |
| <b>Restrict visual similarity</b> | <p>This option enables you to find objects that are partly hidden by other objects or to find objects that should not be in the document. It also works on colors, for example to find logos</p>                                                                                                                                                                                                                                                                                                                                                                                                                             |



| Attribute | Meaning                                                                                                                                                                                                                                                                                                                               |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|           | <div>with a color difference; note however that there should be enough contrast for PitStop to be able to detect it.</div> <div><div></div><div><b>Note:</b> Take into account that there's an error margin. We advise playing with the values to find a value that is optimal for the visual content you want to detect.</div></div> |

Example

The image below shows that the Action is able to detect a logo, even if it's slightly different in size or color, or when it's rotated, cropped or partly hidden. The marked logo is the one that was grabbed in the Action. Using the Action's attributes you can restrict the found instances.

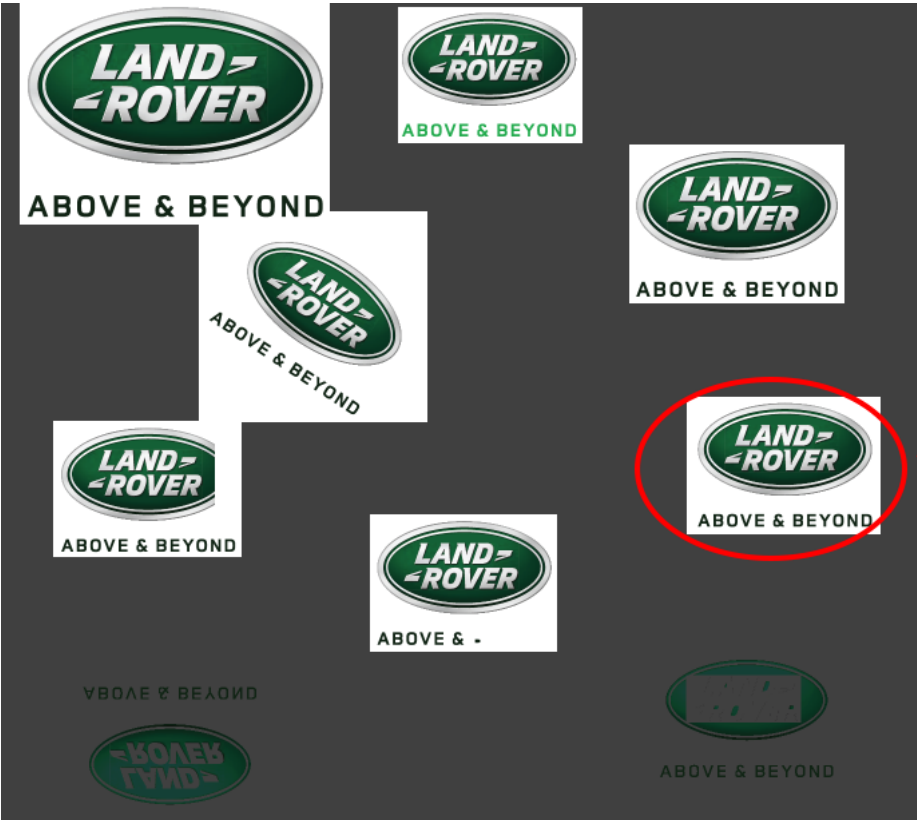

4.4.2.11. Check optimal compression

Belongs to

- **Category:** General
- **Type:** Checks

**What it does**

Checks if the latest and most efficient compression mechanisms have been applied in the PDF document.

Previous versions of Adobe Acrobat (2.1, 3.0, 4.0) featured less advanced compression mechanisms.

**About object compression**

In a PDF, objects have content streams that define (a part of) the object. These content streams can be compressed in order to create smaller files, so this is mostly used if a PDF is to be put on a website. As older RIPS may have problems with this compression, this Action allows you to check if the PDF contains such compressed streams, which you can afterwards remove if required.

**Related Actions**

- [Check object compression](#) on page 326
- [Remove object compression](#) on page 277

## 4.4.2.12. Log selection

**Belongs to**

- **Category:** General
- **Type:** Checks

**What it does**

Allows you to log the presence or absence of a selection you made with another Action in the same Action list.

This Action is useful if you want to check something for which no "Check" Action is available. For example, if you want to check if the PDF contains red text, you can first select all red text, and then use Log selection to display a message either if the document does or does not contain red text.

Note that you can also log the presence or absence of layers.

**How to proceed**

1. From the list at the top of the pane, choose the appropriate option:
  - To display a message if the selection was found, select *Log a message if **objects are selected***.
  - To display a message if the selection was NOT found, select *Log a message if **no objects are selected***.
2. Indicate whether or not the following information should be logged as well (if applicable):
  - The type of page and document objects
  - The annotation objects



**Note:** By default, annotations aren't logged. Even if Log selection applies to a selection made by [Select annotations](#), nothing will be logged, unless the **Report the annotation objects** checkbox is selected.

3. Enter the message that should appear in the Report if the selection was found/not found (depending on the choice made in step1).



**Note:** You can configure different descriptions for different languages (for example: *JPEG images* in English versus *JPEG afbeeldingen* in Dutch). The language shown in the log file depends on the PitStop Pro language (See **Edit > Preferences > PitStop Pro Preferences**).

4. Select the desired log level.



**Note:** In this case, it doesn't make sense to choose "Don't log", since the result of this Action is always shown in the Enfocus Navigator.

### Example

To check for the presence of red text in a document, you could create the following Action List:

```
Select fill and stroke color
  <!-- Add Select color on page 430. Select fill and stroke and determine the
  color you want to check for, for example using the Grab fill and Grab stroke icon -->
Select text segments
  <!-- Select text segments on page 514 -->
AND
  <!-- AND on page 470 : necessary to combine the two previous Actions -->
Log selection
  <!-- Choose "Log a message if objects are selected".
  Configure an English message, for example "This document contains some
  text in red".
  Select "Log as warning". -->
```

If you run this Action List, all red text will be selected and logged as a warning. In the Enfocus Navigator, if you select an object in the Description field, you will see the description ("Red text") under Details. You will also find a warning in the Preflight Report (e.g. "This document contains some text in red (x times on pages y-z)").

Alternatively, if you only want a warning if no red text is found, in the attributes of **Log selection**, choose "Log a message if no objects are selected" and configure a message such as "This document does not contain any red text".

## 4.4.3. Selections

### 4.4.3.1. Select clipping objects

#### Belongs to

- **Category:** General
- **Type:** Selections

#### What it does

Selects clipping objects, i.e. objects of which the shape masks other artwork. Only areas inside the clipping objects are visible.

You could use this Action to select clip text of which you want to change the font.

**Related Actions**

[Select objects that are completely clipped away](#) on page 496

### 4.4.3.2. Select embedded PostScript fragments

**Belongs to**

- **Category:** General
- **Type:** Selections

**What it does**

Selects all fragments of embedded PostScript in the PDF document.

Embedded PostScript fragments do not show up in the screen preview, but could change the appearance of the printed document. They are generally undesirable in a print production environment.

**Related Actions**

- [Check for embedded PostScript fragments](#) on page 329
- [Remove PostScript](#) on page 140

### 4.4.3.3. Select forms

**Belongs to**

- **Category:** General
- **Type:** Selections

**What it does**

Allows you to select all forms in a PDF document.

Forms are rectangular frames in a PDF which contain objects, for example an image or a placed PDF.

For more information, refer to [the PitStop Pro Reference Guide on the Enfocus website](#) (See Chapter "Editing forms").

For more information, refer to the PitStop Pro Reference Guide (See Chapter "Editing forms").

**Example**

To select all forms and log them as an error:

```
Select forms
Log selection <!-- enter "Forms were found in this document" and select "Log as error"
at the bottom -->
```

**Related Actions**

- [Log selection](#) on page 335

- [Select form contents according to form selection](#) on page 444

#### 4.4.3.4. Select form contents according to form selection

##### **Belongs to**

- **Category:** General
- **Type:** Selections

##### **What it does**

Allows you to select or deselect the content of selected forms.

Forms are rectangular frames in a PDF which contain objects, for example an image or a placed PDF.

For more information, refer to [the PitStop Pro Reference Guide on the Enfocus website](#) (See Chapter "Editing forms").

##### **Related Actions**

[Select forms](#) on page 446

#### 4.4.3.5. Select form if content is selected


##### **Belongs to**

- **Category:** General
- **Type:** Selections

##### **What it does**

Allows you to select forms based on selected objects. Note that by selecting the forms, the objects themselves are no longer selected.

You can choose whether or not to select nested forms, i.e. forms included inside other forms. For example, in the example below, the object is part of Form1 and Form2.

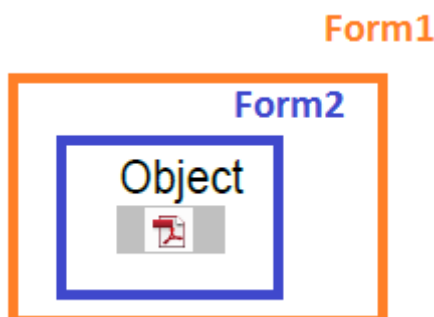

- If **Also selected nested forms** is cleared, only Form1 (= highest level) will be selected.
- If **Also selected nested forms** is selected, both forms will be selected.

**About forms**

Forms are rectangular frames in a PDF, which contain objects, for example an image or a placed PDF.

For more information about forms, refer to [the PitStop Pro Reference Guide on the Enfocus website](#) (See Chapter "Editing forms").

**Example**

The following example Action List consists of 2 Actions:

- The first Action selects all objects inside the art box.
- The second Action selects all forms of which the objects are selected by the first Action, and deselects the objects. Forms inside another form are not selected.

```
Select objects inside or outside region on page 495 <!-- select the art box -->  
Select form if content is selected <!-- clear the option Also select nested forms -->
```

**Related Actions**

- [Select forms](#) on page 446
- [Select form contents according to form selection](#) on page 444

### 4.4.3.6. Select invisible objects without fill and stroke

**Belongs to**

- **Category:** General
- **Type:** Selections

**What it does**

Selects objects that have no fill or stroke color associated with them. Even though these objects are not visible in the document, you might want to remove them.



**Note:** This Action only works on vector art (paths) and text without fill and stroke.

**Related Actions**

- [Select objects that use neither stroke nor fill](#) on page 458 (same functionality)
- [Check for invisible objects without fill and stroke](#) on page 330
- [Remove invisible objects without fill and stroke](#) on page 277

### 4.4.3.7. Select objects that have a clipping path

**Belongs to**

- **Category:** General
- **Type:** Selections

**What it does**

Selects objects of which the shape (partly) masks other artwork. Only areas inside the clipping objects are visible.

**Related Actions**

- [Select clipping objects](#) on page 444
- [Select objects that are completely clipped away](#) on page 496

#### 4.4.3.8. Select parent content object

**Belongs to**

- **Category:** General
- **Type:** Selections

**What it does**

Allows you to select parent content objects, for example the page the object belongs to.

#### 4.4.3.9. Select tiling pattern contents according to parent object selection

**Belongs to**

- **Category:** Color
- **Type:** Selections
- **Since version:** 2020

**What it does**

Allows you to select the tiling pattern content depending on whether or not the parent object (e.g. text or line art) is selected.

There are two options:

- Select the tiling pattern content if the parent object is selected.
- Select everything except the tiling pattern content of parent objects that are not selected.

#### 4.4.3.10. Select XObjects

**Belongs to**

- **Category:** General
- **Type:** Selections

**What it does**

Selects any XObject in the PDF file.

XObjects are PostScript objects, such as background images, that are defined only once in a PDF file, but used several times (e.g. on several pages). Using XObjects can speed up printing but requires extra printer memory.

XObjects are supported as of PDF 1.4.

**Example**

To log the presence of XObjects, use:

```
Select XObjects  
Log Selection
```

**Related Actions**

[Check for reference Xobjects](#) on page 331

## 4.4.4. Settings

---

### 4.4.4.1. Override color management settings

**Belongs to**

- **Category:** Color; General
- **Type:** Settings

**What it does**

Replaces any color management settings from the PDF Profile or general PitStop preferences with the settings defined here. These settings will be used when converting colors.

### 4.4.4.2. Override default image recompression

**Belongs to**

- **Category:** General; Image
- **Type:** Settings

**What it does**

Overrides the default recompression quality setting (used by PitStop when changing images) with the one defined in this Action.

**How it works**

If PitStop is used to change images (e.g. to convert the color, to resample the image...), the images are decompressed first, then changed, and afterwards recompressed according to the default settings (maximum for JPEG, lossless for JPEG 2000). With these default settings, files may grow to an unacceptable size compared to the original input PDF file. In that case, you can use Override default image recompression to make the files smaller.



#### 4.4.4.3. Override page box defaults

**Belongs to**

- **Category:** General; Page
- **Type:** Settings

**What it does**

Replaces the default order (Media > Crop > Art - Bleed - Trim) of the page boxes in a PDF document with the order defined in this Action.

#### 4.4.4.4. Override rounding rules

**Belongs to**

- **Category:** General
- **Type:** Settings

**What it does**

Replaces the default rules used for comparing text size, line weight and/or coordinates to the ones set in this Action.

You have the choice to:

- Leave text size, line weight and/or coordinates unchanged
- Use the default rules, or
- Use decimals.

**Example**

PitStop applies a number of rounding rules when comparing the actual values in a PDF to the ones set in a check (Profile check or "check" Action). For example, if you want to check if the text point size is equal to 10 points, PitStop will give a warning if there is a difference of 0.1 point.

If you don't want to log such small differences, use this Action to overrule the default behavior. Example of such an Action List:

```
Select all
Override rounding rules <!-- Select: Text size: decimals 0 -->
Check if text point size is equal to 10.0 pt <-- Check text point size on page 414 -->
```

**Remark**

We recommend using points as measurement unit because in the background, PitStop Pro converts all the different measurement units (p, in, cm, mm) into points and applies the rounding rules to this value (with its decimals).

#### 4.4.4.5. Restore previous color management settings

**Belongs to**

- **Category:** Color; General
- **Type:** Settings

**What it does**

Allows you to revert to the previous color management settings (if you have changed them before, in the same Action List).

**Related Actions**

[Save color management settings](#) on page 515

#### 4.4.4.6. Save color management settings

**Belongs to**

- **Category:** Color; General
- **Type:** Settings

**What it does**

Allows you to save the current color management settings (changed in the Action List).

**Related Actions**

[Restore previous color management settings](#) on page 515

#### 4.4.4.7. Split Action List


**Belongs to**

- **Category:** General
- **Type:** Settings
- **Since Version:** 2019

**What it does**


This Action changes the way the content of an Action List is processed:

- Without this Action/default behavior: All Actions are executed one after the other, page after page, until the end of the document. There is no way to get back to the beginning of the document, for example to copy something from the end of the document to the beginning.

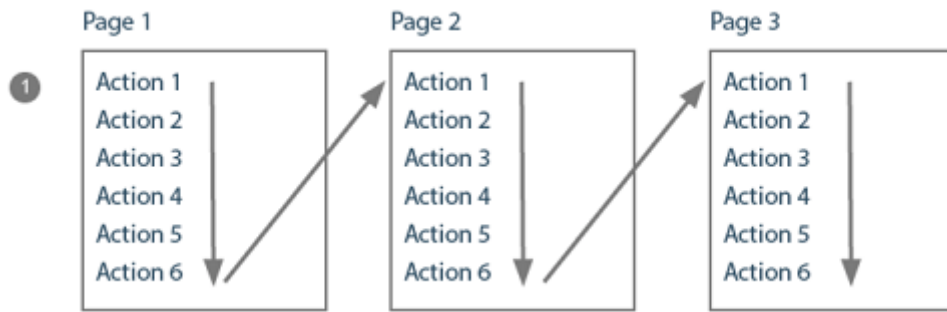

- With this Action:

1. First all Actions **preceding** *Split Action List* are executed, one after the other, page after page, until the end of the document.
2. Then the changes are saved. If anything is copied to the clipboard, it's preserved.
3. Next, the Actions **following** *Split Action List* are executed on the saved document, starting from the beginning of the document until the end or until another *Split Action List*. Note that after saving, the selection is lost, so a selection has to be made after *Split Action List*.

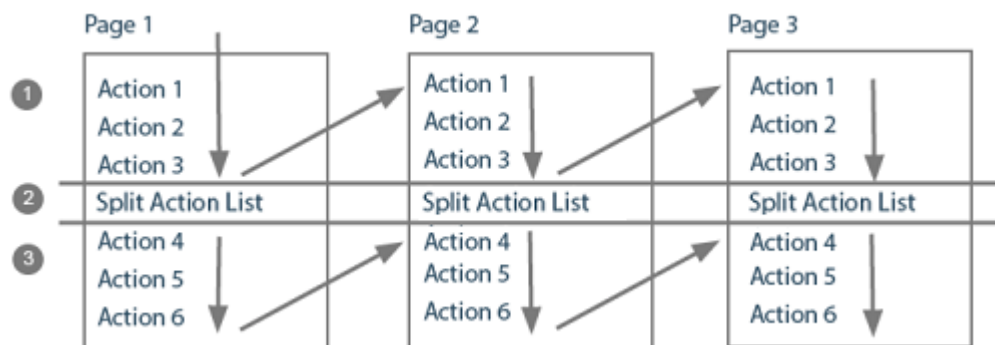

This approach makes it possible to go through a document multiple times.

### Example Action Lists

The following Action List copies the content of page 5 to page 2:

```
select page range          <!--Page range is "5" -->
copy content to clipboard  <!--Clipboard name e.g. content pg 5 -->
split Action List
select page range          <!--Select the target page: Page range is "2" -->
paste objects from clipboard <!--Clipboard name chosen higher -->
```

The following Action List splits pages and reorders them in one and the same Action List:

```
split pages in half        <!--To split the spreads -->
split Action List
select all                 <!--Make the selection -->
reorder pages              <!--Specify the new page order,
                           based on the split pages -->
```

**Related Actions**

This Action is typically used to reorder split pages and to copy content backwards (from later pages to earlier pages). In that case, the following Actions may be useful:

- [Split pages in half](#) on page 224
- [Reorder pages](#) on page 217
- [Copy or cut objects to clipboard](#) on page 131
- [Paste objects from clipboard](#) on page 93

## 4.5. Image

---

### 4.5.1. Changes

---

#### 4.5.1.1. Add alternate images

**Belongs to**

- **Category:** Image
- **Type:** Changes

**What it does**

If you are working with PDFs that contain very high resolution images and render slowly on screen, you can speed up rendering by adding alternate images and then clicking the PitStop **Speed Up Image Display** button (available in the Enfocus View Modes toolbar (Acrobat 8 and 9) or the PitStop View Panel (Acrobat X and XI)).

You can use this Action to add low resolution alternate images.

**How to proceed**

1. Select the preferred downsampling.  
Bicubic looks best but is slowest; subsampling looks worst but is fastest.
2. Specify the preferred resolution.  
72dpi is good for screen viewing.
3. Set **Resample above** to a higher value than the dpi chosen above.  
PitStop suggests a value, but you can change it as required.
4. Select **Convert to RGB** for even faster on screen rendering, but in RGB color values.

**Related Actions**

- [Select by alternate images](#) on page 448
- [Check for alternate images](#) on page 336

- [Remove alternate images](#) on page 146

#### 4.5.1.2. Apply a gaussian blur to an image

**Belongs to**

- **Category:** Image
- **Type:** Changes

**What it does**

Allows you to apply a Gaussian blur to the selected images.

You can define the radius of the blur, by moving the slider. A higher radius will result in a higher amount of blur.

Applying a Gaussian blur is useful to reduce image noise and detail.

#### 4.5.1.3. Apply transfer function

**Belongs to**

- **Category:** Prepress;Text;LineArt;Color;Image
- **Type:** Changes

**What it does**

Adds a transfer function to paths, text, images or all these types of objects. You can exclude spot colors or apply the transfer function on tint values or alternate values only.

Transfer functions are used for creative purposes, artistic effect and to correct the characteristics of a specific, maybe poorly calibrated, output device. For example, a file that is intended for output on a particular image setter may contain transfer functions that compensate for the dot gain inherent to that printer.



---

**Note:** Transfer functions are not allowed in PDF/X compliant documents.

---

**Related Actions**

- [Check for custom transfer function](#) on page 402
- [Remove custom transfer function](#) on page 271

#### 4.5.1.4. Change image brightness and contrast

**Belongs to**

- **Application:** PitStop Pro
- **Category:** Image
- **Type:** Changes

**What it does**

Allows you to make brightness and contrast adjustments to pixel images of all color spaces (e.g. RGB) and image types (e.g. JPEG).



**Note:** This option is also available in the PitStop Inspector (by selecting



>

### 4.5.1.5. Change image compression

**Belongs to**

- **Category:** Image
- **Type:** Changes

**What it does**

This Action changes the compression of the selected images.

- Color, grayscale and soft-mask images can be compressed with JPEG, JPEG 2000, ZIP or LZW compression (ZIP and LZW are lossless, JPEG lossy).
- Monochrome images can be compressed with CCIT Group 3 & 4, ZIP, LZW or RunLength compression.

In addition:

- An ASCII Hex or 85 filter can be applied. From the list, select the appropriate filter or choose **None**.
- An extra Flate compression filter can be applied to JPEG and JPEG 2000 images. Flate, also known as Deflate, is a lossless data compression method that can drastically reduce the file size. To enable this filter, select the **Add ZIP compression on top of JPEG or JPEG 2000** checkbox.



**Note:** Whereas the ASCII filter does not apply to soft-mask image, the Flate compression does.

### 4.5.1.6. Change inline image syntax

**Belongs to**

- **Category:** Image, PDF 2.0
- **Type:** Changes
- **Since version:** 2020

**What it does**

Allows you to change the L key (or Length key) of a PDF to comply with a particular PDF version.

The L key specifies the length of the image data and allows users to skip inline images if required.

Choices are:

- Compatibility with the current document version
- Compatibility with PDF 1.7 (no Length key)
- Compatibility with PDF 2.0 (write Length key)
- Keep presence of the Length key
- Fix the Length key (so it matches the actual inline image data length)



**Note:** The changes you make using this Action will only affect newly saved content: earlier saved content is not touched.

#### **Related Actions**

- [Change PDF text string encoding](#) on page 122
- [Check inline image syntax](#)
- [Select inline image syntax](#) on page 451

### 4.5.1.7. Change OPI info

#### **Belongs to**

- **Category:** Image
- **Type:** Changes

#### **What it does**

Updates the OPI information of the document, for example if you have changed an OPI path with the PitStop Inspector in PitStop.



**Note:** This Action is mainly meant for OEMs, who can change OPI dictionaries through the PitStop Library. If an image with OPI information is encountered during processing, PitStop Library will call the OEM's code to replace it with the OEM's values.

#### **About OPI**

OPI (Open Prepress Interfaces) replaces high resolution images with "preview" images; low resolution substitutes which are stored in the PDF, together with the path to the high resolution images. This facilitates data storage and data transfer of PDFs with a large number of images.

#### **Related Actions**

- [Check OPI path](#) on page 340
- [Check OPI type](#) on page 340
- [Gather OPI information](#) on page 418
- [Remove OPI](#) on page 146
- [Select images with OPI info](#) on page 450

### 4.5.1.8. Convert images to indexed color space

#### **Belongs to**

- **Category:** Color;Image

- **Type:** Changes

**What it does**

Changes the color of images to the indexed color space.

**About the indexed color space**

The indexed color space uses no more than 256 colors, and is as such particularly suited for use in Web applications. Images are typically converted to indexed color mode in order to **decrease their file sizes**. When an image is converted to indexed color, a color lookup table is created, in which the colors that were used in the image are stored and indexed. Using an indexed color table lets you reduce the file size of an image while maintaining the visual quality that you need.

### 4.5.1.9. Crop images

**Belongs to**

- **Category:** Image
- **Type:** Changes

**What it does**

Allows you to crop images to match a clip mask and/or a particular page box.

**New in 13 update 1:** You can now remove the unwanted white borders (e.g. of scanned images), by selecting the **Crop white borders of image** checkbox. This option also works on stencil marks and is particularly useful as it enables subsequent Actions to work on the size of visible objects.

### 4.5.1.10. Remove alternate images

**Belongs to**

- **Category:** Image
- **Type:** Changes

**What it does**

Removes alternate images from a PDF.

If you are working with PDFs that contain very high resolution images and render slowly on screen, you can speed up rendering by adding alternate images and then clicking the PitStop **Speed Up Image Display** button (available in the Enfocus View Modes toolbar (Acrobat 8 and 9) or the PitStop View Panel (Acrobat X and XI)).

As these alternate images are not necessary for print, you may use this Action to remove them and only keep one version. You have three options:

- **Default for printing** only preserves the images that are marked "default for printing" (recommended if you know that the alternate images have been correctly marked for printing)
- **Lowest resolution** only preserves the version with the lowest resolution, regardless of the printing setting (best for print production)



- **Highest resolution** only preserves the version with the highest resolution, regardless of the printing setting (best for on-screen viewing)

**Related Actions**

- [Check for alternate images](#) on page 336
- [Select by alternate images](#) on page 448
- [Add alternate images](#) on page 141

### 4.5.1.11. Remove OPI

**Belongs to**

- **Category:** Image
- **Type:** Changes

**What it does**

Removes OPI (Open Prepress Interface) information from a PDF.

OPI images are treated special as they are assumed to be preview images. They will for example not be preflighted as other images would be. If you don't use OPI in your workflow, run this Action to remove irrelevant OPI information and get correct editing and preflighting of documents.

**About OPI**

OPI (Open Prepress Interfaces) replaces high resolution images with "preview" images; low resolution substitutes which are stored in the PDF, together with the path to the high resolution images. This facilitates data storage and data transfer of PDFs with a large number of images.

**Related Actions**

- [Check OPI path](#) on page 340
- [Check OPI type](#) on page 340
- [Gather OPI information](#) on page 418
- [Change OPI info](#) on page 144
- [Select images with OPI info](#) on page 450

### 4.5.1.12. Resample image

**Belongs to**

- **Category:** Image
- **Type:** Changes

**What it does**

Resamples, i.e. changes the resolution of the selected image(s).

**How to proceed**

1. Select the preferred resampling or interpolation method:
  - **Average Resampling:** computes the average pixel color of the pixels in the sample area, and replaces the entire area with this average.
  - **Bicubic resampling:** calculates the values of the new dots on the basis of a weighted average of the pixels in the same area.
  - **Bicubic B-Spline resampling:** is a modified bicubic interpolation with more sharpening effects and is recommended for upsampling.
  - **Bilinear resampling:** uses weighted interpolation between 4 pixels in the original image.



**Note:** Bicubic gives the best result for photographs (but takes the longest to compute).

2. Enter the preferred resolution, for example 72 ppi for screen viewing.
3. To only resample images with a resolution below a particular threshold, select the **Resample above ... ppi** checkbox and enter a value.

For example, if you enter 150 ppi, only images with a resolution above 150 ppi will be resampled.

### 4.5.1.13. Sharpen an image with unsharp mask

**Belongs to**

- **Category:** Image
- **Type:** Changes

**What it does**

Allows you to sharpen edges in pixel images by applying the unsharp mask filter.

This filter:

- Compares adjacent pixels (specified by **Radius** and **Threshold**) to determine which pixels to correct.
- Increases the contrast of these pixels (specified by **Amount**).

You can modify the amount of contrast to be applied when correcting pixels (Amount), the distance (Radius) and the brightness difference (Threshold) between adjacent pixels.

The effects of the unsharp mask filter are far more pronounced on-screen than in high-resolution output. For print, experiment to determine which options work best for your image.



**Note:** This option is also available in the PitStop Inspector (by selecting  >



).

## 4.5.2. Checks

### 4.5.2.1. Check if JPEG 2000 compressed images are PDF/X compliant

**Belongs to**

- **Category:** Image
- **Type:** Checks

**What it does**

Check if JPEG 2000 compressed images are PDF/X-4 or PDF/X-6 compliant.

You might want to remove or replace non-compliant images.

### 4.5.2.2. Check for alternate images

**Belongs to**

- **Category:** Image
- **Type:** Checks

**What it does**

Searches a PDF for alternate images.

Alternate images are low resolution versions of images that are used for on-screen proofing because they render more quickly. PitStop can check for the presence of all alternate images or only those that are set to print as default.

**Related Actions**

- [Add alternate images](#) on page 141
- [Select by alternate images](#) on page 448
- [Remove alternate images](#) on page 146

### 4.5.2.3. Check for corrupt images

**Belongs to**

- **Category:** Image
- **Type:** Checks
- **Since version:** 2020

**What it does**

Detects images with corrupt image data.

This Action enables you to find corrupt images early in the production process, so you can take corrective action.

#### 4.5.2.4. Check for images with 16 bits per channel

***Belongs to***

- **Category:** Image
- **Type:** Checks

***What it does***

Searches a PDF for images with 16 bits per channel.

These images have a much larger color range than standard 8 bit images. Note that not all of these colors can be accurately reproduced on press.

#### 4.5.2.5. Check image compression

***Belongs to***

- **Category:** Image
- **Type:** Checks

***What it does***

Checks image filters to ensure that the images in the PDF are not compressed using a particular compression method.

You can check for the following compression methods:

- CCITT
- JPEG
- ZIP
- LZW
- RunLength
- JBIG2
- JPEG 2000

By default, soft-mask images are not included, unless you select the **Also check soft-mask images** checkbox.

#### 4.5.2.6. Check image compression ratio

***Belongs to***

- **Category:** Image
- **Type:** Checks

***What it does***

Checks the compression ratio of the images in a PDF against a particular threshold.

You can check the compression ratio of images compressed with one of the following compression methods:

- CCITT
- JPEG
- ZIP
- LZW
- RunLength
- JBIG2
- JPEG 2000

#### **Example**

If the JPEG images in your PDF should not be compressed at all, use the following values:

```
Compression ratio of JPEG images must be    <!-- Choose JPEG -->  
equal to 100                               <!-- Choose "equal to" and "100" -->
```

A compression ratio of "100" means "no compression"; a compression ratio of "50" means "50%", ...

### 4.5.2.7. Check image interpolation

#### **Belongs to**

- **Category:** Image
- **Type:** Checks

#### **What it does**

Checks if images in the PDF have been resampled.

### 4.5.2.8. Check inline image syntax

#### **Belongs to**

- **Category:** Image; PDF 2.0
- **Type:** Checks
- **New since:** PitStop 2022

#### **What it does**

Checks the presence and/or validity of the L key (or Length key) of a PDF.

The L key specifies the length of the image data and allows users to skip inline images if required.

Choices are:

- Inline images must not have the Length key
- Inline images must have the Length key
- Inline images must have a valid Length key.

Note that PDF 2.0 allows (but does not impose) the presence of an L key, but if it's present, it must match the actual inline image data length.

**Related Actions**

- [Select inline image syntax](#)
- [Change inline image syntax](#)

#### 4.5.2.9. Check number of images on page

**Belongs to**

- **Category:** Image
- **Type:** Checks
- **Since:** 2020

**What it does**

Checks the number of images on a page.

**Use case**

Badly created PDF files can have hundreds of images, which can take a long time to rip. This Action can help you detect the pages with more images than expected. Such pages can then be simplified using [Rasterize selection](#) or similar tools.

**Related Actions**

- [Select page by number of images](#) on page 452
- [Rasterize selection](#) on page 138

#### 4.5.2.10. Check OPI path

**Belongs to**

- **Category:** Image
- **Type:** Checks

**What it does**

If your document contains objects with OPI information, you can use this Action to detect images that cannot be found in the location specified in the OPI pointer.

**About OPI**

OPI (Open Prepress Interfaces) replaces high resolution images with "preview" images; low resolution substitutes which are stored in the PDF, together with the path to the high resolution images. This facilitates data storage and data transfer of PDFs with a large number of images.

**Related Actions**

- [Change OPI info](#) on page 144

- [Check OPI type](#) on page 340
- [Gather OPI information](#) on page 418
- [Remove OPI](#) on page 146
- [Select images with OPI info](#) on page 450

#### 4.5.2.11. Check OPI type

***Belongs to***

- **Category:** Image
- **Type:** Checks

***What it does***

Checks which OPI types are allowed in a PDF.

You can check for the following OPI types:

- None
- 1.3
- 2.0
- both 1.3 and 2.0

***About OPI***

OPI (Open Prepress Interfaces) replaces high resolution images with "preview" images; low resolution substitutes which are stored in the PDF, together with the path to the high resolution images. This facilitates data storage and data transfer of PDFs with a large number of images.

***Related Actions***

- [Check OPI path](#) on page 340
- [Change OPI info](#) on page 144
- [Gather OPI information](#) on page 418
- [Remove OPI](#) on page 146
- [Select images with OPI info](#) on page 450

#### 4.5.2.12. Check resolution

***Belongs to***

- **Category:** Image
- **Type:** Checks

***What it does***

Checks the resolution of particular image types (color or grayscale images, 1-bit images or any images) against a particular value, e.g. checks if the resolution is not more/less/... than x ppi.

This Action checks for the **effective** resolution; if the image has been resized, this is the resolution after scaling.

As of PitStop 2018 you can disregard any soft-mask images that are used in the PDF, by selecting the **Ignore soft-masks** option. The resolution of a soft-mask image can be lower than what it acceptable for images, but as this does not affect the end result, it's safe to exclude them from the resolution check.

Note that the log message also mentions the resolution of the matching images.

#### **Related Actions**

[Select by image resolution](#) on page 449

## 4.5.3. Informs

---

### 4.5.3.1. Gather image information

#### **Belongs to**

- **Category:** Image
- **Type:** Informs

#### **What it does**

Collects information about the images used in a PDF and presents it in the log.

The following information is logged:

- Type
- Color Space
- Physical Resolution
- Effective Resolution
- Page found
- Angle
- Skew
- Flipped
- Custom Transfer
- Custom Halftone
- Custom BG (black generation)
- Custom UCR (undercolor removal definitions)

### 4.5.3.2. Gather OPI information

#### **Belongs to**

- **Category:** Image
- **Type:** Informs

#### **What it does**

Collects information about the OPI (Open Prepress Interface) used in a PDF and presents it in the log.



**About OPI**

OPI (Open Prepress Interfaces) replaces high resolution images with "preview" images; low resolution substitutes which are stored in the PDF, together with the path to the high resolution images. This facilitates data storage and data transfer of PDFs with a large number of images.

**Related Actions**

- [Check OPI path](#) on page 340
- [Check OPI type](#) on page 340
- [Change OPI info](#) on page 144
- [Remove OPI](#) on page 146
- [Select images with OPI info](#) on page 450

## 4.5.4. Selections

---

### 4.5.4.1. Select by alternate images

**Belongs to**

- **Category:** Image
- **Type:** Selections

**What it does**

Selects either **all images with alternates** or **all images with alternates that are default for printing**.

An alternate can be a high resolution version of an image that is used in the PDF to preview the image on screen. If you want to make sure that the correct image is set to print, choose **all images with alternates that are default for printing**.

**Related Actions**

- [Add alternate images](#) on page 141
- [Check for alternate images](#) on page 336
- [Remove alternate images](#) on page 146

### 4.5.4.2. Select by image resolution

**Belongs to**

- **Category:** Image
- **Type:** Selections

**What it does**

Makes a selection of images based on their resolution, for example all images with a resolution between 320 and 400 ppi.

You can select all images, or limit your selection to color or gray scale images, or to monochrome images only.



**Note:** This Action checks for the **effective** resolution; if the image has been resized, this is the resolution after scaling.

**Related Actions**

[Check resolution](#) on page 341

### 4.5.4.3. Select by image size

**Belongs to**

- **Category:** Image
- **Type:** Selections

**What it does**

Allows you to select images by their width or height (expressed in pixels).

You can for example select images with a width or height equal to (or more or less than) 64 pixels.

### 4.5.4.4. Select image by filter type

**Belongs to**

- **Category:** Image
- **Type:** Selections

**What it does**

Allows you to select images according to the compression type they use.

You can choose one or more of the following filters:

- ASCII hex
- CCITT
- ZIP
- RunLength
- JPEG 2000
- ASCII 85
- JPEG
- LZW
- JBIG2

Optionally, you can also include soft-mask images (of the chosen filter types) in your selection (i.e. the images that mask an image). These are not included by default.

#### 4.5.4.5. Select images

**Belongs to**

- **Category:** Image
- **Type:** Selections

**What it does**

Selects all the images in a PDF document.

**Example**

The following selects everything in a PDF except for the images:

```
Select all
Select images
NOT
AND
```

#### 4.5.4.6. Select images with OPI info

**Belongs to**

- **Category:** Image
- **Type:** Selections

**What it does**

Selects all the images in a PDF document that contain OPI (Open Prepress Interface) information.

OPI images are treated special as they are assumed to be preview images. They will for example not be preflighted as other images would be.

**About OPI**

OPI (Open Prepress Interfaces) replaces high resolution images with "preview" images; low resolution substitutes which are stored in the PDF, together with the path to the high resolution images. This facilitates data storage and data transfer of PDFs with a large number of images.

**Example**

The following finds any such images and logs them as a caution:

```
Select images with OPI info
Log selection <!-- In the field, type your message (ex. 'Images with OPI comments were
found in this PDF'), then select Log as warning at the bottom -->
```

**Related Actions**

- [Check OPI path](#) on page 340
- [Check OPI type](#) on page 340

- [Gather OPI information](#) on page 418
- [Remove OPI](#) on page 146
- [Change OPI info](#) on page 144

#### 4.5.4.7. Select image type

**Belongs to**

- **Category:** Image
- **Type:** Selections

**What it does**

Allows you to select a particular type of images.

You can select one of the following image types:

- 1-Bit images
- Grayscale images
- Color images
- Stencil mask
- Indexed images

**Example**

The following will convert color images to Grayscale but will not alter Black & White images:

```
Select image type <!-- In the popup, select Color -->
Convert color <!-- In the popup, select Grayscale -->
```

#### 4.5.4.8. Select rendering objects

**Belongs to**

- **Category:** LineArt;Text;Image
- **Type:** Selections

**What it does**

Selects all objects with a rendering intent.

This includes paths, text and images with any of the following rendering intents:

- Absolute Colorimetric
- Relative Colorimetric
- Perceptual
- Saturation



**Note:** This Action does not allow you to make a selection based on **one particular** rendering intent. To select objects by **one** of the listed rendering intents, use [Select by rendering intent](#) on page 427.

**About rendering intents**

A rendering intent is a remapping method, allowing to remap colors so that they best match the intended use. 'Remapping' means that colors from one output device's color space are mapped to the color space of another device.

For more information and examples, refer to [the PitStop Pro Reference Guide on the Enfocus website](#) (See Chapter "Rendering intents to remap colors").

For more information and examples, refer to the PitStop Pro Reference Guide (See Chapter "Rendering intents to remap colors").

**Related Actions**

- [Change rendering intent](#) on page 104
- [Check rendering intent](#) on page 312
- [Remove rendering intent](#) on page 117
- [Select by rendering intent](#) on page 427

#### 4.5.4.9. Select single image page images

**Belongs to**

- **Category:** Image
- **Type:** Selections

**What it does**

Selects single image page images, i.e. images that cover the entire page.

### 4.5.5. Settings

---

#### 4.5.5.1. Override default image recompression

**Belongs to**

- **Category:** General; Image
- **Type:** Settings

**What it does**

Overrides the default recompression quality setting (used by PitStop when changing images) with the one defined in this Action.

**How it works**

If PitStop is used to change images (e.g. to convert the color, to resample the image...), the images are decompressed first, then changed, and afterwards recompressed according to the default settings (maximum for JPEG, lossless for JPEG 2000). With these default settings, files may grow to an unacceptable size compared to the original input PDF file. In that case, you can use Override default image recompression to make the files smaller.

## 4.6. Layers

---

### 4.6.1. Changes

---

#### 4.6.1.1. Add objects to layer with name

***Belongs to***

- **Category:** Layers
- **Type:** Changes
- **Since version:** 12 update 3

***What it does***

Allows you to add any selected objects to a specific layer. You can identify the layer concerned by entering a string (e.g. Layer1). Optionally, you can at the same time remove the added objects from the other layers.

***How to proceed***

1. Add a "select" Action to the Action List, to select the objects you want to add, for example [Select all](#) on page 477.
2. Add **Add objects to layers** to the Action List.
3. Enter the name of the layer.
4. Optionally, select **Remove from other layers**.

***Example***

To add all annotations to a particular layer and remove them from another layer, use the following Actions:

```
Select annotations <!-- Select annotations on page 463 -->
Add objects to layers <!-- Enter a name, e.g. AnnotationLayer and select Remove from
other layers-->
```

***Related Actions***

- [Add objects to layer](#) on page 149
- [Remove objects from layers](#) on page 155

#### 4.6.1.2. Add objects to layer

***Belongs to***

- **Category:** Layers

- **Type:** Changes

#### **What it does**

Allows you to add any selected objects to a specific layer. You can identify the layer concerned by selecting it using another Action in the same Action List.

Optionally, you can at the same time remove the added objects from the other layers.

#### **How to proceed**

1. Add a first "select" Action to the Action List, to select the **layer** to which you want to assign the objects.
2. Add a second "select" Action to the Action List, to select the **objects** to be added.



**Note:** You don't have to specify operators in between the two "select" Actions. However, you can also use **combined** "Select" Actions to specify the layer or the objects concerned (see example 2).

3. Add **Add objects to layers** and select the **Add to selected layers** radio button.

#### **Examples**

**Example 1:** The following Action List will add all annotations to Layer1 and remove them from the other layers:

```
Select layers by name <!-- Select layers by name on page 454 and set the layer name to Layer1 -->
Select annotations <!-- Select annotations on page 463 -->
Add objects to layers <!-- Select Remove from other layers -->
```

**Example 2:** The following Action List will add XObjects and annotations to LayerA and LayerB:

```
Select layers by name <!-- Select layers by name on page 454 and set the layer name to "equals [AB]"; enable Use regular expressions -->
Select XObjects <!-- Select XObjects on page 448 -->
Select annotations <!-- Select annotations on page 463 -->
OR
Add objects to layers
```

#### **Related Actions**

- [Add objects to layer with name](#) on page 148
- [Add objects to layer](#) on page 149

### 4.6.1.3. Change layer print state

#### **Belongs to**

- **Category:** Layers
- **Type:** Changes
- **Since Version:** 2018

**What it does**

Allows you to change the print state of a layer, which determines whether or not objects on the layer are printed. Thanks to this Action, you can avoid that invisible content on a layer is printed accidentally (or the other way around).

Print state options are:

- Always prints
- Prints when visible
- Never prints

**Example**

To make sure only visible content is printed, you could use the following Action List:

```
Select layers <!-- Select layers on page 453 -->
Change layer print state <!-- with the option Print State must be: Prints when visible -->
```

**Related Actions**

- [Check layer properties](#) on page 343
- [Check layer print state](#) on page 342
- [Select layers by print state](#) on page 454

## 4.6.1.4. Change layer properties

**Belongs to**

- **Category:** Layers
- **Type:** Changes

**What it does**

Allows you to change certain properties, i.e. default visibility and presence in the Layers panel ("layer configuration") of the layers selected by another Action in the same Action List.

**Example**

To change the properties of **all** layers in the PDF, create the following Action List:

```
Select layers <!-- Select layers on page 453 -->
Change layer properties
```

**Related Actions**

- [Check layer properties](#) on page 343
- [Select objects in layers by layer properties](#) on page 455

## 4.6.1.5. Fix layers

**Belongs to**

- **Category:** Layers



- **Type:** Changes

**What it does**

Allows you to perform a number of fixes to the layers in a PDF.

**Options:**

- Remove alternate layer configurations, only keep default configuration
- Add missing layer configuration names (e.g. "config\_1", "config\_2", ...)
- Make layer configuration names unique
- Remove order from layer configuration if layers are missing
- Remove AS (AutoState) entry from layer configurations. (AutoState entries are application specific usage entries).



---

**Note:** Layer configuration refers to the Layers panel.

---

**About PDF layers**

Layered content usually comes from applications such as InDesign, AutoCAD or Visio. When converted to PDF, the layers are retained and can be viewed and navigated in Adobe Acrobat. However, if you print a PDF file that contains layers, only the content that is visible on-screen is printed. This may or may not be desired.

**"Conventional" layers versus PDF layers**

**Layers in digital image editing** ("conventional" layers) are used to separate the different elements of an image. Each element is drawn on exactly one layer. The different layers are stacked on top of each other, and the order of the layers defines how the image looks like.

**Layers in PDF** have a different meaning. They are used to hide or show page content:

- Turning *on* a layer, all objects on this layer are shown on-screen.
- Turning *off* a layer, all objects on this layer are hidden, i.e. they become invisible.

As such, layers are also called "optional content groups": groups of objects that can be selectively viewed or hidden by the author of the document. Objects can belong to different layers, and the order of the layers is of no importance.

To work with layers in a PDF document in Adobe Acrobat, select **View > Show/Hide > Navigation Panes > Layers**.

For more information, refer to the Adobe Acrobat help.

**Related Actions**

[Check layers](#) on page 344

## 4.6.1.6. Flatten layers

**Belongs to**

- **Category:** Layers
- **Type:** Changes

**What it does**

Removes the selected layers. You can choose whether or not to remove the objects on these layers as well:

- To keep all objects, regardless of their visibility, select **Make all elements visible**. All objects (including hidden objects) will become visible after the layers have been removed.
- To keep all objects **based on their default visibility**, select **Preserve the initial view of the PDF**. Objects on layers with **default** visibility turned on are preserved (and remain visible). All other objects (i.e. by default hidden objects) are removed.
- To keep all objects **based on their current visibility**, select **Preserve the current view of the PDF**. Objects on visible layers are preserved, regardless of their default visibility state. All other objects (i.e. currently hidden objects) are removed.

**About PDF layers**

Layered content usually comes from applications such as InDesign, AutoCAD or Visio. When converted to PDF, the layers are retained and can be viewed and navigated in Adobe Acrobat. However, if you print a PDF file that contains layers, only the content that is visible on-screen is printed. This may or may not be desired.

**"Conventional" layers versus PDF layers**

**Layers in digital image editing** ("conventional" layers) are used to separate the different elements of an image. Each element is drawn on exactly one layer. The different layers are stacked on top of each other, and the order of the layers defines how the image looks like.

**Layers in PDF** have a different meaning. They are used to hide or show page content:

- Turning *on* a layer, all objects on this layer are shown on-screen.
- Turning *off* a layer, all objects on this layer are hidden, i.e. they become invisible.

As such, layers are also called "optional content groups": groups of objects that can be selectively viewed or hidden by the author of the document. Objects can belong to different layers, and the order of the layers is of no importance.

To work with layers in a PDF document in Adobe Acrobat, select **View > Show/Hide > Navigation Panes > Layers**.

For more information, refer to the Adobe Acrobat help.

**Related Actions**

[Flatten objects in layer](#) on page 153

## 4.6.1.7. Flatten objects in layer

**Belongs to**

- **Category:** Layers
- **Type:** Changes
- **Since version:** 12 update 3

**What it does**

Removes the selected objects from ALL layers and at the same time removes all empty layers.

You can choose whether or not to remove hidden objects:

- To keep all objects, regardless of their visibility, select **Make all elements visible**. All objects (including hidden objects) will become visible after the layers have been removed.
- To keep all objects **based on their default visibility**, select **Preserve the initial view of the PDF**. Objects on layers with **default** visibility turned on are preserved (and remain visible). All other objects (i.e. by default hidden objects) are removed.
- To keep all objects **based on their current visibility**, select **Preserve the current view of the PDF**. Objects on visible layers are preserved, regardless of their default visibility state. All other objects (i.e. currently hidden objects) are removed.

#### **About PDF layers**

Layered content usually comes from applications such as InDesign, AutoCAD or Visio. When converted to PDF, the layers are retained and can be viewed and navigated in Adobe Acrobat. However, if you print a PDF file that contains layers, only the content that is visible on-screen is printed. This may or may not be desired.

#### **"Conventional" layers versus PDF layers**

**Layers in digital image editing** ("conventional" layers) are used to separate the different elements of an image. Each element is drawn on exactly one layer. The different layers are stacked on top of each other, and the order of the layers defines how the image looks like.

**Layers in PDF** have a different meaning. They are used to hide or show page content:

- Turning *on* a layer, all objects on this layer are shown on-screen.
- Turning *off* a layer, all objects on this layer are hidden, i.e. they become invisible.

As such, layers are also called "optional content groups": groups of objects that can be selectively viewed or hidden by the author of the document. Objects can belong to different layers, and the order of the layers is of no importance.

To work with layers in a PDF document in Adobe Acrobat, select **View > Show/Hide > Navigation Panes > Layers**.

For more information, refer to the Adobe Acrobat help.

#### **Related Actions**

[Flatten layers](#) on page 152

## 4.6.1.8. Remove empty layers

#### **Belongs to**

- **Category:** Remove; Layers
- **Type:** Changes

#### **What it does**

Removes empty layers selected by another Action in the same Action List.

#### **Example**

The following Action List will remove **all** empty layers in the PDF:

```
Select layers <!-- Select layers on page 453 -->
```

```
Remove empty layers
```

To remove Layer1 and 2, if they are empty:

```
Select layers by name <!-- Select layers by name on page 454 - Choose "equals Layer  
[12]" and "Use regular expressions" -->  
Remove empty layers
```

### **About PDF layers**

Layered content usually comes from applications such as InDesign, AutoCAD or Visio. When converted to PDF, the layers are retained and can be viewed and navigated in Adobe Acrobat. However, if you print a PDF file that contains layers, only the content that is visible on-screen is printed. This may or may not be desired.

### **"Conventional" layers versus PDF layers**

**Layers in digital image editing** ("conventional" layers) are used to separate the different elements of an image. Each element is drawn on exactly one layer. The different layers are stacked on top of each other, and the order of the layers defines how the image looks like.

**Layers in PDF** have a different meaning. They are used to hide or show page content:

- Turning *on* a layer, all objects on this layer are shown on-screen.
- Turning *off* a layer, all objects on this layer are hidden, i.e. they become invisible.

As such, layers are also called "optional content groups": groups of objects that can be selectively viewed or hidden by the author of the document. Objects can belong to different layers, and the order of the layers is of no importance.

To work with layers in a PDF document in Adobe Acrobat, select **View > Show/Hide > Navigation Panes > Layers**.

For more information, refer to the Adobe Acrobat help.

### **Related Actions**

[Remove objects from layers](#) on page 155

## 4.6.1.9. Remove objects from layers

### **Belongs to**

- **Category:** Layers
- **Type:** Changes

### **What it does**

Allows you to remove objects from the selected layers in a PDF document.

### **About PDF layers**

Layered content usually comes from applications such as InDesign, AutoCAD or Visio. When converted to PDF, the layers are retained and can be viewed and navigated in Adobe Acrobat. However, if you print a PDF file that contains layers, only the content that is visible on-screen is printed. This may or may not be desired.

**"Conventional" layers versus PDF layers**

**Layers in digital image editing** ("conventional" layers) are used to separate the different elements of an image. Each element is drawn on exactly one layer. The different layers are stacked on top of each other, and the order of the layers defines how the image looks like.

**Layers in PDF** have a different meaning. They are used to hide or show page content:

- Turning *on* a layer, all objects on this layer are shown on-screen.
- Turning *off* a layer, all objects on this layer are hidden, i.e. they become invisible.

As such, layers are also called "optional content groups": groups of objects that can be selectively viewed or hidden by the author of the document. Objects can belong to different layers, and the order of the layers is of no importance.

To work with layers in a PDF document in Adobe Acrobat, select **View > Show/Hide > Navigation Panes > Layers**.

For more information, refer to the Adobe Acrobat help.

**How to proceed**

1. Add a first "select" Action to the Action List, to select the **layer** from which you want to remove objects.
2. Add a second "select" Action to the Action List, to select the **objects** to be removed.



**Note:** You don't have to specify operators in between the two "select" Actions. However, you can also use **combined** "select" Actions to specify the layer or the objects concerned (see example 2).

3. Add **Remove objects from layers**.

**Examples**

**Example 1:** The following Action List will remove all objects from Layer1:

```
Select layers by name <!-- Select layers by name on page 454 and set the layer name to
Layer1 -->
Select all <!-- Select all on page 477 -->
Remove objects from layers
```

**Example 2:** The following Action List will remove XObjects and annotations from LayerA and LayerB:

```
Select layers by name <!-- Select layers by name on page 454 and set the layer name to
equals [AB]; enable "Use regular expressions" -->
Select XObjects <!-- Select XObjects on page 448 -->
Select annotations <!-- Select annotations on page 463 -->
OR
Remove objects from layers
```

**Related Actions**

- [Add objects to layer with name](#) on page 148

- [Add objects to layer](#) on page 149

#### 4.6.1.10. Rename layer

##### **Belongs to**

- **Category:** Layers
- **Type:** Changes
- **Since version:** 12 update 3

##### **What it does**


Allows you to change the name of the layers in a document.



**Note:** You can also use regular expressions to define the source and target layer name.

##### **Example**


Suppose you want to rename the layers that are visible in your document, in this example Layer1 and Layer3 (but not Layer2, Layer12 or any other layer).

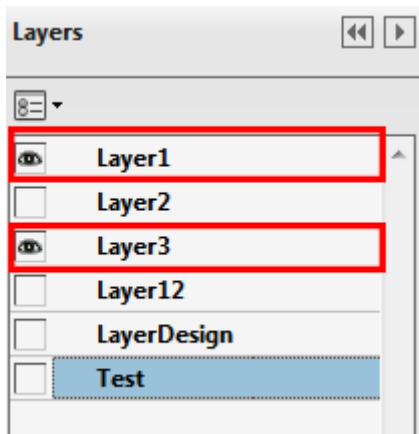

Proceed as follows:

1. Select the **Rename Layer** Action.
2. Under Attributes for Rename layer, configure the source and target layer as follows:
  - **From:** Layer([13])
  - **To:** VisibleLayer\$1
3. Select the **Use regular expressions** checkbox.
4. Click **OK**.
5. Run the Action List.

**Result:**

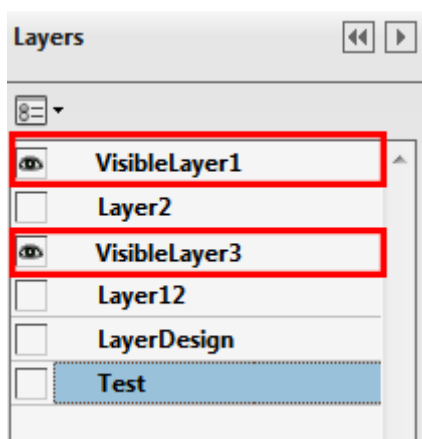

## 4.6.2. Selections

---

### 4.6.2.1. Select layers

***Belongs to***

- **Category:** Layers
- **Type:** Selections
- **Since version:** 12 update 3

***What it does***

Selects ALL layers in a PDF document.

***Related Actions***

[Select layers by name](#) on page 454

### 4.6.2.2. Select layers by name

***Belongs to***

- **Category:** Layers
- **Type:** Selections
- **Since version:** 12 update 3

***What it does***

Allows you to select layers with a particular layer name.



**Note:** You can use regular expressions to define the layer name (if you select **Equals/ Does not equal** as operator method).

**Example**

To select "Layer1" and "Layer3" but not e.g. "Layer2", "Layer12" or any other layer, choose the following attributes:

```
Select layers where name equals [13] <!-- to exclude e.g. Layer2 and Layer12 -->
Select Match case <!-- to exclude e.g. layer1 -->
Select Use regular expressions <!-- to make sure [13] is considered a regular
expression instead of a string -->
```

### 4.6.2.3. Select layers by print state

**Belongs to**

- **Category:** Layers
- **Type:** Selections
- **Since Version:** 2018

**What it does**

Allows you to select all layers with a particular print state.

Print state options are:

- Always prints
- Prints when visible
- Never prints

**Example**

To change the print state 'Always prints' to 'Prints when visible', you could use the following Action List.

```
Select layers by print state <!-- with the option Print: Always prints -->
Change layer print state <!-- with the option Print: Prints when visible -->
```

**Related Actions**

- [Change layer print state](#) on page 150
- [Check layer print state](#) on page 342

### 4.6.2.4. Select objects in layers by layer properties

**Belongs to**

- **Category:** Layers
- **Type:** Selections

**What it does**

Allows you to select content based on the layer properties of the layer it's placed on.

You can select content that is:



- **Optional:** placed on a layer
- **Not optional:** not placed on a layer
- **By default visible:** visible when the document is first opened (applies to both layered and "normal" content)
- **By default invisible:** invisible when the document is first opened
- **Visible:** set to "visible" e.g. by the user or by an application such as PitStop (regardless of the initial visibility state)
- **Invisible:** set to "invisible" e.g. by the user or by an application such as PitStop (regardless of the initial visibility state)

#### Example

The following Action List allows you to select layered content that is by default visible. Normal content (that is visible by default) is not selected.

```
Select objects in layers by layer properties <!-- Choose "Select content that is optional" -->
Select objects in layers by layer properties <!-- Choose "Select content that is visible" -->
AND <!-- This operator makes sure that only content is selected that is optional and visible at the same time -->
```

#### Related Actions

- [Change layer properties](#) on page 150
- [Select objects in layers by name](#) on page 456

## 4.6.2.5. Select objects in layers by name

#### Belongs to

- **Category:** Layers
- **Type:** Selections

#### What it does

Allows you to select objects inside layers with a certain name.

#### How to proceed

1. Select whether the layer name should (not) be equal to or (not) contain the value you specify.
2. Optionally, enable **Match case** or **Use regular expressions**.



**Note:** The option **Use regular expression** is available as of PitStop 12 update 2, if you select **equals** or **does not equal**. This option allows you to define the layer name using a regular expression (e.g Layer[1-3] will match the following layer names: Layer1, Layer2 and Layer3).

#### Related Actions

- [Select objects in selected layers](#) on page 456

- [Select objects in layers by layer properties](#) on page 455

#### 4.6.2.6. Select objects in selected layers

**Belongs to**

- **Category:** Layers
- **Type:** Selections
- **Since version:** 12 update 3

**What it does**

Selects objects in the layer(s) selected by another Action in the same Action List.

**Example**

To select the objects on **all** layers of the PDF, create the following Action List:

```
Select layers <!-- Select layers on page 453 -->
Select objects in selected layers
```

**Related Actions**

- [Select objects in layers by name](#) on page 456
- [Select objects in layers by layer properties](#) on page 455

### 4.6.3. Checks

---

#### 4.6.3.1. Check for empty layers

**Belongs to**

- **Category:** Layers
- **Type:** Checks
- **Since version:** 12 update 3

**What it does**

Allows you to check if the selected layers are empty. The Action must be preceded by another Action that selects the layer(s) concerned.

**Example**

To check if the PDF contains any empty layers:

```
Select layers <!-- Select layers on page 453 selects ALL layers -->
Check for empty layers
```

**Related Actions**

[Remove objects from layers](#) on page 155

### 4.6.3.2. Check if layer is PDF/X-4 compliant

**Belongs to**

- **Category:** Layers
- **Type:** Checks

**What it does**

Checks if the layers in a PDF document comply with the PDF/X-4 specification.

**About layers in PDF/X-4**

The PDF/X-4 standard allows the use of layers (OCGs = Optional Content Groups) in PDF. These layers can have different states (ON or OFF). The state of all OCGs must be defined in an Optional Content Configuration Dictionary (OCCD). This dictionary must be used by compliant readers to switch on or off the layers.

### 4.6.3.3. Check layer properties

**Belongs to**

- **Category:** Layers
- **Type:** Checks

**What it does**

Checks certain properties, i.e. default visibility and presence in the Layers panel ("layer configuration") of the layers selected by another Action in the same Action List.

**Example**

To check the properties of **all** layers in the PDF, create the following Action List:

```
Select layers <!-- Select layers on page 453 -->
Check layer properties
```

**Related Actions**

- [Change layer properties](#) on page 150
- [Select objects in layers by layer properties](#) on page 455

### 4.6.3.4. Check layers

**Belongs to**

- **Category:** Layers
- **Type:** Checks

**What it does**

Checks the layers in a PDF.

You can set a number of different checks, such as:

- Document must not have layers, i.e. optional content is not allowed.
- The document catalog dictionary must not contain OCPProperties key.
- Document must not have alternate layer configurations, i.e. only one Layers panel ("layers palette") is allowed.
- Layer configuration (i.e. the Layers panel) must have a name.
- Multiple layer configurations (i.e. Layers panels) must not have the *same* name.
- Layer group must not be missing from order, i.e. the Layer group must be present in the order of the Layer panel.
- Layer configuration (i.e. the Layers panel) must not contain application specific usage entry.

**About PDF layers**

Layered content usually comes from applications such as InDesign, AutoCAD or Visio. When converted to PDF, the layers are retained and can be viewed and navigated in Adobe Acrobat. However, if you print a PDF file that contains layers, only the content that is visible on-screen is printed. This may or may not be desired.

**"Conventional" layers versus PDF layers**

**Layers in digital image editing** ("conventional" layers) are used to separate the different elements of an image. Each element is drawn on exactly one layer. The different layers are stacked on top of each other, and the order of the layers defines how the image looks like.

**Layers in PDF** have a different meaning. They are used to hide or show page content:

- Turning *on* a layer, all objects on this layer are shown on-screen.
- Turning *off* a layer, all objects on this layer are hidden, i.e. they become invisible.

As such, layers are also called "optional content groups": groups of objects that can be selectively viewed or hidden by the author of the document. Objects can belong to different layers, and the order of the layers is of no importance.

To work with layers in a PDF document in Adobe Acrobat, select **View > Show/Hide > Navigation Panes > Layers**.

For more information, refer to the Adobe Acrobat help.

**Related Actions**

- [Change layer properties](#) on page 150
- [Select objects in layers by layer properties](#) on page 455

- [Fix layers](#) on page 151

### 4.6.4. Informs

#### 4.6.4.1. Gather layer information

**Belongs to**

- **Category:** Layers
- **Type:** Informs
- **Since Version:** 2017

**What it does**

Collects information about the layers used in a PDF and presents it in a report.

You will get a clickable tree view (representing the sequence of the layers), followed by an overview of all layers (listed alphabetically) with their attributes.



PITSTOP  
PRO



Layer Information

Objects

Background

Visuals

Background

Intent

Default State

Locked

Initial State

Visibility

Print

Export

Empty

Objects

Intent

Default State

Locked

Initial State

Visibility

Print

Export

Empty

View

on

no

visible when on

prints when visible

exports when visible

yes

View

on

no

visible when on

prints when visible

exports when visible

yes

## 4.7. Line Art

---

### 4.7.1. Changes

---

#### 4.7.1.1. Apply transfer function

**Belongs to**

- **Category:** Prepress;Text;LineArt;Color;Image
- **Type:** Changes

**What it does**

Adds a transfer function to paths, text, images or all these types of objects. You can exclude spot colors or apply the transfer function on tint values or alternate values only.

Transfer functions are used for creative purposes, artistic effect and to correct the characteristics of a specific, maybe poorly calibrated, output device. For example, a file that is intended for output on a particular image setter may contain transfer functions that compensate for the dot gain inherent to that printer.



---

**Note:** Transfer functions are not allowed in PDF/X compliant documents.

---

**Related Actions**

- [Check for custom transfer function](#) on page 402
- [Remove custom transfer function](#) on page 271

#### 4.7.1.2. Change dash pattern

**Belongs to**

- **Category:** Line Art
- **Type:** Changes

**What it does**

Changes the pattern of dashed lines or converts them to continuous lines.

**How to proceed**

To use continuous lines, click .



To create a dashed pattern, click  and configure the following fields:

- In the **On** fields, enter the desired length of the dashes.
- In the **Off** fields, enter the desired size of the spaces between the dashes.
- In the **Phase** field, enter a value to indicate where the dash pattern should begin. For example, if you have chosen dashes of 5 cm each, if you have specified a phase of 2 cm, the first dash will have a length of 3 cm (5 cm - 2 cm).

### 4.7.1.3. Change fill and/or stroke

#### ***Belongs to***

- **Category:** LineArt;Text
- **Type:** Changes

#### ***What it does***

Allows you to turn on or off the fill and/or stroke for the selected objects.

### 4.7.1.4. Change fill type

#### ***Belongs to***

- **Category:** LineArt;Text
- **Type:** Changes

#### ***What it does***

Allows you to change the fill type of the selected objects to either Non-Zero Winding (Fill) or Even-odd (Eofill).

#### ***About the fill type***

The fill type is an attribute of polygons and loops: compound paths with intersecting lines. To determine whether a point is part of the shape, two different rules can be applied:

- The **Non-Zero Winding** rule (or standard rule). This rule supposes that you draw a line from a point inside the shape to the outside of the shape, without passing through a vertex. You must now count the number of times edges wind around the point inside the shape, in a counter-clockwise direction:
  - For every edge that crosses the line from the point inside the shape in one direction, add 1 to the winding number.
  - For every edge that crosses the line in the opposite direction, subtract 1.

If the winding number is not equal to zero, the shape area to which the point belongs, is filled. For more information, refer to <http://www.wikipedia.org/wiki/nonzero-rule>.

- The **Even-odd rule**: This rule also supposes that you draw a line between a point inside the shape outline and a point outside its outline.

- If that line crosses the line of the shape an odd number of times, the shape area to which the point belongs, is filled.
- If the number of crossings is even, the area is not filled.

#### Checking the fill type of line art

To see which rule is applied, check the object's fill attributes:

1. Select the object, using the Enfocus Select tool .
2. Click  to display the Enfocus Inspector and select  > .
3. At the bottom, check which button is selected:
  -  If **Fill** is selected, the **Non-zero Winding rule** applies.
  -  If **Eofill** is selected, the **Even-odd** rule applies.

#### Related Actions

- [Select paths by fill type](#) on page 460

### 4.7.1.5. Change flatness

#### Belongs to

- **Category:** LineArt;Text
- **Type:** Changes

#### What it does

Allows you to set the flatness of a PostScript curve.

The flatness determines how the objects in a document are printed on a PostScript printer.

The default setting for flatness is 1. Increasing this value will speed up printing, but can reduce the print quality (resulting in visible segments in the curve). Decreasing this value will slow down printing, but will improve the print quality.

#### Related Actions

- [Check flatness](#) on page 399
- [Select flatness](#) on page 503

### 4.7.1.6. Change line cap

#### Belongs to

- **Category:** LineArt;Text
- **Type:** Changes



**What it does**

Changes how the end of a vector line looks like.

**How to proceed**

- To have the line end exactly, click  **butt**.
- To put a round end on the line, click  **round**.
- To have corners projected beyond the length of the line, click  **projecting square**.

### 4.7.1.7. Change line join

**Belongs to**

- **Category:** LineArt; Text
- **Type:** Changes

**What it does**

Changes how a corner on a vector line looks like.

**How to proceed**

- To have a sharp corner, click  **miter**.
- To put a round corner on the line, click  **round**.
- To flatten the corners, click  **bevel**.

### 4.7.1.8. Change line weight

**Belongs to**

- **Category:** LineArt;Text
- **Type:** Changes

**What it does**

Changes the thickness of a selected line to the desired line weight.

**Related Actions**

- [Normalize line weight](#) on page 133
- [Select by line weight](#) on page 457
- [Check line weight](#) on page 346

#### 4.7.1.9. Change miter limit

**Belongs to**

- **Category:** LineArt; Text
- **Type:** Changes

**What it does**

Changes the length of the extension of a corner on a vector line.

The miter limit is the limit when a join switches from mitered (pointed) to beveled (squared-off). To allow “pointier” angles, you can increase the miter limit.

For more information on how to calculate the miter limit, refer to the topic "Stroke attributes: Miter limit" in [the PitStop Pro Reference Guide on the Enfocus website](#).

For more information on how to calculate the miter limit, refer to the topic "Stroke attributes: Miter limit" in the PitStop Pro Reference Guide.

#### 4.7.1.10. Change stroke adjustment

**Belongs to**

- **Category:** LineArt; Text
- **Type:** Changes

**What it does**

Allows you to enable or disable stroke adjustment.

Stroke adjustment takes care of the rendering of paths on a raster device (printing device, computer monitor, etc.).

**Example**

If stroke adjustment is **turned off**, the device will draw the pixel only if it covers the path for more than 50%.

This means that a 1 pixel wide line can be drawn in different ways:

- If the line is drawn nicely on top of a pixel of the screen, the line will look fine.
- If the line is spread over 2 pixels of the screen, the width will be 2 pixels on some places and 1 pixel on other places, turning the line into an ugly, jaggy line.

If stroke adjustment is **turned on**, a correction will be made in such a way that the line looks nice and has the same width (1 pixel) everywhere.

#### 4.7.1.11. Close path

**Belongs to**

- **Category:** Line Art

- **Type:** Changes

**What it does**

Joins the connection between the first and the last anchor point of a path (as required).

## 4.7.1.12. Combine subpaths

**Belongs to**

- **Category:** Line Art
- **Type:** Changes

**What it does**

Combines two selected paths.

**About subpaths**

A path is considered the combination of the path itself which represents most graphic state properties such as color, line-weight, etc. and the subpaths which represent the lines. For example, a doughnut is a single path with a single fill and stroke color, which consists of two subpaths (=two circles).

**Related Actions**

- [Select subpaths](#) on page 462
- [Split in subpaths](#) on page 176

## 4.7.1.13. Combine and divide shapes

**Belongs to**

- **Category:** Line Art
- **Type:** Changes
- **Since version:** 2018

**What it does**

Allows you to combine the selected objects into one shape or vice versa, divide a shape in multiple parts.

In case of combining shapes, you should indicate how the overlapping parts should be handled:

- **Unite:** Combines the selected objects into a single shape.
- **Intersect:** Keeps the areas where objects are stacked on top of each other.
- **Exclude:** Keeps the areas where an odd number of objects are stacked on top of each other.
- **Minus front:** Keeps the areas of the bottom shape which are not overlapping with the overlying shapes.
- **Minus back:** Keeps the areas of the top shape which are not overlapping with the underlying shapes.

If you want to keep the original shapes, select **Create copy**. The changes will be made on the copy and the original shapes will be kept as they are.

**Combine/Divide Shapes** is also an option in the PitStop Pro > Object menu and in the context menu when you make a selection, and a tab in the PitStop Inspector.



**Note:** If used on 'open' paths, the paths are closed before the operation is executed. The result may be unexpected.

Examples

```
Select line art
Combine and divide shapes <!-- Choose an option -->
```

Suppose you're running this Action List on a file with the following 3 partly overlapping objects:



The table below shows the result of each of the options.

| Chosen option | Result                                                                                                                                                   |
|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Unite         | <br>Note that the new shape gets the color of the front/top shape.     |
| Intersect     | As there is no part where all three objects are stacked on each other, the intersection is empty and all shapes are removed.                             |
| Exclude       |                                                                       |
| Minus front   |                                                                       |
| Minus back    |                                                                       |
| Divide        | <br>Once divided, you can for example move the different parts apart. |

| Chosen option | Result                                                                            |
|---------------|-----------------------------------------------------------------------------------|
|               |  |

**Related Actions**

[Select line art](#) on page 457

## 4.7.1.14. Convert stroke to fill

**Belongs to**

- **Category:** Line Art
- **Type:** Changes
- **Since version:** 2018

**What it does**

Converts a stroked path to a filled path.

The stroke properties become the fill properties of the newly created object.

There are two methods to make the conversion:

- **Placing the objects with stroke or fill in a knockout group** This method puts everything in a form. This may be undesirable; if so, you can select the second option.  
**Clipping the object with fill by the object with stroke** This method works in a different way, without knockout groups, it simply cuts away the stroked object. Note that exceptionally small hairlines may be visible (depending on the renderer used).

In most cases, there will be no visual difference between both methods.



**Note:** This option is also available in the Enfocus Inspector (Line Art Editing > Convert Stroke To Fill).

**Examples**

Some examples where this Action can be useful:

- You want to combine shapes ([Combine and divide shapes](#) on page 163). This is not possible with objects that have no fill.
- You want to remove one dash of a dashed line. This is only possible after you have converted the stroke to a filled path.

**Related Actions**

- [Convert fill to stroke](#) on page 164

## 4.7.1.15. Crop line art

*Belongs to*

- **Category:** Line Art
- **Type:** Changes
- **Since version:** 2018

*What it does*

Performs a hard crop on line art.

This is useful to remove redundant data, for example content that is masked away. This reduces the complexity and makes the file faster to process and easier to edit. Note that PitStop 2018 comes with a standard Action List "Clean Up Content" that makes use of this Action.

There are three ways to crop line art:

- **Crop line art to clip mask** Allows you to "execute" clipping masks on line art: the objects are cropped to their clipping mask, while the clipping path itself and anything that was clipped away is removed, without causing any visual difference. During this process, strokes are contourized (converted to fill paths). As a consequence, 'redundant' (because invisible) line art is removed, which reduces the file size and speeds up the rendering and processing of your artwork files.
- **Crop line art to the page box of your choice:** Removes all line art outside the specified page box.
- **Crop line art to forms:** Removes all line art outside the form (if applicable).


In case of knockout behavior, there are two methods to crop the line art:

- **Placing the stroke and fill objects in a knockout group** This method puts everything in a form. This may be undesirable; if so, you can select the second option.
- **Clipping the fill object by the stroke object** This method works in a different way, by cutting away the stroked object. No forms/knockout groups are created. Note that exceptionally small hairlines may be visible (depending on the renderer used).



In most cases, there will be no visual difference between both methods.


*Example 1*

|                                                                                     |                                                                                            |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|
|  | Clipped image. There is no visual difference before and after cropping/running the Action. |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|
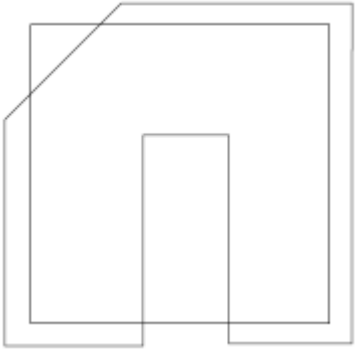
|                                                                                    |                                                                     |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------|
|   | Clipped image in wireframe mode BEFORE cropping/running the Action. |
|  | Clipped image in wireframe mode AFTER cropping/running the Action.  |

Example 2
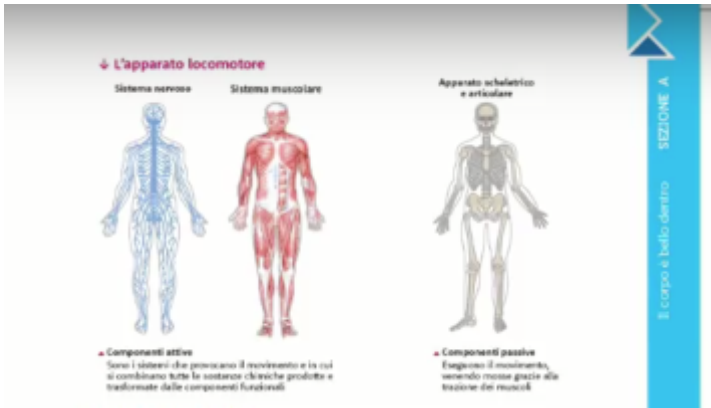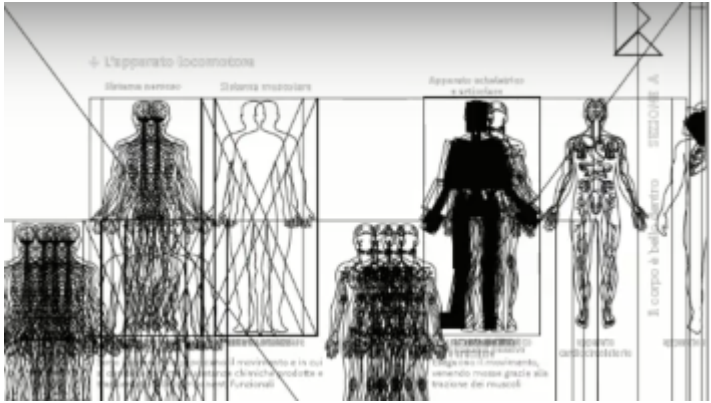
|                                                                                      |                                                                                                 |
|--------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
|  | How the page looks. There is no visual difference before and after cropping/running the Action. |
|  | Page in wireframe mode BEFORE cropping/running the Action.                                      |

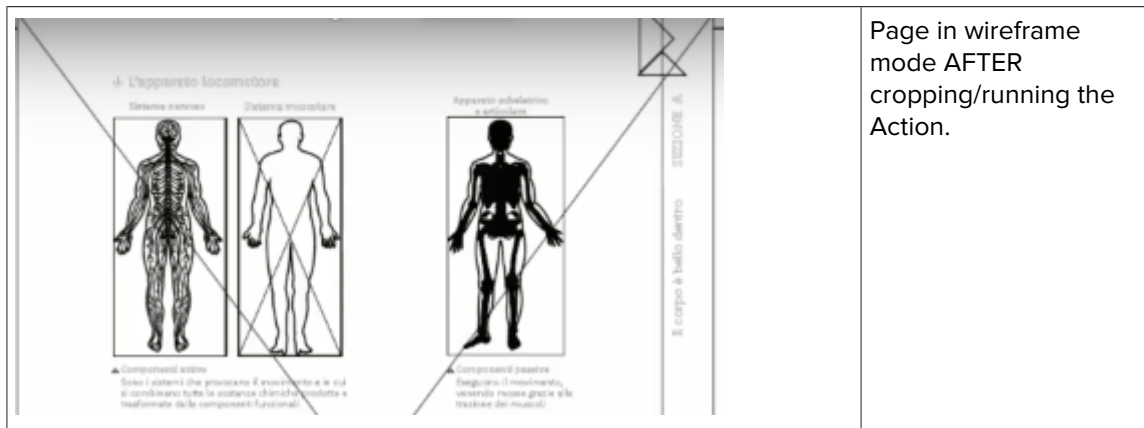

### Want to know more?

There is a nice movie explaining this Action. Check it out on our learning platform ([www.enfocus.com/learn](http://www.enfocus.com/learn)): [PitStop 2018 features](#).

## 4.7.1.16. Fix negative dash pattern phase

### Belongs to


- **Category:** LineArt
- **Type:** Changes
- **Since version:** 13

### What it does

Converts a negative dash pattern phase into a positive phase without any visual change.

The dash pattern phase specifies the distance into the dash pattern to start the dash. Negative values may not be supported by the RIP.

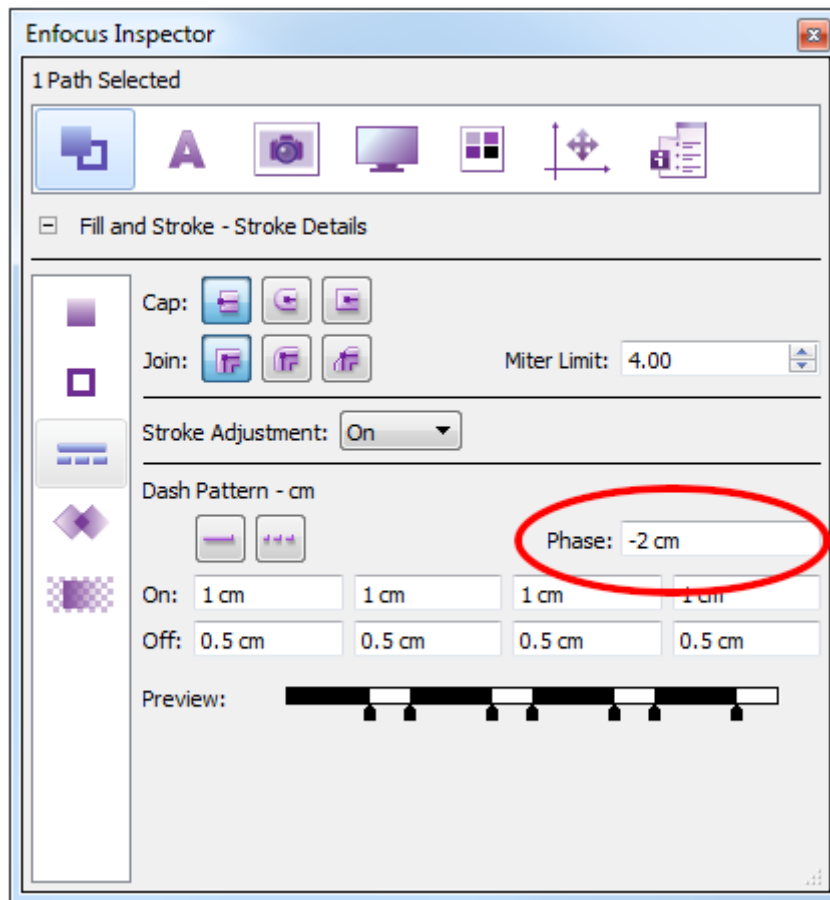

**Example:**

Applying this Action to the dashed pattern in the above example (phase = - 2 cm) will result in a new phase of 4 cm. This positive value is calculated by adding the total length of the dash pattern (6 cm) to the negative phase (-2 cm).

**Related Actions**

- [Select objects with negative dash pattern phase](#) on page 458
- [Fix negative dash pattern phase](#) on page 169

## 4.7.1.17. Match fill and stroke colors

**Belongs to**

- **Category:** Color; LineArt
- **Type:** Changes
- **Since version:** 12 update 3

**What it does**

Changes the stroke color to match the fill color or vice versa.

**Use case**

Suppose you want to print very small text. To improve the readability, you convert the text to outlines and add a stroke. However, the stroke color is black by default. This may not be desired, e.g. if your text is in color. In that case, you can run this Action with the option **Change the stroke color to match the fill color**.

**Related Actions**

[Change color](#) on page 102

## 4.7.1.18. Normalize line weight

**Belongs to**

- **Category:** General; LineArt; Position and size
- **Type:** Changes

**What it does**

Normalizes paths where a transformation matrix caused distortions, by removing the distortion, giving the path a uniform line weight equal to the average reported in the Inspector. The Action also works on sheared paths.

**Related Actions**

- [Change line weight](#) on page 161
- [Select by line weight](#) on page 457
- [Check line weight](#) on page 346

## 4.7.1.19. Offset path

**Belongs to**

- **Category:** Line Art
- **Type:** Changes
- **Since version:** 2018

**What it does**

Grows or shrinks a path by the value defined in the attributes of this Action. This way you can make larger or smaller versions of an object.

Attributes are:

- **Offset:** Determines how much the path will grow or shrink; this value denotes the distance between the original and the new path. Use negative values to make the path smaller, positive values to make it larger.
- **Join:** Determines the path's angles. Choices are:
  - miter (pointed corner) - in that case you can also determine a miter limit, to make the corners sharper (high value) or less sharp (low value)
  - round (rounded corner)
  - bevel (flat corner).


- **Create copy:** Makes sure the original path is kept, in addition to the offset path.

This Action also works on clipping paths and curved paths.

Open paths are automatically closed before growing or shrinking.

**Examples**

**Original object**



| Chosen options                             | Result                                                                              |
|--------------------------------------------|-------------------------------------------------------------------------------------|
| Offset: 5 mm<br>Join: Miter<br>Create copy |   |
| Offset: 5 mm<br>Join: Round<br>Create copy |  |
| Offset: 5 mm<br>Join: Bevel<br>Create copy |  |

| Chosen options                         | Result                                                                            |
|----------------------------------------|-----------------------------------------------------------------------------------|
| Offset: 5 mm<br>Join: Bevel<br>No copy |  |

#### 4.7.1.20. Open path

**Belongs to**

- **Category:** Line Art
- **Type:** Changes

**What it does**

Removes the connection between the first and the last anchor point of a path.

#### 4.7.1.21. Reverse path

**Belongs to**

- **Category:** Line Art
- **Type:** Changes
- **New Since:** PitStop 2022

**What it does**

Changes the direction of the starting and ending point of the selected path.

#### 4.7.1.22. Separate stroke and fill

**Belongs to**

- **Category:** Line Art
- **Type:** Changes


**What it does**

Splits stroke and fill of line art that has both a stroke and a fill.


This is for example useful if you want [to add bleed around a contour](#), which is able to extend line art, but only if it's not both stroked and filled.

**Example**

**Before:**

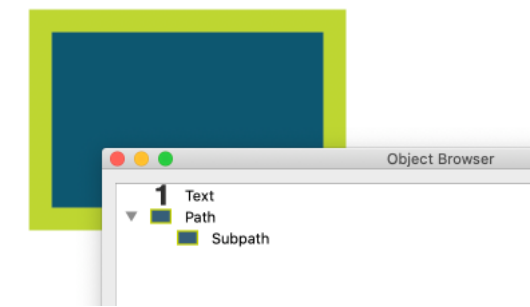

After:

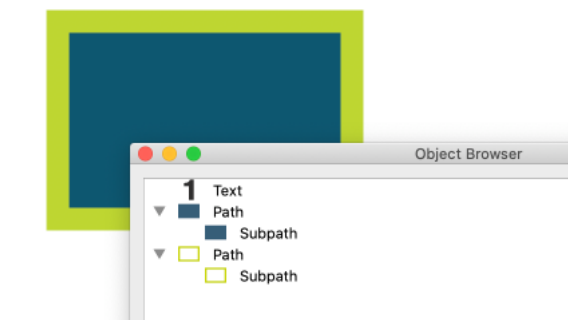

Related Actions

- [Add bleed around contour](#) on page 258

4.7.1.23. Simplify line art

Belongs to

- **Category:** Line Art
- **Type:** Changes
- **Since:** 24.03

What it does

Simplifies a path by reducing the number of nodes.



**Note:** This option is also available in the Enfocus Inspector (Line Art Editing > Simplify Line Art).

Attributes



**Note:** Settings are remembered.

| Attribute                | Description                                                                               |
|--------------------------|-------------------------------------------------------------------------------------------|
| Keep all original curves | Keep the curves that are already present, regardless of the curve fitting settings below. |

| Attribute                                                                       | Description                                                                                                                                                          |
|---------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                 | PitStop will only modify the straight lines in the original path.                                                                                                    |
| Target segment length                                                           | Increase the segment length to increase the space between the nodes and further reduce the number of nodes.<br><br>Default value is 20 pt.                           |
| Keep corners with angle greater than...                                         | Make sure to keep the segments that clearly form an angle, to avoid mistakes.                                                                                        |
| Curve fitting                                                                   | Combine as many curves as possible into one long curve. Use this option in combination with the target segment length.                                               |
| Straight line fitting <ul style="list-style-type: none"><li>Tolerance</li></ul> | Combine as many straight lines a possible into one long straight line, taking into account the tolerance, i.e. the maximum deviation allowed from the original path. |


**Use cases**

Cut paths with many nodes slow down cutting, because the cutting machine needs to stop and start again at every node; by reducing the number of nodes (approximating the original path), the speed will increase.

Line art with many nodes can also be challenging for RIPs.

**Tip**

This Action is also useful if you've [converted a fill to stroke](#), typically resulting in a path with a lot of nodes.

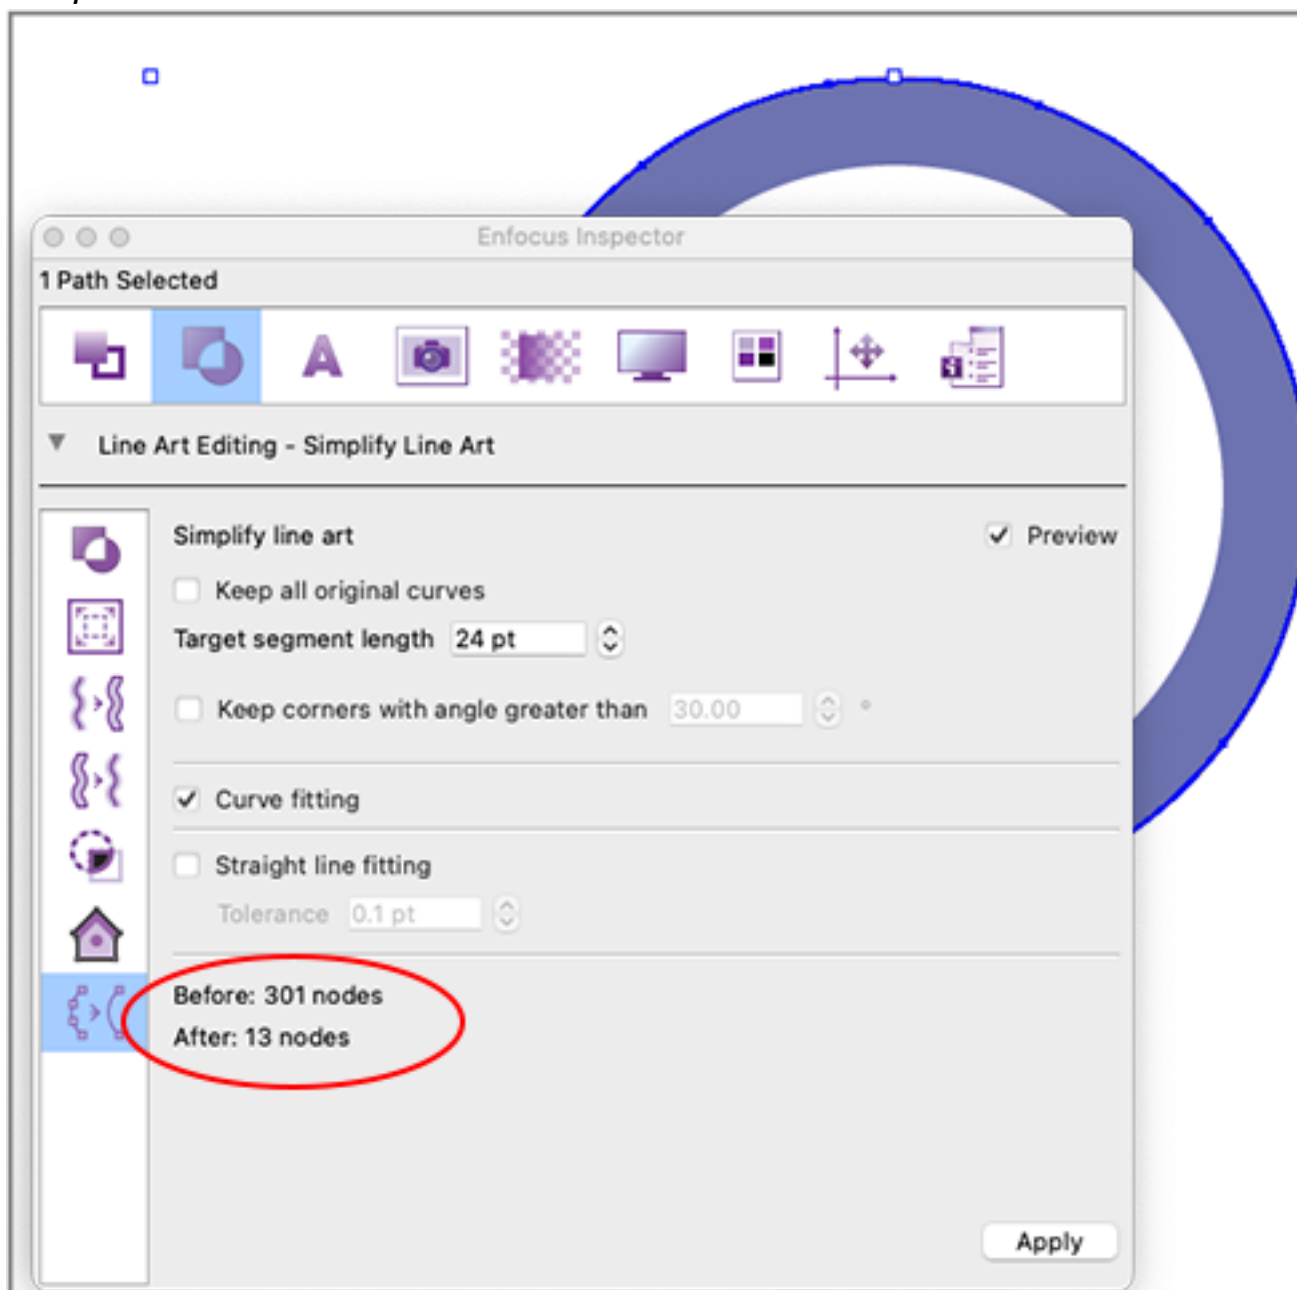*Example*

#### 4.7.1.24. Split in subpaths

***Belongs to***

- **Category:** Line Art
- **Type:** Changes

***What it does***

Allows you to split any compound path into separate paths, for example to give them a different color.

**Splitting compound paths in PitStop Pro**

In PitStop Pro, you can as well split compound paths. Proceed as follows:

1. Select the compound path (by using the PitStop Select Objects tool ).
2. Right-click it.
3. Click **Path > Compound Path > Release Compound Path**.

**Related Actions**

- [Combine subpaths](#) on page 162
- [Select subpaths](#) on page 462

## 4.7.1.25. Split line art in segments

**Belongs to**

- **Category:** Line Art
- **Type:** Changes

**What it does**

Allows you to split a path in multiple individual segments.

**Only split at corners where the angle is at least <value>°** avoids that sequences of continuous lines get split.

**Use cases**

This Action can be useful for optimizing cut lines, because detecting and deleting duplicate lines is a critical process. It can help you break lines apart, remove hidden objects, and close gaps in contours.

**Related Actions**

- [Combine subpaths](#) on page 162
- [Select subpaths](#) on page 462
- [Split in subpaths](#) on page 176

## 4.7.2. Checks

---

### 4.7.2.1. Check line art by length

**Belongs to**

- **Category:** LineArt
- **Type:** Checks
- **Since Version:** 2019



**What it does**

Checks if the line art has a particular length. You can either check the length of individual line art or the total length of all line art in the document.

The exact length is mentioned in the Preflight Report and the Navigator.

**Use case**

Users with a cutting table may want to know the length of a cut path so they can estimate how long the job will take to cut on the table.

## 4.7.2.2. Check line weight

**Belongs to**

- **Category:** LineArt; Prepress
- **Type:** Checks

**What it does**

Checks if the line weight of the selected objects is higher or lower than a particular value.

**Related Actions**

- [Change line weight](#) on page 161
- [Select by line weight](#) on page 457
- [Normalize line weight](#) on page 133

## 4.7.2.3. Check for objects with negative dash pattern phase


**Belongs to**

- **Category:** LineArt
- **Type:** Checks
- **Since version:** 13

**What it does**

Detects if the document contains a dash pattern phase with a negative value.

The dash pattern phase specifies the distance into the dash pattern to start the dash. Negative values may not be supported by the RIP.

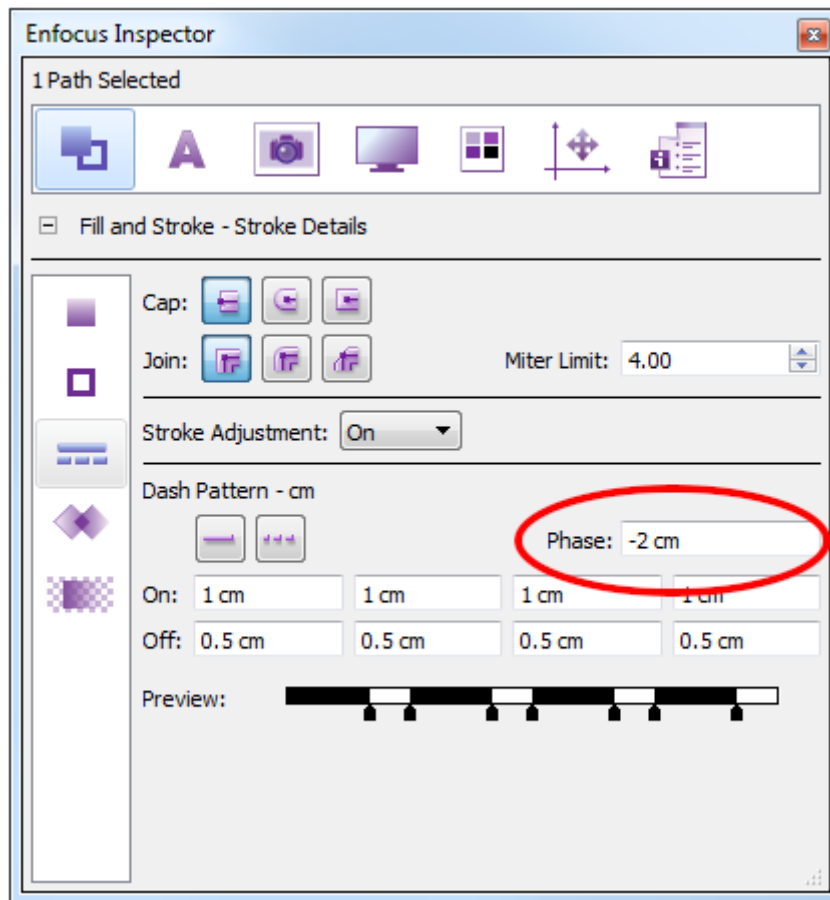

#### Related Actions

- [Select objects with negative dash pattern phase](#) on page 458
- [Fix negative dash pattern phase](#) on page 169

### 4.7.2.4. Check for zero fill line art

#### Belongs to

- **Category:** LineArt
- **Type:** Checks
- **Since version:** 2020

#### What it does

Detects if the document contains line art of which the fill is empty ('zero-width filled lines').

This type of line art may be visible in a PDF but usually it doesn't print or rasterize, so it's important that it is detected in advance.



**Note:** Zero fill clip paths are also detected.

#### 4.7.2.5. Check maximum path length

**Belongs to**

- **Category:** Line Art
- **Type:** Checks

**What it does**

Checks for a maximum amount of nodes in a path.

#### 4.7.2.6. Check number of paths on page

**Belongs to**

- **Category:** Line Art
- **Type:** Checks

**What it does**

Checks the number of paths on one page.

You can for example log a warning if the PDF contains more than 4 paths on a page.

**Related Actions**

[Select page by number of paths](#) on page 459

#### 4.7.2.7. Check thin objects

**Belongs to**

- **Category:** Line Art
- **Type:** Checks
- **Since version:** 2019

**What it does**

Allows you to check if the document contains objects with a stroke smaller than a set threshold.

If desired, you can indicate that for objects of which stroke and fill have the same color, the width of the fill and stroke should be added together.

This Action is typically used to check for thin white lines that may be visible on small screens (e.g. on an iPad screen).

**Related Actions**

[Select thin objects](#) on page 462

### 4.7.2.8. Check total number of nodes on page

**Belongs to**

- **Category:** Line Art
- **Type:** Checks
- **Since version:** 13 update 1

**What it does**

Checks how many nodes are present on each page, depending on the set threshold (e.g. less than/more than (...) the set number of nodes). This Action is useful to detect complex pages, which may take a considerable amount of time to rip and therefore may cause a production bottleneck.

**Related Actions**

- [Select page by total number of nodes](#) on page 460

## 4.7.3. Selections

---

### 4.7.3.1. Select by line weight

**Belongs to**

- **Category:** Line Art
- **Type:** Selections

**What it does**

Selects objects with a particular line weight.

For example, select objects with line weight *less than 0.0123 inch*.

**Related Actions**

- [Normalize line weight](#) on page 133
- [Select by line weight](#) on page 457
- [Check line weight](#) on page 346

### 4.7.3.2. Select closed paths

**Belongs to**

- **Category:** Line Art
- **Type:** Selections
- **Since Version:** 2018

**What it does**

Selects the closed paths in a file.

*Use case:* To be able to manipulate the contents of a file based on the dieline (closed paths), you may select the dieline from within a PDF file containing other paths of the same color and width.

**Related Actions**

- [Select subpaths](#) on page 462

### 4.7.3.3. Select line art

**Belongs to**

- **Category:** Line Art
- **Type:** Selections

**What it does**

Allows you to select objects that are drawn as line art (i.e. vector and not raster).

### 4.7.3.4. Select line art by total number of nodes

**Belongs to**

- **Category:** Line Art
- **Type:** Selections
- **Since Version:** 2019

**What it does**

Selects paths based on the number of nodes. The number of nodes can be counted based on compound paths or subpaths.

This Action can be useful in combination with [Select closed paths](#) on page 457 or with [Rasterize selection](#) on page 138.

**Related Actions**

- [Select page by total number of nodes](#) on page 460

### 4.7.3.5. Select objects that use neither stroke nor fill

**Belongs to**

- **Category:** LineArt;Text
- **Type:** Selections

**What it does**

Selects vector or path objects that contain no stroke or fill color value in a PDF.

**Related Actions**

[Select invisible objects without fill and stroke](#) on page 446 (same functionality)

### 4.7.3.6. Select objects with negative dash pattern phase


**Belongs to**

- **Category:** LineArt
- **Type:** Selections
- **Since version:** 13

**What it does**

Select documents that have a dash pattern phase with a negative value.

The dash pattern phase specifies the distance into the dash pattern to start the dash. Negative values may not be supported by the RIP.

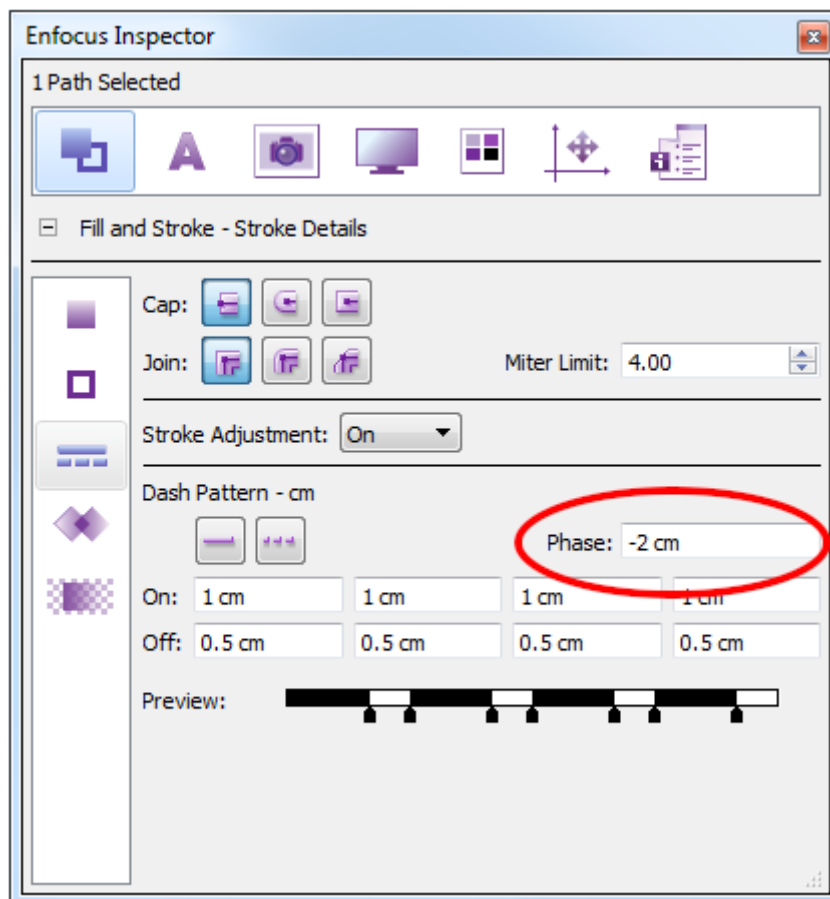**Related Actions**

- [Check for objects with negative dash pattern phase](#) on page 345
- [Fix negative dash pattern phase](#) on page 169

### 4.7.3.7. Select page by number of paths

**Belongs to**

- **Category:** Line Art
- **Type:** Selections

**What it does**

Allows you to make a selection based on the number of paths on a page.

You could for example select all pages with less than 4 pages.

**Related Actions**

[Check number of paths on page](#) on page 347

### 4.7.3.8. Select page by total number of nodes

**Belongs to**

- **Category:** Line Art
- **Type:** Selections
- **Since version:** 13 update 1

**What it does**

Selects pages based on the number of nodes present on that page. You can set the threshold (e.g. less than/more than (...) e.g. 10.000 nodes) as required. This Action is useful to select (and afterwards change) complex pages with lots of points, which may take a considerable amount of time to rip and therefore may cause a production bottleneck. A common way of handling this issue is to select the offending pages and convert them to bitmaps.



**Note:** The new default Action List "Find complex pages (over 5,000 nodes) and rasterize them at 600 dpi" includes this functionality.

**Related Actions**

- [Check total number of nodes on page](#) on page 348
- [Select line art by total number of nodes](#) on page 458

### 4.7.3.9. Select paths by fill type

**Belongs to**

- **Category:** LineArt
- **Type:** Selections
- **Since version:** 2023 update 1

**What it does**

Selects paths based on their fill type:

- Paths without fill
- Paths with Non-Zero Winding fill
- Paths with Even-odd fill

**About the fill type**

The fill type is an attribute of polygons and loops: compound paths with intersecting lines. To determine whether a point is part of the shape, two different rules can be applied:

- The **Non-Zero Winding** rule (or standard rule). This rule supposes that you draw a line from a point inside the shape to the outside of the shape, without passing through a vertex. You must now count the number of times edges wind around the point inside the shape, in a counter-clockwise direction:
  - For every edge that crosses the line from the point inside the shape in one direction, add 1 to the winding number.
  - For every edge that crosses the line in the opposite direction, subtract 1.

If the winding number is not equal to zero, the shape area to which the point belongs, is filled. For more information, refer to <http://www.wikipedia.org/wiki/nonzero-rule>.

- The **Even-odd rule**: This rule also supposes that you draw a line between a point inside the shape outline and a point outside its outline.
  - If that line crosses the line of the shape an odd number of times, the shape area to which the point belongs, is filled.
  - If the number of crossings is even, the area is not filled.

**Checking the fill type of line art**

To see which rule is applied, check the object's fill attributes:

1. Select the object, using the Enfocus Select tool .
2. Click  to display the Enfocus Inspector and select  > .
3. At the bottom, check which button is selected:
  - If  **Fill** is selected, the **Non-zero Winding rule** applies.
  - If  **Eofill** is selected, the **Even-odd** rule applies.

**Related Actions**

- [Change fill type](#) on page 159

## 4.7.3.10. Select rendering objects

**Belongs to**

- **Category:** LineArt;Text;Image
- **Type:** Selections



**What it does**

Selects all objects with a rendering intent.

This includes paths, text and images with any of the following rendering intents:

- Absolute Colorimetric
- Relative Colorimetric
- Perceptual
- Saturation



**Note:** This Action does not allow you to make a selection based on **one particular** rendering intent. To select objects by **one** of the listed rendering intents, use [Select by rendering intent](#) on page 427.

**About rendering intents**

A rendering intent is a remapping method, allowing to remap colors so that they best match the intended use. 'Remapping' means that colors from one output device's color space are mapped to the color space of another device.

For more information and examples, refer to [the PitStop Pro Reference Guide on the Enfocus website](#) (See Chapter "Rendering intents to remap colors").

For more information and examples, refer to the PitStop Pro Reference Guide (See Chapter "Rendering intents to remap colors").

**Related Actions**

- [Change rendering intent](#) on page 104
- [Check rendering intent](#) on page 312
- [Remove rendering intent](#) on page 117
- [Select by rendering intent](#) on page 427

## 4.7.3.11. Select subpaths

**Belongs to**

- **Category:** Line Art
- **Type:** Selections

**What it does**

Selects the subpaths if the entire path is selected.

**About subpaths**

A path is considered the combination of the path itself which represents most graphic state properties such as color, line-weight, etc. and the subpaths which represent the lines. For example, a doughnut is a single path with a single fill and stroke color, which consists of two subpaths (=two circles).

**Related Actions**

- [Combine subpaths](#) on page 162

- [Split in subpaths](#) on page 176

### 4.7.3.12. Select thin objects

#### ***Belongs to***

- **Category:** Line Art
- **Type:** Selections

#### ***What it does***

Allows you to select objects based on the maximum thickness of the fill or stroke.

If desired, you can indicate that for objects of which stroke and fill have the same color, the width of the fill and stroke should be added together.

This Action is typically used to select and afterwards remove thin white lines that may be visible on small screens (e.g. on an iPad screen).

#### ***Example***

If you choose the following options:

```
Select objects with width of Filled rectangle
smaller than 0.0353 cm
Calculate whole thickness when stroke and fill have the same color <!-- selected -->
```

Following objects will be included in the selection:

- Objects with different stroke and fill color, must have a **fill** smaller than 0.0353 cm.
- Objects with the same stroke and fill color, must have a **fill** and **stroke** (added together) smaller than 0.0353 cm.

#### ***Related Actions***

[Check thin objects](#) on page 347

## 4.8. Metadata

---

### 4.8.1. Changes

---

#### 4.8.1.1. Add missing creation and modification date

#### ***Belongs to***

- **Category:** Metadata
- **Type:** Changes

**What it does**

Inserts the creation and modification date.

In some legacy PDF applications it was possible to create a PDF file without a creation or modification date. This Action fixes this issue.

**Related Actions**

[Check creation and modification date](#) on page 351

## 4.8.1.2. Change annotation flags

**Belongs to**

- **Category:** Metadata
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Allows you to enable or disable the annotation flags of your choice.

Following flags can be changed:

- Invisible
- Print
- NoRotate
- ReadOnly
- ToggleNoView
- Hidden
- NoZoom
- NoView
- Locked
- LockedContents

**Related Actions**

- [Check annotation flags settings](#) on page 348
- [Check annotations print setting](#) on page 349
- [Use flags to select annotation](#) on page 469

## 4.8.1.3. Change annotations print setting

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Change annotations' print setting allows you to set the selected annotations to **Printing** or **Non-Printing**.

#### 4.8.1.4. Change binding

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Allows you to redefine a document's binding; you can set binding to the right or to the left.

Most European language documents are bound on the left.



**Note:** To check a document's binding, in Adobe Acrobat, go to **File > Properties** and switch to the **Advanced** tab. The document's binding property (Left Edge or Right Edge) is displayed under Reading Options.

**Related Actions**

- [Check binding](#) on page 350
- [Select by binding](#) on page 465

#### 4.8.1.5. Change document info

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Changes the document information as found in the document properties in Acrobat.

You can change, remove or replace the following details:

- Producer
- Title
- Subject
- Author
- Creator
- Keywords

If you want to replace document info, you can make use of fixed strings and/or document variables, such as the user name, company, date ... see the overview of document variables below.

**Document variables - Overview**

This is the full list of the predefined variables that can be inserted via the **Variable** button:

- %Current Document Name%
- %Full Document Path%
- %Time%

- %UTC Time%
- %Date%
- %UTC Date%
- %User Company%
- %User Name%
- %Page Number%



**Note:** You can use the page number as it is, or increment or decrement it (so always add up or subtract a certain number). To decrement, you need to add a minus sign. For example, if the page number is '12' and you enter '-3', the value of the variable will be '9'. If you enter '3', the value of the variable will be '15'. You can also add leading zeros by defining the minimum number of digits. For example, if Total digits is set to '3', '9' will become '009' and '15' will become '015'.

- %Page Count% = total number of pages



**Note:** You can add leading zeros by defining the minimum number of digits. For example, if Total digits is set to '3', '9' will become '009' and '15' will become '015'.

- %Document Title%
- %Page Box Dimensions%



**Note:** You need to indicate which page box should be considered. For example, if you select Media Box from the Page Box list, the value of the variable will be the dimensions of the media box, for example: 210 x 297 mm (the unit depends on the unit specified in the PitStop Pro preferences).

- %Page Box Width%




**Note:** You need to indicate which page box should be considered. For example, if you select Art Box from the Page Box list, the value of the variable will be the width of the art box, for example: 210 mm (the unit depends on the unit specified in the PitStop Pro preferences).

- %Page Box Height%



**Note:** You need to indicate which page box should be considered. For example, if you select Bleed Box from the Page Box list, the value of the variable will be the height of the bleed box, for example: 210 mm (the unit depends on the unit specified in the PitStop Pro preferences).

This is an example of the dialog that allows you to insert predefined text variables.

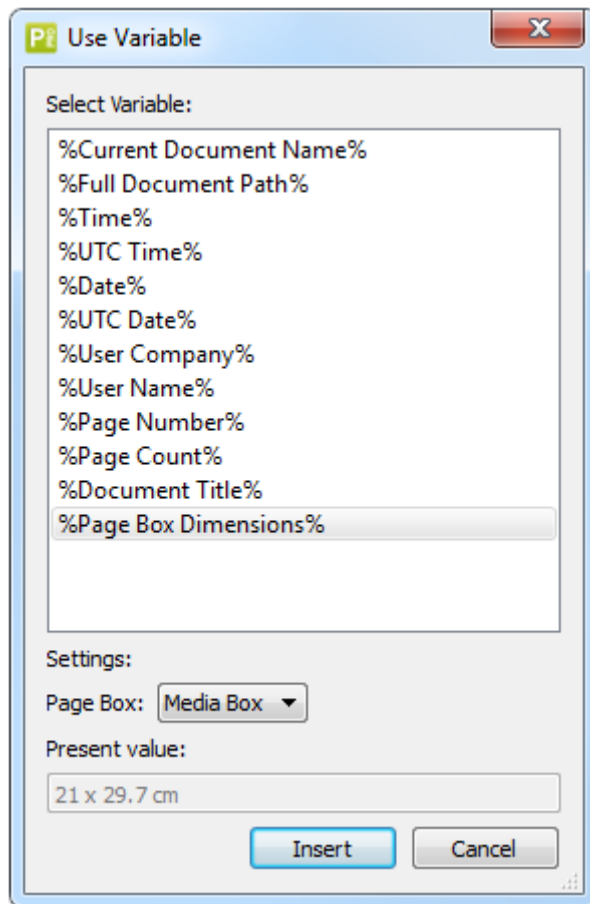

### Example Action List

To replace the current keywords in your document with the document title and the word "PDF", proceed as follows:

1. Run the Change document info Action to remove the current keywords:

```
Change document keywords <!-- select Remove -->
```

2. Run the Change document info Action to insert the new keywords:

```
Change document keywords <!-- select: Set to PDF, %Document Title% -->
```

### Related Actions

- [Check document info](#) on page 352
- [Select by document info](#) on page 465

## 4.8.1.6. Change document information dictionary compliance

- **Category:** Metadata, PDF 2.0
- **Type:** Changes

- **New since:** PitStop 2021

#### **What it does**

Makes the information dictionary compliant with the chosen PDF version.

#### **About the info dictionary**

The info dictionary contains information about the file, such as the title, the author, the creation date ... and is visible through the file's Document Properties.

The specifications for the info dictionary depend on the PDF version:

- **PDF 1.7:** The info dictionary is optional. If it's present, it may contain the following entries: Title, Author, Subject, Keywords, Creator, Producer, CreationDate, ModDate and Trapped.
- **PDF 2.0:** The info dictionary is optional. If it's present, it may be empty, or contain CreationDate and/or ModDate. The other entries are deprecated.
- **PDF/X-6:** There should be no info dictionary, or if there is one, it should be empty.



**Note:** There is one exception to the above: if there is a PieceInfo dictionary in the document catalog dictionary, the info dictionary is required and must contain the ModDate entry.

Note that as of PDF 2.0, the *info* dictionary is officially called *information* dictionary.

#### **Options**

- **PDF 1.7:** PitStop only adds an info dictionary (including ModDate) if document level PieceInfo is present.
- **PDF 2.0:** PitStop removes deprecated entries from the info dictionary (if necessary). If document level PieceInfo is present, it makes sure there is an info dictionary that contains ModDate.
- **PDF/X-6:** PitStop removes the info dictionary if there is one, except if document level PieceInfo is present; then it makes sure there is an info dictionary that contains ModDate.
- **Current document version:** PitStop detects the current PDF version and makes sure the info dictionary is compliant with the current PDF version.
- **None (leave it unchanged):** This option prevents PitStop from interfering with the info dictionary at the time of saving the file.

## 4.8.1.7. Change Output Intent

#### **Belongs to**

- **Category:** Color; Metadata
- **Type:** Changes

#### **What it does**

Changes a PDF's Output Intent to comply with a particular PDF/X or PDF/A version, using a particular ICC profile and/or ICC characterization.

Note that you can change the document Output Intent or the page level Output Intent.

**Related Actions**

[Check Output Intent](#) on page 312

## 4.8.1.8. Change PDF version

**Belongs to**

- **Category:** Metadata, PDF 2.0
- **Type:** Changes

**What it does**

Changes the Acrobat and PDF version of a PDF.

The Acrobat version is the sum of the two numbers that make up the PDF version, for example: PDF 1.4 = Acrobat 5. This is not true anymore for PDF 2.0, as from this version onwards there is no link anymore between the Acrobat and the PDF version.



**Note:** Changing the PDF version will not change the attributes of a higher version PDF to those of a lower one - it only changes the version **number**. As higher versions of Acrobat always save the PDF version number up to their version, even if nothing has changed, this Action can be useful to reset the PDF version to the one used to create the PDF.

**Example**

If you configure this Action to change the PDF version to PDF 1.5, both the PDF version and the Acrobat version will be changed. The new PDF version will be PDF 1.5; the new Acrobat version will be 6.0.

If you change the PDF version to PDF 2.0, the Acrobat version will remain unchanged.

**Related Actions**

- [Select by PDF version](#) on page 466
- [Check PDF/Acrobat compatibility](#) on page 362

## 4.8.1.9. Change PDF/A version key

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Changes the version key tag in a PDF/A document to another version key.

The following version keys are supported:

- PDF/A-1a
- PDF/A-1b
- PDF/A-2a
- PDF/A-2b



- PDF/A-2u

**About PDF/A version keys**

PDF/A is a specialized subset of the PDF specification, also known as "PDF for **A**rchive".

The PDF/A version key identifies the version of the PDF/A standard the document complies with. If the version key is not set correctly, the document is not PDF/A compliant. Note that changing the **key** does not change the compliance of the document! It will only allow you to continue with your workflow.

**Related Actions**

- [Remove PDF/A version key](#) on page 193
- [Check PDF/A version key](#) on page 363

## 4.8.1.10. Change PDF/X version key

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Changes the version key tag in a PDF/X document to another version key.

The following version keys are supported:

- PDF/X-1a:2001
- PDF/X-3:2002
- PDF/X-1a:2003
- PDF/X-3:2003
- PDF/X-4
- PDF/X-4p

**About PDF/X version keys**

PDF/X is a specialized subset of the PDF specification, also known as "PDF for Exchange".

The PDF/X version key identifies the version of the PDF/X standard the document complies with. If the version key is not set correctly, the document is not PDF/X compliant. Note that changing the **key** does not change the compliance of the document! It will only allow you to continue with your workflow.

**Related Actions**

- [Check PDF/X version key](#) on page 363
- [Remove PDF/X version key](#) on page 193

## 4.8.1.11. Change ProcSet resources

- **Category:** Metadata, PDF 2.0

- **Type:** Changes
- **New since:** PitStop 2021

***What it does***

Adds, removes or does not change the ProcSet entry as specified in the attributes of this Action.

You can as well have PitStop make the appropriate change based on the document's PDF version (see Options).

This Action is useful to make a PDF compliant with a particular PDF version.

***About ProcSet resources***

Procedure sets are categories of related PDF operators used in content streams. The ProcSet entry in a content stream's resource dictionary holds an array that consists of the procedure sets used in that content stream, for example: /ProcSet [/PDF /Text] . Procedure sets are used only when the content stream is printed to a PostScript output device.

ProcSet resources were used in older PDF versions, but as of PDF 1.4 this feature is considered obsolete. As of PDF 2.0, this feature is deprecated.

For more details, refer to [the PDF Reference](#) (See 14.2 Procedure Sets).

***Options***

- **Add ProcSet (default)**
- **Remove ProcSet**
- **Do not change the ProcSet presence** (so if the ProcSet entry is defined, just keep it; if it's not, do not add it)
- **Add, remove or don't change ProcSet, dependent on the document's PDF version**, PitStop behaves as follows:
  - PDF 1.3 and earlier: Add ProcSet resources
  - PDF 1.4 - PDF 1.7: Do not change the ProcSet presence
  - PDF 2.0: Remove the ProcSet resources

## 4.8.1.12. Change trapped flag

***Belongs to***

- **Category:** Metadata
- **Type:** Changes

***What it does***

Modifies the trapped flag.

***About trapping***

The trapped flag indicates whether or not a file has been "trapped", i.e. has been corrected for slight color misregistrations. The trapped flag must be defined in PDF/X documents.

The flag can be set to:

- **True:** the document has been trapped, or the creator of the document has decided that it should not be trapped.
- **False:** the document has not been trapped
- **Unknown:** it's not known whether or not the document has been trapped. Note that this status should be avoided.

**Related Actions**

- [Check document trapped flag](#) on page 354
- [Select by trapped flag](#) on page 466
- [Check Trapnets for PDF/X](#) on page 365

### 4.8.1.13. Fix PDF/A extension schema definitions in document XMP metadata

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Fixes issues with the PDF/A extension schema definitions in document XMP metadata.

**About XMP metadata**

XMP metadata is descriptive information about the file embedded in the PDF, for example the name of the author, keywords, copyright information... XMP refers to labeling technology that is used, i.e. Adobe's Extensible Metadata Platform. You can view the XMP metadata in a file's Document Properties in Acrobat (Click the **Additional Metadata** button, then select **Advanced**).

**About XMP schema definitions**

PDF/A supports the predefined schema definitions of the XMP 2004 specification. However, as these only cover general metadata requirements, custom XMP schemas ("extension schemas") are also supported to meet company- or industry-specific requirements, on condition that a description of these extension schemas is embedded in the XMP.

### 4.8.1.14. Fix version compatibility with PDF/A-2

**Belongs to**

- **Category:** Metadata
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Fixes the header and catalog version of the PDF to make it compliant with PDF/A-2.

**Related Actions**

- [Check version compatibility with PDF/A-2](#)

#### 4.8.1.15. Fix version compatibility with PDF/X-6

**Belongs to**

- **Category:** Metadata
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Fixes the header and catalog version of the PDF to make it compliant with PDF/X-6 or PDF/X-6p.

**Related Actions**

- [Check version compatibility with PDF/X-6](#)

#### 4.8.1.16. Flatten form fields

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Allows you to convert form fields to normal objects in a document.

This Action is useful if you have output issues with form fields as content, for example because the output device or the PDF renderer does not support form fields.

**Related Actions**

- [Check form fields](#) on page 355
- [Remove form fields](#) on page 191

#### 4.8.1.17. Make document metadata consistent

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Makes sure that the metadata in the different metadata locations has the same values. In case of inconsistencies, the most recent value is used.

If multiple creators are not considered an inconsistency, select the **Allow multiple creators** checkbox. In that case, the "Creator" property will not be changed, even if it is not the same in the different metadata locations.

#### **How it works**

There are two metadata locations in a PDF file:

- The **info dictionary** contains information about the file, such as the title, the author, the creation date ... and is visible through the file's Document properties. It's not in XML format.
- The **XMP metadata stream** also contains information about the file, but this information is represented as XMP metadata - XMP referring to Adobe's labeling technology **E**xtensible **M**etadata **P**latform. All information in the info dictionary is also represented in the XMP metadata stream dictionary, in the form of XMP properties.

Inconsistencies may occur when only one of the metadata locations has been updated.

#### **Related Actions**

- [Check if document metadata is consistent](#) on page 359
- [Select if document metadata is inconsistent](#) on page 469

## 4.8.1.18. Remove action dictionaries

#### **Belongs to**

- **Category:** Metadata
- **Type:** Changes

#### **What it does**

Removes action dictionaries ("actions") from a PDF.

#### **About action dictionaries**

Action dictionaries are actions that are executed when you click a bookmark or a link, hover over an annotation, open a file ... There are several types of actions, e.g. a music track can be played, a specific page or website can be opened ...

You may want to remove these actions, as they are not allowed in a PDF/X file. The Remove action dictionaries Action will only remove the **action**; the object (the bookmark, annotation) the actions are linked to will not be removed. For example, if you remove the action from a bookmark, the bookmark is still visible, but not clickable anymore.

#### **Related Actions**

[Check for action dictionaries](#) on page 356

## 4.8.1.19. Remove additional actions

#### **Belongs to**

- **Category:** Metadata

- **Type:** Changes
- **Since:** 2022

**What it does**

Removes additional action entries from Root, Page, Widget and Field dictionaries.

This is a fix for PDF/X-6, as PDF/X-6 does not support additional actions.

## 4.8.1.20. Remove attachments

**Belongs to**

- **Category:** Metadata
- **Type:** Changes
- **Since Version:** 13 update 2

**What it does**

Removes attachments and attachment annotations from a PDF. This may be useful to reduce the file size.



**Note:** After running the Action, the attachment reference may still be visible in the Attachments pane. After saving and closing the file, it will be gone.

This Action does not work on PDF Portfolios, as this would result in empty PDF files.

## 4.8.1.21. Remove bookmarks

**Belongs to**

- **Category:** Metadata
- **Type:** Changes
- **Since version:** 24.03

**What it does**

Removes bookmarks from the PDF. You can remove:

- All bookmarks, or
- The bookmarks below a certain level, or
- Bookmarks that link to another document, or
- Bookmarks that link to to a removed page (= invalid bookmarks), or
- Bookmarks that contain neither a link nor an action (for example the title of a group of bookmarks). This last option was added in 24.07.

You can see in the Bookmarks panel in Acrobat that the bookmarks have been removed.



**Note:** Sometimes, empty dictionaries are present in the PDF structure (as metadata), without a visible bookmark in Acrobat's Bookmarks panel. Note that these empty dictionaries are also deleted by the Remove bookmarks Action.

**Important remark**

Note that clicking **Edit > Enfocus Undo Execute Action List** does NOT restore the bookmarks that were removed using this Action.

**Related Actions**

- [Check bookmarks](#)
- [Select pages with bookmarks](#)
- [Add bookmarks](#)

## 4.8.1.22. Remove form fields

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Removes any PDF form fields from a document.

You may lose data if you do this.

**Related Actions**

- [Check form fields](#) on page 355
- [Flatten form fields](#) on page 188

## 4.8.1.23. Remove Javascript

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Removes JavaScript code (which might perform unwanted actions) from a PDF.

This language is often used to add interactive functionality to PDF files. However, in a print production environment, these scripts serve no purpose and may result in increased file sizes.

**Related Actions**

[Check for Javascript](#) on page 357

## 4.8.1.24. Remove marked content

**Belongs to**

- **Category:** Metadata

- **Type:** Changes

**What it does**

Strips PDF generator defined content from a PDF.

Marked content is content tagged with special messages so that the application that opens it can read it in a particular way.

**Related Actions**

[Check marked content](#) on page 362

## 4.8.1.25. Remove metadata

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Removes the selected metadata from a PDF. This is typically done to reduce the file size.

You can remove the following types of metadata:

- Annotations
- Thumbnails
- Article threads
- Page labels
- Acrobat capture info
- Bookmarks
- Structural information (= removes all tags, including Tagged PDF tags)
- PieceInfo
- Job ticket
- Named destinations (includes annotations and bookmarks)
- Metadata streams (to reduce the size of the file) - new option since PitStop 13 update 2



**Note:** In PitStop 2019, the 'Remove structural information' checkbox has been split up into two separate checkboxes: 'Structural information' and 'PieceInfo'. Action Lists from earlier versions with 'Remove structural information' enabled, will have both checkboxes selected.

## 4.8.1.26. Remove name from XObjects

**Belongs to**

- **Category:** Metadata, PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2022



**What it does**

Removes Name from form XObject and image XObject stream dictionaries. This is typically done to fix deprecated PDF 1.x features.

#### 4.8.1.27. Remove PDF/A version key

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

This Action removes the PDF/A version key from the PDF file.

**Related Actions**

- [Change PDF/A version key](#) on page 183
- [Remove PDF/A version key](#) on page 193

#### 4.8.1.28. Remove PDF/X version key

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

This Action removes the PDF/X version key from the PDF file.

**Related Actions**

- [Change PDF/X version key](#) on page 184
- [Check PDF/X version key](#) on page 363

#### 4.8.1.29. Remove unused destinations

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Destinations identify locations or views in a PDF you can point to using bookmarks or links. As destinations increase the file size, you may want to remove the destinations that are not used, to reduce the file size.

See also: [Check unused destinations](#) on page 366

#### 4.8.1.30. Set correct document XMP name spaces

***Belongs to***

- **Category:** Metadata
- **Type:** Changes

***What it does***

The XMP metadata standard (used for labeling metadata in PDFs) defines namespaces for defined sets of core properties. This Action checks if the correct document XMP namespaces are used, and fixes issues as required.

***Related Actions***

[Check if document XMP name space uses correct prefix](#) on page 360

#### 4.8.1.31. Set XMP file identifiers

***Belongs to***

- **Category:** Metadata
- **Type:** Changes

***What it does***

Adds missing file identifiers to the PDF's XMP metadata stream, for example: the Version ID, the DocumentID, the RenditionClass.

***Related Actions***

[Check file identifiers in document XMP metadata](#) on page 322

### 4.8.2. Checks

---

#### 4.8.2.1. Check annotation flags settings

***Belongs to***

- **Category:** Metadata
- **Type:** Checks

***What it does***

Allows you to check if particular annotation flags are enabled or disabled.

Flags that can be checked:

- Invisible
- Print
- NoRotate
- ReadOnly
- ToggleNoView
- Hidden
- NoZoom
- NoView
- Locked

#### ***How to proceed***

1. Select all flags you want to check.
2. Choose the appropriate option:
  - If **The flag must be on** is enabled, a message will be displayed if the selected flags are disabled.
  - If **The flag must be off** is enabled, a message will be displayed if the selected flags are enabled.

#### ***Related Actions***

- [Check annotations print setting](#) on page 349
- [Use flags to select annotation](#) on page 469

## 4.8.2.2. Check annotations print setting

#### ***Belongs to***

- **Category:** Metadata
- **Type:** Checks

#### ***What it does***

Check annotations' print settings allows you to log annotations with a particular print setting (print or non-printing).

#### ***Related Actions***

- [Check annotation flags settings](#) on page 348

## 4.8.2.3. Check annotations type

#### ***Belongs to***

- **Category:** Metadata
- **Type:** Checks

**What it does**

Check annotations' type allows you to log the occurrence of particular types of annotations in a PDF, for example: text, hyperlinks, movies,...

#### 4.8.2.4. Check appearances of annotations and interactive form fields

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks if the document contains annotations and interactive form fields according to the specifications of a particular PDF/X version.

This is useful if you want to print the document (as annotations and interactive form fields cannot be printed) or if your output device or PDF renderer does not support form fields.

**Related Actions**

- [Check form fields](#) on page 355
- [Flatten form fields](#) on page 188
- [Remove form fields](#) on page 191
- [Check for annotations inside art box or trim box](#) on page 370

#### 4.8.2.5. Check article threads

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks for the existence of article threads in a PDF file.

Article threads are electronic threads defined by the author of the PDF. They indicate which elements in a PDF belong together as part of a single story, even if they do not follow each other sequentially in the layout of the document.

#### 4.8.2.6. Check binding

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks if binding is left or right.

Most European language documents are bound on the left.



**Note:** To check a document's binding, in Adobe Acrobat, go to **File > Properties** and switch to the **Advanced** tab. The document's binding property (Left Edge or Right Edge) is displayed under Reading Options.

**Related Actions**

- [Select by binding](#) on page 465
- [Change binding](#) on page 179

## 4.8.2.7. Check bookmarks

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks if the PDF contains bookmarks.

Bookmarks are links in the left hand side bar of a PDF that take you to different sections.

**Related Actions**

- [Select pages with bookmarks](#) on page 485

## 4.8.2.8. Check creation and modification date

**Belongs to**

- **Category:** Metadata
- **Type:** Check

**What it does**

Checks the creation and modification date.

You can indicate which metadata location should be checked, for example only the most recently changed one, or "any" metadata location (if it doesn't matter), ...

**About metadata locations in a PDF file**

There are two metadata locations in a PDF file:

- The **info dictionary** contains information about the file, such as the title, the author, the creation date ... and is visible through the file's Document properties. It's not in XML format.
- The **XMP metadata stream** also contains information about the file, but this information is represented as XMP metadata - XMP referring to Adobe's labeling technology **E**xtensible

**Metadata Platform.** All information in the info dictionary is also represented in the XMP metadata stream dictionary, in the form of XMP properties.

Inconsistencies may occur when only one of the metadata locations has been updated.

#### **Related Actions**

[Add missing creation and modification date](#) on page 177

### 4.8.2.9. Check document info

#### **Belongs to**

- **Category:** Metadata
- **Type:** Checks

#### **What it does**

Searches for the requested document info in the document properties of the PDF.

You can check:

- Title
- Subject
- Author
- Keywords
- Producer
- Creator

Use the **Compare with** field to enter (part of) the name of the document info you are looking for.

Use the operator methods **equals** and **doesn't equal** if you are looking for an exact match; use **contain** or **doesn't contain** if the entered value is just part of the document info you are looking for.

Select the **Match case** checkbox if you want the search to take into account the lower and upper cases of the entered value.



---

**Note:** From version 12 update 2 onwards, you can use regular expressions to define the value in the **Compare with** field (if you select **Equals/Does not equal** as operator method).

---

#### **Related Actions**

- [Change document info](#) on page 179
- [Select by document info](#) on page 465

### 4.8.2.10. Check document information dictionary compliance

#### **Belongs to**

- **Category:** Metadata; PDF 2.0
- **Type:** Checks

- **Since:** 2022

**What it does**

Checks if the information dictionary is compliant with the chosen PDF version (PDF/X-6 or PDF 2.0).

For more information about the information dictionary, refer to [Change document information dictionary compliance](#) on page 181.

**Related Actions**

- [Change document information dictionary compliance](#) on page 181

## 4.8.2.11. Check document permissions

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Allows you to check the permission settings of a PDF, such as (low/high resolution) printing, copying, editing, ...

**About document permissions**

The table below gives an overview of the permissions that can be set in a PDF.

| Document permission      | If enabled...                                                                                   |
|--------------------------|-------------------------------------------------------------------------------------------------|
| Assembly                 | Users can insert, delete and rotate pages, and create bookmarks and thumbnails.                 |
| Content accessibility    | Accessibility software (such as a screen reader) is allowed to use the content of the document. |
| Fill-in or changing      | Users can fill in and change forms.                                                             |
| Annotating               | Users can make annotations.                                                                     |
| Copying                  | Users can select and copy contents to the clipboard.                                            |
| Editing                  | Users can make modifications to the document.                                                   |
| Low resolution printing  | Users can print a low-resolution bitmapped image of the pages (for personal use).               |
| High resolution printing | Users can print the document with a high resolution output.                                     |
| Printing                 | Users can print the document.                                                                   |

To view a summary of the document permissions, proceed as follows:

1. Open Adobe Acrobat.
2. Select **File > Properties**.

3. Switch to the **Security** tab. The document restrictions are displayed in the lower part of the dialog.

#### 4.8.2.12. Check document security

***Belongs to***

- **Category:** Metadata, PDF 2.0
- **Type:** Checks

***What it does***

Checks if a particular encryption was used to secure the PDF file.

Options:

- A PDF version (1.3 - 2.0)
- A combination of "none" and a PDF version (1.3 - 2.0)
- None
- None or Standard (= no custom security)
- Custom (enter a custom name in the text field)

#### 4.8.2.13. Check document trapped flag

***Belongs to***

- **Category:** Metadata
- **Type:** Checks

***What it does***

Allows you to check the value of the trapped flag in a PDF.

***About trapping***

The trapped flag indicates whether or not a file has been "trapped", i.e. has been corrected for slight color misregistrations. The trapped flag must be defined in PDF/X documents.

The flag can be set to:

- **True:** the document has been trapped, or the creator of the document has decided that it should not be trapped.
- **False:** the document has not been trapped
- **Unknown:** it's not known whether or not the document has been trapped. Note that this status should be avoided.

The trapped flag is stored in the info dictionary and/or in the XMP metadata stream, but the data can be inconsistent; that's why you must indicate where the trapped flag must be taken from, e.g. from the most recent metadata location.

***Related Actions***

- [Change trapped flag](#) on page 185



- [Select by trapped flag](#) on page 466
- [Check Trapnets for PDF/X](#) on page 365

#### 4.8.2.14. Check external hyperlink annotations

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks if the annotations in the PDF contain hyperlinks to files, applications, and/or web pages.

**Related Actions**

[Check if URLs in Link Annotations are valid](#) on page 361

#### 4.8.2.15. Check for action dictionaries

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks if a PDF contains particular action dictionaries, i.e. action types.

**About action dictionaries**

Action dictionaries are actions that are executed when you click a bookmark or a link, hover over an annotation, open a file ... There are several types of actions, e.g. a music track can be played, a specific page or website can be opened ...

You may want to remove these actions, as they are not allowed in a PDF/X file. The Remove action dictionaries Action will remove the action only; the object (the bookmark, annotation) the actions are linked to will not be removed. For example, if you remove the action from a bookmark, the bookmark is still visible, but not clickable anymore.

**Related Actions**

- [Remove action dictionaries](#) on page 189
- [Check for additional actions](#) on page 356

#### 4.8.2.16. Check for additional actions

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks if a PDF contains action dictionaries, i.e. action types, other than the standard ones.

**About action dictionaries**

Action dictionaries are actions that are executed when you click a bookmark or a link, hover over an annotation, open a file ... There are several types of actions, e.g. a music track can be played, a specific page or website can be opened ...

**Related Actions**

- [Remove action dictionaries](#) on page 189
- [Check for action dictionaries](#) on page 356

#### 4.8.2.17. Check for annotations inside printable area

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Searches a PDF for any annotations that appear in the printable area of the PDF.

#### 4.8.2.18. Check for deprecated attributes in XMP metadata

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks if the XMP metadata streams in the PDF contain attributes that are outdated.

**About XMP metadata**

XMP metadata is descriptive information about the file embedded in the PDF, for example the name of the author, keywords, copyright information... XMP refers to labeling technology that is used, i.e. Adobe's Extensible Metadata Platform. You can view the XMP metadata in a file's Document Properties in Acrobat (Click the **Additional Metadata** button, then select **Advanced**).

**Related Actions**

[Check if XMP metadata is well-formed](#) on page 361

## 4.8.2.19. Check for Javascript

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks if a PDF contains instances of the JavaScript programming language.

This language is often used to add interactive functionality to PDF files. However, in a print production environment, these scripts serve no purpose and may result in increased file sizes.

**Related Actions**

[Remove Javascript](#) on page 191

## 4.8.2.20. Check form fields

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Looks for the presence of form fields in a PDF.

**Related Actions**

- [Flatten form fields](#) on page 188
- [Remove form fields](#) on page 191

## 4.8.2.21. Check for XFA forms

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks whether the PDF contains XFA forms.

An XFA form is a web form and is not suited for printing documents. XFA stands for XML Forms Architecture. It's an XML specification, which is rather vague and does not specify any rendering.

Optionally, you can also check if a NeedsRendering key is present in the PDF document (**log if NeedsRendering key is present**).

#### 4.8.2.22. Check for XMP schema definitions as required by PDF/A

***Belongs to***

- **Category:** Metadata
- **Type:** Checks

***What it does***

Checks whether the PDF contains XMP schema definitions for identifying the document, as required by the PDF/A specification.

#### 4.8.2.23. Check if date is present in document XMP metadata

***Belongs to***

- **Category:** Metadata
- **Type:** Checks

***What it does***

Checks for the date in the XMP metadata of a PDF.

***About XMP metadata***

XMP metadata is descriptive information about the file embedded in the PDF, for example the name of the author, keywords, copyright information... XMP refers to labeling technology that is used, i.e. Adobe's Extensible Metadata Platform. You can view the XMP metadata in a file's Document Properties in Acrobat (Click the **Additional Metadata** button, then select **Advanced**).

***Related Actions***

- [Check file identifiers in document XMP metadata](#) on page 322
- [Check presence of document metadata stream](#) on page 364

#### 4.8.2.24. Check if document is produced by PDFWriter

***Belongs to***

- **Category:** Metadata
- **Type:** Checks

***What it does***

Checks if a PDF was produced by PDFWriter.

PDFs created with PDFWriter are not suitable for high-end printing.

#### 4.8.2.25. Check if document XMP metadata types are valid

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks if metadata streams defined in a PDF conform to the XMP schema.

**About XMP metadata streams**

There are two metadata locations in a PDF file:

- The **info dictionary** contains information about the file, such as the title, the author, the creation date ... and is visible through the file's Document properties. It's not in XML format.
- The **XMP metadata stream** also contains information about the file, but this information is represented as XMP metadata - XMP referring to Adobe's labeling technology **E**xtensible **M**etadata **P**latform. All information in the info dictionary is also represented in the XMP metadata stream dictionary, in the form of XMP properties.

Inconsistencies may occur when only one of the metadata locations has been updated.

**Related Actions**

- [Check if XMP metadata is well-formed](#) on page 361
- [Make document metadata consistent](#) on page 188
- [Select if document metadata is inconsistent](#) on page 469

#### 4.8.2.26. Check if document XMP name space uses correct prefix

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

The XMP metadata standard (used for labeling metadata in PDFs) defines namespaces for defined sets of core properties. This Action checks if the correct prefixes are used.

**Related Actions**

[Set correct document XMP name spaces](#) on page 194

#### 4.8.2.27. Check if document metadata is consistent

**Belongs to**

- **Category:** Metadata

- **Type:** Checks

**What it does**

Checks if metadata that is present in different metadata locations is identical.

**How it works**

There are two metadata locations in a PDF file:

- The **info dictionary** contains information about the file, such as the title, the author, the creation date ... and is visible through the file's Document properties. It's not in XML format.
- The **XMP metadata stream** also contains information about the file, but this information is represented as XMP metadata - XMP referring to Adobe's labeling technology **E**xtensible **M**etadata **P**latform. All information in the info dictionary is also represented in the XMP metadata stream dictionary, in the form of XMP properties.

Inconsistencies may occur when only one of the metadata locations has been updated.

**Extra checks**

Optionally you can check if metadata in one location (selected from the list) is also present in the other location; if all metadata should be present in both locations, select **any metadata location**.

If multiple creators are not considered an inconsistency, select the **Allow multiple creators** checkbox.

**Related Actions**

- [Make document metadata consistent](#) on page 188
- [Select if document metadata is inconsistent](#) on page 469

## 4.8.2.28. Check if metadata streams do not have a compression filter

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks if metadata streams do not have a compression filter.

A compression filter is used to reduce the file size of a PDF. If no compression filter has been used, you may want to add one; if a compression filter has been used, you may want to check which one (e.g. to see if it complies with certain specifications).

**Related Actions**

[Check presence of document metadata stream](#) on page 364

## 4.8.2.29. Check if URLs in Link Annotations are valid

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks the validity of the hyperlinks in annotations with hyperlinks to web pages, i.e. checks if the target web page exists.

If you're using a proxy server, you should enter the proxy server address and port, and your user name and password. Otherwise, the check cannot be performed.

**Related Actions**

[Check external hyperlink annotations](#) on page 355

## 4.8.2.30. Check if XMP metadata is well-formed

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks if the XMP metadata streams in the PDF conform to the XMP specifications.

If the XMP metadata is not well-formed, the document cannot be made PDF/X-4 compliant.



**Tip:** PitStop provides an Action to solve these problems: [Fix non well-formed XMP metadata](#) on page 290.

**About XMP metadata**

XMP metadata is descriptive information about the file embedded in the PDF, for example the name of the author, keywords, copyright information... XMP refers to labeling technology that is used, i.e. Adobe's Extensible Metadata Platform. You can view the XMP metadata in a file's Document Properties in Acrobat (Click the Additional Metadata button, then select Advanced).

## 4.8.2.31. Check marked content

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Logs content that has been identified with a marked content tag in a PDF.

Marked content is content tagged with special messages so that the application that opens it can read it in a particular way.

**Related Actions**

[Remove marked content](#) on page 191

## 4.8.2.32. Check PDF/Acrobat compatibility

**Belongs to**

- **Category:** Metadata, PDF 2.0
- **Type:** Checks

**What it does**

Allows you to check if a particular Acrobat or PDF version is used in a PDF document.

You can for example check if the Acrobat version is equal to or higher/lower than a particular version.



**Note:** As of PitStop 2020, you can check a PDF 1.7 by its extension level (Adobe Extension 1, 3, 5, 6 or 8). For more details concerning the extensions, refer to [https://www.adobe.com/devnet/pdf/pdf\\_reference.html](https://www.adobe.com/devnet/pdf/pdf_reference.html).

Note that the PDF version can be specified in 3 different locations (in the PDF header, in the document catalog and in the Adobe extension). If the versions are different, PitStop uses the version from the Adobe extension. If there is no version specified in the Adobe extension, the header version or catalog version are considered, and the highest version number is taken.

## 4.8.2.33. Check pdfxid prefix in XMP name space

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks if the pdfxid prefix in the XMP namespace is correct.

The namespace prefix is required for PDF/A.

## 4.8.2.34. Check PDF/A version key

**Belongs to**

- **Category:** Metadata



- **Type:** Checks

**What it does**

Checks the PDF/A version key.

**Related Actions**

- [Change PDF/A version key](#) on page 183
- [Remove PDF/A version key](#) on page 193

#### 4.8.2.35. Check PDF/X version key

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks the PDF/X version key.

**Related Actions**

- [Change PDF/X version key](#) on page 184
- [Remove PDF/X version key](#) on page 193

#### 4.8.2.36. Check presence of document metadata stream

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks if the PDF contains metadata, i.e. descriptive information about the file, such as the title, the author, the creation date ...

**About XMP metadata**

XMP metadata is descriptive information about the file embedded in the PDF, for example the name of the author, keywords, copyright information... XMP refers to labeling technology that is used, i.e. Adobe's Extensible Metadata Platform. You can view the XMP metadata in a file's Document Properties in Acrobat (Click the **Additional Metadata** button, then select **Advanced**).

**Related Actions**

- [Check if date is present in document XMP metadata](#) on page 358
- [Check file identifiers in document XMP metadata](#) on page 322

### 4.8.2.37. Check thumbnails

***Belongs to***

- **Category:** Metadata
- **Type:** Checks

***What it does***

Checks if the PDF contains thumbnails.

### 4.8.2.38. Check Trapnets for PDF/X

***Belongs to***

- **Category:** Metadata
- **Type:** Checks

***What it does***

Checks whether trapnet information in a PDF is compliant with PDF/X-1, PDF/X-3 or PDF/X-6 standards.

***About trapping***

In printing, even the slightest misregistration of the plates can cause gaps or color shifts between colored objects to appear. **Trapping** is a technique that compensates for misregistration by expanding adjacent colored objects so that they overlap. Trapping can be performed by the source application, in the PDF, by dedicated trapping tools, or during the RIP-process.

If the traps in a document were added before the PDF document was created, they are included in the PDF file as **trap networks**. A page may have more than one trap network, e.g. one for each intended output device, but all the different trap networks are stored in the same trap network, also called **trapnet annotation**. When printed, the trapnet annotation provides all the required trapping information for the page.

***About the PDF/X Requirements for trapping***

When trapnet annotations are found in the document, **PDF/X-1a:2001** requires that:

- The **trapped flag** in the document is set to either True or False (Unknown is not allowed).
  - If the trapped flag is **False**, the document does not contain trapnet annotations.
  - If the trapped flag is **True**, the document is completely trapped, and the document contains trapnet annotations.
- **Font substitution** is not used.
- The **CMYK** color space is used.

When trapnet annotations are found in the document, **PDF/X-3:2002** requires that:

- Trapping occurs only when all the **fonts in the document are embedded**.
- The **CMYK** color space is used.

In **PDF/X-6** and **PDF/X-6p**, trapnet annotations are not allowed.

**Related Actions**

- [Check document trapped flag](#) on page 354
- [Select by trapped flag](#) on page 466
- [Change trapped flag](#) on page 185

#### 4.8.2.39. Check unused destinations

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Destinations identify locations or views in a PDF you can point to using bookmarks or links. As destinations increase the file size, you may want to check for and remove destinations that are not used.

This Action allows you to **verify** if there are any unused destinations in a PDF document.

The Action [Remove unused destinations](#) allows you to **remove** them from the PDF.

#### 4.8.2.40. Check version compatibility with PDF/A-2

**Belongs to**

- **Category:** PDF 2.0, Metadata
- **Type:** Checks
- **New since:** PitStop 2022

**What it does**

Checks if the version of the PDF complies with PDF/A-2.

Note that the PDF version can be specified in 3 different locations (in the PDF header, in the document catalog and in the Adobe extension). PDF/A-2 requires that both the version specified in the header and the version specified in the document catalog are 1.x (so the version should be lower than 2.0).

**Related Actions**

- [Fix version compatibility with PDF/A-2](#) on page 186

#### 4.8.2.41. Check version compatibility with PDF/X-6

**Belongs to**

- **Category:** PDF 2.0, Metadata
- **Type:** Checks

- **New since:** PitStop 2022

**What it does**

Checks if the version of the PDF complies with PDF/X-6 or PDF/X-6p.

Note that the PDF version can be specified in 3 different locations (in the PDF header, in the document catalog and in the Adobe extension). PDF/X-6 and PDF/X-6p require that both the version specified in the header and the version specified in the document catalog are 2.0 (or higher).

**Related Actions**

- [Fix version compatibility with PDF/X](#)

## 4.8.3. Informs

---

### 4.8.3.1. Gather pages information

**Belongs to**

- **Category:** Metadata; Page
- **Type:** Informs

**What it does**

Collects information about the pages (number of pages and range) in a PDF and presents it in the log.

## 4.8.4. Selections

---

### 4.8.4.1. Select annotations

**Belongs to**

- **Category:** Metadata
- **Type:** Selections

**What it does**

Selects annotations of a particular type in a PDF document.

**Example**

To delete all annotations of the type "Movie" and "Sound" in a PDF, configure the following Action List:

```
Select annotations <!-- select Movie and Sound -->
Remove selection
```

#### 4.8.4.2. Select annotations appearance streams contents according to annotation selection

##### ***Belongs to***

- **Category:** Metadata
- **Type:** Selections

##### ***What it does***

Allows you to select content based on the selected annotations.

##### ***About annotation appearance streams***

An appearance stream determines the visual appearance of an annotation (e.g. borders, colors,...). Different from [Select annotations](#) on page 463 (which only selects the annotation **content**), this Action allows you to also include the appearance stream in your selection, so that other actions can be applied to it. You could for example check for RGB objects only inside appearance streams.

This Action has two options:

- **Select the annotation content if the annotation is selected:** If the annotation is selected, all the PDF objects in the appearance stream will be selected too.
- **Select everything except the annotation content of annotations that are not selected:** This is the inverse of the first option; everything in the PDF is selected, except for the objects inside appearance streams of unselected annotations.

##### ***Example***

To select all annotations of the type "Text" and change their color, configure the following Action List:

```
Select annotations <!-- select Text only - See Select annotations on page 463 -->
Select annotations' appearance streams contents according to annotation selection <!--
choose first option -->
Change color <!-- Pick the desired fill/stroke color - See Change color on page 102 --
>
```

To select and change the color of the whole document, including text annotations but excluding video, sound, ... configure the following Action List:

```
Select annotations <!-- select Text only - See Select annotations on page 463-->
Select annotations' appearance streams contents according to annotation selection <!--
choose the second option -->
Change color <!-- Pick the desired fill/stroke color - See Change color on page 102 --
>
```

#### 4.8.4.3. Select annotations by print setting

##### ***Belongs to***

- **Category:** Metadata

- **Type:** Selections

**What it does**

Selects annotations based on their print setting.

**Example**

To select all printing annotations and remove them

```
Select annotations by print setting <!--Option: Select annotations if set to print -->
Remove selection
```

To select all printing annotations and set them to non-printing

```
Select annotations by print setting <!-- Option: Select annotations if set to print -->
Change annotations' print setting <!-- Option: Set annotation to Non-Printing -->
```

See also: [Change annotations print setting](#) on page 178

#### 4.8.4.4. Select by binding

**Belongs to**

- **Category:** Metadata
- **Type:** Selections

**What it does**

Allows the selection of a PDF based on its binding (left-edge or right-edge binding).

Most European language documents are bound on the left.



**Note:** To check a document's binding, in Adobe Acrobat, go to **File > Properties** and switch to the **Advanced** tab. The document's binding property (Left Edge or Right Edge) is displayed under Reading Options.

**Related Actions**

- [Check binding](#) on page 350
- [Change binding](#) on page 179

#### 4.8.4.5. Select by document info

**Belongs to**

- **Category:** Metadata
- **Type:** Selections

**What it does**

Allows you to make selections based on document info, such as the title, subject, author, keywords, producer or creator of the PDF. You can specify where the information must be taken from, and what the expected value is.



**Note:** From version 12 update 2 onwards, you can use regular expressions to define the value in the **Compare with** field (if you select **Equals/Does not equal** as operator method).

**Example**

Suppose you want to select a document of which the author is Anne Banks. It doesn't matter where this information is taken from.

Attributes:

- Document info: author
- Read value from: any metadata location



**Note:** If you select **Both metadata locations**, the name of the author will be searched for in both the XMP metadata stream and the info dictionary; if you select **Most recent metadata location**, only the most recently changed metadata location will be checked.

- Operator method: equals
- Compare with: Anne Banks

If you are not sure about the spelling of the name *Anne* (spelled Ann or Anne?), you could select the **Use regular expressions** checkbox and enter "Ann(e)? Banks" in the **Compare with** field.

**Related Actions**

- [Change document info](#) on page 179
- [Check document info](#) on page 352

## 4.8.4.6. Select by PDF version

**Belongs to**

- **Category:** Metadata, PDF 2.0
- **Type:** Selections

**What it does**

Allows you to make a selection based on the PDF's Acrobat or PDF version.

The Acrobat version is the sum of the two numbers that make up the PDF version, for example: PDF 1.4 = Acrobat 5. This is not true anymore for PDF 2.0, as from this version onwards there is no link anymore between the Acrobat and the PDF version.



**Note:** As of PitStop 2020, you can select a PDF 1.7 by its extension level (Adobe Extension 1, 3, 5, 6 or 8). For more details concerning the extensions, refer to [https://www.adobe.com/devnet/pdf/pdf\\_reference.html](https://www.adobe.com/devnet/pdf/pdf_reference.html).

**Example**

To select PDFs with Acrobat version higher than 7.0, proceed as follows:

```
Select by PDF version <!-- options: Acrobat version must be more than 7.0 -->
```

**Related Actions**

- [Change PDF version](#) on page 183
- [Check PDF/Acrobat compatibility](#) on page 362

## 4.8.4.7. Select by trapped flag

**Belongs to**

- **Category:** Metadata
- **Type:** Selections

**What it does**

Allows the selection of a PDF based on the value of the trapped flag.

**About trapping**

The trapped flag indicates whether or not a file has been "trapped", i.e. has been corrected for slight color misregistrations. The trapped flag must be defined in PDF/X documents.

The flag can be set to:

- **True:** the document has been trapped, or the creator of the document has decided that it should not be trapped.
- **False:** the document has not been trapped
- **Unknown:** it's not known whether or not the document has been trapped. Note that this status should be avoided.

The trapped flag is stored in the info dictionary and/or in the XMP metadata stream, but the data can be inconsistent; that's why you must indicate where the trapped flag must be taken from, e.g. from the most recent metadata location.

**Related Actions**

- [Check document trapped flag](#) on page 354
- [Select by trapped flag](#) on page 466
- [Check Trapnets for PDF/X](#) on page 365

## 4.8.4.8. Select document if XMP file identifiers are not present

**Belongs to**

- **Category:** Metadata



- **Type:** Selections

**What it does**

Selects document if XMP file identifiers are not present.

**Related Actions**

- [Set XMP file identifiers](#) on page 194
- [Check file identifiers in document XMP metadata](#) on page 322

#### 4.8.4.9. Select external hyperlink annotations

**Belongs to**

- **Category:** Metadata
- **Type:** Selections

**What it does**

Selects annotations with external links to other files, applications and/or web Pages embedded in a PDF document.



**Tip:** You can check the validity of the links with [Check external hyperlink annotations](#) on page 355.

#### 4.8.4.10. Select if document metadata is inconsistent

**Belongs to**

- **Category:** Metadata
- **Type:** Selections

**What it does**

Selects if document metadata is inconsistent, i.e. if the metadata values are not identical in the different metadata locations.

**How it works**

There are two metadata locations in a PDF file:

- The **info dictionary** contains information about the file, such as the title, the author, the creation date ... and is visible through the file's Document properties. It's not in XML format.
- The **XMP metadata stream** also contains information about the file, but this information is represented as XMP metadata - XMP referring to Adobe's labeling technology **E**xtensible **M**etadata **P**latform. All information in the info dictionary is also represented in the XMP metadata stream dictionary, in the form of XMP properties.

Inconsistencies may occur when only one of the metadata locations has been updated.

**Extra checks**

Optionally you can make the selection only if metadata in one location (selected from the list) is also present in the other location; if all metadata should be present in both locations, select **any metadata location**.

If multiple creators should not be considered an inconsistency, select the **Allow multiple creators** checkbox.

**Related Actions**

- [Check if document metadata is consistent](#) on page 359
- [Make document metadata consistent](#) on page 188

#### 4.8.4.11. Select document if document XMP metadata contains invalid types

**Belongs to**

- **Category:** Metadata
- **Type:** Selections

**What it does**

Selects the document if metadata streams defined in the PDF do not conform to the XMP schema.

**About XMP metadata streams**

There are two metadata locations in a PDF file:

- The **info dictionary** contains information about the file, such as the title, the author, the creation date ... and is visible through the file's Document properties. It's not in XML format.
- The **XMP metadata stream** also contains information about the file, but this information is represented as XMP metadata - XMP referring to Adobe's labeling technology **Extensible Metadata Platform**. All information in the info dictionary is also represented in the XMP metadata stream dictionary, in the form of XMP properties.

Inconsistencies may occur when only one of the metadata locations has been updated.

**Related Actions**

[Check if document XMP metadata types are valid](#) on page 360

#### 4.8.4.12. Select if document XMP contains an invalid name space prefix

**Belongs to**

- **Category:** Metadata
- **Type:** Selections

**What it does**

Selects if document XMP contains an invalid namespace prefix.

**About XMP metadata**

XMP metadata is descriptive information about the file embedded in the PDF, for example the name of the author, keywords, copyright information... XMP refers to labeling technology that is used, i.e. Adobe's Extensible Metadata Platform. You can view the XMP metadata in a file's Document Properties in Acrobat (Click the Additional Metadata button, then select Advanced).

**Related Actions**

[Check if date is present in document XMP metadata](#) on page 358

[Check file identifiers in document XMP metadata](#) on page 322

## 4.8.4.13. Use flags to select annotation

**Belongs to**

- **Category:** Metadata
- **Type:** Selections
- **New since:** PitStop 2022

**What it does**

Selects annotations based on the flag they have.

You can select the flags of your choice and indicate whether or not the flags should be enabled.

Following flags can be selected:

- Invisible
- Print
- NoRotate
- ReadOnly
- ToggleNoView
- Hidden
- NoZoom
- NoView
- Locked
- LockedContents

**Related Actions**

- [Check annotation flags settings](#) on page 348

## 4.9. Operators

---

### 4.9.1. Selections

---

#### 4.9.1.1. AND

***Belongs to***

- **Category:** Operators
- **Type:** Selections

***What it does***

AND is a logical operator. This means it is used to select a single object with more than one attribute.

***Example***

To select text that was Helvetica AND size 12 pt, use:

```
Select Font Helvetica  
Select Text if Point Size = 12.00 pt  
AND
```



**Note:** AND is NOT used to select two different objects!

For example, **the following is incorrect** because a font cannot be both Helvetica and Arial:

```
Select Font Helvetica  
Select Font Arial  
AND
```

#### 4.9.1.2. Duplicate top of selection stack

***Belongs to***

- **Category:** Operator
- **Type:** Selections

***What it does***

Duplicate top of selection stack is a logical operator. It is used to **duplicate** the top of the current Action list stack. It's typically combined with the [Remove top of selection stack](#) ("delete") operator.

***For internal use only***

Both "Duplicate top of selection stack" and [Remove top of selection stack](#) are only used internally by PitStop.

When running a Preflight Profile, PitStop turns this Profile into an Action List; the more checks and fixes there are in the Preflight Profile, the longer and more elaborate its Action List representation. In order to avoid having to perform complex selections multiple times, PitStop optimizes the internal Action List by duplicating these selections when they are needed multiple times.

### 4.9.1.3. Group Actions

***Belongs to***

- **Category:** Operator
- **Type:** Selections

***What it does***

Allows you to group several Actions within an Action List.

This Action is useful to organize and document your Action List.



---

**Note:** Instead of using the Group Actions Action, you can as well right-click an Action in the Action List and select **Make Group** from the context menu.

---


***How to proceed***

1. Double-click **Group Actions** to add it to the Action List.
2. Specify a meaningful name for your Action group and enter a description.
3. Move **Group Actions** to the desired position. You can drag and drop it, or use the options in the context menu (**Move Up**, **Move Down**).
4. Add the required Actions to your Action List and drag them to your group.

***Example***

The screenshot below shows the **Add my Printer Marks and Enlarge** Action List (by default provided with PitStop). This Action List contains 3 Action groups (preceded by an icon: ▴ if the group is expanded; ▾ if the group is collapsed):

- The **Registration marks** group contains the different Actions required to add registration marks to the top, bottom, left and right of the page.
- The **Color bars** group contains the Actions to create two color bars.
- The **Trim marks** group contains the Actions to set the trim marks (using [Add object](#) on page 77).

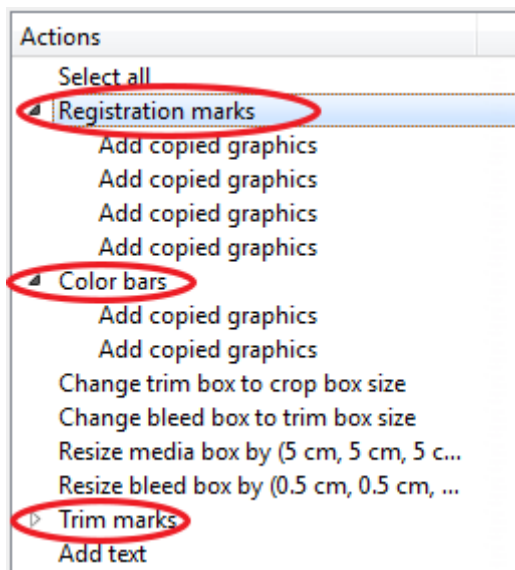

#### 4.9.1.4. NOT

##### ***Belongs to***

- **Category:** Operators
- **Type:** Selections

##### ***What it does***

NOT is a logical operator. It is used to exclude objects according to their attributes.

##### ***Example***

To select all the text in a document that was not Arial, you need to exclude Arial from your selection.

```
Select Text
Select Font Arial
NOT <!-- NOT only applies to the immediately preceding item in the list of selections
-->
AND
```

#### 4.9.1.5. OR

##### ***Belongs to***

- **Category:** Operator
- **Type:** Selections

##### ***What it does***

OR is a logical operator. It is used to select objects that share attributes.

**Example**

To select all text that is either Helvetica or Arial, use the following:

```
Select Font Helvetica  
Select Font Arial  
OR
```



**Note:** Do not use OR to exclude objects!

For example, the following will select all 12pt AND 14pt fonts:

```
Select Text if point size = 12.00 pt  
Select Text if point size = 14.00 pt  
OR
```

## 4.9.1.6. ROLL

**Belongs to**

- **Category:** Operators
- **Type:** Selections
- **Since version:** 13 update 2

**What it does**

Allows you to change the order of the selections in the stack.

You must set:

- The *number of selections* to be taken into account, for example "3" if you want to change the order of the 3 last selections preceding the ROLL operator.
- The *distance*, i.e. the number of positions to move the items in the stack. If distance is set to "1", all selections in the stack move up one position. The selection on top moves down to the bottom of the stack.

Just like the other operators, ROLL must be placed after the selections in the Action List. The affected selections will be highlighted with a green indicator. Refer to [Using operators in Action Lists](#) on page 40.

**For advanced use only**

This Action may be used in advanced and complex Action Lists by users who are familiar with the ROLL operator in PostScript (which has the same functionality).

**Example**

Suppose you have a document with text, line art and images.

The following Action List results in a stack with the text segments at the bottom and images at the top.


```
Select text segments  
Select line art  
Select images
```

With Roll added (number of selection set to 3 and distance to 1), images will move to the bottom of the stack, line art to the top and images will be inbetween.

```
Select text segments
Select line art
Select images
Roll                                <!-- Selection set to 3, distance is 1 -->
```



**Tip:** You can test this by adding Log selections to your Action List and checking the result in the Enfocus Navigator as shown in the screenshot below.

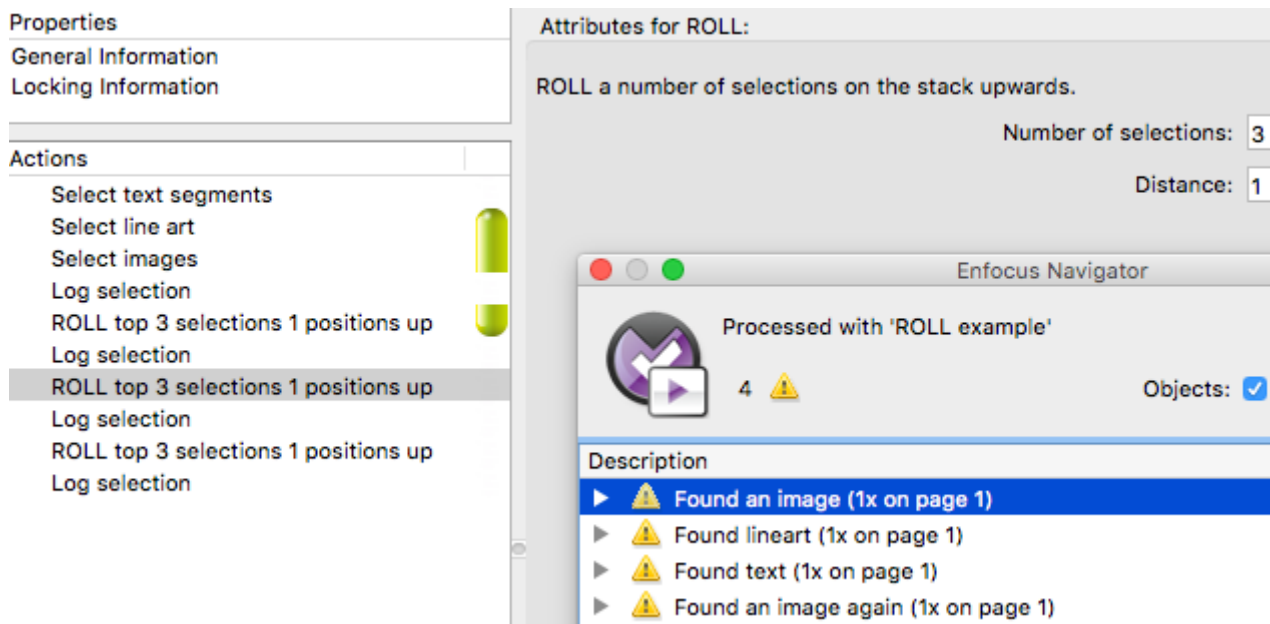

#### 4.9.1.7. Remove top of selection stack

##### ***Belongs to***

- **Category:** Operator
- **Type:** Selections

##### ***What it does***

**Deletes** the top of the current Action list stack. It's typically combined with the [Duplicate top of selection stack](#) operator.

##### ***For internal use only***

Both "Remove top of selection stack" and [Duplicate top of selection stack](#) are only used internally by PitStop.

When running a Preflight Profile, PitStop turns this Profile into an Action List; the more checks and fixes there are in the Preflight Profile, the longer and more elaborate its Action List representation. In order to avoid having to perform complex selections multiple times, PitStop



optimizes the internal Action List by duplicating these selections when they are needed multiple times.

### 4.9.1.8. Restore selection

#### ***Belongs to***

- **Category:** Operators
- **Type:** Selections
- **Since version:** 13

#### ***What it does***

Restores a previously saved selection, so that it can be re-used in the Action List.

The selection must have been saved using the [Save selection](#) on page 476 Action; if this is the case, you will find it in the **Restore selection from list**.

If the selection is no longer available (for example because it has been removed from the Action List), you will get a warning: "Restoring unknown selection".

#### ***Example***

Suppose you have a document with both CMYK and RGB objects. The following Action List allows you to:

- Select all CMYK objects
- Save this selection (i.e. all CMYK objects in the PDF) and name it "CMYK objects"
- Convert all CMYK objects to RGB
- Select all objects in the document
- Apply a curve on all RGB objects
- Restore the original selection (i.e. all objects that were originally in CMYK)

```
Select by color space <!-- Select by color space on page 425 Select CMYK -->
Save selection <!-- Type "As CMYK objects" -->
Convert to RGB objects <!-- Convert color on page 106 -->
Select all <!-- Select all on page 477 -->
Apply RGB curve Select by color space on page 425
Restore selection <!-- From the list, select "CMYK objects" -->
```

#### ***Related Actions***

[Save selection](#) on page 476

### 4.9.1.9. Save selection

#### ***Belongs to***

- **Category:** Operators
- **Type:** Selections
- **Since version:** 13

**What it does**

Preserves the currently selected objects (line art, text, docs... = whatever is selectable in a PDF) for later use in the same Action List.

You should choose a name for your saved selection, for example "Save selection as: CMYK objects".

**Remark**

**This Action does not preserve the saved Actions, only the resulting selection.** For example, if you have selected all text and save this selection, you can use [Restore selection](#) on page 474 to re-use this text later on in the Action List. However, if you added text later (after saving the selection), the added text will not be included in the saved selection.

**Example**

Suppose you have a document with both CMYK and RGB objects. The following Action List allows you to:

- Select all CMYK objects
- Save this selection (i.e. all CMYK objects in the PDF) and name it "CMYK objects"
- Convert all CMYK objects to RGB
- Select all objects in the document
- Apply a curve on all RGB objects
- Restore the original selection (i.e. all objects that were originally in CMYK)

```
Select by color space <!-- Select by color space on page 425 Select CMYK -->
Save selection <!-- Type "As CMYK objects" -->
Convert to RGB objects <!-- Convert color on page 106 -->
Select all <!-- Select all on page 477 -->
Apply RGB curve Select by color space on page 425
Restore selection <!-- From the list, select "CMYK objects" -->
```

**Related Actions**

[Restore selection](#) on page 474

## 4.9.1.10. Select all

**Belongs to**

- **Category:** Operator
- **Type:** Selections

**What it does**

Allows you to select every object in a PDF document.

**Example**

To delete every object in a PDF:

```
Select all
Remove selection
```

**Remark**

Note that objects that are clipped away (hence are invisible) are selected as well. If you don't want this, we recommend removing them first. You can use [Select objects that are completely clipped away](#) on page 496 and [Remove selection](#) on page 278 to do so.

### 4.9.1.11. Select last added objects

**Belongs to**

- **Category:** Operator
- **Type:** Selections

**What it does**

Selects the objects that were added recently (in the same Action List).

This Action must be preceded by an Action of the type "Add".

**Example**

The following Action List will first add graphics to the PDF. The added graphics will then be selected and used by the third Action.

```
Add copied graphics <!-- Add copied graphics on page 76 -->
Select last added objects
Check XY scaling difference <!-- Check XY scaling difference on page 392 -->
```

## 4.9.2. Changes

---

### 4.9.2.1. Copy or cut objects to clipboard

**Belongs to**

- **Category:** General, Operators
- **Type:** Changes
- **Since Version:** 13 update 1

**What it does**

Allows you to cut or copy the selected objects to a clipboard. You should give the clipboard a name (by default: Untitled 1), to avoid confusion when copy-and-pasting different selections in one Action List. You can use up to 1,000 clipboards if you wish, however it is important to realize that these clipboards are not saved; they are only used while the Action List in which they are used is run.

This Action should be preceded by a selection (i.e. to select the object you want to cut or copy) and followed by [Paste objects from clipboard](#) on page 93 in the same Action List. You cannot cut or copy something to a clipboard in one Action List and then paste it within another Action List.

**How to proceed?**

1. Create a new Action List.
2. Add a select Action that select the objects you want to cut or copy.
3. Add a *Cut or copy objects to clipboard* Action to your Action List and set the attributes (select Cut or Copy and type an appropriate name).
4. Add a *Select pages* on page 484 Action to indicate the pages on which the selection should be pasted (if not yet selected in step 1, e.g. if you added "Select all" in step 1).
5. Add a *Paste objects from clipboard* on page 93 Action and set the attributes on the different tabs (e.g. to define the position of the pasted objects).

**Note:**

- Action Lists are executed page after page. As a consequence, you can only paste objects to the following pages. For example, if you copy an object that is present on page 3, you can paste it on page 3, 4, 5, ... but not on page 1 or 2.
- If there is nothing to select to cut or copy (i.e. the select Action of step 2 in the above procedure result in an empty selection), the content of the clipboard is not overwritten with an "empty" set of objects! The previous content (if any) is preserved and will be pasted once more. If you do not want this, you can select the **Clear clipboard after paste** checkbox in the attributes of *Paste objects from clipboard* on page 93 Action.

**Related Action**

- *Paste objects from clipboard* on page 93

## 4.9.2.2. Paste objects from clipboard

**Belongs to**

- **Category:** Add, General, Operators
- **Type:** Changes
- **Since Version:** 13 update 1

**What it does**

Allows you to paste objects from the clipboard to one or more selected pages. You can paste them multiple times (with fixed distances or distributed across a distance) as required and indicate where they should be placed.

This Action must be preceded by a "copy/cut" Action (that moves the objects to the clipboard) and a "select" Action (that indicates where the objects should be pasted) in the same Action List.

If there are several "copy/cut" Actions in the Action List, you may want to give each of the clipboards an appropriate name, to make sure the different objects are pasted on the correct pages.

**How to proceed?**

1. Create a new Action List.
2. Add a select Action that select the objects you want to cut/copy-and-paste.
3. Add a *Copy or cut objects to clipboard* on page 131 Action to your Action List and set the attributes (select Cut or Copy and type an appropriate name).

4. Add a [Select pages](#) on page 484 Action to indicate the pages on which the selection should be pasted (if not yet selected in step 2 -if you added "Select all" in step 2, step 4 is redundant).
5. Add a *Paste objects from clipboard* Action and select the name of the clipboard (as entered in step 2). Switch to the different tabs to define the region and the position of the copied objects (see table below).



**Note:** Action Lists are executed page after page. As a consequence, you can only paste objects to the following pages. For example, if you copy an object that is present on page 3, you can paste it on page 3, 4, 5, ... but not on page 1 or 2.

### Tabs

| Tabs       | On this tab, do the following:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Graphics   | <p>Select the clipboard that contains the objects to be pasted.</p> <p>Determine whether or not the clipboard should be cleared after the object was pasted. This option determines what happens if there are no objects to be copied (= if the select Action in step 2 of the above procedure results in an empty selection).</p> <ul style="list-style-type: none"> <li>• If checked, the clipboard will be empty, so nothing will be pasted.</li> <li>• If cleared, the clipboard will still contain content from the previous page and that content will be pasted.</li> </ul>                                                                                                                                                        |
| Attributes | <p>Determine if the objects should be pasted in the foreground or in the background of the document.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Region     | <p>Determine the region where the objects should be moved to. The region is defined based on the page box of your choice and you can define margins within that page box, by grabbing the offsets from a selected area (using the <b>Grab position</b> button ).</p> <p>You can also specify a specific area the objects should not be placed in, also based on a page box and with the option to set margins.</p> <div> <p><b>Note:</b> The settings on this tab are only used if <b>Move graphic elements</b> is selected on the Position tab. If this is not the case, the original location of the graphic elements is preserved.</p> </div>                                                                                          |
| Repeat     | <p>If the objects should be pasted more than once on a page, change <b>No repeat</b> to:</p> <ul style="list-style-type: none"> <li>• <b>Distribute/Repeat fixed number of graphic elements</b> if you want to determine how often the copied objects should be pasted (e.g. 6 times horizontally, 4 times vertically)</li> <li>• <b>Distribute/Repeat graphic elements in region</b> if you want PitStop to fill the region (specified on the Region tab).</li> </ul> <p>If you want PitStop to divide the pasted objects evenly across the defined region, choose "distribute" rather than "repeat". In case of "Distribute graphic elements in region", you can choose the maximum or minimum distance between the pasted objects.</p> |

| Tabs     | On this tab, do the following:                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|          | <p>If you choose "repeat", you should define the exact distance between the pasted objects yourself.</p> <p>The distance can be between the bounding boxes of the pasted objects (choose: <b>Between edges</b>) or from center to center (choose: <b>Between centers</b>).</p> <div> <b>Note:</b> Remember that you can use Smart Preflight variables to define the distances.</div> |
| Position | <p>If the selected objects should be moved, select <b>Move graphic elements</b>. Indicate how the objects should be positioned relative to the chosen region. Note that, when adding multiple copies, the same corner should be used to position the graphic elements in the region.</p>                                                                                                                                                                              |

**Related Action**

- [Copy or cut objects to clipboard](#) on page 131
- [Add copied graphics](#) on page 76

## 4.10. Packaging

### 4.10.1. Changes

#### 4.10.1.1. Change layer processing steps - ISO 19593-1

**Belongs to**

- **Application:** PitStop Pro
- **Category:** Packaging
- **Type:** Changes
- **Since Version:** 13 update 2

**What it does**

Allows you to change processing steps metadata of the layers of a PDF. You can either choose a different group or a different type. Processing steps metadata is defined by ISO standard 19593-1. For more information, refer to [the website of ISO \(International Organization for Standardization\)](#).

Supported groups:

- Structural
- Dimensions
- Braille
- Legend
- Positions

- White
- Varnish

You can as well define a custom group and custom step types. To do so, enter the appropriate name in the text box.

**Related Actions**

- [Select layers by processing steps - ISO 19593-1](#) on page 479
- [Check processing steps - ISO 19593-1](#) on page 369
- [Remove processing steps - ISO 19593-1](#) on page 277

## 4.10.1.2. Close gaps in contours

**Belongs to**

- **Category:** Packaging
- **Type:** Changes
- **Since Version:** 13 update 2

**What it does**

Allows you to close gaps in contours. You can set the threshold, e.g. only close gaps that are smaller than 0,10 cm.

If gaps should only be closed if the result is a closed contour, select the corresponding checkbox.

**Remark**

We recommend using this Action in combination with [Override rounding rules](#) on page 517 because of precision issues.

**Related Action**

- [Select inside or outside contour](#) on page 493

## 4.10.2. Checks

---

### 4.10.2.1. Check barcode

**Belongs to**

- **Category:** Packaging
- **Type:** Checks
- **Since Version:** 2019

**What it does**

Checks the presence of barcodes in your document. You can either log a message for each barcode found, or a message in case no barcodes were found in the document.

The Action also works on user selections.

**Properties Overview**

| Fields                     | Meaning                                                                                                                                                                                                                |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Barcode tab</b>         | Select the barcode(s) you want to check for.                                                                                                                                                                           |
| Select all                 | Select this checkbox to check for all barcode types in the list.<br>Clear this checkbox to deselect all types and manually click the ones you want to check for.                                                       |
| Value                      | Select this checkbox to check for a particular value.                                                                                                                                                                  |
| <b>Options tab</b>         | Select one or more options. You can use variables as required.<br> <b>Note:</b> Extra options (checkboxes) will slow down processing. |
| Scan resolution (ppi)      | Enter the scan resolution. The default is set to 300 dpi. Note that a higher resolution will slow down processing.                                                                                                     |
| Scan for multiple barcodes | When selected, the document is checked until all barcodes are found. Note that this slows down processing! If you know that there's only one barcode in the document, we recommend clearing this checkbox.             |
| Scan for rotated barcodes  | When selected, PitStop also searches for rotated barcodes.                                                                                                                                                             |
| Enhanced scan              | When selected, PitStop searches for very small barcodes too.                                                                                                                                                           |

**Note:**

- If the option **Scan for multiple barcodes** (on the Options tab) is enabled, EAN and UPC barcodes may be reported twice per barcode. This is a known issue.
- MaxiCode barcodes cannot be detected when they are rotated.

**Related Actions**

- [Check Esko barcode value](#) on page 368
- [Check Esko barcode type](#) on page 368
- [Select Esko barcode type](#) on page 478
- [Add barcode](#) on page 68

## 4.10.2.2. Check Esko barcode type

**Belongs to**

- **Category:** Packaging
- **Type:** Checks
- **Since Version:** 13 update 2

**What it does**

Checks if the Esko barcode matches a particular type (chosen from a list).



Both the new ArtPro Plus barcodes as well as the old XMP ones are supported.

As of PitStop 25.07, the EAN-13 Iceland Foods barcode is also in the list.

#### **Related Actions**

- [Check Esko barcode value](#) on page 368
- [Select Esko barcode](#) on page 478
- [Select Esko barcode type](#) on page 478
- [Add barcode](#) on page 68

### 4.10.2.3. Check Esko barcode value

#### **Belongs to**

- **Category:** Packaging
- **Type:** Checks
- **Since Version:** 13 update 2

#### **What it does**

Checks if the Esko barcode contains or equals a particular string. You can take into account the case of the string or use regular expressions or Smart Preflight variables as required. The actual value of the Esko barcode is mentioned in the log, in the Navigator and in the Preflight Report, for example: Esko barcode value "1234567890128" does not contain "222".

Both the new ArtPro Plus barcodes as well as the old XMP ones are supported.

As of PitStop 25.07, the EAN-13 Iceland Foods barcode is also in the list.



---

**Note:** The metadata attached to the barcode is checked. If the metadata is absent, the Action won't be able to check the barcode.

---

#### **Related Actions**

- [Check Esko barcode type](#) on page 368
- [Select Esko barcode](#) on page 478
- [Select Esko barcode type](#) on page 478
- [Add barcode](#) on page 68

### 4.10.2.4. Check processing steps - ISO 19593-1

#### **Belongs to**

- **Application:** PitStop Pro
- **Category:** Packaging
- **Type:** Checks
- **Since Version:** 13 update 2

#### **What it does**

Allows you to check if particular processing steps metadata is present in a file. Processing steps metadata is defined by ISO standard 19593-1.

Note that you must select a processing steps group; a processing steps type is optional.

Supported groups:

- Structural
- Dimensions
- Braille
- Legend
- Positions
- White
- Varnish

You can as well define a custom group and/or custom step types.

#### **Related Actions**

- [Select layers by processing steps - ISO 19593-1](#) on page 479
- [Change layer processing steps - ISO 19593-1](#) on page 197
- [Remove processing steps - ISO 19593-1](#) on page 277

## 4.10.3. Selections

---

### 4.10.3.1. Select Esko barcode

#### **Belongs to**

- **Category:** Packaging
- **Type:** Selections
- **Since Version:** 13 update 2

#### **What it does**

Allows you to select Esko barcodes (both the new ArtPro Plus barcodes as well as the old XMP ones).

As of PitStop 25.07, the EAN-13 Iceland Foods barcode is also in the list.



**Note:** The selection is made based on the metadata attached to the barcode. If the metadata is absent, the Action won't be able to select the barcode.

---

#### **Related Actions**

- [Select Esko barcode type](#) on page 478
- [Check Esko barcode value](#) on page 368
- [Check Esko barcode type](#) on page 368
- [Add barcode](#) on page 68

### 4.10.3.2. Select Esko barcode type

***Belongs to***

- **Category:** Packaging
- **Type:** Selections
- **Since Version:** 13 update 2

***What it does***

Allows you to select Esko barcodes by type (chosen from a list).

As of PitStop 25.07, the EAN-13 Iceland Foods barcode is also in the list.

***Related Actions***

- [Select Esko barcode](#) on page 478
- [Check Esko barcode type](#) on page 368
- [Check Esko barcode value](#) on page 368
- [Add barcode](#) on page 68

### 4.10.3.3. Select layers by processing steps - ISO 19593-1

***Belongs to***

- **Application:** PitStop Pro
- **Category:** Packaging
- **Type:** Selections
- **Since Version:** 13 update 2

***What it does***

Allows you to select layers based on the layer's processing steps information. Processing steps metadata is defined by ISO standard 19593-1. For more information, refer to [the website of ISO \(International Organization for Standardization\)](#).

Note that you can select layers based on the presence of any processing steps metadata (regardless of the processing step type), or restrict your selection to the layers that contain a particular processing steps group. If the group consists of different processing step types, you can further limit your selection to a specific type (**Restrict to processing steps type** checkbox).

Supported groups:

- Structural
- Dimensions
- Braille
- Legend
- Positions
- White
- Varnish

You can as well define a custom group and custom step types. To do so, enter the appropriate name in the text box.

**Related Actions**

- [Check processing steps - ISO 19593-1](#) on page 369
- [Change layer processing steps - ISO 19593-1](#) on page 197
- [Remove processing steps - ISO 19593-1](#) on page 277

#### 4.10.3.4. Select spot colors from Esko Normalized PDF XMP

**Belongs to**

- **Category:** Packaging
- **Type:** Selections
- **Since Version:** 13 update 2

**What it does**

Allows you to select spot colors based on the metadata attached to ESKO Normalized PDF files.

There are three categories of metadata to choose from: **Ink book**, **Printing method** and **Ink attribute**. If properties from different categories are selected, they are combined in the selection.

## 4.11. Page

---

### 4.11.1. Changes

---

#### 4.11.1.1. Add hems or pockets

**Belongs to**

- **Category:** Page
- **Type:** Changes


**What it does**

Generates mirrored content for banners, i.e. hems or pockets between the trim and bleed box. You can choose to add them to particular sides and/or to the corners.

You can also add a margin inside the trim box. This value determines where the bleed starts from the inside of the trim box. This can be useful to avoid hairlines if the artwork is positioned close to the trim box.

**Example**

Bleed is added between the trim box (in blue) and the bleed box (in red). The line art is mirrored, not extended.

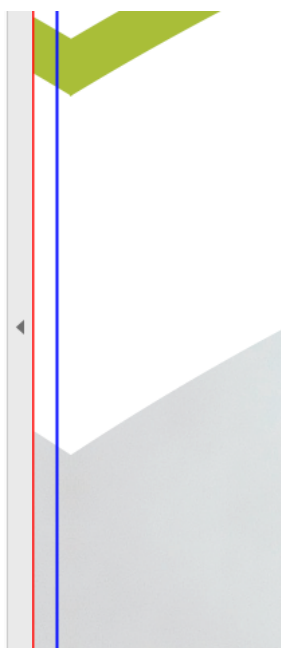

#### 4.11.1.2. Add pages

***Belongs to***

- **Category:** Add; Page
- **Type:** Changes

***What it does***

Allows you to insert either empty pages or pages from a particular PDF file (by embedding the file or by using the file path (optionally specified by a variable)).

You can choose the number of pages to add, the location of the new pages in the PDF ...

As of PitStop 2019, you can insert pages before or after a selection you made earlier in your Action List. You could for example select all pages with a certain string and insert empty pages based on this selection. See also the example Action List below.

***"R[number]" notation***

If you want to add pages starting from the end of the PDF, you can use the "R[number]" notation in the **Before pages/After pages** text box. R1 refers to the last page (= 1 page from the end), R2 refers to the last but one (= 2 pages from the end), ... This allows you for example to add a backup interleave page to every page in the PDF.

Attributes for Add pages:

☒ Insert empty pages  
☐ Insert pages from document

---

Insert Empty Pages:

☐ Exact number of pages:   
☒ Until  pages

---

Location: ☒ Before pages

☐ After pages

☐ Before last page

☐ After last page

☐ Before every  pages starting from page  to

☐ After every  pages starting from page  to

☐ Before selected pages

☐ After selected pages

**Example Action List**

Suppose you have a mixed landscape/portrait document and you want to insert an empty page after every landscape page. That's possible with the following Action List.

```
Select all
Select by page orientation <!-- select if page orientation = landscape -->
Add pages <!-- select "insert empty pages" and "after selected pages" -->
```

### 4.11.1.3. Apply page rotation

**Belongs to**

- **Category:** Position/Size;Page
- **Type:** Changes

**What it does**

Sets the page rotate key defined in the PDF to 0°. This may have a visual effect.

**Related Actions**

- [Check page rotation angle](#) on page 379

- [Select by page rotation angle](#) on page 481
- [Normalize Page Rotate Key](#) on page 214

#### 4.11.1.4. Apply page scaling factor

**Belongs to**

- **Category:** Position/Size;Page
- **Type:** Changes

**What it does**

Apply page scaling factor removes the page scaling factor and scales the page to compensate.

A page of 10 by 10 inches and a page scaling factor 2 will be displayed and printed as a page of 20 by 20 inches. By applying the page scaling factor, the actual page size will become 20 by 20 inches.

Page scaling has been introduced in PDF 1.6. If the page scaling factor is not removed or applied, the page size can only be displayed correctly in Acrobat 7 or higher.



**Note:** When the result of applying the scaling factor exceeds the size of 200x200 inches, the page may not be displayed well. This is a limitation of Adobe Acrobat.

**Related Actions**

- [Check if page scaling factor is used](#) on page 374
- [Remove page scaling factor](#) on page 216

#### 4.11.1.5. Center page content

**Belongs to**

- **Category:** Page;Position/Size
- **Type:** Changes

**What it does**

Places all objects in the center of the page.

You can:

- Center the objects horizontally, vertically or both.
- Center the content relative to a page box and set margins (left, right, top and bottom).
- Use page rotation and scaling factor as required.
- Only center the visible part of the content.

#### 4.11.1.6. Change art box

**Belongs to**

- **Category:** Page

- **Type:** Changes

**What it does**

Allows you to create or resize an art box.

You must choose one of the following options:

- To create a new art box, select **Define new rectangle** and enter the required values, or grab them from a selected area using the **Grab Offsets** button . Note that boxes are defined from lower left to upper right.
- To resize the art box relative to the axes of the existing art box, select **Resize** and enter the required values.
- To re-use the dimensions from another box, select **Use box size** and select the appropriate page box.
- To determine the size of the art box based on a selection, select **Resize page box to fit the selection** and enter the offset values.

There are some additional options available:

- **Only apply if not all pages have the same size**
- **Ignore page rotation and scaling factor**
- **Always require page box to be defined**

#### 4.11.1.7. Change bleed box

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Allows you to create or resize a bleed box.

You must choose one of the following options:

- To create a new bleed box, select **Define new rectangle** and enter the required values, or grab them from a selected area using the **Grab Offsets** button . Note that boxes are defined from lower left to upper right.
- To resize a bleed box relative to the axes of the existing bleed box, select **Resize** and enter the required values.
- To re-use the dimensions from another box, select **Use box size** and select the appropriate page box.
- To determine the size of a bleed box based on a selection, select **Resize page box to fit the selection** and enter the offset values.

There are some additional options available:

- **Only apply if not all pages have the same size**
- **Ignore page rotation and scaling factor**



- Always require page box to be defined

#### 4.11.1.8. Change blending color space

##### ***Belongs to***

- **Category:** Color; Page
- **Type:** Changes

##### ***What it does***

Allows to change the blending color space and/or the luminosity softmask blending color space (if defined in the PDF document).

You can:

- Change the color to CMYK, gray or RGB, or
- Remove the blending color space, by selecting "none" from the first list, or
- Leave one of the color spaces unchanged, by selecting **Do not change**.

##### ***About blending color spaces***

When Adobe Acrobat interprets transparent objects and attempts to create a preview of the flattened artwork, it needs to do so using a single color space for all the items involved in the transparency group. This color space is called the **blending color space**.

The blending color space for soft masks (masks with soft transitions) is called the **luminosity softmask blending color space**. It is usually gray.

##### ***Related Actions***

- [Check if blending color space is defined](#) on page 308
- [Select by blending color space](#) on page 424

#### 4.11.1.9. Change crop box

##### ***Belongs to***

- **Category:** Page
- **Type:** Changes

##### ***What it does***

Allows you to create or resize a crop box.

You must choose one of the following options:

- To create a new crop box, select **Define new rectangle** and enter the required values, or grab them from a selected area using the **Grab Offsets** button . Note that boxes are defined from lower left to upper right.
- To resize a crop box relative to the axes of the existing crop box, select **Resize** and enter the required values.
- To re-use the dimensions from another box, select **Use box size** and select the appropriate page box.

- To determine the size of a crop box based on a selection, select **Resize page box to fit the selection** and enter the offset values.

There are some additional options available:

- **Only apply if not all pages have the same size**
- **Ignore page rotation and scaling factor**
- **Always require page box to be defined**

#### 4.11.1.10. Change media box

##### ***Belongs to***

- **Category:** Page
- **Type:** Changes

##### ***What it does***

Allows you to create or resize a media box.

Choose one of the following options:

- To create a new media box, select **Define new rectangle** and enter the required values, or grab them from a selected area using the **Grab Offsets** button . Note that boxes are defined from lower left to upper right.
- To resize a media box relative to the axes of the existing media box, select **Resize** and enter the required values.
- To re-use the dimensions from another box, select **Use box size** and select the appropriate page box.
- To determine the size of a media box based on a selection, select **Resize page box to fit the selection** and enter the offset values.

There are some additional options available:

- **Only apply if not all pages have the same size**
- **Ignore page rotation and scaling factor**
- **Position the page content**

The last option allows you to determine the position of the content on the page. Note that the dropdown only controls *the distance between the new page box and the content*. Options are:

- **No move:** The content stays where it was (the coordinates do not change), regardless of the new size or position of the media box. It is possible that the content does no longer fit in the media box!
- **Center:** The content will keep its position relative to the center of the mediabox. For example, if the content is placed in the bottom left corner of the media box, that will also be the case after resizing, but again: it is possible that the content does no longer fall inside the media box (e.g. if the new box is too narrow).
- **Lower left/lower right:** The content will keep its position relative to the lower left or lower right of the media box; the distance to the lower left or lower right of the media box will be kept the same. For example, if the content is placed in the rightmost corner of the media box, that will also be the case after resizing.
- **Upper left/upper right:** The content will keep its position relative to the upper left or upper right of the media box; the distance to the upper left or upper right of the media box will be kept the same. For example, if the content is placed in the rightmost corner of the media box, that will also be the case after resizing.

- **Shrink to fit:** This option makes sure that the content fits the new page box; the content may be resized as well if needed.

**Remark**

Be aware that this Action does not change the crop box; only the media box and the content (if moved along with the media box) are affected. As Acrobat uses the crop box definition for display, when opening the file in Acrobat, the content may not be visible/no longer centered due to the media box being resized and content being moved along. You can fix this by removing the crop box or by changing the crop box in the same way as the media box (see [Remove crop box](#) on page 215 or [Change crop box](#) on page 203).

If no crop box was defined, Acrobat uses the media box for display.

#### 4.11.1.11. Change objects that are close to the page edge

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Changes objects that are close to the page edge, but do not bleed enough.

You must specify the required distance to the trim box and the distance into the bleed.

Optionally, you can choose to treat subpaths of compound paths individually. In that case, each of the subpaths will be changed separately.

See also:

- [Check if object is close to the page edge](#) on page 373
- [Select objects close to the page edge](#) on page 483

#### 4.11.1.12. Change page box layout

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Changes the page box layout in a PDF to Press, Screen viewing or PDF/X Layout.

The attributes depend on the chosen layout:

- **Press layout** (typically used for print)

If you select this layout, the trim box will be derived from the first page box (out of the list below) that is present on the page. Use the **Up** and **Down** button to move the preferred page box to the top of the list. For example, if *bleed box* is the first item in the list, and *art box* is the second, the trim box will be derived from the bleed box, if found; if there is no bleed box found, the trim box will be derived from the art box; if there is no art box, the Action will search for the third page box in the list, and so on.

You must also define the minimum distance between the media and bleed boxes and between the bleed and trim boxes.

To get the PDF to display at the size of the media it will be printed on, select the appropriate option:

- **Crop box must equal trim box**, or
- **No crop box must be defined or the crop box equals the media box**. This means that, if the crop box is not defined yet, it will not be added by this Action; if the crop box is defined, it will get the same size and position as the media box.

- **Screen viewing**

If you select this layout, the page is defined solely by the crop box, which should have the same size as the media box. No other page boxes are allowed. The crop box/media box is derived from the first page box (out of the list below) that is present on the page. Use the **Up** and **Down** button to move the preferred page box to the top of the list. For example, if *bleed box* is the first item in the list, the crop box/media box will be derived from the bleed box if found in the PDF; if the bleed box is not found, the second page box in the list will be searched for, ...

- **PDF/X layout**

If you select this layout, the exact page box layout depends on the chosen PDF/X version.

- If you have chosen PDF/X-1a:2003 or PDF/X-3:2003, the art box or trim box shall not extend beyond the boundaries of the bleed box and the crop box.
- PDF/X-4 allows either a trim or an art box but forbids having both.
- PDF/X-6 allows an art box, next to the mandatory trim box.

To define the trim box relative to the media box, define the desired margins.

#### **Related Actions**

[Check page box layout](#) on page 377

### 4.11.1.13. Change page format

#### **Belongs to**

- **Category:** Page
- **Type:** Changes

#### **What it does**

Snap the page box of your choice to a multiple of either columns or rows.

This Action is useful for newspapers or magazines with content displayed in columns and rows.

#### **How to proceed**

To configure the Change page format Action

1. Select the page box you wish to define.
2. Select **A multiple of columns** and/or **A multiple of rows** as required.
3. Set the preferred column or row width.
4. Add column/row spacing as required.

See also [Check page format](#) on page 378

#### 4.11.1.14. Change page labels

##### ***Belongs to***

- **Category:** Page
- **Type:** Changes
- **Since Version:** 2019

##### ***What it does***

Changes the label of a page. You can select a different number style, a different prefix and/or change the number to start with.

If you leave any of the options unselected, then the corresponding label property remains untouched (or receives the default property value, if the document did not have page labels).

##### ***Example***

Suppose you have a document with 10 pages and inconsistent page labels (e.g. inconsistent numbering, some with and some without prefix, etc.). You could use the following Action List to make the labels consistent ( mydoc\_1, mydoc\_2, mydoc\_3 etc).

```
Select pages with page label  <!-- choose "range: 1-10" and select both odd and even
-->
Change page labels           <!-- choose "number style: decimal", "prefix: mydoc_",
start: 1" -->
```

##### ***Related Actions***

- [Select pages with page label](#) on page 486
- [Remove page labels](#) on page 216

#### 4.11.1.15. Change page orientation

##### ***Belongs to***

- **Category:** Page
- **Type:** Changes

##### ***What it does***

Changes the page layout to either portrait, landscape or the orientation that is used most in the PDF.

The page orientation is based on the selected page box. If you don't want to change the page orientation in case all pages have already the same orientation, enable the **Only apply if not all pages have the same orientation** checkbox.

##### ***Related Actions***

- [Select by page orientation](#) on page 481

- [Check page orientation](#) on page 379

#### 4.11.1.16. Change page scaling factor

##### ***Belongs to***

- **Category:** Position/Size; Page
- **Type:** Changes
- **Since Version:** 2018

##### ***What it does***

Allows you to scale the print size of a page. There are three ways to rescale:

- **Set Optimal Value Automatically:** Rescales the page based on the media box of the document and within the 200x200 inch limit - the maximum Acrobat size. If a document is larger, PitStop applies the appropriate page scaling factor to bring the size down within the limit.
- **Set Scaling Factor to:** Rescales by setting the page scaling factor to a certain value.
- **Multiply Scaling Factor by:** Rescales by multiplying the existing page scaling factor.


For example, if no page scaling factor was defined (meaning that the page scaling factor = 1):


- To print a page to half its size, set the page scaling factor to 0.5
- To print a page to twice its size, set the page scaling factor to 2.

If a page has a scaling factor of 2, to print it to twice its size, multiply the existing page scaling factor by 2 (resulting in page scaling factor 4).

Note that it is also possible to change the defined values while keeping the effective values; to do so, select the **Keep Effective Values Constant** checkbox.

Remember that the page scaling factor (and the defined values) as well as the effective values can be viewed with the Enfocus Inspector as shown below.

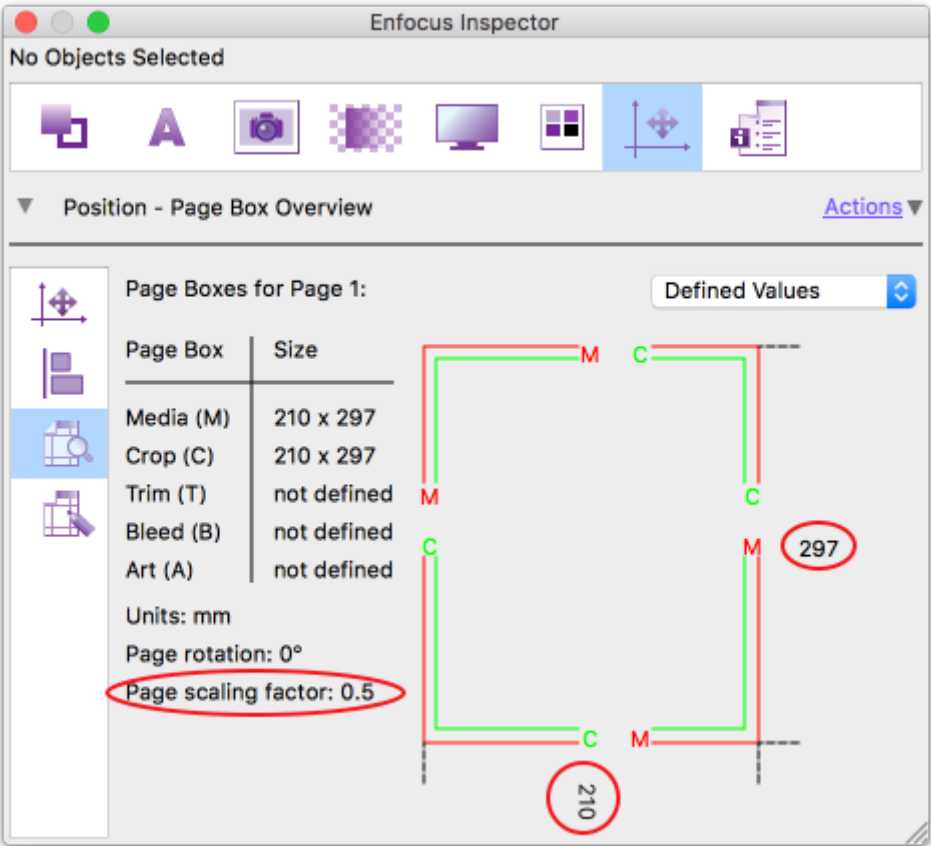

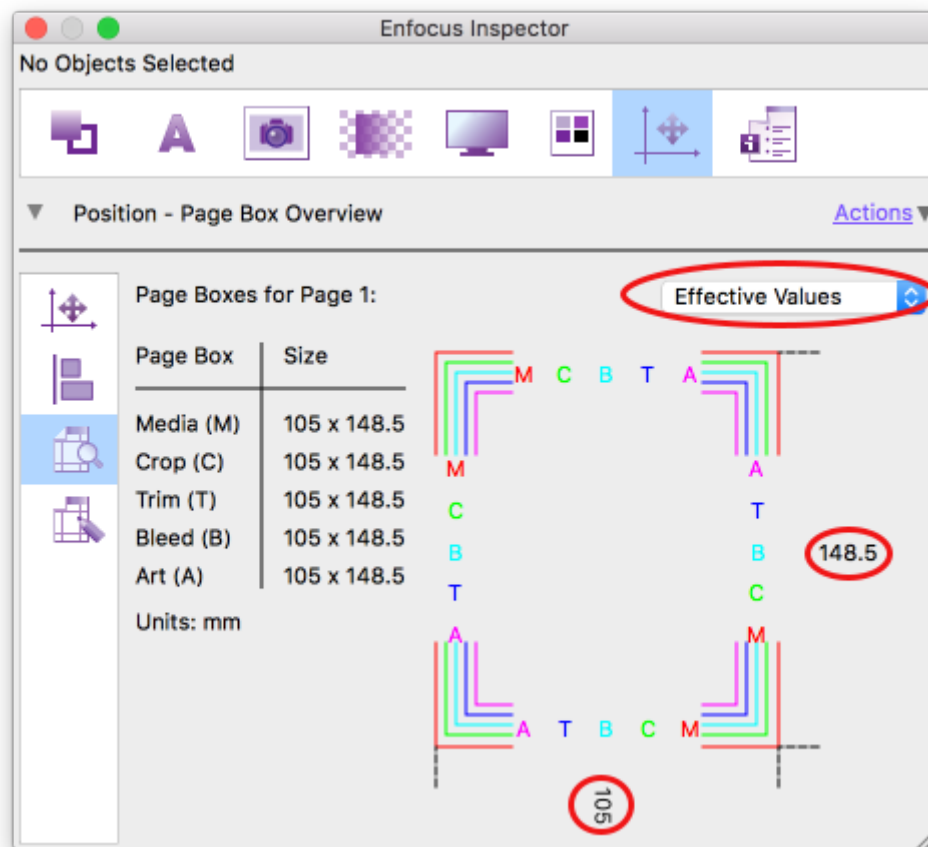

#### Related Actions

- [Check if page scaling factor is used](#) on page 374
- [Remove page scaling factor](#) on page 216
- [Apply page scaling factor](#) on page 201

### 4.11.17. Change trim box

#### Belongs to

- **Category:** Page
- **Type:** Changes

#### What it does

Allows you to create or resize a trim box.

You must choose one of the following options:

- To create a new trim box, select **Define new rectangle** and enter the required values, or grab them from a selected area using the **Grab Offsets** button . Note that boxes are defined from lower left to upper right.



- To resize a trim box relative to the axes of the existing trim box, select **Resize** and enter the required values.
- To re-use the dimensions from another box, select **Use box size** and select the appropriate page box.
- To determine the size of a trim box based on a selection, select **Resize page box to fit the selection** and enter the offset values.

There are some additional options available:

- **Only apply if not all pages have the same size**
- **Ignore page rotation and scaling factor**
- **Always require page box to be defined**

#### 4.11.1.18. Flip content

##### ***Belongs to***

- **Category:** Page;Position/Size
- **Type:** Changes

##### ***What it does***

Flips the contents of a selected object horizontally or vertically.

You can flip the content relative to the center of one of the page boxes. Note that you can take page rotation into account as required.

##### ***Related Actions***

- [Check for flipped objects](#) on page 389
- [Flip selection](#) on page 242

#### 4.11.1.19. Move media box to 0.0

##### ***Belongs to***

- **Category:** Page
- **Type:** Changes

##### ***What it does***

Changes the coordinates of the media box, so that the lower left corner of the media box is located at coordinates 0,0. This won't change the way the file looks.

The media box is the largest page box and defines the size of the physical medium on which the page will be printed or displayed. Some applications don't give the lower left 0,0 coordinates, but for example 100,100, which will cause problems when preflighting the file.

##### ***Related Actions***

- [Check media box origin](#) on page 376

- [Select by media box origin](#) on page 480

#### 4.11.1.20. Move objects into the page box

**Belongs to**

- **Category:** Page;Position/Size
- **Type:** Changes

**What it does**

Moves the selected objects into a particular page box.  
You can include annotations as required.

**Related Actions**

- [Move objects to corner](#) on page 243
- [Move objects out of the page box](#) on page 212

#### 4.11.1.21. Move objects out of the page box

**Belongs to**

- **Category:** Page; Position/Size
- **Type:** Changes

**What it does**

Moves the selected objects out of a particular page box.  
You can can include annotations as required.

**Related Actions**

- [Move objects to corner](#) on page 243
- [Move objects into the page box](#) on page 212

#### 4.11.1.22. Move page box

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Allows you to move one of the page boxes to the desired position.

You can choose which page you want to move, and define the target position in one of the following ways:

- By specifying the position relative to one of the other page boxes, based on the anchor point.

- By specifying the target X and Y coordinates.
- By specifying the values by which the X and Y axis should be moved.

You can take into account page rotation and scaling factor as required.

### 4.11.1.23. Move page content

#### ***Belongs to***

- **Category:** Page; Position/Size
- **Type:** Changes

#### ***What it does***

Moves the contents of a page in the preferred direction (horizontally or vertically) by the specified distance:

- A positive value, e.g. "1 cm" will move the content to the right (horizontally) or to the top of the page (vertically).
- A negative value, e.g. "-1 cm" will move the content to the left (horizontally) or to the bottom of the page (vertically).



---

**Note:** Remember that the unit used in Actions (in this example "cm") is defined in the PitStop Pro Preferences (Units & Guides Category).

---

You can choose whether or not to take into account page rotation and scaling factor (if applicable).

### 4.11.1.24. Move page content to corner

#### ***Belongs to***

- **Category:** Page; Position/Size
- **Type:** Changes

#### ***What it does***

Moves the contents of a page to a chosen corner.

This Action does not center the object on the corner but moves the closest objects to that corner and moves the other objects by the same distance towards the corner (horizontally or vertically).

#### ***Example***

To move the page content to the lower left

1. Select Move page content horizontally to **Left Side**.
2. Select Move page content vertically to **Bottom Side**.
3. Select the page box to be used as a reference, for example the **media box**.
4. Optionally, set **margins** to be added to the media box.
5. Select the **Use page rotation and scaling factor** checkbox, if page rotation and scaling factor should be taken into account.

#### 4.11.1.25. Normalize page boxes

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Normalizes page boxes, i.e. makes sure they are all positioned correctly and are placed in the right order, e.g. the media box should be the largest box, the bleed box should be inside the bleed marks, ...

#### 4.11.1.26. Normalize Page Rotate Key

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Allows you to manipulate page rotate keys in a PDF.

You can do one of the following:

- Flatten a rotate key into the page content (no visual effect)
- Introduce a rotate key for landscape pages and flatten it for portrait pages.

You can indicate which page box determines the page orientation. For example, if you select "trim box" and the trim box is 4 units wide and 3 units tall, the page is considered to have a landscape orientation.

- Remove a rotate key without flattening it into the page content. This may have a visual effect.

**Related Actions**

- [Check page rotation angle](#) on page 379
- [Select by page rotation angle](#) on page 481
- [Apply page rotation](#) on page 200

#### 4.11.1.27. Remove art box

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Removes the art box from a PDF.

The art box delimits the size a PDF will display in a page layout application like QuarkXPress. An art box is not essential to a PDF's structure and may be removed.

#### 4.11.1.28. Remove bleed box

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Removes the bleed box from a PDF.

The bleed box delimits the size the area beyond the final cut size of a document onto which ink may be printed in order to provide a bleed effect (which is where ink goes right to the edge of the page). A bleed box is not essential to a PDF's structure and may be removed.

#### 4.11.1.29. Remove crop box

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Removes the crop box from a PDF.

The crop box is the PDF page box that defines the frame of a PDF as it is displayed on screen. If you remove this box, the PDF will display at Media Box size.

#### 4.11.1.30. Remove empty page

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Deletes any pages in a PDF document that contain no objects.

You can specify that elements outside of a specific page box should be ignored. This way you can make sure that pages containing only registration marks (which are graphic elements outside the visible or printable page area, i.e. the trim box) are considered empty.

You can also ignore visually empty pages (i.e. paper-white and invisible (fully transparent) objects).



**Tip:** When you've removed the empty pages, check whether the page numbering is still consistent. If necessary, you can correct the page numbering using [Add page number](#) on page 81. Also check other references to page numbers such as the table of contents, the index or cross-references. If these page numbers are incorrect, you will need to update your source files and create a new PDF document.

#### **Related Actions**

- [Check for empty pages](#) on page 370
- [Select empty pages](#) on page 482

### 4.11.1.31. Remove page labels

#### **Belongs to**

- **Category:** Page
- **Type:** Changes
- **Since Version:** 2019

#### **What it does**

Removes the selected page labels. This Action has no attributes. It's typically used with [Select pages with page label](#) on page 486.

#### **Related Actions**

- [Change page labels](#) on page 207
- [Select pages with page label](#) on page 486

### 4.11.1.32. Remove page scaling factor

#### **Belongs to**

- **Category:** Page; Position and size
- **Type:** Changes

#### **What it does**

Removes the page scaling factor and reverts the page to its original size.

A page of 10 by 10 inches and a page scaling factor 2 will be displayed and printed as a page of 20 by 20 inches. By removing the page scaling factor, the page size will be at 10 by 10 inches again.

Page scaling has been introduced in PDF 1.6. If the page scaling factor is not removed or applied, the page size can only be displayed correctly in Acrobat 7 or higher.

#### **Related Actions**

- [Check if page scaling factor is used](#) on page 374

- [Apply page scaling factor](#) on page 201

#### 4.11.1.33. Remove sub-page navigation support

***Belongs to***

- **Category:** Page
- **Type:** Changes
- **Since Version:** 2022

***What it does***

Removes the PresSteps entry from a selected page's dictionary.

This is a fix for PDF/X-6, as PDF/X-6 does not support sub-page navigation.

#### 4.11.1.34. Remove trim box

***Belongs to***

- **Category:** Page
- **Type:** Changes

***What it does***

Removes the trim box from a PDF document. The trim box defines the final cut size of a printed PDF document.

#### 4.11.1.35. Reorder pages

***Belongs to***

- **Category:** Page; Document
- **Type:** Changes
- **Since Version:** 2017

***What it does***

Allows you to change the order of the pages in a document.

There are three preconfigured options:

- Reverse pages (first page becomes last etc)
- Swap first and last page
- Swap even and odd pages

When you select one of these options, you can immediately see the new page order in the Preview section at the bottom of the pane.

Apart from that, you can configure for each individual page what the new page number should be. To do so, you should select 'Custom' from the list of options and enter the page numbers in the preferred order (one by one, or using the notation explained in the GUI).

**Note:**

- Any 'forgotten' pages (not listed in the custom order), will be added at the end.
- If a page is by accident listed twice, the first occurrence counts.

By default, page labels are re-ordered together with the pages, unless you clear the **Move page labels** checkbox.

**Examples**

In the table below you can find some examples. Remember that you can enter any combination you want; you're warned about syntax errors and you can preview the page order for a document of up to 1000 pages.

| Notation                                                             | Meaning                                                                                                                                                                                                                             |
|----------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| One single page number<br>5                                          | Put this page first, then add the other pages without changing the order.<br><b>5, 1, 2, 3, 4, 6, 7, 8, 9, 10</b>                                                                                                                   |
| R followed by one page number<br>R5                                  | Put this page counting from the back first, then add the other pages without changing the page order.<br><b>6, 1, 2, 3, 4, 5, 7, 8, 9, 10</b>                                                                                       |
| One single page number followed by three dots<br>5...                | Put this page first, add the following pages till the end of the document, finally add the missing pages (all without changing the page order).<br><b>5, 6, 7, 8, 9, 10, 1, 2, 3, 4</b>                                             |
| R number followed by three dots<br>R5...<br>R1...                    | Put this page counting from the back first, then put the following pages counting from the back of the document, finally add the other pages (7-10)<br><b>6, 5, 4, 3, 2, 1, 7, 8, 9, 10</b><br><b>10, 9, 8, 7, 6, 5, 4, 3, 2, 1</b> |
| (number, number) ...<br>(2,1)...<br>(6,5)...                         | Swap the pages in between the brackets and do the same for the rest of the document. Other pages are added at the end.<br><b>2, 1, 4, 3, 6, 5, 8, 7, 10, 9</b><br><b>6, 5, 8, 7, 10, 9, 1, 2, 3, 4</b>                              |
| R number (number-number) number (number, number)<br>R1 (3-6) 2 (8,7) | Put the last page first (10), then a page range (pages 3 to 6), then a particular page (2), then swap even and odd pages (swap 8 and 7), add leftover pages (1, 9).<br><b>10, 3, 4, 5, 6, 2, 8, 7, 1, 9</b>                         |

**Use case**

When receiving PDFs in spreads, after having split the pages and added marks and bleeds, page 1 (which is actually the back cover) should be moved to the last page. Using this Action, that's very easy.



**Remark**

Due to a refresh issue in Adobe Acrobat, sometimes the page order seems not to be changed after successfully running the Action. Saving and reopening the document may solve the issue.

### 4.11.1.36. Rotate content

**Belongs to**

- **Category:** Page; Position/Size
- **Type:** Changes

**What it does**

Rotates the page content at a particular angle around a particular point.

You could for example rotate the page content at an angle of 90° relative to the center of the media box.

You can choose whether or not to take into account page rotation.

**Related Actions**

- [Check for rotated objects](#) on page 389
- [Rotate object](#) on page 247
- [Rotate objects as group](#) on page 247

### 4.11.1.37. Rotate page

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Allows you to set page rotation to -90, 0, 90 or 180 degrees (clockwise).

**Related Actions**

[Rotate content](#) on page 219

### 4.11.1.38. Scale page boxes

**Belongs to**

- **Category:** Page; Position and size
- **Type:** Changes

**What it does**

Allows you to scale all page boxes simultaneously.

Specify X and Y scaling percentages. You can anchor the page boxes at a certain corner in the PDF, for instance at the lower left corner of the media box. You can also choose whether or not to use the page rotation.



**Note:** If you want to scale the page boxes proportionally, you need to specify the same values for X and Y.

#### **Related Actions**

- [Scale page content to fit](#) on page 221
- [Scale to fit page size](#) on page 222
- [Scale page content](#) on page 220
- [Shrink page content to fit](#) on page 223

### 4.11.1.39. Scale page content

#### **Belongs to**

- **Category:** Page;Position/Size
- **Type:** Changes

#### **What it does**


Scales page content along the X and/or Y axis by a certain percentage.



**Note:** If you want to scale the page content proportionally, you need to specify the same values for X and Y.

#### **Example**

Suppose you have an A4-size PDF document (210 x 297 mm). You want to keep the page size “as is”, but need to make the page content narrower. You also wish to move the page content to the upper right corner of the crop box.

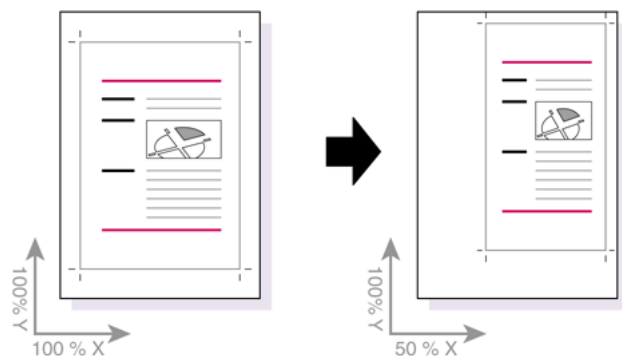

#### **How to proceed**

1. Enter the preferred scaling percentage for the X and Y axis.
2. Do one of the following:

- To define an anchor point, select **Anchored at**.
  - To define the target position of the page contents, select **Moving page content to**.
3. Define the anchor point or target position, for example (anchored at/moving to) the upper right of the crop box.

#### **Related Actions**

- [Scale page content to fit](#) on page 221
- [Scale to fit page size](#) on page 222
- [Scale page boxes](#) on page 219
- [Shrink page content to fit](#) on page 223

### 4.11.1.40. Scale page content to fit

#### **Belongs to**

- **Category:** Page; Position/Size
- **Type:** Changes

#### **What it does**

Scales the page content to fit the size of a particular page box. You can add extra margins, if necessary.


You should also define the target position of the page content inside the page box, e.g. "page content should move to the upper right".

You can choose whether or not to take into account the page rotation and scaling factor.

Scaling is by default restricted to the visible elements of the page (unless you clear the **Use only visible part of content** checkbox), to avoid that hidden content leads to incorrect results.

#### **Example**

In the example below, the page content is scaled to fit the size of the trim box (A).

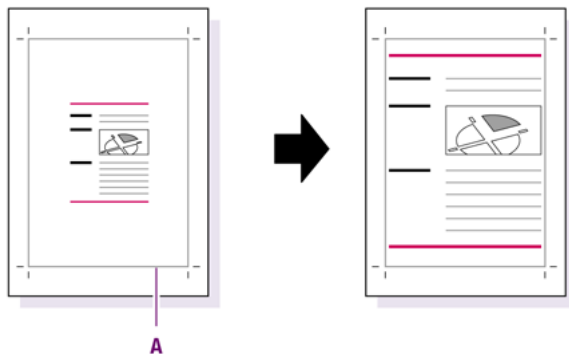

#### **Related Actions**

- [Scale page content](#) on page 220

- [Scale to fit page size](#) on page 222
- [Scale page boxes](#) on page 219
- [Shrink page content to fit](#) on page 223

#### 4.11.1.41. Scale to fit page size

##### **Belongs to**

- **Category:** Position/Size; Page
- **Type:** Changes

##### **What it does**

Scales all page boxes (and optionally all page content as well) until the specified page box fits the target size.


The target size should be specified by defining the target width and height either as a value, a percentage of the original value or proportionally relative to the other dimension.

Note that for both the page content and the page boxes you can separately decide whether or not to scale proportionally to match the target page size.

##### **Remark**

In case of proportional scaling (=default, **Allow non-proportional scaling** checkbox NOT selected), it may happen that the requested target width and height cannot be achieved without changing the aspect ratio; in that case, the target size serves as a frame in which the resized page box should fit.

For example, if the original page box is a rectangle and the requested width and height result in a square, the page box will be scaled to fit in the square (and vice versa). See the image below; the blue object represents the requested target dimensions.

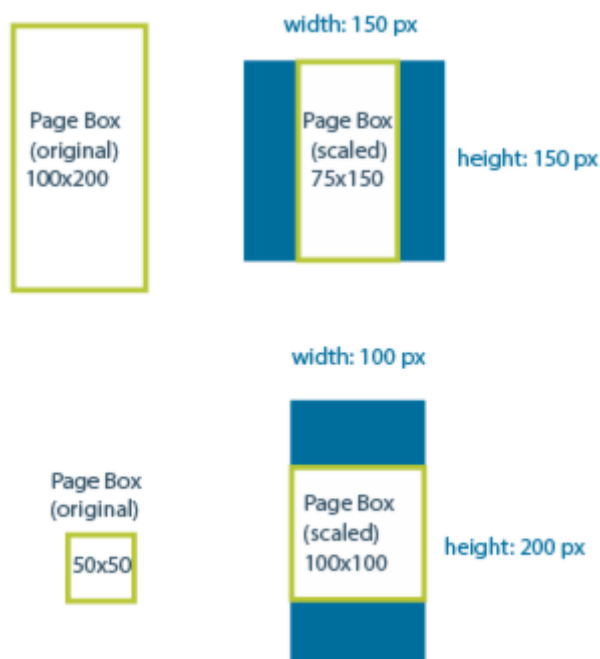

**Related Actions**

- [Scale page content to fit](#) on page 221
- [Scale page content](#) on page 220
- [Scale page boxes](#) on page 219
- [Shrink page content to fit](#) on page 223

#### 4.11.1.42. Set page size to the largest in document

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Increases the size of smaller pages in a PDF document, so they are all equal to the size of the largest page.

If a PDF contains pages of different sizes, this may cause problems during the printing process. You can use this Action to fix this problem.

**Related Actions**

[Set page size to the smallest in document](#) on page 223

#### 4.11.1.43. Set page size to the smallest in document

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Decreases the size of larger pages in a PDF document, so that they are all equal to the size of the smallest page.

If a PDF contains pages of different sizes, this may cause problems during the printing process. You can use this Action to fix this problem.

**Related Actions**

[Set page size to the largest in document](#) on page 223

#### 4.11.1.44. Shrink page content to fit

**Belongs to**

- **Category:** Page; Position/Size

- **Type:** Changes

**What it does**

Shrinks page content to fit the size of a particular page box. You can add extra margins, if necessary. You should also define the anchor point, for example "anchored at the lower left of the media box".

You can choose whether or not to take into account page rotation and scaling factor.

**Related Actions**

- [Scale page content to fit](#) on page 221
- [Scale to fit page size](#) on page 222
- [Scale page content](#) on page 220
- [Scale page boxes](#) on page 219

#### 4.11.1.45. Split pages in half

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Splits pages in half in a certain direction (horizontally, vertically, or orientation dependent), based on the desired page box.

Orientation depending means that the landscape pages are split vertically and portrait pages are split horizontally.



---

**Note:** PitStop provides three Actions Lists, allowing you split A4, A5 and US Letter documents in half.

---

This Action can be useful if you scanned two pages of a book as a single page, but want to have them as separate pages (e.g. for better readability); or if you have an image spread over two pages which has to be split in two for printing purposes.

#### 4.11.1.46. Use trim marks to set page box

**Belongs to**

- **Category:** Page; Position and size
- **Type:** Changes

**What it does**

Allows you to set the trim box and/or the bleed box based on the trim or bleed marks found in the PDF.

**Note:**

- Crop marks with a **dash pattern** cannot be used to set the page box.
- Crop marks generated with Illustrator, InDesign and QuarkXpress are supported.

**How to proceed**

1. Indicate which page box you want to set: the trim box, the bleed box or both.
2. Specify the color of the trim marks by choosing one or more of the following:
  - 400% CMYK
  - Separation All (registration)
  - 100% black
  - A specific color.
3. If desired, specify how much the marks are allowed to deviate from the expected position:
  - The unit is the unit set in the PitStop Pro Preferences (Units & Guides category), for example: cm or pt
  - The maximum value is 2.7 pt; if you enter a higher value, it is automatically reset to 2.7 pt or an equivalent value (if you're using a different unit).

**Example**

In the image below, the red marks are detected as trim marks and used to set the trim box (blue box). The position of the vertical marks in the top and bottom left corner is not as expected (they are not exactly on one vertical line), but the deviation (= difference between the position of both marks) is less than the specified threshold.

**Related Actions**

- [Select trim marks](#) on page 488
- [Check if trim marks match page box](#) on page 374

## 4.11.2. Checks

#### 4.11.2.1. Check for annotations inside art box or trim box

**Belongs to**

- **Category:** Page
- **Type:** Checks

**What it does**

Searches a PDF for any annotations that appear inside the art box or trim box - an undesirable location for printing.

#### 4.11.2.2. Check for differences in page boxes

**Belongs to**

- **Category:** Page
- **Type:** Checks

**What it does**

Allows you to compare a certain page box's size with that of another page box.



---

**Note:** As of PitStop 2021, you can use variables to specify the difference in size.

---

**Example**

Check if the media box is x inch wider and y inch higher than the trim box.

#### 4.11.2.3. Check for empty pages

**Belongs to**

- **Category:** Page
- **Type:** Checks

**What it does**

Checks if the PDF has pages without content.

Additionally, you can specify that elements outside of a specific page box should be ignored.

It's also possible to ignore visually empty pages (with paper-white and invisible (fully transparent) objects on it).

**Related Actions**

- [Remove empty page](#) on page 215
- [Select empty pages](#) on page 482



#### 4.11.2.4. Check for pre-separated pages

***Belongs to***

- **Category:** Color; Page
- **Type:** Checks

***What it does***

Checks if the PDF document contains any pages that already have been separated.

A pre-separated PDF contains pages that have been separated into their CMYK components. In offset printing each of these colors is printed with a separate plate. This means that each page in a PDF document is separated into its four constituent colors: cyan, magenta, yellow and black. For example, a pre-separated PDF file for a two-page CMYK print job, results in a PDF file with 8 pages.

This separation process is usually carried out by the RIP, and not in the source PDF document.

#### 4.11.2.5. Check for solids and tints

***Belongs to***

- **Category:** Color; Page
- **Type:** Checks

***What it does***


Checks if the PDF document contains any colors that have a tint below or above a set threshold.

The threshold is set in the **Effective solidness threshold** field. The default is 100%.

It's also possible to define a threshold for considering a colorant as a tint, by selecting the **Ignore tints that cover a surface area below** checkbox and entering a value of your choice (in ppm). You can take into account the printable surface area, the surface area of the own channel, or the surface area of all channels. This option is useful to avoid that colorants on pages with for example only 1 non-solid pixel in the rendered page would be marked as a tint.

***Example***

In this example, the threshold was set to 90%.

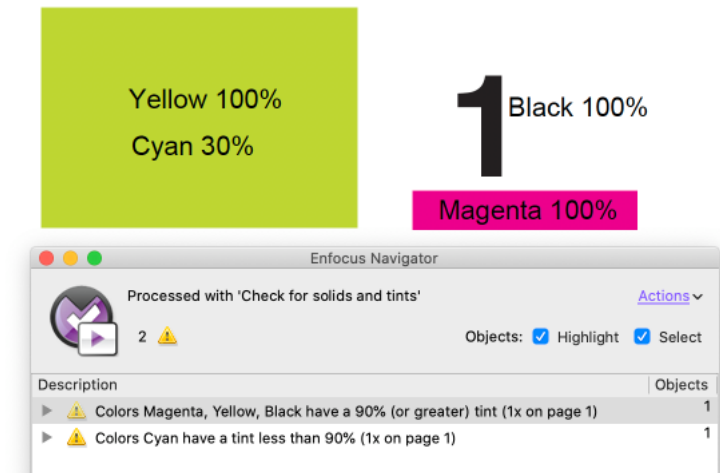

#### 4.11.2.6. Check for sub-page navigation support

##### ***Belongs to***

- **Category:** Page
- **Type:** Checks

##### ***What it does***

Checks if the PDF supports sub-page navigation, i.e. the possibility to navigate from one layer to another layer on the same page.

Sub-page navigation support is not desired in documents for print.

##### ***About page and sub-page navigation***

Page navigation allows you to navigate from one **page** to another, whereas sub-page navigation allows you to navigate from **one layer to another layer** on the same page.

##### ***Example***

Suppose you have a single page PDF showing the slides of a presentation. Each slide is on a different layer. When the user presses the forward arrow, the next slide (on the same page, but on another layer) is shown and the previous one (on another layer) is hidden.

#### 4.11.2.7. Check if blending color space is defined

##### ***Belongs to***

- **Category:** Color; Page
- **Type:** Checks

##### ***What it does***

Checks if the page blending color space has been defined in the PDF document.

You must set the required blending color space and the required luminosity softmask blending color.

#### **About blending color spaces**

When Adobe Acrobat interprets transparent objects and attempts to create a preview of the flattened artwork, it needs to do so using a single color space for all the items involved in the transparency group. This color space is called the **blending color space**.

The **page blending color space** is the blending color space assigned to a page; it is used when individual artwork does not have a blending color space.

The blending color space for soft masks (masks with soft transitions) is called the **luminosity softmask blending color space**. It is usually gray.

#### **Related Actions**

- [Change blending color space](#) on page 103
- [Select by blending color space](#) on page 424

### 4.11.2.8. Check if object is close to the page edge

#### **Belongs to**

- **Category:** Page
- **Type:** Checks

#### **What it does**

Checks whether the selected object is situated close to the page edge and might need to be enlarged.

You must specify the required distance to the trim box and the distance into the bleed. Optionally, you can choose to treat subpaths of compound paths individually. In that case, each of the subpaths will be checked separately.

See also:

- [Select objects close to the page edge](#) on page 483
- [Change objects that are close to the page edge](#) on page 205

### 4.11.2.9. Check if object is completely outside page box

#### **Belongs to**

- **Category:** Page; Position and size
- **Type:** Checks

#### **What it does**

Searches for (and optionally selects) objects that lie completely outside the selected page box. Depending on your workflow, you may want to remove these objects before printing.

#### 4.11.2.10. Check if page box is defined

**Belongs to**

- **Category:** Page
- **Type:** Checks

**What it does**

Checks if the selected page box (trim, crop, art or bleed box) has been defined in the PDF.

#### 4.11.2.11. Check if page box is too large

**Belongs to**

- **Category:** Page
- **Type:** Checks

**What it does**

Checks if the selected page box (art, bleed, crop, or trim box) lies inside the media box.

#### 4.11.2.12. Check if page scaling factor is used

**Belongs to**

- **Category:** Page; Position and size
- **Type:** Checks

**What it does**

Checks whether the PDF uses a page scaling factor. If so, you can optionally check if a certain page scaling factor applies.

A page with scaling factor 2 will be displayed and printed twice the original size (= scaling factor 1). Page scaling has been introduced in PDF 1.6 and allows you to extend the maximum page size beyond 200 by 200 inch.

**Related Actions**

- [Apply page scaling factor](#) on page 201
- [Remove page scaling factor](#) on page 216

#### 4.11.2.13. Check if trim marks match page box

**Belongs to**

- **Category:** Page
- **Type:** Checks

## What it does

Checks if trim marks found in the PDF match the trim box and/or the bleed marks match the bleed box.

## How to proceed

1. Indicate which marks you want to check: trim marks, bleed marks or both.
2. To help PitStop detect the trim marks, specify the potential color of the marks, by choosing one or more of the following:

- 400% CMYK
- Separation All (registration)
- 100% black
- A specific color

In case of a specific color, do one of the following:

- Select a color space from the list and use the sliders to select the appropriate color.
- Click  and select the appropriate color.
- Select an object with the Enfocus Selection tool and click  to grab the fill or stroke color from the selection.

3. If desired, specify how much the marks are allowed to deviate from the expected position:
  - The unit is the unit set in the PitStop Preferences (Units & Guides category), for example: cm or pt
  - The maximum value is 2.7 pt; if you enter a higher value, it is automatically reset to 2.7 pt or an equivalent value, if you're using a different unit.

## Example

In the image below, the red marks are detected as trim marks, although the position of the vertical marks in the top and bottom left corner is not as expected (they are not exactly on one vertical line). In this case, the deviation (= difference between the position of both marks) is less than the specified threshold.



**Remark**

A filled path with 3 lines is accepted as a trim mark if:

- The color is as specified in the attributes of this Action.
- It has no dash pattern.
- The 4 points of the 3 lines are a rectangle.
- The path is closed.
- The width is between 0.1 and 2 pt.
- The length is between 8 and 40 pt.

**Related Actions**

- [Use trim marks to set page box](#) on page 224
- [Select trim marks](#) on page 488

#### 4.11.2.14. Check media box origin

**Belongs to**

- **Category:** Page; Position and size
- **Type:** Checks

**What it does**

Checks whether the media box is set to coordinates 0,0.

The media box is the largest page box and defines the size of the physical medium on which the page will be printed or displayed. Some applications don't give the lower left 0,0 coordinates, but for example 100,100, which will cause problems when preflighting the file.

**Related Actions**

- [Select by media box origin](#) on page 480
- [Move media box to 0.0](#) on page 211

#### 4.11.2.15. Check number of pages

**Belongs to**

- **Category:** Page;Doc
- **Type:** Checks

**What it does**

Checks the number of pages in a PDF.

You can for example check if there are less/more than x page(s), or if the PDF contains an odd/even number of pages ...

#### 4.11.2.16. Check page bleed box

***Belongs to***

- **Category:** Page
- **Type:** Checks

***What it does***

Checks and compares the size of the bleed box with the size of the trim or crop box.

As of PitStop 2022, you can indicate which side(s) should be checked (left, right, top or bottom). Also, you can enable **Mirror according to page binding**, a new option that, when selected, checks the inner and/or outer side instead of the left and/or the right side of the page. This is useful in case of books, where you may want to ignore the inner edge (which does not require bleed).

#### 4.11.2.17. Change page box layout

***Belongs to***

- **Category:** Page
- **Type:** Changes

***What it does***

Changes the page box layout in a PDF to Press, Screen viewing or PDF/X Layout.

The attributes depend on the chosen layout:

- **Press layout** (typically used for print)

If you select this layout, the trim box will be derived from the first page box (out of the list below) that is present on the page. Use the **Up** and **Down** button to move the preferred page box to the top of the list. For example, if *bleed box* is the first item in the list, and *art box* is the second, the trim box will be derived from the bleed box, if found; if there is no bleed box found, the trim box will be derived from the art box; if there is no art box, the Action will search for the third page box in the list, and so on.

You must also define the minimum distance between the media and bleed boxes and between the bleed and trim boxes.

To get the PDF to display at the size of the media it will be printed on, select the appropriate option:

- **Crop box must equal trim box**, or
- **No crop box must be defined or the crop box equals the media box**. This means that, if the crop box is not defined yet, it will not be added by this Action; if the crop box is defined, it will get the same size and position as the media box.
- **Screen viewing**

If you select this layout, the page is defined solely by the crop box, which should have the same size as the media box. No other page boxes are allowed. The crop box/media box is derived from the first page box (out of the list below) that is present on the page. Use the **Up** and **Down** button to move the preferred page box to the top of the list. For example, if *bleed box* is the first item in the list, the crop box/media box will be derived from the bleed box if found in the PDF; if the bleed box is not found, the second page box in the list will be searched for, ...

- **PDF/X layout**

If you select this layout, the exact page box layout depends on the chosen PDF/X version.

- If you have chosen PDF/X-1a:2003 or PDF/X-3:2003, the art box or trim box shall not extend beyond the boundaries of the bleed box and the crop box.
- PDF/X-4 allows either a trim or an art box but forbids having both.
- PDF/X-6 allows an art box, next to the mandatory trim box.

To define the trim box relative to the media box, define the desired margins.

**Related Actions**

[Check page box layout](#) on page 377

## 4.11.2.18. Check page boxes consistency

**Belongs to**

- **Category:** Page
- **Type:** Checks

**What it does**

Checks if two different page boxes (if defined) have the same size and position.

You can either compare the trim and art box, or the trim and crop box.

## 4.11.2.19. Check page format

**Belongs to**

- **Category:** Page
- **Type:** Checks

**What it does**

Ensures that the media box is defined as being the width or height of a multiple of a particular measurement. This allows you to check whether the page size of your document fits your column and/or row layout.

**Example**

To set all your page boxes to a multiple of 22cm wide

1. Select **A multiple of columns**.



2. To have pages that are always multiples of 22 cm:
  - a. Enter 22 cm as column width.
  - b. Enter 0 as column spacing.

**Related Actions**

[Change page format](#) on page 207

## 4.11.2.20. Check page orientation

**Belongs to**

- **Category:** Page
- **Type:** Checks

**What it does**

Checks if all the pages in a PDF have a given orientation (portrait, landscape, all the same orientation or the most used orientation).

The orientation is based on the selected page box.

**Related Actions**

- [Change page orientation](#) on page 208
- [Select by page orientation](#) on page 481

## 4.11.2.21. Check page rotation angle

**Belongs to**

- **Category:** Page; Position and size
- **Type:** Checks

**What it does**

Checks whether the page rotation angle is equal to a specific value.

You can check for a rotation angle of -90°, 0°, 90°, or 180° (clockwise).

**Related Actions**

- [Select by page rotation angle](#) on page 481
- [Apply page rotation](#) on page 200

## 4.11.2.22. Check page safe type zone

**Belongs to**

- **Category:** Page
- **Type:** Checks

**What it does**

Checks for text or objects that overlap or come close to an edge limit in a PDF.

The safe type zone is the area where you must not place any text or objects, unless these objects are intended as bleed.


**How to proceed**

1. Define the safe type zone as one of the page boxes.
2. Optionally define values for the left, right, top and/or bottom margin.
3. To make sure that even and odd pages are mirrored, select **Mirror horizontal margins**. This is recommended if the left and right margin have a different size.

Figure 2: Mirror horizontal margins illustrated

**A** = **Mirror horizontal margins** is not selected. Margins of odd and even pages are the same; the left margin is larger than the right margin.

**B** = **Mirror horizontal margins** is selected. Odd and even pages are mirrored; the outer margin is smaller than the inner margin.

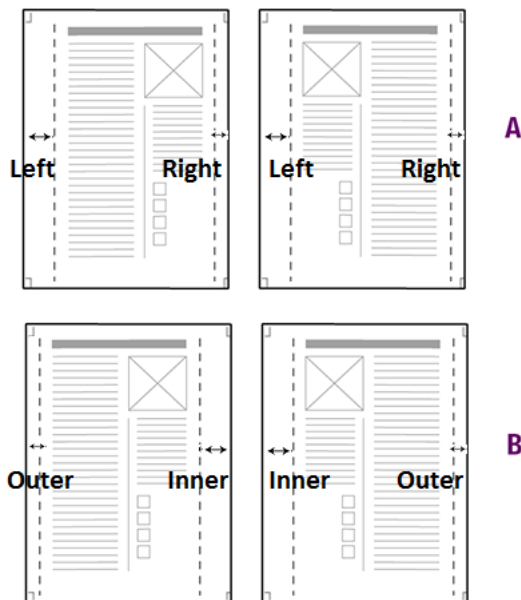

4. To only check for text in the page safe type zone, select the **Restrict this check to text** checkbox.

#### 4.11.2.23. Check pages have same size

**Belongs to**

- **Category:** Page
- **Type:** Checks

**What it does**

Checks whether all pages in a PDF have the same size. The page size is based on the selected page box.

## 4.11.2.24. Check page size

**Belongs to**

- **Category:** Page
- **Type:** Checks

**What it does**

Allows you to check if the size or position of a specific page box matches the desired size or position.

**How to proceed**

1. Do one of the following:
  - To check the coordinates of the selected page box, select **Rectangle**.
  - To check the height and width of the selected page box, select **Size**.
2. Select the page box of which you want to check the size or position.
3. Enter the required values (coordinates or width and height).
4. In the **Precision** field, indicate how much the actual size or position is allowed to deviate from the entered values.

A precision of 0 means that no deviation is allowed: the size or position needs to match exactly the entered values. For example, if you are checking for a height of 10 inch, even a very small difference (e.g. a page box height of 10.001 inch) will result in an error or warning.

5. Disable **Ignore page orientation** as required.

When enabled (default setting), the smallest value is considered the width and the largest value is considered the height. When disabled, the page orientation is taken into account, meaning that the first value is considered the width and the second the height.



**Note:** Action Lists upgraded from older versions (before this option was introduced) will have **Ignore page orientation** disabled. There's one exception: in Action Lists upgraded from version 17.1 to 2018, the checkbox will be *enabled*, and this may yield unexpected results. We advise reviewing such Action Lists before using them.

**Related Actions**

[Select by page size](#) on page 481

## 4.11.3. Informs

---

### 4.11.3.1. Gather page box information

**Belongs to**

- **Category:** Page
- **Type:** Informs

**What it does**

Collects information about the page boxes used in a PDF document and presents it in the log.

In the report file (under Page boxes), each page box layout is represented by 2 drawings:

- One to show the page boxes that were defined in the document ("defined" page boxes)
- One to show the actual position of the page ("effective" page boxes).

Below these drawings, an overview of all page boxes and their sizes is listed:

- The pages this page box layout applies to
- The start position of the media box
- The page rotation
- The page scaling factor

### 4.11.3.2. Gather pages information

**Belongs to**

- **Category:** Metadata; Page
- **Type:** Informs

**What it does**

Collects information about the pages (number of pages and range) in a PDF and presents it in the log.

## 4.11.4. Selections

---

### 4.11.4.1. Select by blending color space

**Belongs to**

- **Category:** Color; Page

- **Type:** Selections

**What it does**

Makes a selection based on the blending color space.

You must set the required blending color space and the required luminosity softmask blending color (or select the option **Undefined**).

**About blending color spaces**

When Adobe Acrobat interprets transparent objects and attempts to create a preview of the flattened artwork, it needs to do so using a single color space for all the items involved in the transparency group. This color space is called the **blending color space**.

The blending color space for soft masks (masks with soft transitions) is called the **luminosity softmask blending color space**. It is usually gray.

**Related Actions**

- [Change blending color space](#) on page 103
- [Check if blending color space is defined](#) on page 308

#### 4.11.4.2. Select by media box origin

**Belongs to**

- **Category:** Page
- **Type:** Selections

**What it does**

Allows you to select pages of which the lower left corner is not located at coordinates 0,0.

The media box is the largest page box and defines the size of the physical medium on which the page will be printed or displayed. Some applications don't give the lower left 0,0 coordinates, but for example 100,100, which will cause problems when preflighting the file.

**Related Actions**

- [Check media box origin](#) on page 376
- [Move media box to 0.0](#) on page 211

#### 4.11.4.3. Select by page orientation

**Belongs to**

- **Category:** Page
- **Type:** Selections

**What it does**

Allows you to select pages by orientation.

Choose either Portrait, Landscape, Same orientation or Most used orientation to select all pages with this orientation, and select the page box the orientation must be based on.

**Related Actions**

- [Change page orientation](#) on page 208
- [Check page orientation](#) on page 379

#### 4.11.4.4. Select by page rotation angle

**Belongs to**

- **Category:** Page; Position and Size
- **Type:** Selections

**What it does**

Selects pages with a certain rotation angle.

You can choose a rotation angle of -90°, 0°, 90°, or 180° (clockwise).

**Related Actions**

- [Check page rotation angle](#) on page 379
- [Apply page rotation](#) on page 200

#### 4.11.4.5. Select by page size

**Belongs to**

- **Category:** Page
- **Type:** Selections

**What it does**

Allows you to select pages based on the size of one of the page boxes.

You can for example select pages with a trim box of 21x29 cm.

The precision indicates how much the actual size is allowed to differ from the specified size. A precision of 0 means that no deviation is allowed: the size needs to match exactly the entered values.

**Related Actions**

- [Check page size](#) on page 380

#### 4.11.4.6. Select color bars

**Belongs to**

- **Category:** Page
- **Type:** Selections

**What it does**

Allows you to select color bars with a certain color patch border and patch size.

Color bars (also called color control bars or color control strips) are small squares of color representing CMYK inks and tints of gray, that are used by press operators to control ink density, dot gain, print contrast, ...



**Note:** PitStop provides an Action List to add color bars.

**Example**

You could combine this Action with another Action to, for example, delete all color bars at once:

```
Select color bars
Remove selection <!-- Remove selection on page 278 -->
```

#### 4.11.4.7. Select empty pages

**Belongs to**

- **Category:** Page
- **Type:** Selections

**What it does**

Selects pages in a PDF document that contain no objects.

You can specify that elements outside of a specific page box should be ignored and/or visually empty pages (paper-white and invisible (fully transparent) objects).

**Related Actions**

- [Check for empty pages](#) on page 370
- [Remove empty page](#) on page 215

#### 4.11.4.8. Select objects close to the page edge

**Belongs to**

- **Category:** Page
- **Type:** Selections

**What it does**

Selects objects close to the page edge.

You must specify the distance to the trim box and the distance into the bleed.

Optionally, you can choose to treat subpaths of compound paths individually. In that case, each of the subpaths will be selected separately.

See also:

- [Check if object is close to the page edge](#) on page 373
- [Change objects that are close to the page edge](#) on page 205

#### 4.11.4.9. Select objects if page is selected

***Belongs to***

- **Category:** Page
- **Type:** Selections

***What it does***

Allows you to select all objects on the selected page(s).

#### 4.11.4.10. Select page by its page box properties

***Belongs to***

- **Category:** Page
- **Type:** Selections

***What it does***

Allows you to select a number of pages based on one of the following criteria:

- Whether or not a certain page box is defined.
- The fact that the crop or art box differs from the trim box.
- The fact that a certain page box lies (partially) outside of the media box.
- The fact that the size of the bleed box is not sufficient compared to the trim or crop box.

This allows you to detect pages of which the page boxes are not well defined.

#### 4.11.4.11. Select page if content is selected

***Belongs to***

- **Category:** Page
- **Type:** Selections

***What it does***

Allows you to select a page if the content is selected.

You can select or both the page object and the entire page content.

***How to proceed***

1. Specify **what** you want to select:



- The page object only, or
  - Both the page object and the entire page content.
2. Specify on what **condition** you want to select it, for example if more than one objects are selected.

#### 4.11.4.12. Select pages

##### **Belongs to**

- **Category:** Page
- **Type:** Selections


##### **What it does**

Allows you to select a particular page, a set of pages, or a page range, for example the first or last page of a PDF, all odd pages, pages from 1 to 5, ...


You can also make a selection based on the *number of pages* in the PDF, for example: Select if number of pages is not a multiple of 10.

##### **New options added in 13 update 1**

- **Rn notation** allowed in page range selection. If you want to add pages starting from the end of the PDF, you can use this notation in the **Page range** text box. R1 refers to the last page (= 1 page from the end), R2 refers to the last but one (= 2 pages from the end), ...

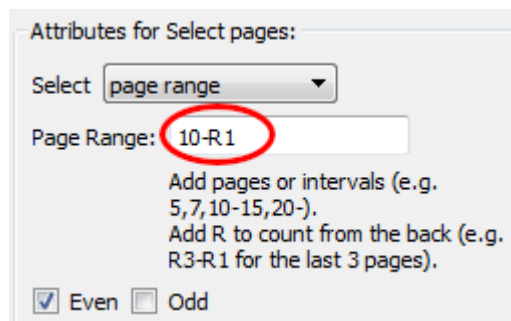

- **Extra option to select every Nth page**, e.g. every second page in the PDF in the first 20 pages of the PDF.

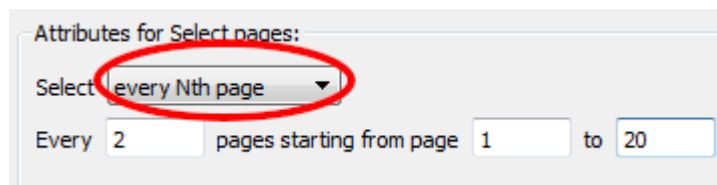

**Example**

To select every page but the first page of a PDF, and then add a copied graphic to that page, proceed as follows:

```
Select all pages <!-- Choose: Select all pages, Even and Odd -->
Select first page <!-- Choose: Select first page, Even and Odd -->
NOT
AND
Add copied graphics <!-- See Add copied graphics on page 76 -->
```

#### 4.11.4.13. Select pages with bookmarks

**Belongs to**

- **Category:** Page
- **Type:** Selections
- **Since Version:** 24.03

**What it does**

Selects pages based on the bookmarks in the PDF.

You can define the name of the bookmark, or specify a list of comma-separated names of bookmarks, or even use regular expressions. If the case of the entered names should be taken into account, you can select the **Case sensitive** checkbox.

**Use case**

Based on the selection, you can add inserts into the document, for example dividers between the chapters or add the end of a chapter, etc.

**Related Actions**

- [Check bookmarks](#) on page 351
- [Add bookmarks](#)
- [Remove bookmarks](#)

#### 4.11.4.14. Select pages with page label

**Belongs to**

- **Category:** Page
- **Type:** Selections
- **Since Version:** 2019

**What it does**

Selects pages based on their label. You can enter the label or (a combination of) properties, such as the label prefix, the number style or the page range (odd, even, page numbers).

**Related Actions**

- [Change page labels](#) on page 207
- [Remove page labels](#) on page 216

#### 4.11.4.15. Select objects with PieceInfo

**Belongs to**

- **Category:** Page
- **Type:** Selections

**What it does**

Searches for objects containing PieceInfo.

This can for example apply to pages coming from Illustrator, containing Illustrator PieceInfo. If a PDF contains PieceInfo, it was saved with editing capabilities from applications such as Illustrator, which may be lost if you edit the PDF with another application.

Removing PieceInfo will make the file smaller, but it won't be possible anymore to import the document in Illustrator.

**Related Actions**

- [Remove metadata](#) on page 192

#### 4.11.4.16. Select pages with transparent objects

**Belongs to**

- **Category:** Page
- **Type:** Selections

**What it does**

Selects pages containing transparency.

**About transparency in PDF**

Transparency can cause some problems if you view documents in Adobe Acrobat 4.0 or earlier: transparent objects can be rendered incorrectly.

A transparent layer can also cause problems when you transpose the PostScript code of your PDF document to the halftone information of your printer (the 'ripping').

A typical example is saving graphics with transparent elements as PDF compatible with Acrobat 5.0 in Adobe Illustrator 9.0 or Adobe InDesign 2.0. In Adobe Acrobat 4.0, transparent objects in your PDF document are displayed and printed opaque, but transparency is not removed. If you open the same PDF document in Adobe Acrobat 5.x, the transparent objects will look (and print) fine again.

It can be useful to make the distinction between spot colors and CMYK colors when checking the transparency settings in your documents, because different rules govern the overprinting of spot colors.

**Related Actions**

- [Check for transparent objects](#) on page 399
- [Remove transparency](#) on page 274
- [Select transparent objects](#) on page 504
- [Change transparency](#) on page 265

## 4.11.4.17. Select registration marks

**Belongs to**

- **Category:** Page
- **Type:** Selections

**What it does**

Allows you to select potential registration marks with a certain color.

**How to proceed**

Specify the potential color of the registration marks, by choosing one or more of the following:

- 400% CMYK
- Separation All (registration)
- 100% black
- A specific color

In case of a specific color, do one of the following:

- Select a color space from the list and use the sliders to select the appropriate color.
- Click  and select the appropriate color.
- Select an object with the Enfocus Selection tool and click  to grab the fill or stroke color from the selection.

**Related Actions**

[Add registration marks](#) on page 84

## 4.11.4.18. Select trim marks

**Belongs to**

- **Category:** Page
- **Type:** Selections

**What it does**

Allows you to select potential trim or bleed marks with a certain color.

**How to proceed**

1. Indicate which marks you want to select: trim marks, bleed marks or both.

2. To help PitStop detect the trim marks, specify the potential color of the marks, by choosing one or more of the following:

- 400% CMYK
- Separation All (registration)
- 100% black
- A specific color

In case of a specific color, do one of the following:

- Select a color space from the list and use the sliders to select the appropriate color.
- Click  and select the appropriate color.
- Select an object with the Enfocus Selection tool and click  to grab the fill or stroke color from the selection.

3. If desired, specify how much the marks are allowed to deviate from the expected position:
  - The unit is the unit set in the PitStop Preferences (Units & Guides category), for example: cm or pt
  - The maximum value is 2.7 pt; if you enter a higher value, it is automatically reset to 2.7 pt or an equivalent value, if you're using a different unit.

### Example

In the image below, the red marks are detected as trim marks, although the position of the vertical marks in the top and bottom left corner is not as expected (they are not exactly on one vertical line). In this case, the deviation (= difference between the position of both marks) is less than the specified threshold.



### Remark

A filled path with 3 lines is accepted as a trim mark if:

- The color is as specified in the attributes of this Action.
- It has no dash pattern.
- The 4 points of the 3 lines are a rectangle.
- The path is closed.

- The width is between 0.1 and 2 pt.
- The length is between 8 and 40 pt.

**Related Actions**

- [Use trim marks to set page box](#) on page 224
- [Check if trim marks match page box](#) on page 374

## 4.11.4.19. Select pages with transparent objects

**Belongs to**

- **Category:** Page
- **Type:** Selections

**What it does**

Selects pages containing transparency.

**About transparency in PDF**

Transparency can cause some problems if you view documents in Adobe Acrobat 4.0 or earlier: transparent objects can be rendered incorrectly.

A transparent layer can also cause problems when you transpose the PostScript code of your PDF document to the halftone information of your printer (the 'ripping').

A typical example is saving graphics with transparent elements as PDF compatible with Acrobat 5.0 in Adobe Illustrator 9.0 or Adobe InDesign 2.0. In Adobe Acrobat 4.0, transparent objects in your PDF document are displayed and printed opaque, but transparency is not removed. If you open the same PDF document in Adobe Acrobat 5.x, the transparent objects will look (and print) fine again.

It can be useful to make the distinction between spot colors and CMYK colors when checking the transparency settings in your documents, because different rules govern the overprinting of spot colors.

**Related Actions**

- [Check for transparent objects](#) on page 399
- [Remove transparency](#) on page 274
- [Select transparent objects](#) on page 504
- [Change transparency](#) on page 265

## 4.11.5. Settings

---

### 4.11.5.1. Override page box defaults

**Belongs to**

- **Category:** General; Page
- **Type:** Settings

***What it does***

Replaces the default order (Media > Crop > Art - Bleed - Trim) of the page boxes in a PDF document with the order defined in this Action.

## 4.12. PDF 2.0

---

### 4.12.1. Selections

---

#### 4.12.1.1. Select black point compensation

***Belongs to***


- **Category:** PDF 2.0
- **Type:** Selections
- **New since:** PitStop 2022

***What it does***

Selects objects based on the presence of black point compensation (regardless of its value) or based on a particular value (On, Off, or Default).

The black point compensation option is a feature of Adobe Photoshop to address color conversion problems caused by differences between the darkest level of black achievable on one device and the darkest level of black achievable on another.

Note that the black point compensation attribute of a selected object can be found in the Enfocus Inspector, on the **Prepress - General** tab. Possible values are On, Off or Default. When no blackpoint compensation is set (or when multiple objects with different black point compensation values are selected), you'll see a dash.

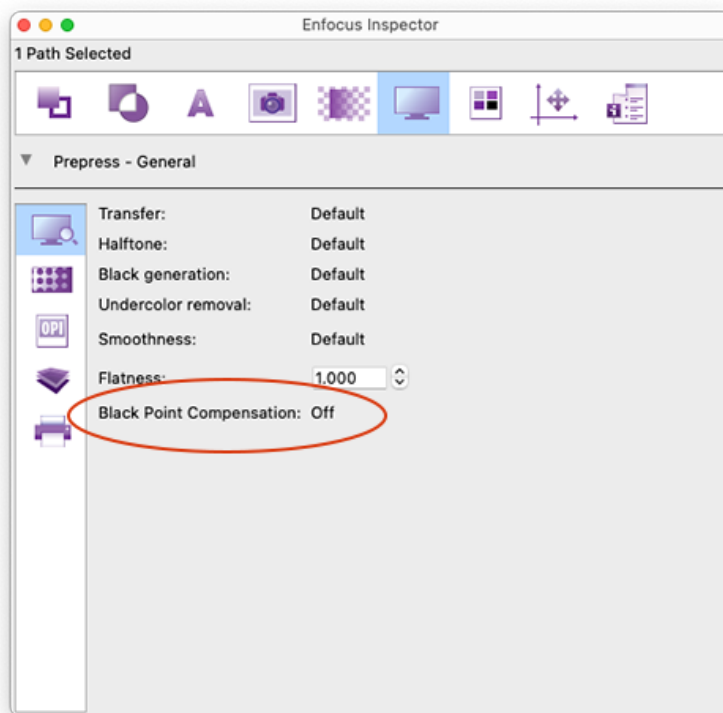**Related Actions**

- [Check black point compensation](#) on page 381
- [Remove black point compensation](#) on page 232
- [Set black point compensation](#) on page 235

#### 4.12.1.2. Select by halftone origin

**Belongs to**

- **Category:** PDF 2.0
- **Type:** Selections
- **New since:** PitStop 2022

**What it does**

Selects objects either with or without default HTO (halftone origin) values, or with particular HTO values.

PDF 2.0 allows specifying the halftone origin, whereas in earlier versions, the HTO value had to be 'Default' (= not specified).

**Related Actions**

- [Check halftone origin](#) on page 385
- [Change halftone origin](#) on page 226



- [Set default halftone origin](#) on page 236

### 4.12.1.3. Select by PDF version

#### **Belongs to**

- **Category:** Metadata, PDF 2.0
- **Type:** Selections

#### **What it does**

Allows you to make a selection based on the PDF's Acrobat or PDF version.

The Acrobat version is the sum of the two numbers that make up the PDF version, for example: PDF 1.4 = Acrobat 5. This is not true anymore for PDF 2.0, as from this version onwards there is no link anymore between the Acrobat and the PDF version.



**Note:** As of PitStop 2020, you can select a PDF 1.7 by its extension level (Adobe Extension 1, 3, 5, 6 or 8). For more details concerning the extensions, refer to [https://www.adobe.com/devnet/pdf/pdf\\_reference.html](https://www.adobe.com/devnet/pdf/pdf_reference.html).

#### **Example**

To select PDFs with Acrobat version higher than 7.0, proceed as follows:

```
Select by PDF version <!-- options: Acrobat version must be more than 7.0 -->
```

#### **Related Actions**

- [Change PDF version](#) on page 183
- [Check PDF/Acrobat compatibility](#) on page 362

### 4.12.1.4. Select inline image syntax

#### **Belongs to**

- **Category:** Image; PDF 2.0
- **Type:** Selections
- **New since:** PitStop 2022

#### **What it does**

Selects images based on the presence of an L key.

The L key specifies the length of the image data and allows users to skip inline images if required.

You can select images...

- Without an L key
- With an L key

- With an invalid L key

Note that PDF 2.0 allows (but does not impose) the presence of an L key, but if it's present, it must match the actual inline image data length.

#### **Related Actions**

- [Check inline image syntax](#)
- [Change inline image syntax](#) on page 144

## 4.12.2. Changes

---

### 4.12.2.1. Change document information dictionary compliance

- **Category:** Metadata, PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2021

#### **What it does**

Makes the information dictionary compliant with the chosen PDF version.

#### **About the info dictionary**

The info dictionary contains information about the file, such as the title, the author, the creation date ... and is visible through the file's Document Properties.

The specifications for the info dictionary depend on the PDF version:

- **PDF 1.7:** The info dictionary is optional. If it's present, it may contain the following entries: Title, Author, Subject, Keywords, Creator, Producer, CreationDate, ModDate and Trapped.
- **PDF 2.0:** The info dictionary is optional. If it's present, it may be empty, or contain CreationDate and/or ModDate. The other entries are deprecated.
- **PDF/X-6:** There should be no info dictionary, or if there is one, it should be empty.



**Note:** There is one exception to the above: if there is a PiecInfo dictionary in the document catalog dictionary, the info dictionary is required and must contain the ModDate entry.

Note that as of PDF 2.0, the *info* dictionary is officially called *information* dictionary.

#### **Options**

- **PDF 1.7:** PitStop only adds an info dictionary (including ModDate) if document level PiecInfo is present.
- **PDF 2.0:** PitStop removes deprecated entries from the info dictionary (if necessary). If document level PiecInfo is present, it makes sure there is an info dictionary that contains ModDate.
- **PDF/X-6:** PitStop removes the info dictionary if there is one, except if document level PiecInfo is present; then it makes sure there is an info dictionary that contains ModDate.

- **Current document version:** PitStop detects the current PDF version and makes sure the info dictionary is compliant with the current PDF version.
- **None (leave it unchanged):** This option prevents PitStop from interfering with the info dictionary at the time of saving the file.

#### 4.12.2.2. Change halftone origin

##### **Belongs to**

- **Category:** PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2022

##### **What it does**


Changes the halftone origin by the entered values.

You can change the halftone origin on page or form level as required:

- The X and Y values relative to the lower-left corner of the Media Box.
- The X and Y values in the form space of the outer selected Form XObject.

This Action is typically used for packaging and labels (step and repeat), to make sure that all images have the same halftone origin, hence look identical when printed.

Note that you can view (and also manually change) the halftone origin of a selected object in the Inspector, on the Prepress - Halftone tab.

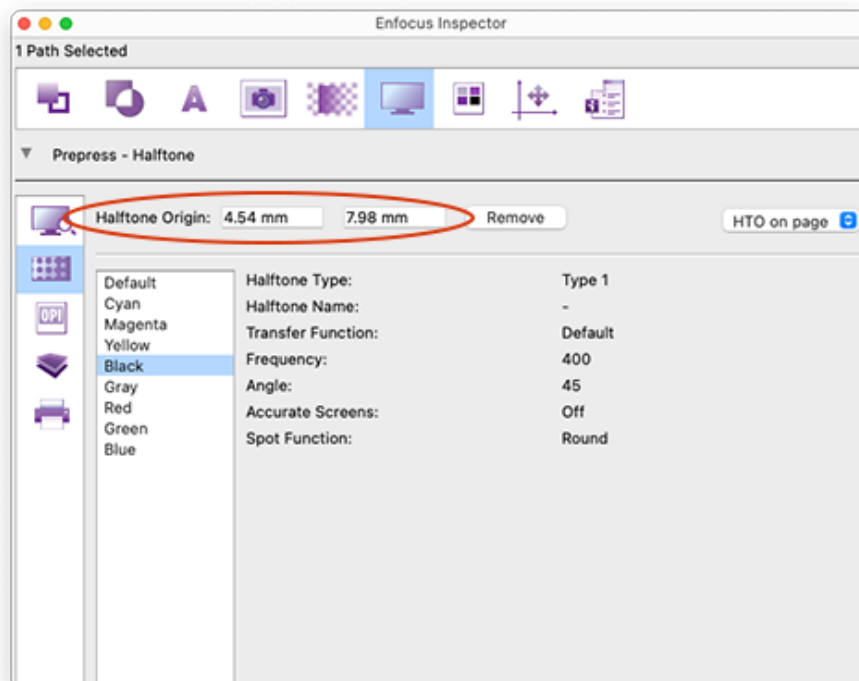

##### **Related Actions**

- [Check halftone origin](#) on page 385

- [Select by halftone origin](#) on page 490
- [Set default halftone origin](#) on page 236

### 4.12.2.3. Change inline image syntax

**Belongs to**

- **Category:** Image, PDF 2.0
- **Type:** Changes
- **Since version:** 2020

**What it does**

Allows you to change the L key (or Length key) of a PDF to comply with a particular PDF version.

The L key specifies the length of the image data and allows users to skip inline images if required.

Choices are:

- Compatibility with the current document version
- Compatibility with PDF 1.7 (no Length key)
- Compatibility with PDF 2.0 (write Length key)
- Keep presence of the Length key
- Fix the Length key (so it matches the actual inline image data length)



---

**Note:** The changes you make using this Action will only affect newly saved content: earlier saved content is not touched.

---

**Related Actions**

- [Change PDF text string encoding](#) on page 122
- [Check inline image syntax](#)
- [Select inline image syntax](#) on page 451

### 4.12.2.4. Change PDF text string encoding

**Belongs to**

- **Category:** Document, PDF 2.0
- **Type:** Changes
- **Since version:** 2020

**What it does**

Allows you to change the text encoding of a PDF to comply with a particular PDF version.

Choices are compatibility with the current document version, with PDF 1.7 (PDFDocEncoding or UTF-16BE) or with PDF 2.0 (ASCII or UTF-8).



---

**Note:** The changes you make using this Action will only affect newly saved content: earlier saved content is not touched.

---

#### **Related Actions**

- [Change inline image syntax](#) on page 144

## 4.12.2.5. Change PDF version

#### **Belongs to**

- **Category:** Metadata, PDF 2.0
- **Type:** Changes

#### **What it does**

Changes the Acrobat and PDF version of a PDF.

The Acrobat version is the sum of the two numbers that make up the PDF version, for example: PDF 1.4 = Acrobat 5. This is not true anymore for PDF 2.0, as from this version onwards there is no link anymore between the Acrobat and the PDF version.



---

**Note:** Changing the PDF version will not change the attributes of a higher version PDF to those of a lower one - it only changes the version **number**. As higher versions of Acrobat always save the PDF version number up to their version, even if nothing has changed, this Action can be useful to reset the PDF version to the one used to create the PDF.

---

#### **Example**

If you configure this Action to change the PDF version to PDF 1.5, both the PDF version and the Acrobat version will be changed. The new PDF version will be PDF 1.5; the new Acrobat version will be 6.0.

If you change the PDF version to PDF 2.0, the Acrobat version will remain unchanged.

#### **Related Actions**

- [Select by PDF version](#) on page 466
- [Check PDF/Acrobat compatibility](#) on page 362

## 4.12.2.6. Change ProcSet resources

- **Category:** Metadata, PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2021

#### **What it does**

Adds, removes or does not change the ProcSet entry as specified in the attributes of this Action.

You can as well have PitStop make the appropriate change based on the document's PDF version (see Options).

This Action is useful to make a PDF compliant with a particular PDF version.

**About ProcSet resources**

Procedure sets are categories of related PDF operators used in content streams. The ProcSet entry in a content stream's resource dictionary holds an array that consists of the procedure sets used in that content stream, for example: `/ProcSet [/PDF /Text]`. Procedure sets are used only when the content stream is printed to a PostScript output device.

ProcSet resources were used in older PDF versions, but as of PDF 1.4 this feature is considered obsolete. As of PDF 2.0, this feature is deprecated.

For more details, refer to [the PDF Reference](#) (See 14.2 Procedure Sets).

**Options**

- **Add ProcSet (default)**
- **Remove ProcSet**
- **Do not change the ProcSet presence** (so if the ProcSet entry is defined, just keep it; if it's not, do not add it)
- **Add, remove or don't change ProcSet, dependent on the document's PDF version**, PitStop behaves as follows:
  - PDF 1.3 and earlier: Add ProcSet resources
  - PDF 1.4 - PDF 1.7: Do not change the ProcSet presence
  - PDF 2.0: Remove the ProcSet resources

## 4.12.2.7. Change Requirements

**Belongs to**

- **Category:** PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Removes or adds either all document Requirements or one or more specific Requirement types (in that case you can specify which types to add or to remove).

The Requirements dictionary specifies the requirements the PDF file has. Until PDF 2.0, the only possible requirement was 'EnableJavaScripts'. As of PDF 2.0, a number of new types are allowed, such as 3D Markup, Attachment, Encryption etc.

**Related Actions**

- [Check if Requirements are used](#) on page 386

## 4.12.2.8. Remove alternative blend modes

**Belongs to**

- **Category:** PDF 2.0, Prepress, Remove
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Removes alternative blend modes in case of multiple blend modes, because using multiple blend modes is deprecated in PDF 2.0. Only the first blend mode is kept.


Note that you can check the blend modes using the PitStop Inspector (Transparency - General).

Blend modes determine how colors on different layers blend with each other. For more information about blend modes, visit the Adobe website (<http://www.adobe.com>) or refer to the Help or documentation of your design application (Adobe InDesign, QuarkXPress, ...)

**Example**

In this example, three blend modes are selected: Multiply, Saturation and Colorburn.

Running this Action will remove Saturation and Colorburn and only keep the first blend mode in the list: Multiply.

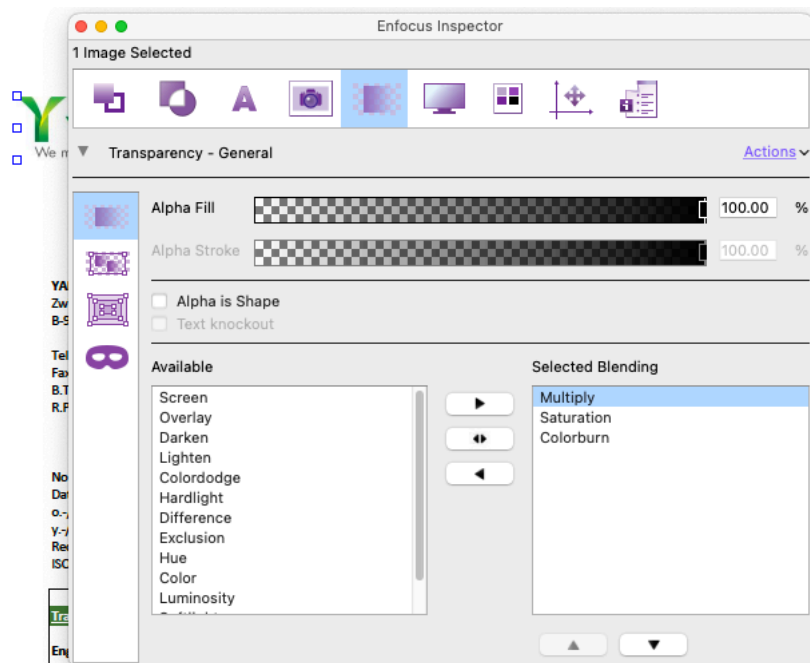

**Note:** As of PitStop 2022, it will no longer be possible to add multiple blend modes to a selected object using the Enfocus Inspector. However, if an object already has multiple blend modes, they will still be shown.

**Related Actions**

- [Select by blend modes](#) on page 500
- [Check for non-standard blend modes](#) on page 403

## 4.12.2.9. Remove associated files

**Belongs to**

- **Category:** General, PDF 2.0
- **Type:** Changes

- **New since:** PitStop 2022

**What it does**

Removes associated files.

This fix can be used to make PDF files compliant with PDF 2.0.

**Related Actions**

- [Check for associated files](#) on page 329

## 4.12.2.10. Remove black point compensation

**Belongs to**

- **Category:** PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Removes objects that have a black point compensation attribute (regardless of its value).

The black point compensation option is a feature of Adobe Photoshop to address color conversion problems caused by differences between the darkest level of black achievable on one device and the darkest level of black achievable on another.

**Related Actions**

- [Check black point compensation](#) on page 381
- [Select black point compensation](#) on page 489
- [Set black point compensation](#) on page 235

## 4.12.2.11. Remove CharSet or CIDSet

**Belongs to**

- **Category:** PDF 2.0, Text
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Removes the CharSet or CIDSet if present in the PDF.

If a font is subset, only the characters of the font that are actually used are embedded in the document. They are held in a CharSet (simple fonts) or a CIDSet (composite fonts).

CharSets and CIDSets are deprecated in PDF 2.0. That means that they are allowed, but not needed, so they can as well be removed.



**Related Actions**

[Check if a subset font contains a complete CharSet or CIDSet](#) on page 412

## 4.12.2.12. Remove DPart metadata

**Belongs to**

- **Category:** PDF 2.0, Text
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Removes DPart metadata from a PDF if present.

DPart (Document Part) metadata provides information about pages or parts of a PDF, allowing PDF processors to easily identify pages or page ranges that have particular properties.

This is a PDF 2.0 feature, hence this Action is typically used to check for PDF 2.0 features.

**Related Actions**

[Check DPart metadata](#) on page 383

## 4.12.2.13. Remove enforcements on viewer preferences

**Belongs to**

- **Category:** PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Removes the Enforced key if it is used in the Viewer preferences.

Enforcing the viewer preferences is a PDF 2.0 feature, hence this Action is typically used to remove PDF 2.0 features.

**Related Actions**

- [Check enforced viewer preferences](#) on page 384

## 4.12.2.14. Remove file specification keys

**Belongs to**

- **Category:** PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Removes PDF 2.0 specific file specification keys.

PDF streams are holders of large amounts of data, such as image pixels, page contents, embedded fonts, etc. In some instances, the streams do not contain the data inside the PDF but point to embedded or even external files. This Action will remove the PDF 2.0 specific file specification keys, such as Thumb, AFRelationship and EP.

**Related Actions**

[Check file specification keys](#) on page 328

## 4.12.2.15. Remove name from XObjects

**Belongs to**

- **Category:** Metadata, PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Removes Name from form XObject and image XObject stream dictionaries. This is typically done to fix deprecated PDF 1.x features.

## 4.12.2.16. Remove Output Intents

**Belongs to**

- **Category:** PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Removes the Output Intents from the document and/or the individual pages.

An Output Intent describes the color characteristics of the output devices on which the PDF document might be rendered. The Output Intent may be defined on document and/or page level.

**Related Actions**

- [Check if Output Intents are used](#) on page 385

## 4.12.2.17. Remove specific Output Intent keys

**Belongs to**

- **Category:** PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Removes either the Mixing Hints or Spectral Data key, or both if they are available in the Output Intents (on page or document level) of the PDF.

These keys are PDF 2.0 specific, hence this Action is typically used to removed PDF 2.0 features.

**Related Actions**

- [Check Missing Hints in Output Intent](#)
- [Check Spectral Data in Output Intent](#)

## 4.12.2.18. Set black point compensation

**Belongs to**


- **Category:** PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Allows you to set the black point compensation to a particular value (On, Off, or Default).

The black point compensation option is a feature of Adobe Photoshop to address color conversion problems caused by differences between the darkest level of black achievable on one device and the darkest level of black achievable on another.

Note that the black point compensation attribute of a selected object can be found and changed in the Enfocus Inspector, on the **Prepress - General** tab.

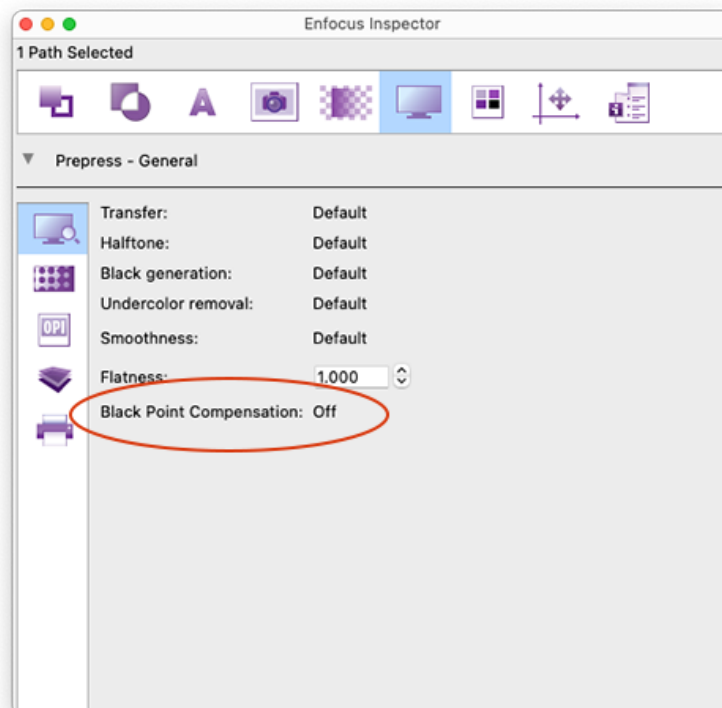

**Related Actions**

- [Check black point compensation](#) on page 381
- [Select black point compensation](#) on page 489
- [Remove black point compensation](#) on page 232

## 4.12.2.19. Set default halftone origin

**Belongs to**


- **Category:** PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Changes the halftone origin to 'Default'.

'Default' means that the halftone origin (HTO) is not specified, so setting the HTO to 'Default' removes the HTO from any object it uses. This is useful if you want to remove PDF 2.0 features from your document.

Note that you can view (and also manually change) the halftone origin of a selected object in the Inspector, on the Prepress - Halftone tab.

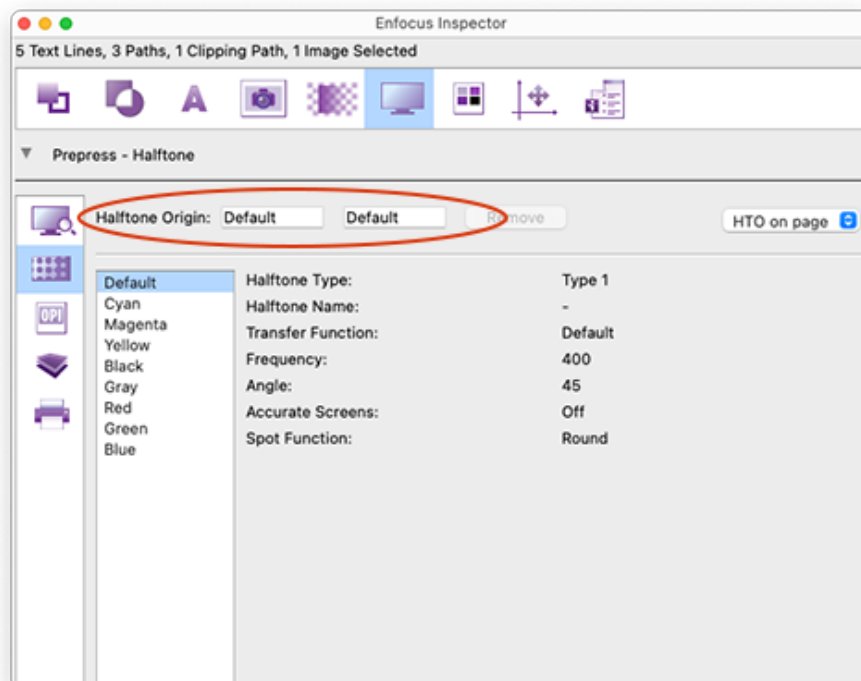**Related Actions**

- [Check halftone origin](#) on page 385

- [Select by halftone origin](#) on page 490
- [Change halftone origin](#) on page 226

## 4.12.3. Checks

---

### 4.12.3.1. Check black point compensation

#### ***Belongs to***


- **Category:** PDF 2.0
- **Type:** Checks
- **New since:** PitStop 2022

#### ***What it does***

Checks if either black point compensation is not present or has a particular value (On, Off, or Default).

The black point compensation option is a feature of Adobe Photoshop to address color conversion problems caused by differences between the darkest level of black achievable on one device and the darkest level of black achievable on another.

Note that the black point compensation attribute of a selected object can be found in the Enfocus Inspector, on the **Prepress - General** tab. Possible values are On, Off or Default. When no blackpoint compensation is set (or when multiple objects with different black point compensation values are selected), you'll see a dash.

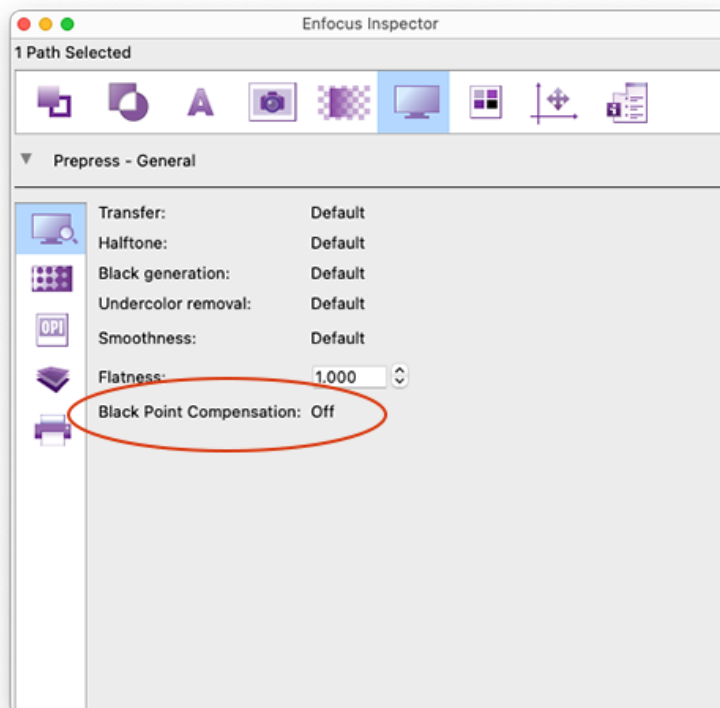

**Related Actions**

- [Remove black point compensation](#) on page 232
- [Select black point compensation](#) on page 489
- [Set black point compensation](#) on page 235

### 4.12.3.2. Check document information dictionary compliance

**Belongs to**

- **Category:** Metadata; PDF 2.0
- **Type:** Checks
- **Since:** 2022

**What it does**

Checks if the information dictionary is compliant with the chosen PDF version (PDF/X-6 or PDF 2.0).

For more information about the information dictionary, refer to [Change document information dictionary compliance](#) on page 181.

**Related Actions**

- [Change document information dictionary compliance](#) on page 181

### 4.12.3.3. Check document security

**Belongs to**

- **Category:** Metadata, PDF 2.0
- **Type:** Checks

**What it does**

Checks if a particular encryption was used to secure the PDF file.

Options:

- A PDF version (1.3 - 2.0)
- A combination of "none" and a PDF version (1.3 - 2.0)
- None
- None or Standard (= no custom security)
- Custom (enter a custom name in the text field)

### 4.12.3.4. Check DPart metadata

**Belongs to**

- **Category:** PDF 2.0
- **Type:** Checks

- **New since:** PitStop 2022

**What it does**

Checks if the document contains DPart metadata.

DPart (Document Part) metadata provides information about pages or parts of a PDF, allowing PDF processors to easily identify pages or page ranges that have particular properties.

This is a PDF 2.0 feature, hence this Action is typically used to check for PDF 2.0 features.

**Related Actions**

- [Remove DPart metadata](#) on page 232

### 4.12.3.5. Check enforced viewer preferences

**Belongs to**

- **Category:** PDF2.0
- **Type:** Checks
- **New since:** PitStop 2022

**What it does**

Checks if the Enforced key is used in the Viewer preferences.

Enforcing the viewer preferences is a PDF 2.0 feature, hence this Action is typically used to find (and remove) PDF 2.0 features.

**Related Actions**

- [Remove enforcements on viewer preferences](#) on page 233

### 4.12.3.6. Check file specification keys

**Belongs to**

- **Category:** General
- **Type:** Checks

**What it does**

Searches the PDF for file specification keys.

PDF streams are holders of large amounts of data, such as image pixels, page contents, embedded fonts, etc. In some instances, the streams do not contain the data inside the PDF but point to embedded or even external files. This Action will search for this type of links and check if they contain either the required file specification keys or the PDF 2.0 specific keys.

**Related Actions**

- [Check for file specifications](#) on page 330
- [Remove file specification from streams](#) on page 140

- [Remove file specification keys](#) on page 233

#### 4.12.3.7. Check for associated files

**Belongs to**

- **Category:** General, PDF2.0
- **Type:** Checks
- **New since:** PitStop 2022

**What it does**

Checks if a PDF file contains associated files.

This is a PDF 2.0 feature. If you don't want PDF 2.0 features in your file, you can remove the associated files using a dedicated [Action](#).

For more information about associated files, refer to [PDF 2.0 Application Note 002: Associated Files](#).

**Related Actions**

- [Remove associated files](#) on page 140

#### 4.12.3.8. Check halftone origin

**Belongs to**

- **Category:** PDF2.0
- **Type:** Checks
- **New since:** PitStop 2022

**What it does**

Logs either objects with or without default HTO (halftone) values, or with particular HTO values.

PDF 2.0 allows specifying the halftone origin, whereas in earlier versions, the halftone origin value had to be 'Default' (= not specified). If you want to remove the halftone origin from your document, you can use the [Set default halftone origin](#) Action.

**Related Actions**

- [Select by halftone origin](#) on page 490
- [Change halftone origin](#) on page 226
- [Set default halftone origin](#) on page 236

#### 4.12.3.9. Check if Output Intents are used

**Belongs to**

- **Category:** PDF2.0
- **Type:** Checks
- **New since:** PitStop 2022



**What it does**

Checks for the presence of Output Intents, either on page or document level.

An Output Intent describes the color characteristics of the output devices on which the PDF document might be rendered. The Output Intent may be defined on document and/or page level.

This Action can be useful if you don't want PDF2.0 features in your PDFs. You can remove Output Intents using a dedicated [Action](#).

**Related Actions**

- [Remove Output Intents](#) on page 234

## 4.12.3.10. Check if Requirements are used

**Belongs to**

- **Category:** PDF2.0
- **Type:** Checks
- **New since:** PitStop 2022

**What it does**

Checks if the PDF contains a Requirements dictionary in the Catalog, or one or more specific Requirement types (in that case you can specify which types to check for).

The Requirements dictionary specifies the requirements the PDF file has. Until PDF 2.0, the only *possible* requirement was 'EnableJavaScripts'. As of PDF 2.0, a number of new types are allowed, such as 3D Markup, Attachment, Encryption etc.

**Related Actions**

- [Change Requirements](#)

## 4.12.3.11. Check inline image syntax

**Belongs to**

- **Category:** Image; PDF 2.0
- **Type:** Checks
- **New since:** PitStop 2022

**What it does**

Checks the presence and/or validity of the L key (or Length key) of a PDF.

The L key specifies the length of the image data and allows users to skip inline images if required.

Choices are:

- Inline images must not have the Length key
- Inline images must have the Length key
- Inline images must have a valid Length key.

Note that PDF 2.0 allows (but does not impose) the presence of an L key, but if it's present, it must match the actual inline image data length.

**Related Actions**

- [Select inline image syntax](#)
- [Change inline image syntax](#)

### 4.12.3.12. Check Mixing Hints in Output Intent

**Belongs to**

- **Category:** PDF 2.0
- **Type:** Checks
- **New since:** PitStop 2022

**What it does**

Checks if the document contains an Output Intent on document or page level that contains the Mixing Hints dictionary. Note that only the presence of the dictionary, not the contents is checked.

A Mixing Hints dictionary provides information about how spot colors interact with each other. That information may be used in blending calculations when the actual spot colors are not available on the target device. As of PDF 2.0, a Mixing Hints dictionary is allowed in an Output intent dictionary for the complete PDF.

### 4.12.3.13. Check PDF text string encoding

**Belongs to**

- **Category:** Document, PDF 2.0
- **Type:** Checks
- **New since:** PitStop 2022

**What it does**

Allows you to check if the text encoding of a PDF complies with a particular PDF version. Choices are compatibility with the current document version, with PDF 1.7 (PDFDocEncoding or UTF-16BE) or with PDF 2.0 (ASCII or UTF-8).

**Related Actions**

- [Change PDF text string encoding](#) on page 122

### 4.12.3.14. Check PDF/Acrobat compatibility

**Belongs to**

- **Category:** Metadata, PDF 2.0
- **Type:** Checks

**What it does**

Allows you to check if a particular Acrobat or PDF version is used in a PDF document.

You can for example check if the Acrobat version is equal to or higher/lower than a particular version.



**Note:** As of PitStop 2020, you can check a PDF 1.7 by its extension level (Adobe Extension 1, 3, 5, 6 or 8). For more details concerning the extensions, refer to [https://www.adobe.com/devnet/pdf/pdf\\_reference.html](https://www.adobe.com/devnet/pdf/pdf_reference.html).

Note that the PDF version can be specified in 3 different locations (in the PDF header, in the document catalog and in the Adobe extension). If the versions are different, PitStop uses the version from the Adobe extension. If there is no version specified in the Adobe extension, the header version or catalog version are considered, and the highest version number is taken.

### 4.12.3.15. Check Spectral Data in Output Intent

**Belongs to**

- **Category:** PDF 2.0
- **Type:** Checks
- **New since:** PitStop 2022

**What it does**

Checks if the document contains an Output Intent on document or page level that contains the Spectral Data dictionary. Note that only the presence of the dictionary, not the contents is checked.

The Spectral Data dictionary provides information about the spectral characteristics and the opacity properties of spot colors.

### 4.12.3.16. Check version compatibility with PDF/X-6

**Belongs to**

- **Category:** PDF 2.0, Metadata
- **Type:** Checks
- **New since:** PitStop 2022

**What it does**

Checks if the version of the PDF complies with PDF/X-6 or PDF/X-6p.

Note that the PDF version can be specified in 3 different locations (in the PDF header, in the document catalog and in the Adobe extension). PDF/X-6 and PDF/X-6p require that both the version specified in the header and the version specified in the document catalog are 2.0 (or higher).

**Related Actions**

- [Fix version compatibility with PDF/X](#)

## 4.13. Position and Size

### 4.13.1. Changes

#### 4.13.1.1. Align or distribute objects

**Belongs to**

- **Category:** Position/Size;Page
- **Type:** Changes
- **New since:** PitStop 2021

**What it does**

Aligns or distributes the selected objects and/or distributes spacing between them.  
You can align objects relative to your selection ("Selection bounding box") or to one of the page boxes.






**Note:** This functionality is also available in the Enfocus Inspector (on the Position tab).

**Remarks**

The 'Select all' Action, which is added automatically to a new Action List, should be removed in most cases. You can either add your own 'select' Actions or run the Action List on a user selection.  
Note that you could also create your Action List by recording your actions while aligning and/or distributing objects using the Enfocus Inspector.

**Examples**
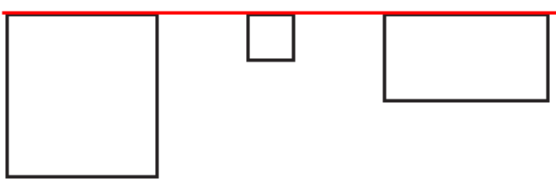
| Example                                                                             | Description        |
|-------------------------------------------------------------------------------------|--------------------|
|  | Aligned top edges. |
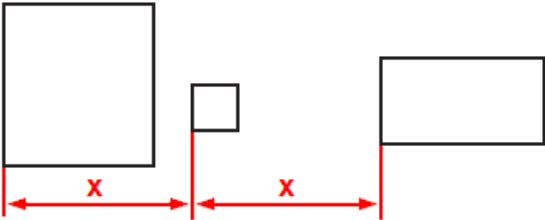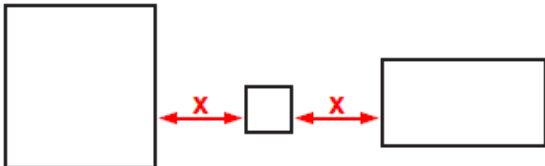
| Example                                                                           | Description                     |
|-----------------------------------------------------------------------------------|---------------------------------|
|  | Distributed left edges.         |
|  | Distributed horizontal spacing. |

4.13.1.2. Apply page rotation

*Belongs to*

- **Category:** Position/Size;Page
- **Type:** Changes

*What it does*

Sets the page rotate key defined in the PDF to 0 °. This may have a visual effect.

*Related Actions*

- [Check page rotation angle](#) on page 379
- [Select by page rotation angle](#) on page 481
- [Normalize Page Rotate Key](#) on page 214

4.13.1.3. Apply page scaling factor

*Belongs to*

- **Category:** Position/Size;Page
- **Type:** Changes

*What it does*

Apply page scaling factor removes the page scaling factor and scales the page to compensate.

A page of 10 by 10 inches and a page scaling factor 2 will be displayed and printed as a page of 20 by 20 inches. By applying the page scaling factor, the actual page size will become 20 by 20 inches.

Page scaling has been introduced in PDF 1.6. If the page scaling factor is not removed or applied, the page size can only be displayed correctly in Acrobat 7 or higher.



**Note:** When the result of applying the scaling factor exceeds the size of 200x200 inches, the page may not be displayed well. This is a limitation of Adobe Acrobat.

#### **Related Actions**

- [Check if page scaling factor is used](#) on page 374
- [Remove page scaling factor](#) on page 216

### 4.13.1.4. Center page content

#### **Belongs to**

- **Category:** Page;Position/Size
- **Type:** Changes

#### **What it does**

Places all objects in the center of the page.

You can:

- Center the objects horizontally, vertically or both.
- Center the content relative to a page box and set margins (left, right, top and bottom).
- Use page rotation and scaling factor as required.
- Only center the visible part of the content.

### 4.13.1.5. Change position

#### **Belongs to**

- **Category:** Position/Size
- **Type:** Changes

#### **What it does**

Moves selected objects to a new position.

You can define an absolute or a relative target position:

- **Move absolute to** moves either all selected objects in one go or each of the selected objects individually to a new position relative to the page they are on.
- **Move relative by** moves an object in relation to itself.

Indicate whether page rotation and/or the page scaling factor (if applicable) should be taken into account when moving the selection.

### 4.13.1.6. Change page scaling factor

#### **Belongs to**

- **Category:** Position/Size; Page

- **Type:** Changes
- **Since Version:** 2018

### What it does

Allows you to scale the print size of a page. There are three ways to rescale:

- **Set Optimal Value Automatically:** Rescales the page based on the media box of the document and within the 200x200 inch limit - the maximum Acrobat size. If a document is larger, PitStop applies the appropriate page scaling factor to bring the size down within the limit.
- **Set Scaling Factor to:** Rescales by setting the page scaling factor to a certain value.
- **Multiply Scaling Factor by:** Rescales by multiplying the existing page scaling factor.


For example, if no page scaling factor was defined (meaning that the page scaling factor = 1):


- To print a page to half its size, set the page scaling factor to 0.5
- To print a page to twice its size, set the page scaling factor to 2.

If a page has a scaling factor of 2, to print it to twice its size, multiply the existing page scaling factor by 2 (resulting in page scaling factor 4).

Note that it is also possible to change the defined values while keeping the effective values; to do so, select the **Keep Effective Values Constant** checkbox.

Remember that the page scaling factor (and the defined values) as well as the effective values can be viewed with the Enfocus Inspector as shown below.

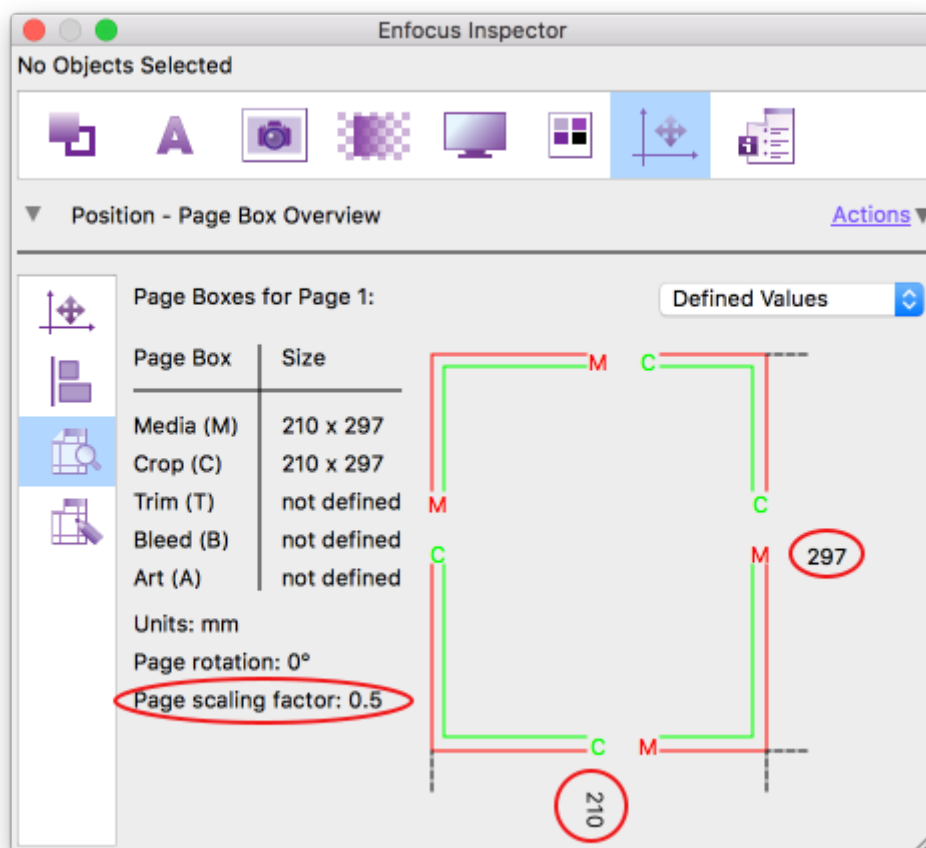

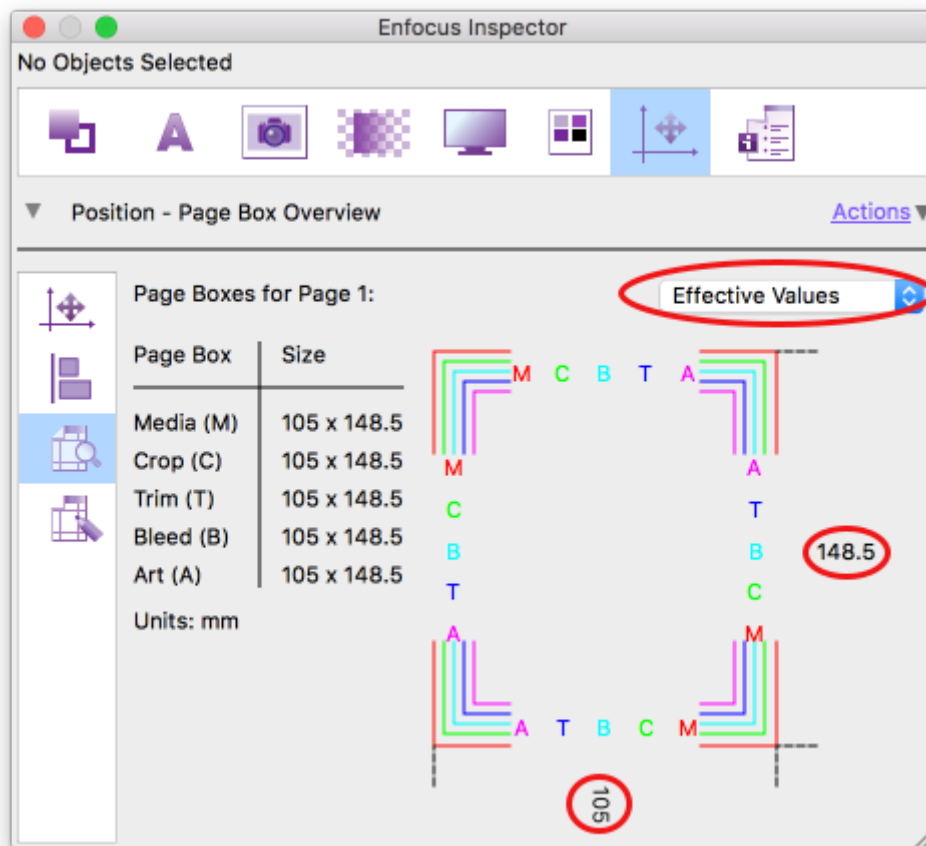

#### Related Actions

- [Check if page scaling factor is used](#) on page 374
- [Remove page scaling factor](#) on page 216
- [Apply page scaling factor](#) on page 201

### 4.13.1.7. Crop images

#### Belongs to

- **Category:** Image
- **Type:** Changes

#### What it does

Allows you to crop images to match a clip mask and/or a particular page box.

**New in 13 update 1:** You can now remove the unwanted white borders (e.g. of scanned images), by selecting the **Crop white borders of image** checkbox. This option also works on stencil marks and is particularly useful as it enables subsequent Actions to work on the size of visible objects.



#### 4.13.1.8. Flip content

**Belongs to**

- **Category:** Page;Position/Size
- **Type:** Changes

**What it does**

Flips the contents of a selected object horizontally or vertically.

You can flip the content relative to the center of one of the page boxes. Note that you can take page rotation into account as required.

**Related Actions**

- [Check for flipped objects](#) on page 389
- [Flip selection](#) on page 242

#### 4.13.1.9. Flip selection

**Belongs to**

- **Category:** Position/Size
- **Type:** Changes
- **Since version:** 2020

**What it does**

Flips a selected object horizontally or vertically.

You can flip the content relative to the center of the selection bounding box or to the visible area of selection. This last option is relevant if part of a selected image has been clipped away.

Note that you can take page rotation into account as required.

**Example**

This Action is useful to flip images while keeping text untouched.

```
select image  
flip selection
```

**Related Actions**

- [Check for flipped objects](#) on page 389

- [Flip content](#) on page 211

#### 4.13.1.10. Move objects into the page box

**Belongs to**

- **Category:** Page;Position/Size
- **Type:** Changes

**What it does**

Moves the selected objects into a particular page box.  
You can include annotations as required.

**Related Actions**

- [Move objects to corner](#) on page 243
- [Move objects out of the page box](#) on page 212

#### 4.13.1.11. Move objects out of the page box

**Belongs to**

- **Category:** Page; Position/Size
- **Type:** Changes

**What it does**

Moves the selected objects out of a particular page box.  
You can include annotations as required.

**Related Actions**

- [Move objects to corner](#) on page 243
- [Move objects into the page box](#) on page 212

#### 4.13.1.12. Move objects to corner

**Belongs to**

- **Category:** Position/Size
- **Type:** Changes

**What it does**

Moves the selected graphic elements to the defined corner of the selected page box.

**How to proceed**

Proceed as follows:

1. Select the anchor point of the object you want to use for positioning the object, for example "upper left".
2. Select the anchor point of the specified page box you want to use for positioning, for example "center".
3. Select the page box itself, for example "crop box".
4. Select the **Use page rotation** checkbox as required.

### Example

To move the images in your document to the lower right corner of the page, without cutting off the images, use:

```
Select images
Move objects to corner
  <!-- settings (example): Place the lower right corner of the graphic elements
relative to the lower right corner of the trim box -->
```

If you have chosen to place the center of the graphic elements relative to the lower right corner of the trim box, the center point of the image will be positioned on the lower right corner point of the trim box, meaning that the right hand side and lower half of the image will lie outside of the trim box.

### Related Actions

- [Move objects out of the page box](#) on page 212
- [Move objects into the page box](#) on page 212

## 4.13.1.13. Move page content

### Belongs to

- **Category:** Page; Position/Size
- **Type:** Changes

### What it does

Moves the contents of a page in the preferred direction (horizontally or vertically) by the specified distance:

- A positive value, e.g. "1 cm" will move the content to the right (horizontally) or to the top of the page (vertically).
- A negative value, e.g. "-1 cm" will move the content to the left (horizontally) or to the bottom of the page (vertically).



**Note:** Remember that the unit used in Actions (in this example "cm") is defined in the PitStop Pro Preferences (Units & Guides Category).

You can choose whether or not to take into account page rotation and scaling factor (if applicable).

#### 4.13.1.14. Move page content to corner

***Belongs to***

- **Category:** Page; Position/Size
- **Type:** Changes

***What it does***

Moves the contents of a page to a chosen corner.

This Action does not center the object on the corner but moves the closest objects to that corner and moves the other objects by the same distance towards the corner (horizontally or vertically).

***Example***

To move the page content to the lower left

1. Select Move page content horizontally to **Left Side**.
2. Select Move page content vertically to **Bottom Side**.
3. Select the page box to be used as a reference, for example the **media box**.
4. Optionally, set **margins** to be added to the media box.
5. Select the **Use page rotation and scaling factor** checkbox, if page rotation and scaling factor should be taken into account.

#### 4.13.1.15. Normalize line weight

***Belongs to***

- **Category:** General; LineArt; Position and size
- **Type:** Changes

***What it does***

Normalizes paths where a transformation matrix caused distortions, by removing the distortion, giving the path a uniform line weight equal to the average reported in the Inspector. The Action also works on sheared paths.

***Related Actions***

- [Change line weight](#) on page 161
- [Select by line weight](#) on page 457
- [Check line weight](#) on page 346

#### 4.13.1.16. Remove page scaling factor

***Belongs to***

- **Category:** Page; Position and size

- **Type:** Changes

**What it does**

Removes the page scaling factor and reverts the page to its original size.

A page of 10 by 10 inches and a page scaling factor 2 will be displayed and printed as a page of 20 by 20 inches. By removing the page scaling factor, the page size will be at 10 by 10 inches again.

Page scaling has been introduced in PDF 1.6. If the page scaling factor is not removed or applied, the page size can only be displayed correctly in Acrobat 7 or higher.

**Related Actions**

- [Check if page scaling factor is used](#) on page 374
- [Apply page scaling factor](#) on page 201

#### 4.13.1.17. Rotate content

**Belongs to**

- **Category:** Page; Position/Size
- **Type:** Changes

**What it does**

Rotates the page content at a particular angle around a particular point.

You could for example rotate the page content at an angle of 90° relative to the center of the media box.

You can choose whether or not to take into account page rotation.

**Related Actions**

- [Check for rotated objects](#) on page 389
- [Rotate object](#) on page 247
- [Rotate objects as group](#) on page 247

#### 4.13.1.18. Rotate object

**Belongs to**

- **Category:** Position/Size
- **Type:** Changes

**What it does**

Rotates an object at a certain amount of degrees around a particular point.

**Related Actions**

- [Check for rotated objects](#) on page 389

- [Rotate content](#) on page 219
- [Rotate objects as group](#) on page 247

#### 4.13.1.19. Rotate objects as group

**Belongs to**

- **Category:** Position/Size
- **Type:** Changes

**What it does**

Rotates a selection of objects at a particular angle around a particular point.

You could for example rotate the selection around the center of the media box at an angle of 90 degrees.



---

**Note:** Rotating objects as a group means that all of the selected objects act as one large object during the rotation.

---

**How to proceed**

1. Select what specific place in the page box you want to use as the rotation point (center, lower left ...).
2. Specify the page box of your choice or choose "selection bounding box" or "visible area of selection". This last option is relevant if part of a selected image has been clipped away.
3. Define the rotation angle.
4. Select the **Use page rotation** checkbox as required.

**Related Actions**

- [Check for rotated objects](#) on page 389
- [Rotate content](#) on page 219
- [Rotate object](#) on page 247

#### 4.13.1.20. Rotate page

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Allows you to set page rotation to -90, 0, 90 or 180 degrees (clockwise).

**Related Actions**

[Rotate content](#) on page 219

### 4.13.1.21. Scale page boxes

**Belongs to**

- **Category:** Page; Position and size
- **Type:** Changes

**What it does**

Allows you to scale all page boxes simultaneously.

Specify X and Y scaling percentages. You can anchor the page boxes at a certain corner in the PDF, for instance at the lower left corner of the media box. You can also choose whether or not to use the page rotation.



---

**Note:** If you want to scale the page boxes proportionally, you need to specify the same values for X and Y.

---

**Related Actions**

- [Scale page content to fit](#) on page 221
- [Scale to fit page size](#) on page 222
- [Scale page content](#) on page 220
- [Shrink page content to fit](#) on page 223

### 4.13.1.22. Scale page content

**Belongs to**

- **Category:** Page;Position/Size
- **Type:** Changes

**What it does**

Scales page content along the X and/or Y axis by a certain percentage.




---

**Note:** If you want to scale the page content proportionally, you need to specify the same values for X and Y.

---

**Example**

Suppose you have an A4-size PDF document (210 x 297 mm). You want to keep the page size “as is”, but need to make the page content narrower. You also wish to move the page content to the upper right corner of the crop box.

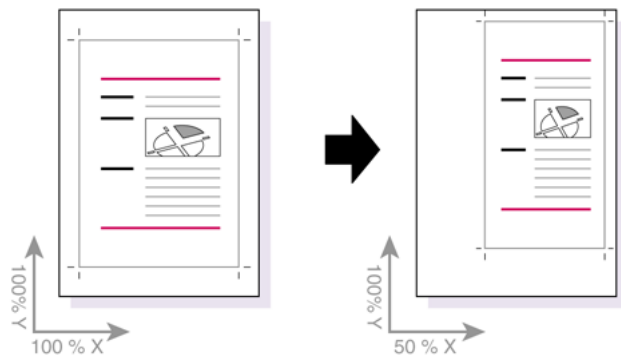**How to proceed**

1. Enter the preferred scaling percentage for the X and Y axis.
2. Do one of the following:
  - To define an anchor point, select **Anchored at**.
  - To define the target position of the page contents, select **Moving page content to**.
3. Define the anchor point or target position, for example (anchored at/moving to) the upper right of the crop box.

**Related Actions**

- [Scale page content to fit](#) on page 221
- [Scale to fit page size](#) on page 222
- [Scale page boxes](#) on page 219
- [Shrink page content to fit](#) on page 223

### 4.13.1.23. Scale page content to fit

**Belongs to**

- **Category:** Page; Position/Size
- **Type:** Changes

**What it does**

Scales the page content to fit the size of a particular page box. You can add extra margins, if necessary.

You should also define the target position of the page content inside the page box, e.g. "page content should move to the upper right".

You can choose whether or not to take into account the page rotation and scaling factor.

Scaling is by default restricted to the visible elements of the page (unless you clear the **Use only visible part of content** checkbox), to avoid that hidden content leads to incorrect results.

**Example**

In the example below, the page content is scaled to fit the size of the trim box (A).



**Related Actions**

- [Scale page content](#) on page 220
- [Scale to fit page size](#) on page 222
- [Scale page boxes](#) on page 219
- [Shrink page content to fit](#) on page 223

#### 4.13.1.24. Scale selection

**Belongs to**

- **Category:** Position/Size
- **Type:** Changes
- **Since Version:** 2017

**What it does**


Resizes one or more selected objects.

You can set the width and height using fixed values, variables, percentages or page boxes, proportional or not. You can also determine the anchor point of the object being scaled and the direction in which the object will resize.









Note that the reference for the anchor point is the bounding box of the selection.

**Example 1: One object selected**

**Object before scaling:**




**Result of the Action depending on the chosen options:**

| Chosen options                                                                                                                                                                                              | Result                                                                                |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <div><div>WidthScale by percentage50%</div><div>HeightKeep proportional to width</div><div><div>Anchor</div></div></div>   |    |
| <div><div>WidthScale by percentage50%</div><div>HeightKeep proportional to width</div><div><div>Anchor</div></div></div>  |    |
| <div><div>WidthScale by percentage50%</div><div>HeightKeep proportional to width</div><div><div>Anchor</div></div></div> |  |
| <div><div>WidthAdjust by value-10 mm</div><div>HeightDon't change</div><div><div>Anchor</div></div></div>                |  |

Example 2: Two objects selected

Objects before scaling:



Result of the Action depending on the chosen options:

| Chosen options                                                                                              | Result |
|-------------------------------------------------------------------------------------------------------------|--------|
| <div><div>WidthScale by percentage120%</div><div>HeightScale by percentage120%</div><div>Anchor</div></div> |        |
| <div><div>WidthScale by percentage120%</div><div>HeightScale by percentage120%</div><div>Anchor</div></div> |        |

4.13.1.25. Scale to fit page size

**Belongs to**

- **Category:** Position/Size; Page
- **Type:** Changes

**What it does**

Scales all page boxes (and optionally all page content as well) until the specified page box fits the target size.


The target size should be specified by defining the target width and height either as a value, a percentage of the original value or proportionally relative to the other dimension.

Note that for both the page content and the page boxes you can separately decide whether or not to scale proportionally to match the target page size.

**Remark**

In case of proportional scaling (=default, **Allow non-proportional scaling** checkbox NOT selected), it may happen that the requested target width and height cannot be achieved without changing the aspect ratio; in that case, the target size serves as a frame in which the resized page box should fit.

For example, if the original page box is a rectangle and the requested width and height result in a square, the page box will be scaled to fit in the square (and vice versa). See the image below; the blue object represents the requested target dimensions.

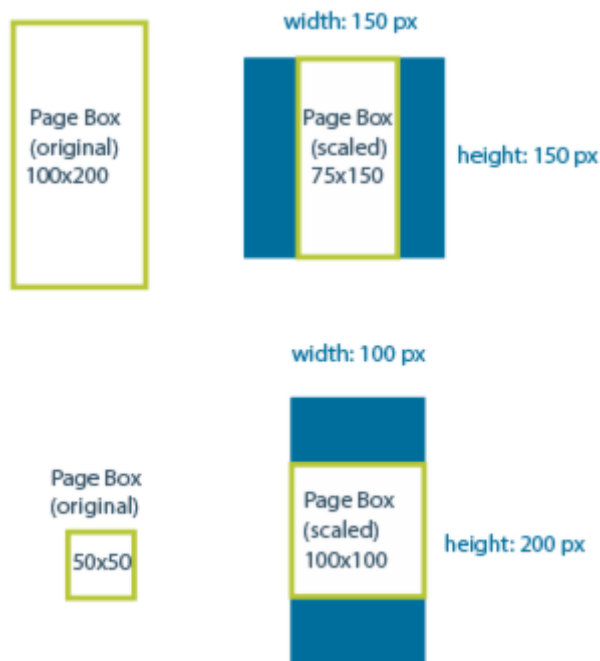**Related Actions**

- [Scale page content to fit](#) on page 221
- [Scale page content](#) on page 220
- [Scale page boxes](#) on page 219
- [Shrink page content to fit](#) on page 223

#### 4.13.1.26. Shrink page content to fit

**Belongs to**

- **Category:** Page; Position/Size
- **Type:** Changes

**What it does**

Shrinks page content to fit the size of a particular page box. You can add extra margins, if necessary. You should also define the anchor point, for example "anchored at the lower left of the media box".

You can choose whether or not to take into account page rotation and scaling factor.

**Related Actions**

- [Scale page content to fit](#) on page 221
- [Scale to fit page size](#) on page 222
- [Scale page content](#) on page 220
- [Scale page boxes](#) on page 219

## 4.13.1.27. Use trim marks to set page box

**Belongs to**

- **Category:** Page; Position and size
- **Type:** Changes

**What it does**

Allows you to set the trim box and/or the bleed box based on the trim or bleed marks found in the PDF.

**Note:**


- Crop marks with a **dash pattern** cannot be used to set the page box.
- Crop marks generated with Illustrator, InDesign and QuarkXpress are supported.

**How to proceed**

1. Indicate which page box you want to set: the trim box, the bleed box or both.
2. Specify the color of the trim marks by choosing one or more of the following:
  - 400% CMYK
  - Separation All (registration)
  - 100% black
  - A specific color.
3. If desired, specify how much the marks are allowed to deviate from the expected position:
  - The unit is the unit set in the PitStop Pro Preferences (Units & Guides category), for example: cm or pt
  - The maximum value is 2.7 pt; if you enter a higher value, it is automatically reset to 2.7 pt or an equivalent value (if you're using a different unit).

**Example**

In the image below, the red marks are detected as trim marks and used to set the trim box (blue box). The position of the vertical marks in the top and bottom left corner is not as expected (they are not exactly on one vertical line), but the deviation (= difference between the position of both marks) is less than the specified threshold.

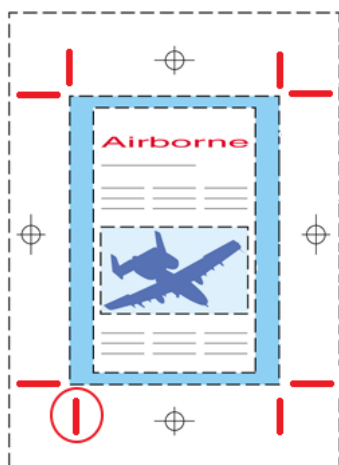**Related Actions**

- [Select trim marks](#) on page 488
- [Check if trim marks match page box](#) on page 374

## 4.13.2. Checks

---

### 4.13.2.1. Check for flipped objects

**Belongs to**

- **Category:** Position/Size
- **Type:** Checks

**What it does**

Searches a PDF for objects that have been flipped, normally using QuarkXpress. These can slow down the RIP.

**Related Actions**

- [Flip content](#) on page 211
- [Flip selection](#) on page 242

### 4.13.2.2. Check for rotated objects

**Belongs to**

- **Category:** Position/Size
- **Type:** Checks

**What it does**


Checks if a PDF contains rotated objects. Objects can have been rotated by page layout applications such as QuarkXPress, and this may cause problems for (older) RIPs.

You can specify the non-permitted level of rotation, for example 'objects must not be rotated more than 2 degrees', optionally combined with two extra options:


- **Interpret all angles as rotations between 0 and 45 degrees from vertical or horizontal:** This option allows you to find small rotations in either direction. To decide whether or not an object is rotated, the measured angle is converted to an interval [0,45] degrees compared to the nearest horizontal or vertical page edge. As a consequence, a rotation of 88 degrees is converted to 2 (90-88) and a rotation of 271 degrees is converted to 1 (271-270). When checking for rotations smaller than 4 degrees, both rotations will be logged, whereas for example a rotation of 290 degrees (converted to 20 => 290-270) won't be logged. See example 1 below.
- **Ignore objects that are aligned horizontally or vertically:** This option allows you to exclude objects that are aligned exactly 0, 90, 180 or 270 degrees to the page edges. Such objects (rotated a multiple of 90 degrees) do not look rotated, so in most cases they should not be logged. See example 2 below.

**Remark**

Note that you can check the rotation angle of an object using the PitStop Inspector.

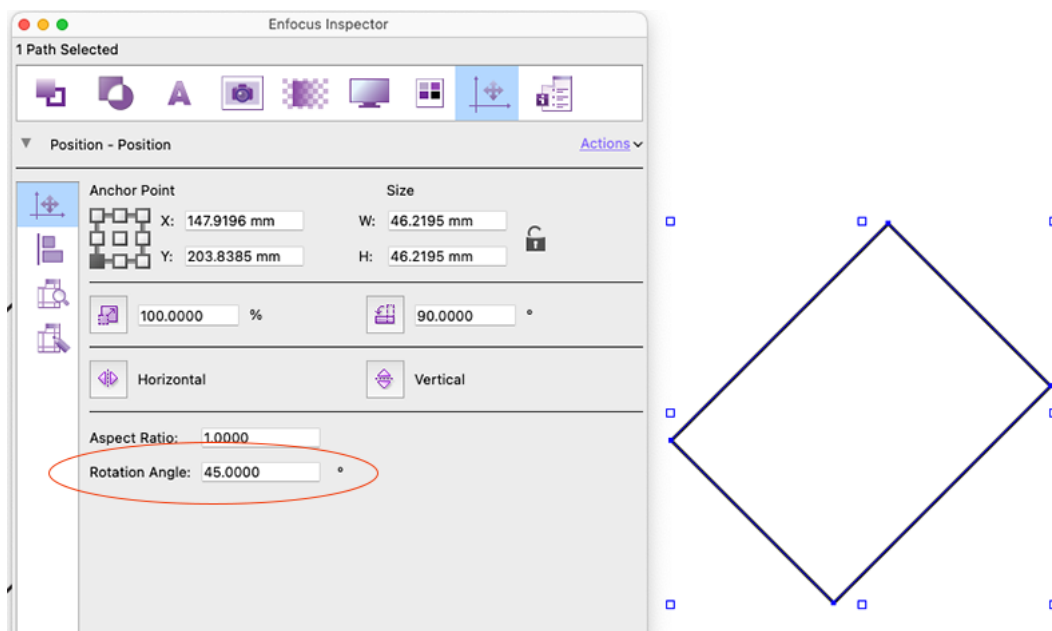**Example 1**


In the example below, all angles are interpreted as rotations between 0 and 45 degrees from vertical to horizontal (first option). The first three objects are logged because they have a rotation angle of less than 4 degrees from the nearest vertical or horizontal page edge (as explained higher).

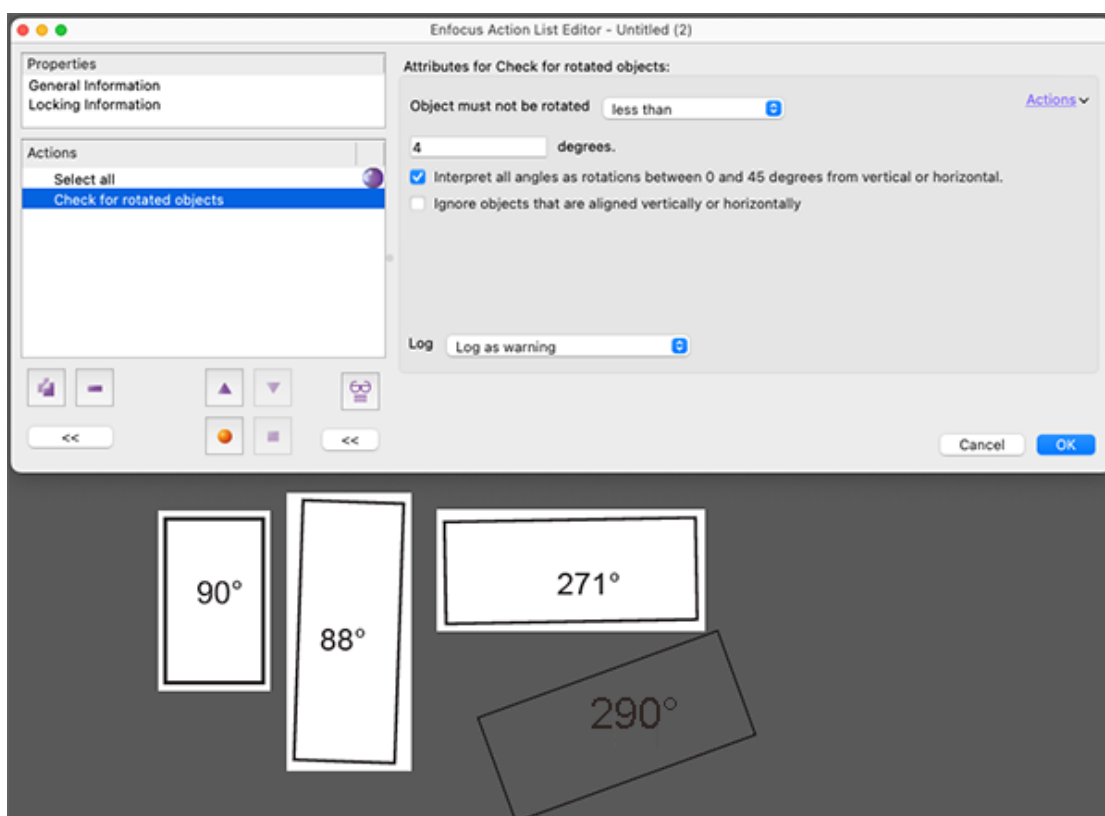

### Example 2

When the **Ignore objects that are aligned horizontally or vertically** checkbox is selected, the object that has a rotation angle of 90° is no longer logged.



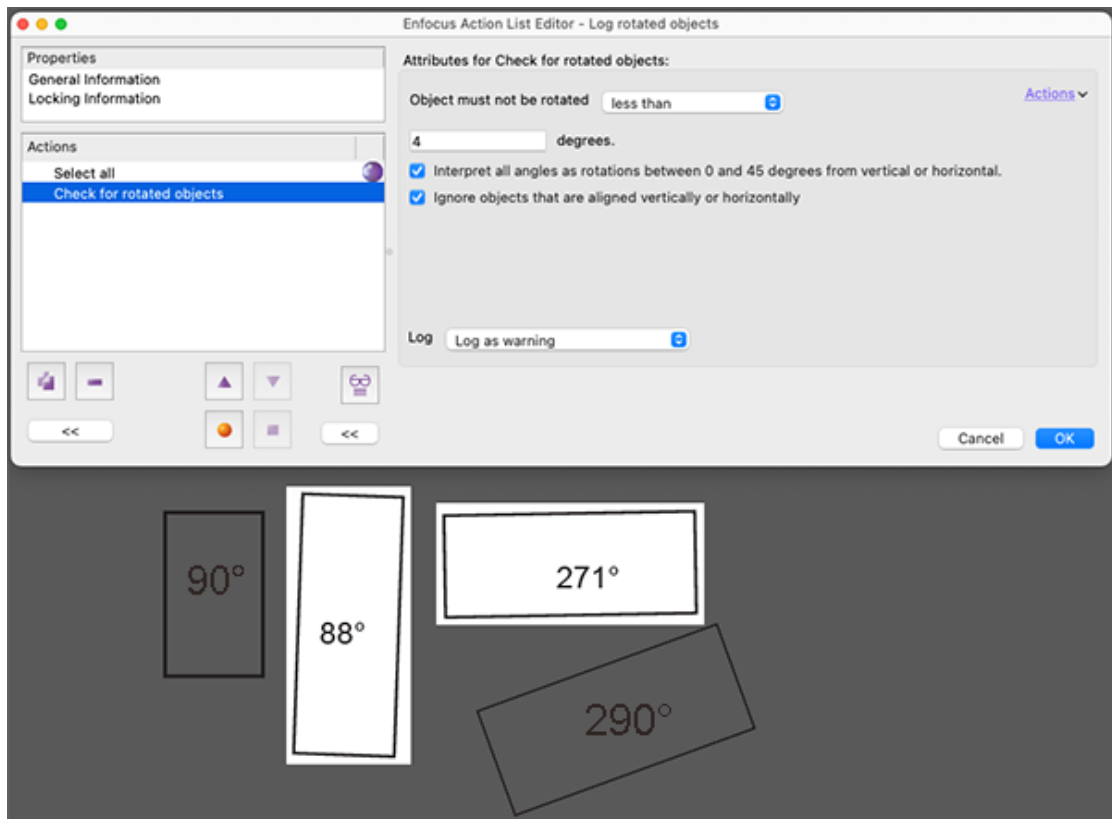

#### **Related Actions**

- [Rotate object](#) on page 247
- [Rotate content](#) on page 219
- [Rotate objects as group](#) on page 247
- [Select rotated objects](#) on page 497

### 4.13.2.3. Check for sheared objects

#### **Belongs to**

- **Category:** Position/Size
- **Type:** Checks

#### **What it does**

Checks if the PDF contains objects that have been disproportionally skewed or twisted in a page layout application such as QuarkXpress.

### 4.13.2.4. Check if object is completely outside page box

#### **Belongs to**

- **Category:** Page; Position and size

- **Type:** Checks

**What it does**

Searches for (and optionally selects) objects that lie completely outside the selected page box.

Depending on your workflow, you may want to remove these objects before printing.

#### 4.13.2.5. Check if page scaling factor is used

**Belongs to**

- **Category:** Page; Position and size
- **Type:** Checks

**What it does**

Checks whether the PDF uses a page scaling factor. If so, you can optionally check if a certain page scaling factor applies.

A page with scaling factor 2 will be displayed and printed twice the original size (= scaling factor 1). Page scaling has been introduced in PDF 1.6 and allows you to extend the maximum page size beyond 200 by 200 inch.

**Related Actions**

- [Apply page scaling factor](#) on page 201
- [Remove page scaling factor](#) on page 216

#### 4.13.2.6. Check media box origin

**Belongs to**

- **Category:** Page; Position and size
- **Type:** Checks

**What it does**

Checks whether the media box is set to coordinates 0,0.

The media box is the largest page box and defines the size of the physical medium on which the page will be printed or displayed. Some applications don't give the lower left 0,0 coordinates, but for example 100,100, which will cause problems when preflighting the file.

**Related Actions**

- [Select by media box origin](#) on page 480

- [Move media box to 0.0](#) on page 211

#### 4.13.2.7. Check page rotation angle

***Belongs to***

- **Category:** Page; Position and size
- **Type:** Checks

***What it does***

Checks whether the page rotation angle is equal to a specific value.  
You can check for a rotation angle of -90°, 0°, 90°, or 180° (clockwise).

***Related Actions***

- [Select by page rotation angle](#) on page 481
- [Apply page rotation](#) on page 200

#### 4.13.2.8. Check XY scaling difference

***Belongs to***

- **Category:** Position/Size
- **Type:** Checks

***What it does***

Checks the proportional scaling of a selected object.

If the XY scaling difference is 0%, the object is scaled proportionally, i.e. the height-to-width ratio is maintained. The object is enlarged or reduced both horizontally (X) and vertically (Y) with the same percentage.

In some cases, a small XY scaling difference is allowed, for example in line art (e.g. a rectangle in one color); in images this may cause distortions.

### 4.13.3. Selections

---

#### 4.13.3.1. Select by intersecting bounding boxes

***Belongs to***

- **Category:** Position and Size
- **Type:** Selections

**What it does**

Selects the objects defined by a first selection, that overlap the objects defined by a second selection (within the same Action List).

In order to define the first and second selection, this Action needs to be preceded by 2 other selection Actions.

**Example**

Suppose you have two magenta filled line art objects and two yellow filled line art objects. One of the two magenta objects physically overlaps 1 of the 2 yellow objects; that's the object you want to select and log.

To do so, proceed as follows:

```
Select color <!-- settings: Fill - CMYK - 100% M -->
Select color <!-- settings: Fill - CMYK - 100% Y -->
Select by intersecting bounding boxes
Log selection <!-- Choose user-defined text, for example: Magenta objects overlapping
yellow objects have been found -->
```

### 4.13.3.2. Select by page rotation angle

**Belongs to**

- **Category:** Page; Position and Size
- **Type:** Selections

**What it does**

Selects pages with a certain rotation angle.

You can choose a rotation angle of -90°, 0°, 90°, or 180° (clockwise).

**Related Actions**

- [Check page rotation angle](#) on page 379
- [Apply page rotation](#) on page 200

### 4.13.3.3. Select concealed objects

**Belongs to**

- **Category:** Position and Size
- **Type:** Selections
- **Since Version:** 2017

**What it does**

Selects completely hidden objects that do not affect the visual appearance of the PDF, such as redundant objects that were left behind on a hidden layer or original cropped content that is of no use.

Hidden objects can increase the file size, add to the file complexity and they may produce false hits during preflight. Therefore, you may want to use this Action to select these unneeded objects and ignore or remove them before preflighting the document.

Note that there are different options to determine whether or not an object is visible; you have the choice whether or not to take into account the objects on other layers, or you can limit the scope by adding another select Action.

### Example

The following Action List can be used to remove all objects that are not needed to render or print a PDF.

```
Select concealed objects
Remove selection
```

### Related Actions

[Select visible objects](#) on page 499

## 4.13.3.4. Select inside or outside contour

### Belongs to

- **Category:** Position and Size
- **Type:** Selections
- **Since version:** 13 update 1

### What it does

Selects objects using the area defined by the current selection. This Action is useful to select objects only within a defined shape, such as a Dieline or a Cutter Guide.

There are several options. You can select:

- The objects inside or outside the contour.
- The objects inside or outside the contour or overlapping contour.
- The objects completely covering the area inside the contour.

Note that this Action must be preceded by a Select Action in the same Action List (for example a Select spot color or a Select objects on layer Action). You can use any "select" Action you want, e.g. select by layer, by color, by line weight and you can use even operators (AND, OR) as required, but remember that only the **basic shape of the selected line art objects** will contribute to the contour!

### Remarks

- *Clipping* is taken into account when determining whether an object lies inside or outside the contour. For example, if an image is partly outside the contour, but this part is clipped, it's considered to be completely inside the contour. The clipping paths are not logged.
- As of PitStop 2022 update 1, in case of complex shapes, the non-zero winding rule (in the Inspector: Fill) is used to determine what lies inside the contour. For more information, refer to the [PDF Reference \(figure 7.9\)](#). This change is done to apply with the latest PDF specifications. In older versions of PitStop (2022 and earlier), the even-odd rule was applied. In the example

below, the image on the left shows how PitStop 2022 interpreted the contour (the part in the middle will be cut out), the image on the right shows how PitStop 2022 update 1 will draw it.



- The line art that is used to determine the contour area (through the preceding "select" Action) is not selected by "Select inside contour"; only the objects (images, shadings - which may have exactly the same shape as selected the line art) in that area will be part of the selection. This is illustrated in example 2 and 3.
- You can even select objects inside or outside a non-closed contour or one with gaps using the **Ignore gaps in contour if smaller than ...** checkbox.
- Annotation objects are logged too.
- It's also possible to use text as a contour.

#### Example 1

This Action List logs all images inside the contour formed by all line art on the Cutting layer:

```
Select by layer "Cutting"
Select inside contour
Select images
Select AND
Log selection
```

#### Example 2

This Action List moves all elements belonging to the barcode to a separate layer. Note that the technical contour around the barcode is not moved!

```
Select spot color "Barcode area"
Select inside contour
Move to layer "Barcode"
```

#### Example 3

This Action List converts the color of all objects with spot color "Content area" to CMYK. The "content area" spot color itself is (obviously) not touched.

```
Select spot color "Content area"
Select inside contour
Convert selection to CMYK
```

#### Related Action

- [Close gaps in contours](#) on page 198

### 4.13.3.5. Select objects inside or outside region

#### *Belongs to*

- **Category:** Position and Size
- **Type:** Selections

#### *What it does*

Makes a selection across pages defined by a user-defined area or by PDF page boxes.

This is useful to select (and afterwards remove or move) objects that lay outside the trim box, hence will not be printed.

#### *How to proceed*

1. Define the area inside or outside which the objects should be selected. Choose one of the following options:
  - **Define the region relative to the lower left of the media box:** You can manually enter the values of the X and Y axis (the anchor point) and the height and width (the size) of the area, or grab them by clicking the icon . Note that you can grab them from a selection or from a page box.
  - **Use (one of the page boxes):** You can choose one of the page boxes, the printing area or either the art or trim box, depending on what's defined (option **the art box (if defined) or trim box**).
  - **Use region relative to page box:** You can specify the exact location of the area to check, for example "place the center left of the region relative to the center right of the bleed box with a particular offset, height and width".
2. Indicate which objects relative to the defined area should be selected, for example the objects inside or overlapping the region.
3. Indicate whether or not annotations and clipping paths should be included in the selection.
4. If applicable, choose whether or not to take into account page rotation and scaling factor.

#### *Example*

To select any objects that lay outside of the trim box and delete them, you could use the following:

```
Select objects inside or outside region <!-- Select "Use trim box" and "Select objects
  outside region" -->
Remove selection
```

### 4.13.3.6. Select objects that are completely clipped away

#### *Belongs to*

- **Category:** Position and Size
- **Type:** Selections

**What it does**

Allows you to select objects that are hidden ("clipped away") by other objects of which the shape masks the artwork.

Optionally, you can include invisible objects that belong to this form.

**Related Actions**

[Select clipping objects](#) on page 444

### 4.13.3.7. Select overlapping objects

**Belongs to**

- **Category:** Position and Size
- **Type:** Selections
- **Since Version:** 2017

**What it does**

Selects objects based on their relationship with other objects they interact with, i.e. objects that (at least partly) lay on top of, or below other objects.

There are four options:

- The first option allows you to select objects that (at least partly) *overlap* any object on the page.
- The second option allows you to select object that (at least partly) *are overlapped* by any other object on the page
- The third option allows you to select objects that (at least partly) *are on top of other objects selected earlier* in the same Action List.
- The third option allows you to select objects that (at least partly) *are below other objects selected earlier* in the same Action List.

This Action is included in a number of default Action Lists:

- Find Images without an overlapping Varnish
- Check for Black Text sitting on Dark Color (does not include images)
- Check for White Text sitting on Light Color (does not include images)

**Example**

The following Action List will remove all objects that are on top of the text in your PDF:

```
Select text
Select overlapping objects (third option selected)
Remove selection
```

### 4.13.3.8. Select rotated objects

**Belongs to**

- **Category:** Position and Size
- **Type:** Selections
- **Since Version:** PitStop 2022



**What it does**

Selects objects that are rotated.


Objects can have been rotated by page layout applications such as QuarkXPress, and this may cause problems for (older) RIPs.

You can specify the required level of rotation, for example 'objects that are rotated more than 2 degrees', optionally combined with two extra options:


- **Interpret all angles as rotations between 0 and 45 degrees from vertical or horizontal:** This option allows you to find small rotations in either direction. To decide whether or not an object is rotated, the measured angle is converted to an interval [0,45] degrees compared to the nearest horizontal or vertical page edge. As a consequence, a rotation of 88 degrees is converted to 2 (90-88) and a rotation of 271 degrees is converted to 1 (271-270). When checking for rotations smaller than 4 degrees, both rotations will be selected, whereas for example a rotation of 290 degrees (converted to 20 => 290-270) won't be selected. See example 1 below.
- **Ignore objects that are aligned vertically or horizontally:** This option allows you to exclude objects that are aligned exactly 0, 90, 180 or 270 degrees to the page edges. Such objects (rotated a multiple of 90 degrees) do not look rotated, so in most cases they should not be selected. See example 2 below.

**Example 1**

Suppose you have a PDF file with the following 4 rotated objects. You want to select and remove the objects that have a rotation angle of less than 4 degrees.

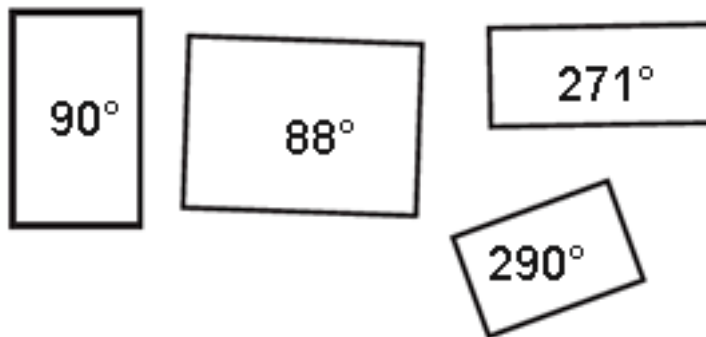


In the example below, all angles are interpreted as rotations between 0 and 45 degrees from vertical to horizontal (first option). The first three objects are selected and removed because they all have a rotation angle of less than 4 degrees from the nearest vertical or horizontal page edge (as explained higher).

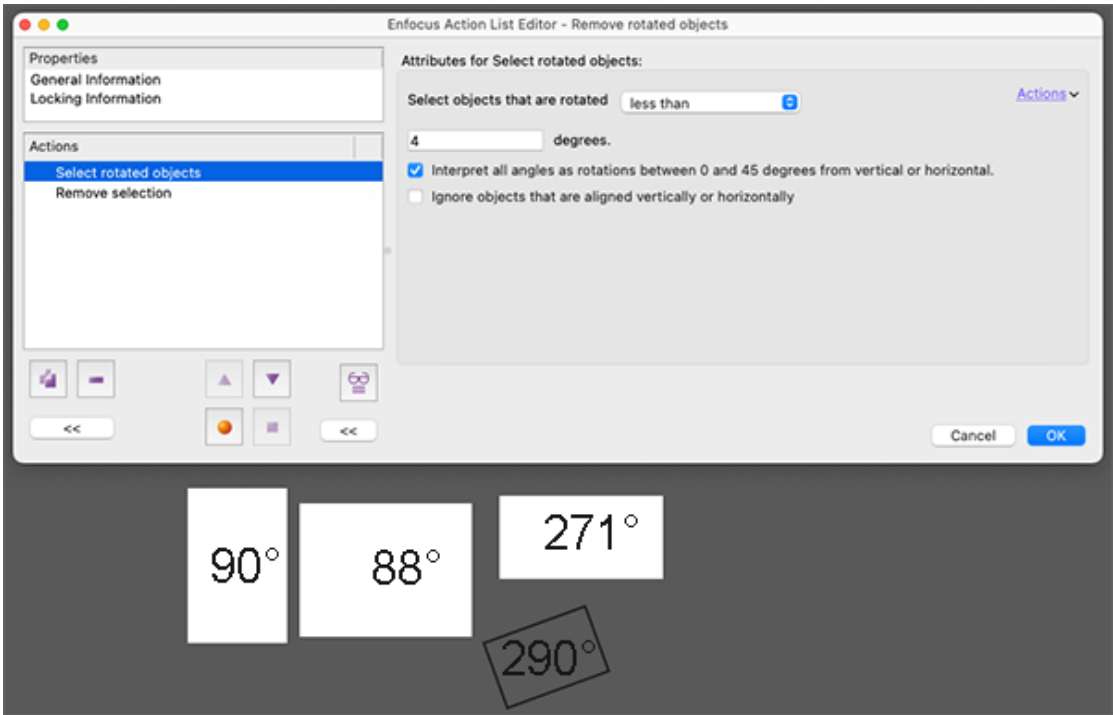

**Example 2**

When the **Ignore objects that are aligned vertically or horizontally** checkbox is selected, the object that has a rotation angle of 90° is no longer selected nor removed.

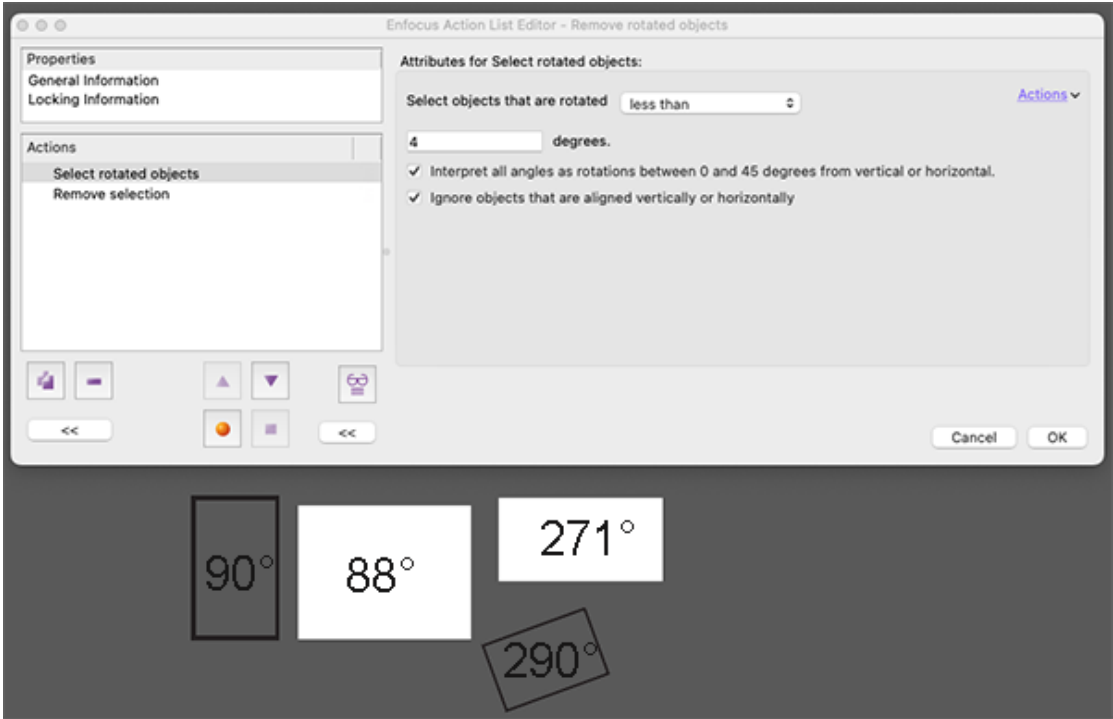

**Related Actions**

- [Check for rotated objects](#) on page 389

### 4.13.3.9. Select size

**Belongs to**

- **Category:** Position/Size
- **Type:** Selections

**What it does**

Allows you to select any object in a PDF of which the height or width is less than, equal to, or greater than a certain size.

You can choose whether or not to take into account page rotation and scaling factor.

### 4.13.3.10. Select visible objects

**Belongs to**

- **Category:** Position and Size
- **Type:** Selections
- **Since Version:** 2017

**What it does**

Selects all objects that are needed to render and print a PDF and that affect the visual appearance of the PDF.



---

**Note:** This Action only takes into account the transparency of the objects, not the colors.

---

This Action can be useful to separate visible from invisible content, or to make sure that preflight checks are only applied to visible content, as it doesn't make sense to check and fix objects that are invisible. Note that PitStop comes with a default Restricting Action List created using this Action; you can use it in conjunction with a Preflight Profile to check only the elements needed to render the file, and ignore the rest.

To determine whether or not an object is visible, you can take into account the objects on other layers, or you can limit the scope by adding another select Action.

**Related Actions**

- [Select concealed objects](#) on page 493

# 4.14. Prepress

## 4.14.1. Changes

### 4.14.1.1. Add bleed

**Belongs to**

- **Category:** Prepress
- **Type:** Changes
- **Since version:** 13

**What it does**

Allows you to add bleed all around the page, e.g. on all 4 edges if needed.



**Note:** This Action applies bleed based on the bleed box; if you don't have a bleed box yet, you can use the 'Change bleed box' Action to create one.

You may use this Action to make your file PDF/X-4 compliant.

**How to proceed**

1. Select the edge(s) you want to add bleed to. Bleed is added from the trim box edges to the bleed box.
2. Select **Add bleed in corners** as required.
3. Indicate where the bleed should start (inside the bleed box).



**Note:** By default, the same values are used on all edges; if you change one value, all other values are automatically changed as well. If you don't want this, click the Lock

icon , so it changes to . You can now use different values as required.


4. Select **Mirror margins according to page binding** as required. When selected, the inner and outer instead of the left and right margins have to be set, so the amount of bleed may be different for even and odd pages.
5. By default, to add bleed, PitStop uses several techniques, such as extending clips and mirroring existing content. In some cases, it may be preferable to only use the mirroring technique. If that is the case, select **Only add bleed by mirroring content**. Note that this also helps to keep the file size down.
6. Select one of the following options as required:

| Option                              | Description                                                                                                                                                                                                      |
|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Only add bleed by mirroring content | By default, to add bleed, PitStop uses several techniques, such as extending clips and mirroring existing content. In some cases, it may be preferable to only use the mirroring technique. If that is the case, |

| Option                                            | Description                                                                                                                                                                                                                                                                        |
|---------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                   | <p>select this option. Note that this also helps to keep the file size down.</p> <div> <b>Note:</b> We advise clearing this checkbox if line art needs to be extended. See example 3 below.</div> |
| Allow mirroring of text                           | Mirroring of text can be useful to generate fold-over flaps for banners with text near the trim edge.                                                                                                                                                                              |
| Use all objects to fill bleed area when mirroring | By default, objects that do not touch the trim box are not used to create bleed, unless you select this option. In that case, objects near the trim box are also mirrored.                                                                                                         |
| Retain objects in bleed area                      | By default, existing objects in the bleed area are removed, unless you select this option.                                                                                                                                                                                         |


Example 1

Bleed is added in the bleed area.

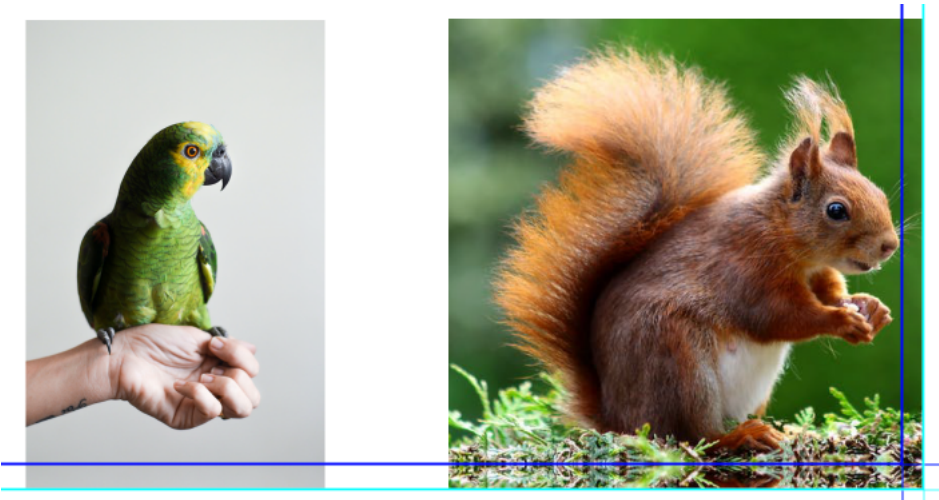

Example 2


With this kind of image, enabling **Only add bleed by mirroring content** is not recommended.

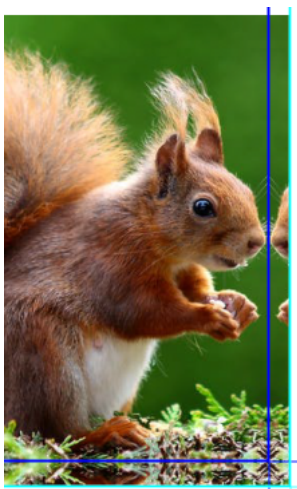

### Example 3

Line art should be extended instead of mirrored.

Running the Action with **Only add bleed by mirroring content** checkbox selected, resulted in line art not extended correctly (= the image on the left). When the **Only add bleed by mirroring content** checkbox was cleared, the result was OK (= the image on the right).

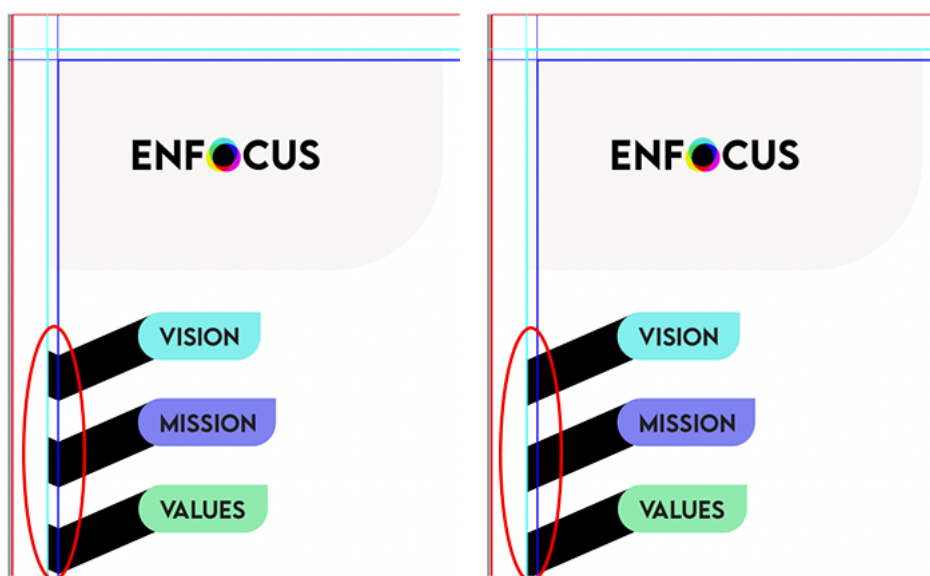

### Related Actions

- [Check bleed](#) on page 294
- [Change bleed box](#) on page 202

## 4.14.1.2. Add bleed around contour

### Belongs to

- **Category:** Prepress

- **Type:** Changes
- **Since version:** 2021

**What it does**

Allows you to add missing bleed around the contour (typically the dieline or cut line) of an object.

Note that this Action only works on selected line art that is not filled. The contour must be closed and it must be a compound path of at least 3 nodes.



**Note:** You can *detect* missing bleed around contours through the [Check bleed around contour](#) Action.


**Attributes**

| Attribute                                 | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Use trim box as contour                   | If selected, bleed is added based on the trim box. The amount of bleed is based on the value set in the <b>Bleed offset</b> option, so not on the bleed box.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Use inner/outer according to page binding | If the trim box is used as contour, you can add bleed to the inner and/or outer contour based on the page binding. If selected, left and right are replaced with inner and outer in the <b>Add bleed for edges</b> option.<br><br>Example: In case of magazines, typically "inner" will be cleared.                                                                                                                                                                                                                                                                                                                                            |
| Add bleed for edges                       | If the trim box is used as contour, this option determines the edges where bleed is added.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Add bleed in corners                      | If the trim box is used as contour, you can add bleed in the corners.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Bleed offset                              | The desired amount of bleed (starting from the contour).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Trim area margin                          | Indicates how close/far from the trim area the bleed should start. This is useful for objects near but not crossing the trim box.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Extend line art                           | <p>Extends line art. See example 2 below.</p> <div>  <p><b>Note:</b> This only works for line art that is not in a form. The line art must also not have both a stroke and a fill. If so, first <a href="#">separate the stroke and the fill</a>.</p> </div> <p>This option is also useful for <i>clipped images (clip masks)</i>. See example 3 below. If this option is selected, the clip path is extended. The parts for which there is not enough image data can be filled using pixel cloning, if the <b>Repeat last pixel</b> option is enabled.</p> |

| Attribute                                                                                                                                                                               | Description                                                                                                                                          |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| Repeat last pixel                                                                                                                                                                       | Repeats the last pixel of images if any.                                                                                                             |
| White threshold                                                                                                                                                                         | The threshold for white makes sure that a color that is "almost white" (and looks white when printed) is considered white. The default value is 10%. |
| Image output: <ul style="list-style-type: none"><li>• Resolution (ppi)</li><li>• Color space</li><li>• Compression</li><li>• Quality</li><li>• Convert to indexed color space</li></ul> | Desired output properties                                                                                                                            |

**Remark**

Bleed cannot be added to overlapping or intersecting contours. In the example below, the two rectangles are separate paths. In this case, PitStop cannot determine where bleed should be added. Should bleed be added to the internal line or the external line? To solve this issue and help PitStop, you should first convert the two paths into one compound path.



**Example 1**


Missing bleed is added based on the cutter guide (in orange), both to the inner contour (the white space between the leaves that has to be cut out) and the outer contour.





**Example 2**


Example where the trim box is used as contour, with the **Extend line art** checkbox cleared:

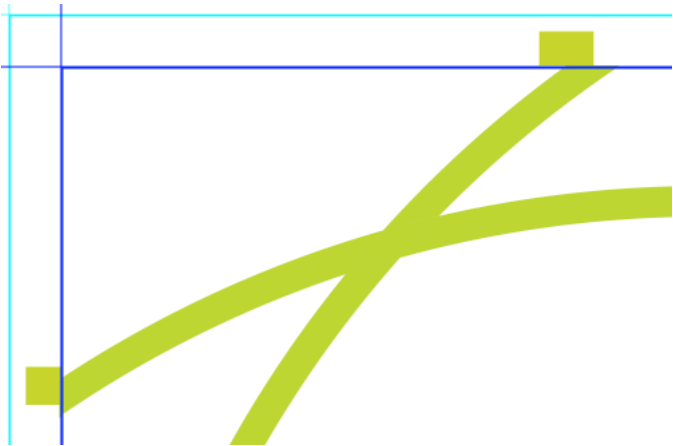

Example where the trim box is used as contour, with the **Extend line art** checkbox selected:

**Example 3**

Clip mask example. The bleed area is filled with clipped away image data. This is obtained by selecting the **Extend line art** checkbox.

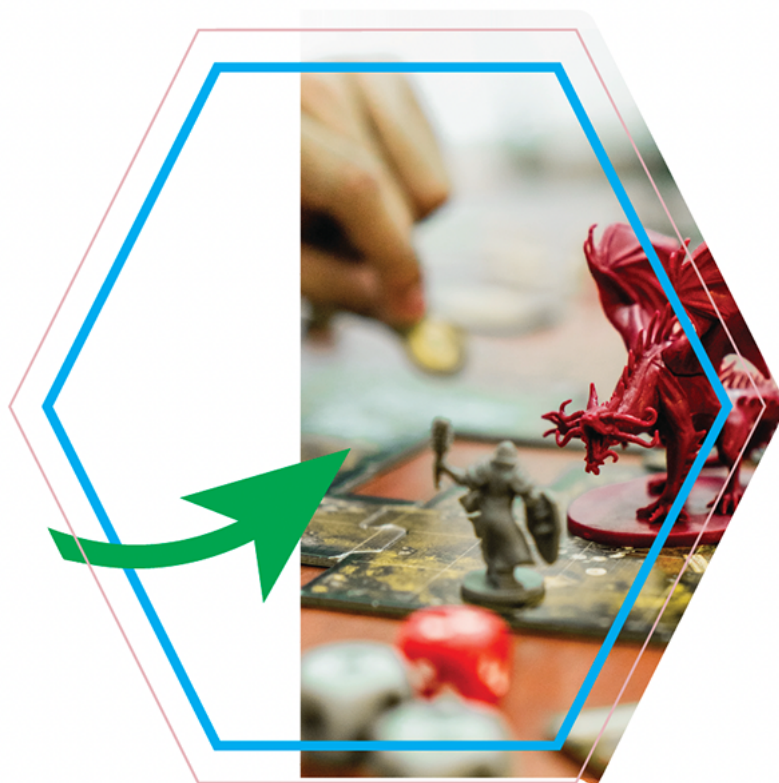**Related Actions**

- [Check bleed](#) on page 294

- [Check bleed around contour](#) on page 297

### 4.14.1.3. Apply transfer function

#### **Belongs to**

- **Category:** Prepress;Text;LineArt;Color;Image
- **Type:** Changes

#### **What it does**

Adds a transfer function to paths, text, images or all these types of objects. You can exclude spot colors or apply the transfer function on tint values or alternate values only.

Transfer functions are used for creative purposes, artistic effect and to correct the characteristics of a specific, maybe poorly calibrated, output device. For example, a file that is intended for output on a particular image setter may contain transfer functions that compensate for the dot gain inherent to that printer.



---

**Note:** Transfer functions are not allowed in PDF/X compliant documents.

---

#### **Related Actions**

- [Check for custom transfer function](#) on page 402
- [Remove custom transfer function](#) on page 271

### 4.14.1.4. Change overprint

#### **Belongs to**

- **Category:** Prepress
- **Type:** Changes

#### **What it does**

Changes the overprint for a selected object's fill and/or stroke.

#### **How to proceed**

Proceed as follows:

1. To change the Fill/Stroke overprint, select the Fill/Stroke overprint checkbox.



---

**Note:** The checkbox only indicates **what** you want to change, **not how** you want it to change. If none of the checkboxes has been selected, the name of the Action will change into "Do not change overprint".

---

2. To enable or disable Fill/Stroke overprint, click the buttons:



Overprint is off.



Overprint is on.



**Tip:** Check the Actions field, to see if the Action is configured appropriately. For example, if you selected the Fill overprint checkbox and clicked the button next to it, the name of the Action should change into "Set fill overprint to off."

#### **Related Actions**

- [Check if object is set to overprint](#) on page 401
- [Select by overprint](#) on page 501

### 4.14.1.5. Change overprint mode

#### **Belongs to**

- **Category:** Prepress
- **Type:** Changes

#### **What it does**

Allows you to change the overprint mode of a selection to Standard overprint (OPM 0) or Illustrator overprint mode (OPM 1).

#### **About overprint modes**

- In **Standard overprint mode** (OPM 0), the tint value 0 of one of the CMYK inks in the foreground object has a knockout effect on the color rendering of the underlying object. In other words, a foreground ink with a C, M, Y or K value of 0 % erases the corresponding background ink. Here, the "foreground inks win" principle applies.
- In **Illustrator overprint mode** (OPM 1), the tint value 0 is neutral: it is ignored (as if it were "not specified") and has therefore no effect on the color rendering of the underlying object.

For more information and examples, refer to [the PitStop Pro Reference Guide on the Enfocus website](#).

For more information and examples, refer to the PitStop Pro Reference Guide.

#### **Related Actions**

- [Check overprint mode](#) on page 404
- [Select by overprint mode](#) on page 502

### 4.14.1.6. Change rendering intent

#### **Belongs to**

- **Category:** Prepress;Color
- **Type:** Changes

#### **What it does**

Modifies the rendering intent of an object to one of the following:

- Absolute Colorimetric

- Relative Colorimetric
- Perceptual
- Saturation

**About rendering intents**

A rendering intent is a remapping method, allowing to remap colors so that they best match the intended use. 'Remapping' means that colors from one output device's color space are mapped to the color space of another device.

For more information and examples, refer to [the PitStop Pro Reference Guide on the Enfocus website](#) (See Chapter "Rendering intents to remap colors").

For more information and examples, refer to the PitStop Pro Reference Guide (See Chapter "Rendering intents to remap colors").

**Related Actions**

- [Select by rendering intent](#) on page 427
- [Check rendering intent](#) on page 312
- [Remove rendering intent](#) on page 117

### 4.14.1.7. Change rendering parameter

**Belongs to**

- **Category:** Prepress
- **Type:** Changes

**What it does**

Changes the rendering parameter of your choice to the corresponding rendering parameter of the grabbed object.

**Example**

To apply a transfer curve from an object to the objects of your selection in the Action List

1. Select an object in your PDF document, by using the PitStop Select Objects tool .
2. In the attributes of the Change rendering parameter Action, select Change **transfer**.
3. Click **Grab Transfer From Selection**.

### 4.14.1.8. Change smoothness

**Belongs to**

- **Category:** Prepress
- **Type:** Changes

**What it does**

Changes the value of smoothness of a selected PostScript curve.

A value of 1 is a good default.

#### 4.14.1.9. Change transparency

***Belongs to***

- **Category:** Prepress
- **Type:** Changes

***What it does***

Allows you to modify the transparency of the objects in a PDF file.

You can:

- Modify the alpha channel of a fill and/or stroke, by moving the sliders to the desired percentage. Note that, to gain full opacity, you should move the slider to 100%.
- Change the blending modes.

This will change the way in which the colors of a transparent object on top blend with the colors of underlying objects.

To select the blending modes you want to apply, proceed as follows:

1. Select a blending mode under **Available**.
2. Click **Add** to move it to the **Selected** list.
3. Repeat steps 1-2 as required.

The blending modes will be applied in the order as they appear in the Selected list.

- Turn on or off **Alpha is Shape** as required. This may affect anti-aliasing. (Do not turn it on, unless you really need it.)
- Turn on or off **Text Knockout**.

If Text Knockout is enabled, the inks of underlying objects, if any, will be cut out on the other separations. This option may be useful in case of overlapping characters.



---

**Note:** As of PitStop 2022, this Action also works on transparent annotations.

---

***Related Actions***

- [Check for transparent objects](#) on page 399
- [Select pages with transparent objects](#) on page 486
- [Select transparent objects](#) on page 504
- [Remove transparency](#) on page 274

#### 4.14.1.10. Change transparency group settings

***Belongs to***

- **Category:** Prepress
- **Type:** Changes
- **Since:** 2020

**What it does**

Allows you to to modify the transparency group settings, on form or page level.

Remember that you can also change (and view) the transparency group settings in PitStop Pro using the Enfocus Inspector.

**About transparency groups**

A transparency group is a group of objects that belong together; the group can be defined on form level (a so-called XObject form) or on page level. Checking the transparency group properties may be useful to know whether an object's visual appearance has changed because it's part of a group.

**About the transparency group settings that can be changed using this Action**

| Setting                                                 | Meaning                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Change forms or pages to transparency groups            | <ul style="list-style-type: none"> <li>• <b>On:</b> The page or form is converted to a transparency group. If it is already a transparency group, nothing changes. The other transparency settings (knockout flag, isolated flag, blending color space) are used to render the transparency group.</li> <li>• <b>Off:</b> The page or form will not/no longer be a transparency group. The objects will be rendered as if they were placed directly on the page. The other settings in this Action are grayed out (as they are not relevant if there is no transparency group).</li> </ul> |
| Change the knockout flag to                             | <ul style="list-style-type: none"> <li>• <b>On:</b> If the knockout flag is on, the objects in the transparency group are rendered as one object. Overlapping parts cannot interact with each other: the objects on top fully overwrite the objects underneath.</li> <li>• <b>Off:</b> The objects are not rendered as one object.</li> </ul>                                                                                                                                                                                                                                              |
| Change the isolated flag to                             | <ul style="list-style-type: none"> <li>• <b>On:</b> If the isolated flag is on, the objects in the transparency group are not affected by the objects underneath.</li> <li>• <b>Off:</b> If the isolated flag is off, the objects in the transparency group can be affected by other objects.</li> </ul>                                                                                                                                                                                                                                                                                   |
| Change the blending color space to <select from a list> | This is the blending color space that will be used to render the transparency group. Note that this option is only active in case of an isolated group (isolated flag set to On).                                                                                                                                                                                                                                                                                                                                                                                                          |

| Setting     | Meaning                                                                                          |
|-------------|--------------------------------------------------------------------------------------------------|
| ICC Profile | If the blending color space is Gray, RGB or CMYK, you should select the appropriate ICC Profile. |

#### 4.14.1.11. Clean up unused resources

##### ***Belongs to***

- **Category:** Prepress
- **Type:** Changes

##### ***What it does***

Removes resources that are not used, for example embedded images or fonts, to reduce the file size.

#### 4.14.1.12. Clip bleed around contour

##### ***Belongs to***

- **Category:** Prepress
- **Type:** Changes
- **Since version:** 2021

##### ***What it does***

Allows you to clip away existing bleed around the contour (typically the dieline or cut line) of an object. This can be necessary if the bleed contour is not as desired. Once you have clipped away the bleed, you can add new bleed using the [Check bleed around contour](#) on page 297 Action.

Note that this Action only works on selected line art that is not filled. The contour must be closed and it must be a compound path of at least 3 nodes.



**Tip:** If the line art you want to check is not a closed or compound path, you can use [Close path](#) on page 162 and/or [Combine subpaths](#) on page 162 to create one.

You can also clip away bleed from the page edges by selecting the **Use trim box as contour** checkbox.

##### ***Related Actions***

- [Check bleed](#) on page 294
- [Check bleed contours](#) on page 300
- [Check bleed around contour](#) on page 297
- [Add bleed around contour](#) on page 258

#### 4.14.1.13. Convert PDF/X-4p Output Intent to PDF/X-4

##### ***Belongs to***

- **Category:** Prepress



- **Type:** Changes

**What it does**

Converts PDF/X-4p Output Intent to PDF/X-4.

PDF/X-4p is used when the ICC profile in the Output Intent is supplied externally.

In PDF/X-4, the ICC profile in the Output Intent must be supplied internally, so this Action embeds the external ICC profile.

#### 4.14.1.14. Convert shading to images

**Belongs to**

- **Category:** Prepress
- **Type:** Changes
- **Since Version:** 13 update 2

**What it does**

Converts shadings and shading color spaces to images, in order to improve the performance of RIPs that have difficulties handling shadings.

This Action is able to handle *objects, text and masks* with shadings, as well as *shaded color spaces in the fill and stroke* of paths, text, and image masks. In case of image masks, the *combined visible area* of all selected objects that use shading is converted to an image which is used as a coloured tiling pattern.

If the shading is tagged with an ICC profile, the resulting image will be tagged with the same ICC profile; if the shading does not have an ICC profile attached, the resulting image won't have one either.



---

**Tip:** As only the *visible content* of the shading is replaced, we recommend performing all conversions that change the bounding box (e.g. changes to the font size or the width of the stroke) **BEFORE** running this Action.

---

Note that due to this conversion, the file size will increase.

**Options**

In the attributes of this Action, you can determine:

- The preferred **resolution** of the resulting images (by default: 300 ppi)
- The **compression type** (JPEG, JPEG 2000, ZIP or none)
- The **quality** of the images.

#### 4.14.1.15. Convert shading to path

**Belongs to**

- **Category:** Prepress
- **Type:** Changes
- **Since Version:** 25.03


**What it does**


Converts selected shading *objects* (so not shading pattern color spaces) into paths filled with the same shading (as a shading pattern color space). This means that you can keep the line art and change its graphic properties.

**Example**

In this example, after the conversion to path, the shading color space is converted to a solid color.

```
Select all  
Convert shading to path  
Select last added objects  
Convert shading color space to solid color
```

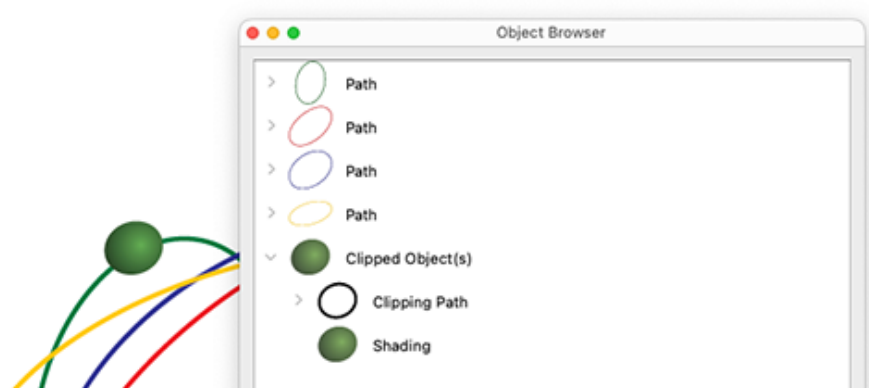**Before:****After:**

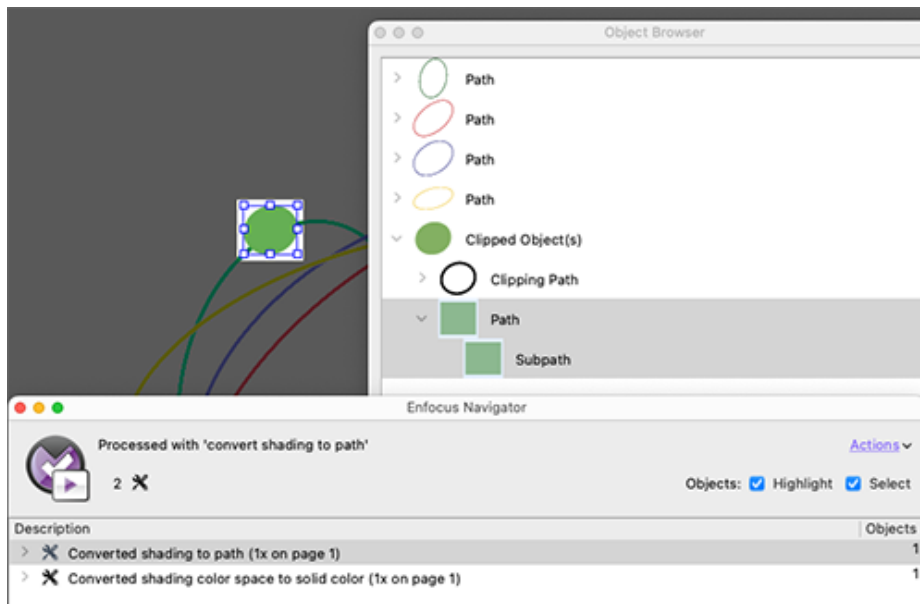

#### 4.14.1.16. Make mask

##### ***Belongs to***

- **Category:** Prepress
- **Type:** Changes

##### ***What it does***

Creates a mask from at least two selected objects (line art or text).

##### ***Related Actions***

[Release mask](#) on page 271

#### 4.14.1.17. Overprint on all separations

##### ***Belongs to***

- **Category:** Prepress
- **Type:** Changes

##### ***What it does***

Ensures that if an object is set to overprint, it overprints on all separations. You can apply the overprint to the fill color and/or the stroke color.

The overprint rules in PDF are clearly defined but sometimes very surprising. For example, a gray object that is set to overprint will overprint on underlying Pantone colors, but it will not overprint

on Cyan, Magenta and Yellow. This Action will ensure that the document will still print as Black, but with overprint on CMY.

#### 4.14.1.18. Release mask

***Belongs to***

- **Category:** Prepress
- **Type:** Changes

***What it does***

Removes a selected mask.

In PitStop masks refer to clipping paths, i.e. objects (line art or text) of which the shape (partly) masks other artwork. Only areas inside the clipping objects are visible. This Action allows you to remove the mask, so that the different objects become visible again.

***Related Actions***

[Make mask](#) on page 270

#### 4.14.1.19. Remove alternative blend modes

***Belongs to***

- **Category:** PDF 2.0, Prepress, Remove
- **Type:** Changes
- **New since:** PitStop 2022

***What it does***

Removes alternative blend modes in case of multiple blend modes, because using multiple blend modes is deprecated in PDF 2.0. Only the first blend mode is kept.


Note that you can check the blend modes using the PitStop Inspector (Transparency - General).

Blend modes determine how colors on different layers blend with each other. For more information about blend modes, visit the Adobe website (<http://www.adobe.com>) or refer to the Help or documentation of your design application (Adobe InDesign, QuarkXPress, ...)

***Example***

In this example, three blend modes are selected: Multiply, Saturation and Colorburn.

Running this Action will remove Saturation and Colorburn and only keep the first blend mode in the list: Multiply.

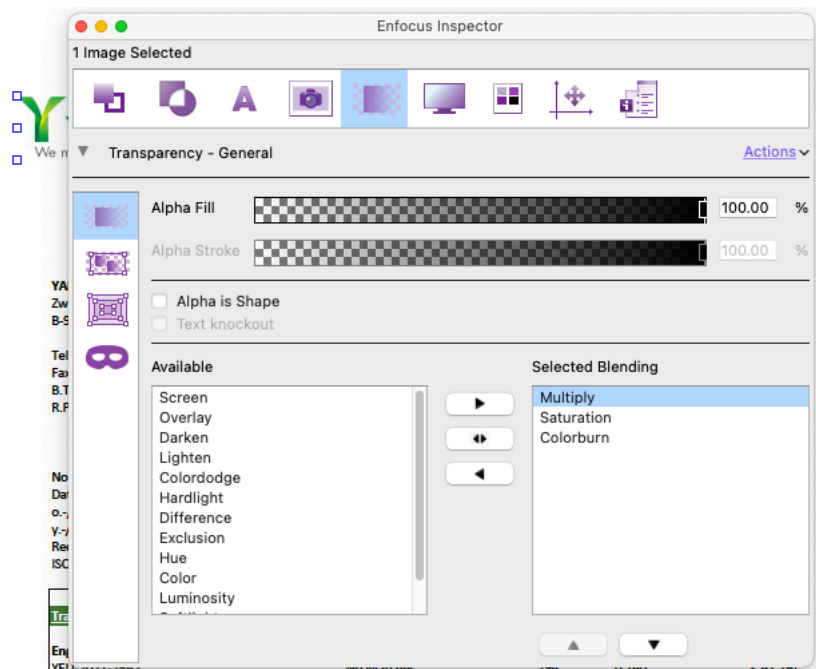

**Note:** As of PitStop 2022, it will no longer be possible to add multiple blend modes to a selected object using the Enfocus Inspector. However, if an object already has multiple blend modes, they will still be shown.

#### Related Actions

- [Select by blend modes](#) on page 500
- [Check for non-standard blend modes](#) on page 403

### 4.14.1.20. Remove black generation

#### Belongs to

- **Category:** Prepress
- **Type:** Changes

#### What it does

Allows you to remove black generation settings.

Black generation is a custom setting that tries to replace CMYK-mixed blacks and grays with a greater percentage of black to save on colored ink and give a clearer black. As many printers prefer to set these settings themselves, they can use this Action to remove them from a PDF.

**Related Actions**

[Check for custom black generation](#) on page 401

## 4.14.1.21. Remove custom transfer function

**Belongs to**

- **Category:** Prepress
- **Type:** Changes

**What it does**

Remove a custom transfer function applied to an object in a PDF.

Transfer functions are used for creative purposes, artistic effect and to correct the characteristics of a specific, maybe poorly calibrated, output device. For example, a file that is intended for output on a particular image setter may contain transfer functions that compensate for the dot gain inherent to that printer.



---

**Note:** Transfer functions are not allowed in PDF/X compliant documents.

---

**Related Actions**

- [Apply transfer function](#) on page 101
- [Remove custom transfer function](#) on page 271

## 4.14.1.22. Remove halftone

**Belongs to**

- **Category:** Prepress
- **Type:** Changes

**What it does**

Removes any custom halftone information from a document.

Halftoning is a method of printing shades using a single color ink. By varying the size or density of dots, the eye can see a shade somewhere between the solid color and the color of the background paper. Custom halftones are mostly used for screening frequency and angles.

Associated with every output device is a default halftone definition that is appropriate for that device. Only relatively sophisticated documents need to define their own halftones to achieve special effects. In general, when a PDF document provides its own halftone specifications, it sacrifices portability: they may lead to unpredictable printed output when the same document is sent to different printers. This is why they are generally undesirable.

**Related Actions**

[Check for custom halftone](#) on page 401

#### 4.14.1.23. Remove halftone phase

**Belongs to**

- **Category:** Prepress
- **Type:** Changes

**What it does**

Removes all halftone phases from a PDF document.

A halftone phase is a shift in the alignment of halftone and pattern cells in device space, to compensate for window system operations that involve scrolling. It is no longer used, but may still be found in documents containing artwork from older source applications.



**Note:** It may be interesting to remove halftone phases, because halftone curves, when defined, overrule general transfer curves.

**Related Actions**

[Check halftone phase](#) on page 400

#### 4.14.1.24. Remove non-PDF/X compliant halftone

**Belongs to**

- **Category:** Prepress
- **Type:** Changes

**What it does**

Removes any instances of halftones that are not compliant with the PDF/X specification.

Halftoning is a method of printing shades using a single color ink. By varying the size or density of dots, the eye can see a shade somewhere between the solid color and the color of the background paper. Some of these halftones are not allowed according to the PDF/X specification, which is why you might want to remove them.

**Related Actions**

[Check for non-PDF/X compliant halftone](#) on page 403

#### 4.14.1.25. Remove rendering intent

**Belongs to**

- **Category:** Color; Prepress
- **Type:** Changes

**What it does**

Strips rendering intents from color managed objects in a PDF.

**About rendering intents**

A rendering intent is a remapping method, allowing to remap colors so that they best match the intended use. 'Remapping' means that colors from one output device's color space are mapped to the color space of another device.

For more information and examples, refer to [the PitStop Pro Reference Guide on the Enfocus website](#) (See Chapter "Rendering intents to remap colors").

For more information and examples, refer to the PitStop Pro Reference Guide (See Chapter "Rendering intents to remap colors").

**Related Actions**

- [Select by rendering intent](#) on page 427
- [Check rendering intent](#) on page 312
- [Change rendering intent](#) on page 104

## 4.14.1.26. Remove transparency

**Belongs to**

- **Category:** Remove; Prepress
- **Type:** Changes

**What it does**

Removes transparency from the objects in a PDF file.

You can remove transparency from **all** objects in the PDF, or from objects for which:

- Fill is set to overprint, and/or
- Stroke is set to overprint, and/or
- Spot colors are used.



---

**Note:** As of PitStop 2022, this Action also removes transparent annotations.

---

**About transparency in PDF**

Transparency can cause some problems if you view documents in Adobe Acrobat 4.0 or earlier: transparent objects can be rendered incorrectly.

A transparent layer can also cause problems when you transpose the PostScript code of your PDF document to the halftone information of your printer (the 'ripping').

A typical example is saving graphics with transparent elements as PDF compatible with Acrobat 5.0 in Adobe Illustrator 9.0 or Adobe InDesign 2.0. In Adobe Acrobat 4.0, transparent objects in your PDF document are displayed and printed opaque, but transparency is not removed. If you open the same PDF document in Adobe Acrobat 5.x, the transparent objects will look (and print) fine again.



It can be useful to make the distinction between spot colors and CMYK colors when checking the transparency settings in your documents, because different rules govern the overprinting of spot colors.

**Related Actions**

- [Check for transparent objects](#) on page 399
- [Select pages with transparent objects](#) on page 486
- [Select transparent objects](#) on page 504
- [Change transparency](#) on page 265

## 4.14.1.27. Remove undercolor removal

**Belongs to**

- **Category:** Prepress
- **Type:** Changes

**What it does**

Removes any custom undercolor removal information from a PDF.

Undercolor removal is the process of removing large percentages of cyan (C), magenta (M), and yellow (Y) ink prior to printing, and replacing them with black (K) ink, in order to achieve a clearer black color in print, and to save on color inks.

**Related Actions**

[Check for custom undercolor removal](#) on page 402

## 4.14.2. Checks

---

### 4.14.2.1. Check bleed

**Belongs to**

- **Category:** Prepress
- **Type:** Checks
- **Since version:** 2020

**What it does**

Allows you to check if bleed is missing. You should indicate the areas to be checked, that is the region(s) between the left, right, top or bottom corner of the trim box and the bleed box.

You should also specify where the bleed should start (= distance from the inside of the trim box).

Optionally you can enable the **Mirror margins according to page binding** checkbox and set a **white threshold for white** (by moving the slider or entering a value (in %)). The threshold for white makes sure that a color that is "almost white" (and looks white when printed) is considered white.

New as of PitStop 2021 is the slider to increase or decrease the **detection sensitivity**. A high bleed edge sensitivity will report missing bleed for e.g. tapered objects (because of the small

gaps between them). A lower sensitivity value won't. The default value (which usually gives the best results) is 30%.



**Note:** When upgrading from older PitStop versions, existing Check bleed Actions get a detection sensitivity of 100%, because that best matches the old behavior.

The last option (**Ignore missing bleed smaller than**) allows you to ignore extremely small areas.



**Note:**

- This is a page-based, pixel-based check: it doesn't look at individual objects, but it renders the whole page and checks the pixels.
- Text objects that cross the trim box but don't reach the bleed box do not trigger bleed errors.


**Important remark:** The document must have a *valid trim and bleed box*. This is required for PitStop to know where the bleed should start and how big it should be.

**Example**

Example file with page boxes (media, bleed, trim box) shown:



When 'Highlight' is enabled in the Enfocus Navigator, the white areas show where bleed is missing:

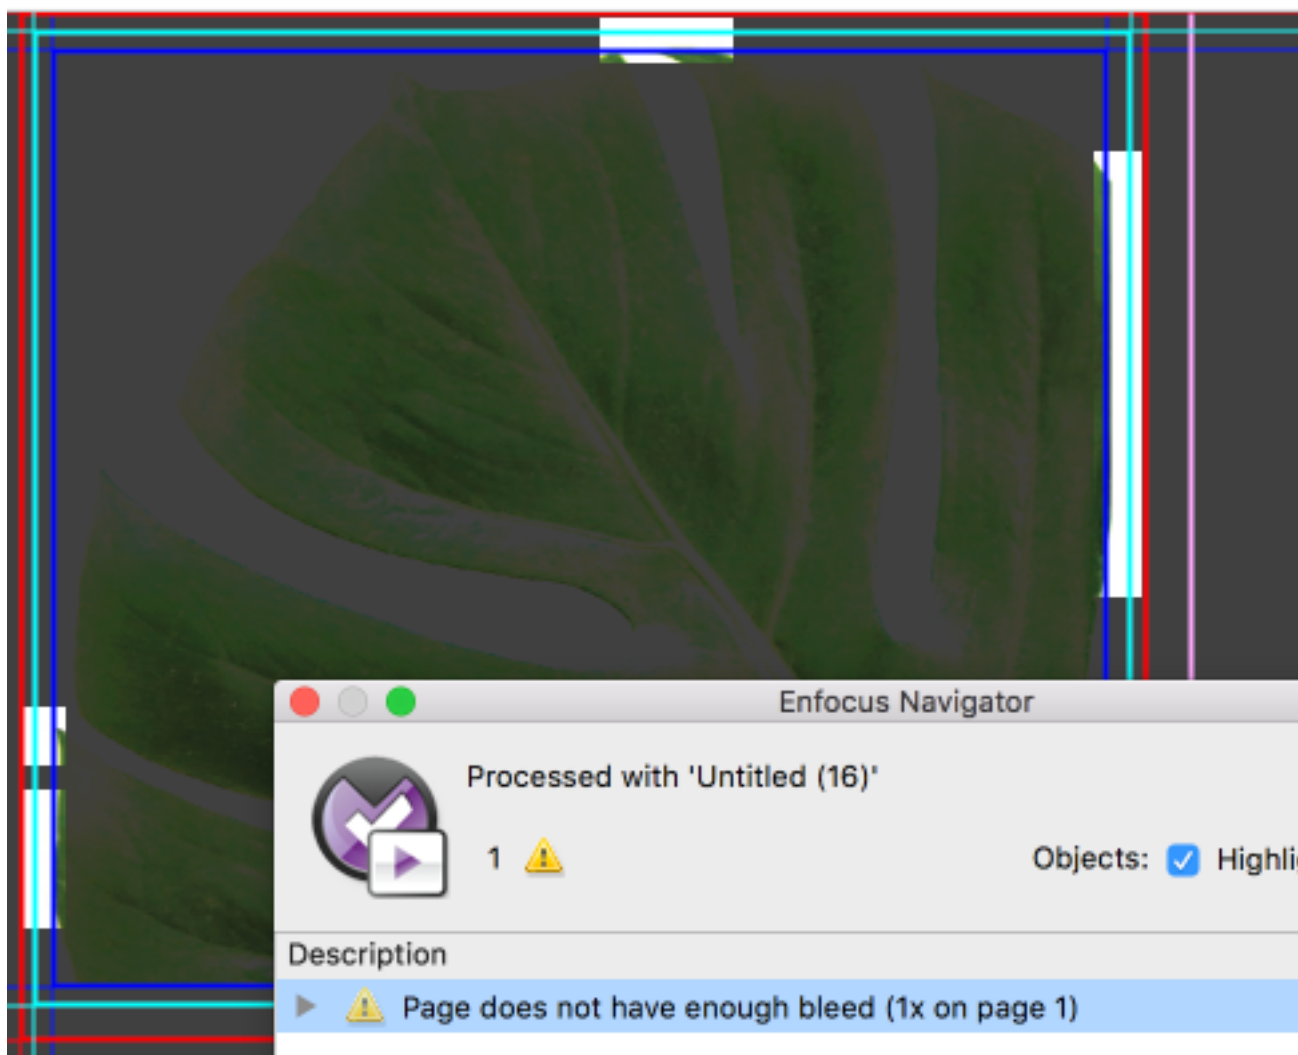

#### **Remark about the corners**

By default, corners are checked for bleed if one of the touching sides is being checked. For example, if only the left side of the page should be checked, the upper and bottom left corner of the page will also be included in the bleed check.

There is one exception: if the Action is configured to NOT check the *inner* sides and the check depends on page binding (**Mirror margins according to page binding** selected), the inner corners (the bleed areas of the top and bottom that extend into the inner side) are NOT checked. This is not needed, because in that case, the corners are cut off anyway, so there's no need to check them.

#### **Example: Checking bleed on a saddle-stitched (bound) book**

If you only need to have bleed on the outer edges of your document:

1. Enable **Mirror margins according to page binding**. This changes the options left/right to inner/outer.
2. Disable the "Inner" option so the check will not include the binding edge. Note that it will depend on the page binding setting of the document and page index of the checked page if the inner edge means the 'left' or 'right' edge (for that page).

**Attributes for Check bleed:**

Check bleed between these trim box edges and the bleed box:

☐ Inner

☒ Outer

☒ Top

☒ Bottom

---

Bleed must start at this distance from the inside of the trim box:


Inner

Outer

Top

Bottom

☒ Mirror margins according to page binding.



#### Related Actions

- [Check bleed around contour](#) on page 297
- [Check bleed contours](#) on page 300
- [Add bleed](#) on page 255
- [Add bleed around contour](#) on page 258

### 4.14.2.2. Check flatness

#### Belongs to

- **Category:** Prepress
- **Type:** Checks

#### What it does

Allows you to check the minimum or maximum flatness of a line art curve.

The default setting to produce a smooth curve is 1. A value higher than 1 can produce a jaggy edge; lower than 1 can slow down the RIP.

**Related Actions**

- [Check flatness](#) on page 399
- [Select flatness](#) on page 503

### 4.14.2.3. Check for custom black generation

**Belongs to**

- **Category:** Prepress
- **Type:** Checks

**What it does**

Checks if custom black generation curves (BG) have been included in the PDF document.

Black generation (BG) is the process of adding black ink to CMY-generated black and gray, in order to achieve a clear black color and to save valuable color ink.

**Related Actions**

[Remove black generation](#) on page 271

### 4.14.2.4. Check for custom halftone

**Belongs to**

- **Category:** Prepress
- **Type:** Checks

**What it does**

Searches a PDF for objects to which custom halftones are applied.

Halftoning is a method of printing shades using a single color ink. By varying the size or density of dots, the eye can see a shade somewhere between the solid color and the color of the background paper. Custom halftones are mostly used for screening frequency and angles.

Associated with every output device is a default halftone definition that is appropriate for that device. Only relatively sophisticated documents need to define their own halftones to achieve special effects. In general, when a PDF document provides its own halftone specifications, it sacrifices portability: they may lead to unpredictable printed output when the same document is sent to different printers. This is why they are generally undesirable.

**Related Actions**

[Remove halftone](#) on page 272

### 4.14.2.5. Check for custom transfer function

**Belongs to**

- **Category:** Prepress

- **Type:** Checks

**What it does**

Checks if a PDF contains objects to which transfer functions are applied.

Transfer functions are used for creative purposes, artistic effect and to correct the characteristics of a specific, maybe poorly calibrated, output device. For example, a file that is intended for output on a particular image setter may contain transfer functions that compensate for the dot gain inherent to that printer.



---

**Note:** Transfer functions are not allowed in PDF/X compliant documents.

---

**Related Actions**

- [Apply transfer function](#) on page 101
- [Remove custom transfer function](#) on page 271

#### 4.14.2.6. Check for custom undercolor removal

**Belongs to**

- **Category:** Prepress
- **Type:** Checks

**What it does**

Checks if custom undercolor removal definitions (UCR) have been included in the PDF document.

Undercolor removal is the process of removing large percentages of cyan (C), magenta (M), and yellow (Y) ink prior to printing, and replacing them with black (K) ink, in order to achieve a clearer black color in print, and to save on color inks.

**Related Actions**

[Remove undercolor removal](#) on page 274

#### 4.14.2.7. Check for non-PDF/X compliant halftone

**Belongs to**

- **Category:** Prepress
- **Type:** Checks

**What it does**

Searches a PDF for objects with halftones that are not compliant with the PDF/X specification.

Halftoning is a method of printing shades using a single color ink. By varying the size or density of dots, the eye can see a shade somewhere between the solid color and the color of the background paper. Some of these halftones are not allowed according to the PDF/X specification.

**Related Actions**

[Remove non-PDF/X compliant halftone](#) on page 273

## 4.14.2.8. Check for non-standard blend modes

**Belongs to**

- **Category:** Prepress
- **Type:** Checks

**What it does**

Checks whether the PDF contains objects with a blend mode other than one of the standard blend modes.

Blend modes determine how colors on different layers blend with each other.

There are 16 standard blend modes described in the PDF Specifications. They can be detected using the PitStop Inspector or the [Select by blend modes](#) Action. If new blend modes would be introduced (which is theoretically possible), this Action could be used to detect them.

For more information about blend modes, visit the Adobe website (<http://www.adobe.com>) or refer to the Help or documentation of your design application (Adobe InDesign, QuarkXPress, ...)

**Related Actions**

[Select by blend modes](#) on page 500

## 4.14.2.9. Check for transparent objects

**Belongs to**

- **Category:** Prepress
- **Type:** Checks

**What it does**

Searches the PDF document for any objects with transparency.

You can check the transparency of different elements, such as the fill or stroke, the blend modes, ... For the whole list of options, check the attributes of the Action in PitStop.

You can either search for all transparent objects or you can restrict your search to transparent objects that have *all* or *at least one* of the following *selected* properties:

- Fill is set to overprint
- Stroke is set to overprint
- Graphic element uses a spot color

**About transparency in PDF**

Transparency can cause some problems if you view documents in Adobe Acrobat 4.0 or earlier: transparent objects can be rendered incorrectly.

A transparent layer can also cause problems when you transpose the PostScript code of your PDF document to the halftone information of your printer (the 'ripping').

A typical example is saving graphics with transparent elements as PDF compatible with Acrobat 5.0 in Adobe Illustrator 9.0 or Adobe InDesign 2.0. In Adobe Acrobat 4.0, transparent objects in your PDF document are displayed and printed opaque, but transparency is not removed. If you open the same PDF document in Adobe Acrobat 5.x, the transparent objects will look (and print) fine again.

It can be useful to make the distinction between spot colors and CMYK colors when checking the transparency settings in your documents, because different rules govern the overprinting of spot colors.

**Related Actions**

- [Select transparent objects](#) on page 504
- [Select pages with transparent objects](#) on page 486
- [Remove transparency](#) on page 274
- [Change transparency](#) on page 265

#### 4.14.2.10. Check halftone phase

**Belongs to**

- **Category:** Prepress
- **Type:** Checks

**What it does**

Checks the PDF documents for the presence of halftone phases.

A halftone phase is a shift in the alignment of halftone and pattern cells in device space, to compensate for window system operations that involve scrolling. It is no longer used, but may still be found in documents containing artwork from older source applications.

**Related Actions**

[Remove halftone phase](#) on page 272

#### 4.14.2.11. Check if object is set to knockout

**Belongs to**

- **Category:** Prepress
- **Type:** Checks

**What it does**

Checks if a selected object is set to knockout or not. You can distinguish between the fill and stroke being 'knocked out'.

If an object is set to knockout, the colors of this object cut out the area underneath. The background color is erased.



#### 4.14.2.12. Check if object is set to overprint

**Belongs to**

- **Category:** Prepress
- **Type:** Checks

**What it does**

Checks if the fill and/or stroke of a selected object is set to overprint.

Black objects and particularly smaller text objects should be set to overprint, to compensate for misregistration and to preserve the legibility of the text.

**Related Actions**

[Change overprint](#) on page 263

#### 4.14.2.13. Check ink coverage (basic object check)

**Belongs to**

- **Category:** Color;Prepress
- **Type:** Checks

**What it does**

Checks the total CMYK ink coverage of the color of the **objects** in the PDF.

You can for example check if the ink coverage is at least 300%.

When including images in the ink coverage check, the threshold will determine the minimum area in which the ink coverage has to be exceeded before reporting an error or warning. For example, when entering '0', even 1 dot exceeding the maximum ink coverage will be reported.

**Related Actions**

[Select by ink coverage \(basic object check\)](#) on page 426

#### 4.14.2.14. Check ink coverage (total page check)

**Belongs to**

- **Category:** Color;Prepress
- **Type:** Checks

**What it does**

Allows you to check the CMYK ink coverage either of all colors combined or per separation on a page (inside a particular page box).

You can for example check if the ink coverage in the media box is at least 300%.

In case of a separation-based check, you may exclude separations with 0% ink coverage (i.e. empty areas without content).

It's also possible to ignore small areas, for example areas smaller than 1 inch.

#### 4.14.2.15. Check line weight

***Belongs to***

- **Category:** LineArt; Prepress
- **Type:** Checks

***What it does***

Checks if the line weight of the selected objects is higher or lower than a particular value.

***Related Actions***

- [Change line weight](#) on page 161
- [Select by line weight](#) on page 457
- [Normalize line weight](#) on page 133

#### 4.14.2.16. Check Output Intents for DotGain

***Belongs to***

- **Category:** Prepress
- **Type:** Checks
- **New since:** PitStop 2022

***What it does***

Checks if the Output Intents contain a DotGain dictionary.

A DotGain dictionary is a PDF 2.0 feature.

#### 4.14.2.17. Check overprint mode

***Belongs to***

- **Category:** Prepress
- **Type:** Checks

***What it does***

Checks if fill and/or stroke overprint is set to Standard overprint mode (OPM 0), or Illustrator overprint mode (OPM 1).

***About overprint modes***

- In **Standard overprint mode** (OPM 0), the tint value 0 of one of the CMYK inks in the foreground object has a knockout effect on the color rendering of the underlying object.

In other words, a foreground ink with a C, M, Y or K value of 0 % erases the corresponding background ink. Here, the “foreground inks win” principle applies.

- In **Illustrator overprint mode** (OPM 1), the tint value 0 is neutral: it is ignored (as if it were “not specified”) and has therefore no effect on the color rendering of the underlying object.

For more information and examples, refer to [the PitStop Pro Reference Guide on the Enfocus website](#).

#### **Related Actions**

- [Change overprint mode](#) on page 263
- [Select by overprint mode](#) on page 502

## 4.14.2.18. Check rendering intent

#### **Belongs to**

- **Category:** Color; Prepress
- **Type:** Checks

#### **What it does**

Allows you to check the rendering intent of particular objects (Paths, Text, Paths or Text, Images, or all Rendering objects) in a PDF.

You can check whether or not they use rendering, and if they do, which type:

- Absolute Colorimetric
- Relative Colorimetric
- Perceptual
- Saturation

#### **About rendering intents**

A rendering intent is a remapping method, allowing to remap colors so that they best match the intended use. ‘Remapping’ means that colors from one output device’s color space are mapped to the color space of another device.

For more information, refer to the chapter “Rendering intents to remap colors” in [the PitStop Pro Reference Guide on the Enfocus website](#).

For more information, refer to the chapter “Rendering intents to remap colors” in the PitStop Pro Reference Guide.

#### **Related Actions**

- [Select by rendering intent](#) on page 427
- [Change rendering intent](#) on page 104
- [Remove rendering intent](#) on page 117

## 4.14.3. Selections

---

### 4.14.3.1. Select by blend modes

**Belongs to**

- **Category:** Prepress
- **Type:** Selections

**What it does**

Allows you to select objects with or without one or more specific blend modes.

Blend modes determine how colors on different layers blend with each other. For more information about blend modes, visit the Adobe website (<http://www.adobe.com>) or refer to the Help or documentation of your design application (Adobe InDesign, QuarkXPress, ...)

**Related Actions**

- [Check for non-standard blend modes](#) on page 403
- [Remove alternative blend modes](#) on page 230

### 4.14.3.2. Select by graphic state attributes

**Belongs to**

- **Category:** Prepress
- **Type:** Selections

**What it does**

Allows you to select objects based on their graphic state attributes.

You can select one of the following object types:

- Objects with non-PDF/X-1 compliant halftone info
- Objects with transfer function info
- Objects with halftone info
- None

**Viewing the graphic state attributes of an object**

Proceed as follows:

1. Select the object, using the PitStop Select Objects tool .
2. Click  to display the Enfocus Inspector.
3. Select  (**Prepress**) >  (General) or  (**Halftone**).

**Related Actions**

- [Check for non-PDF/X compliant halftone](#) on page 403
- [Check for custom transfer function](#) on page 402

#### 4.14.3.3. Select by ink coverage (basic object check)

**Belongs to**

- **Category:** Color; Prepress
- **Type:** Selections

**What it does**

Makes a selection of all objects that meet your ink coverage criteria.

You can for example select objects only if the ink coverage is at least 300%.

When including images in this selection, the threshold will determine the minimum area in which the ink coverage criteria have to be met in order to be selected. E.g. when entering '0', even an image of which only 1 dot meets the ink coverage requirement will be selected.

**Related Actions**

[Check ink coverage \(basic object check\)](#) on page 309

#### 4.14.3.4. Select by overprint

**Belongs to**

- **Category:** Prepress
- **Type:** Selections

**What it does**

Selects objects based on the overprint mode of their fill and/or stroke.

**How to proceed**

Proceed as follows:

1. To select objects based on their fill/stroke overprint, select the corresponding checkbox. For example, to select object based on the overprint mode of their stroke, select **Stroke overprint**.
2. Indicate whether overprint must be enabled or disabled for the options selected in step 1, by clicking the buttons.
  -  Overprint is off.
  -  Overprint is on.



---

**Tip:** Check the Actions field, to see if the Action is configured appropriately. For example, if you selected the Stroke overprint checkbox and clicked the button next to it, the name of the Action should change into "Select if stroke overprint is off."

---

**Related Actions**

- [Check if object is set to overprint](#) on page 401
- [Change overprint](#) on page 263

### 4.14.3.5. Select by overprint mode

**Belongs to**

- **Category:** Prepress
- **Type:** Selections

**What it does**

Allows you to select objects based on the overprint mode of their fill and/or stroke color.

**About overprint modes**

- In **Standard overprint mode** (OPM 0), the tint value 0 of one of the CMYK inks in the foreground object has a knockout effect on the color rendering of the underlying object. In other words, a foreground ink with a C, M, Y or K value of 0 % erases the corresponding background ink. Here, the “foreground inks win” principle applies.
- In **Illustrator overprint mode** (OPM 1), the tint value 0 is neutral: it is ignored (as if it were “not specified”) and has therefore no effect on the color rendering of the underlying object.

For more information and examples, refer to [the PitStop Pro Reference Guide on the Enfocus website](#).

For more information and examples, refer to the PitStop Pro Reference Guide.

**Related Actions**

- [Change overprint mode](#) on page 263
- [Check overprint mode](#) on page 404

### 4.14.3.6. Select by rendering intent

**Belongs to**

- **Category:** Color;Prepress
- **Type:** Selections

**What it does**

Selects color managed objects based on a particular rendering intent.

You can select paths, text, images, or all rendering objects, with one of the the following rendering intents:

- Absolute Colorimetric
- Relative Colorimetric
- Perceptual

- Saturation

**About rendering intents**

A rendering intent is a remapping method, allowing to remap colors so that they best match the intended use. 'Remapping' means that colors from one output device's color space are mapped to the color space of another device.

For more information and examples, refer to [the PitStop Pro Reference Guide on the Enfocus website](#) (See Chapter "Rendering intents to remap colors").

For more information and examples, refer to the PitStop Pro Reference Guide (See Chapter "Rendering intents to remap colors").

**Related Actions**

- [Change rendering intent](#) on page 104
- [Check rendering intent](#) on page 312
- [Remove rendering intent](#) on page 117
- [Select rendering objects](#) on page 452

### 4.14.3.7. Select flatness

**Belongs to**

- **Category:** Prepress
- **Type:** Selections

**What it does**

Allows you to select objects with a flatness setting equal to or higher/lower than a certain value.

The default setting to produce a smooth curve is 1. A value higher than 1 can produce a jaggy edge; lower than 1 can slow down the RIP.

**Example**

If the curves in a PDF are showing visible line segments, try the following to solve the problem:

```
Select flatness <!-- Option: Select objects with a flatness higher than 1.0 -->  
Change flatness <!-- Option: Change flatness to 1.00 -->
```

**Related Actions**

- [Check flatness](#) on page 399
- [Change flatness](#) on page 160

### 4.14.3.8. Select objects in areas with dense graphics

**Belongs to**

- **Category:** Prepress

- **Type:** Selections
- **Since version:** 2020

**What it does**

Detects and selects areas that have dense vector graphics (i.e. many line art or clip mask nodes).

Typically, the selection will then be rasterized to make the file less complex (and easier for the RIP to handle).

You should define the area to be detected (by entering the length of 1 side), and the minimum number of nodes in that area. Alternatively, PitStop can calculate the minimum number of nodes per area based on a selection in a document: to do so, select an area with many nodes and click **Grab settings**.

**Note:**

- The unit in which the length is expressed, depends on your user preferences (PitStop Preferences - Units & Guides category).
- Remember that the number of nodes (in the document or in a selected area) can also be found in the PitStop Inspector (on the Summary tab).

#### 4.14.3.9. Select transparent objects

**Belongs to**

- **Category:** Prepress
- **Type:** Selections

**What it does**

Allows you to select transparent objects.

You can check the transparency of different elements, such as the fill or stroke, the blend modes, ... For the whole list of options, check the attributes of the Action in PitStop.

As of PitStop 25.07 it's possible to restrict the selection based on the transparency level (alpha value). That way, you can detect for example 0% alpha objects, or objects where the transparency is below a certain level.

You can select all transparent objects or restrict your selection to objects that have *all* or *at least one* of the following properties:

- Fill is set to overprint
- Stroke is set to overprint
- Graphic element uses a spot color



**Note:** When checking for transparency groups, pages will be selected if they have an explicit transparency group key (i.e. when "Page is transparency group" is selected in the transparency group properties in the Enfocus Inspector. For more information, refer to the PitStop Reference Guide).

**About transparency in PDF**

Transparency can cause some problems if you view documents in Adobe Acrobat 4.0 or earlier: transparent objects can be rendered incorrectly.



A transparent layer can also cause problems when you transpose the PostScript code of your PDF document to the halftone information of your printer (the 'ripping').

A typical example is saving graphics with transparent elements as PDF compatible with Acrobat 5.0 in Adobe Illustrator 9.0 or Adobe InDesign 2.0. In Adobe Acrobat 4.0, transparent objects in your PDF document are displayed and printed opaque, but transparency is not removed. If you open the same PDF document in Adobe Acrobat 5.x, the transparent objects will look (and print) fine again.

It can be useful to make the distinction between spot colors and CMYK colors when checking the transparency settings in your documents, because different rules govern the overprinting of spot colors.

#### **Related Actions**

- [Check for transparent objects](#) on page 399
- [Select pages with transparent objects](#) on page 486
- [Remove transparency](#) on page 274
- [Change transparency](#) on page 265

## 4.15. Remove

---

### 4.15.1. Changes

---

#### 4.15.1.1. Remove alternative blend modes

##### **Belongs to**

- **Category:** PDF 2.0, Prepress, Remove
- **Type:** Changes
- **New since:** PitStop 2022

##### **What it does**

Removes alternative blend modes in case of multiple blend modes, because using multiple blend modes is deprecated in PDF 2.0. Only the first blend mode is kept.


Note that you can check the blend modes using the PitStop Inspector (Transparency - General).

Blend modes determine how colors on different layers blend with each other. For more information about blend modes, visit the Adobe website (<http://www.adobe.com>) or refer to the Help or documentation of your design application (Adobe InDesign, QuarkXPress, ...)

##### **Example**

In this example, three blend modes are selected: Multiply, Saturation and Colorburn.

Running this Action will remove Saturation and Colorburn and only keep the first blend mode in the list: Multiply.

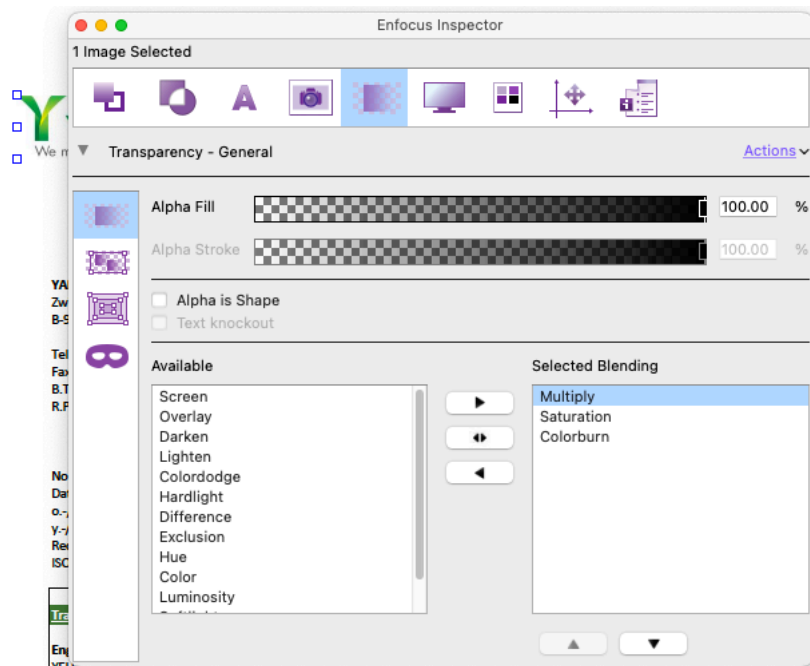

**Note:** As of PitStop 2022, it will no longer be possible to add multiple blend modes to a selected object using the Enfocus Inspector. However, if an object already has multiple blend modes, they will still be shown.

#### Related Actions

- [Select by blend modes](#) on page 500
- [Check for non-standard blend modes](#) on page 403

### 4.15.1.2. Remove Certified PDF workflow information

#### Belongs to

- **Category:** Remove
- **Type:** Changes

#### What it does

Removes Certified PDF workflow information from a PDF.

Certified PDF workflow information is extra information that is added to a PDF when it's processed as part of an Enfocus Certified PDF workflow. This information can include save states of previous versions, a PDF Profile and other metadata.

For more information and examples, refer to [the PitStop Pro Reference Guide](#) (Chapter: Working with Certified PDF documents).

#### Related Actions

See also [Check Certified PDF state](#) on page 320

### 4.15.1.3. Remove concealed segments from line art

**Belongs to**

- **Category:** Remove
- **Type:** Changes
- **Since:** 25.07

**What it does**

Removes segments from not-filled line art that are hidden by other items in the same selection.

This can be useful to remove overlapping paths.

Note that the removed parts are reported in the Enfocus Navigator.

**Related Actions**

- [Select concealed objects](#) on page 493

### 4.15.1.4. Remove empty layers

**Belongs to**

- **Category:** Remove; Layers
- **Type:** Changes

**What it does**

Removes empty layers selected by another Action in the same Action List.

**Example**

The following Action List will remove **all** empty layers in the PDF:

```
Select layers <!-- Select layers on page 453 -->
Remove empty layers
```

To remove Layer1 and 2, if they are empty:

```
Select layers by name <!-- Select layers by name on page 454 - Choose "equals Layer
[12]" and "Use regular expressions" -->
Remove empty layers
```

**About PDF layers**

Layered content usually comes from applications such as InDesign, AutoCAD or Visio. When converted to PDF, the layers are retained and can be viewed and navigated in Adobe Acrobat. However, if you print a PDF file that contains layers, only the content that is visible on-screen is printed. This may or may not be desired.

**"Conventional" layers versus PDF layers**

**Layers in digital image editing** ("conventional" layers) are used to separate the different elements of an image. Each element is drawn on exactly one layer. The different layers are stacked on top of each other, and the order of the layers defines how the image looks like.

**Layers in PDF** have a different meaning. They are used to hide or show page content:

- Turning *on* a layer, all objects on this layer are shown on-screen.
- Turning *off* a layer, all objects on this layer are hidden, i.e. they become invisible.

As such, layers are also called "optional content groups": groups of objects that can be selectively viewed or hidden by the author of the document. Objects can belong to different layers, and the order of the layers is of no importance.

To work with layers in a PDF document in Adobe Acrobat, select **View > Show/Hide > Navigation Panes > Layers**.

For more information, refer to the Adobe Acrobat help.

**Related Actions**

[Remove objects from layers](#) on page 155

### 4.15.1.5. Remove invisible objects without fill and stroke

**Belongs to**

- **Category:** Remove
- **Type:** Changes

**What it does**

Removes objects that have no fill or stroke color associated with them.

Designers sometimes leave such objects in a document rather than deleting them.



---

**Note:** This Action only works on vector art (paths) and text without fill and stroke.

---

**Related Actions**

- [Check for invisible objects without fill and stroke](#) on page 330
- [Select invisible objects without fill and stroke](#) on page 446

### 4.15.1.6. Remove object compression

**Belongs to**

- **Category:** Remove
- **Type:** Changes

**What it does**

Removes the object compression from a PDF.

**About object compression**

In a PDF, objects have content streams that define (a part of) the object. These content streams can be compressed in order to create smaller files, so this is mostly used if a PDF is to be put on a website. As older RIPS may have problems with this compression, this Action allows you to remove this compression.

**Related Actions**

- [Check object compression](#) on page 326
- [Check optimal compression](#) on page 334

## 4.15.1.7. Remove processing steps - ISO 19593-1

**Belongs to**

- **Application:** PitStop Pro
- **Category:** Packaging
- **Type:** Changes
- **Since Version:** 13 update 2

**What it does**

Allows you to remove processing steps metadata from the layers of a PDF. Processing steps metadata is defined by ISO standard 19593-1. For more information, refer to [the website of ISO \(International Organization for Standardization\)](#).

**Related Actions**

- [Select layers by processing steps - ISO 19593-1](#) on page 479
- [Check processing steps - ISO 19593-1](#) on page 369
- [Change layer processing steps - ISO 19593-1](#) on page 197

## 4.15.1.8. Remove pages

**Belongs to**

- **Application:** PitStop Pro
- **Category:** Remove
- **Type:** Changes
- **Since Version:** 2017

**What it does**

Deletes pages.

This Action has no attributes of its own; it needs to be preceded by a [Select pages](#) Action to define the pages you wish to remove.

**Example**

The following Action List will delete all even pages from the PDF:

```
Select pages (attributes: All pages - even)
Remove pages
```

**Related Actions**

- [Select pages](#) on page 484

### 4.15.1.9. Remove selection

**Belongs to**

- **Category:** Remove
- **Type:** Changes

**What it does**

Removes any currently selected object in a PDF.



**Note:** If forms are selected (for example with the "Select forms" Action), they are not removed, unless they are empty.

### 4.15.1.10. Remove transparency

**Belongs to**

- **Category:** Remove; Prepress
- **Type:** Changes

**What it does**

Removes transparency from the objects in a PDF file.

You can remove transparency from **all** objects in the PDF, or from objects for which:

- Fill is set to overprint, and/or
- Stroke is set to overprint, and/or
- Spot colors are used.



**Note:** As of PitStop 2022, this Action also removes transparent annotations.

**About transparency in PDF**

Transparency can cause some problems if you view documents in Adobe Acrobat 4.0 or earlier: transparent objects can be rendered incorrectly.

A transparent layer can also cause problems when you transpose the PostScript code of your PDF document to the halftone information of your printer (the 'ripping').

A typical example is saving graphics with transparent elements as PDF compatible with Acrobat 5.0 in Adobe Illustrator 9.0 or Adobe InDesign 2.0. In Adobe Acrobat 4.0, transparent objects in

your PDF document are displayed and printed opaque, but transparency is not removed. If you open the same PDF document in Adobe Acrobat 5.x, the transparent objects will look (and print) fine again.

It can be useful to make the distinction between spot colors and CMYK colors when checking the transparency settings in your documents, because different rules govern the overprinting of spot colors.

**Related Actions**

- [Check for transparent objects](#) on page 399
- [Select pages with transparent objects](#) on page 486
- [Select transparent objects](#) on page 504
- [Change transparency](#) on page 265

## 4.16. Text

---

### 4.16.1. Changes

---

#### 4.16.1.1. Add font metadata

**Belongs to**

- **Category:** Text
- **Type:** Changes

**What it does**

Adds font information to the PDF's metadata (based on the font resource).

**About font metadata**

Font metadata is descriptive information about the fonts used in a PDF, for example the name of the font, its type and encoding. You can find the font metadata of a file in Adobe Acrobat by selecting **File > Document Properties** and switching to the **Fonts** tab.

**Related Actions**

[Check font metadata](#) on page 409

#### 4.16.1.2. Apply transfer function

**Belongs to**

- **Category:** Prepress;Text;LineArt;Color;Image

- **Type:** Changes

**What it does**

Adds a transfer function to paths, text, images or all these types of objects. You can exclude spot colors or apply the transfer function on tint values or alternate values only.

Transfer functions are used for creative purposes, artistic effect and to correct the characteristics of a specific, maybe poorly calibrated, output device. For example, a file that is intended for output on a particular image setter may contain transfer functions that compensate for the dot gain inherent to that printer.



---

**Note:** Transfer functions are not allowed in PDF/X compliant documents.

---

**Related Actions**

- [Check for custom transfer function](#) on page 402
- [Remove custom transfer function](#) on page 271

### 4.16.1.3. Change character spacing

**Belongs to**

- **Category:** Text
- **Type:** Changes

**What it does**

Changes the amount of space between two characters in a selected text string.

The amount of space is expressed in 'em' units. An 'em' refers to the width of the capital M in the current font.

### 4.16.1.4. Change corrupt font widths

**Belongs to**

- **Category:** Text
- **Type:** Changes

**What it does**

Changes corrupt font widths.

Corrupt font widths may occur in a PDF, when "artificial" bold or italic was used instead of the "bold" or "italic" version of the font concerned. For example, if "Futura" is used in your PDF, the "Futura-Bold" and "Futura-Oblique" fonts should be used instead of applying bold and italics on the regular Futura font. Artificial font may cause problems when printing the PDF.

**Related Actions**

- [Check corrupt font widths](#) on page 406



- [Select corrupt font widths](#) on page 506

#### 4.16.1.5. Change fill and/or stroke

***Belongs to***

- **Category:** LineArt;Text
- **Type:** Changes

***What it does***

Allows you to turn on or off the fill and/or stroke for the selected objects.

#### 4.16.1.6. Change fill type

***Belongs to***

- **Category:** LineArt;Text
- **Type:** Changes

***What it does***

Allows you to change the fill type of the selected objects to either Non-Zero Winding (Fill) or Even-odd (Eofill).

***About the fill type***

The fill type is an attribute of polygons and loops: compound paths with intersecting lines. To determine whether a point is part of the shape, two different rules can be applied:

- The **Non-Zero Winding** rule (or standard rule). This rule supposes that you draw a line from a point inside the shape to the outside of the shape, without passing through a vertex. You must now count the number of times edges wind around the point inside the shape, in a counter-clockwise direction:
  - For every edge that crosses the line from the point inside the shape in one direction, add 1 to the winding number.
  - For every edge that crosses the line in the opposite direction, subtract 1.

If the winding number is not equal to zero, the shape area to which the point belongs, is filled. For more information, refer to <http://www.wikipedia.org/wiki/nonzero-rule>.

- The **Even-odd rule**: This rule also supposes that you draw a line between a point inside the shape outline and a point outside its outline.
  - If that line crosses the line of the shape an odd number of times, the shape area to which the point belongs, is filled.
  - If the number of crossings is even, the area is not filled.

***Checking the fill type of line art***

To see which rule is applied, check the object's fill attributes:

1. Select the object, using the Enfocus Select tool .

2.

Click  to display the Enfocus Inspector and select  >  .

3. At the bottom, check which button is selected:

-  If **Fill** is selected, the **Non-zero Winding rule** applies.
-  If **Eofill** is selected, the **Even-odd** rule applies.

**Related Actions**

- [Select paths by fill type](#) on page 460

## 4.16.1.7. Change flatness

**Belongs to**

- **Category:** LineArt;Text
- **Type:** Changes

**What it does**

Allows you to set the flatness of a PostScript curve.

The flatness determines how the objects in a document are printed on a PostScript printer.

The default setting for flatness is 1. Increasing this value will speed up printing, but can reduce the print quality (resulting in visible segments in the curve). Decreasing this value will slow down printing, but will improve the print quality.

**Related Actions**

- [Check flatness](#) on page 399
- [Select flatness](#) on page 503

## 4.16.1.8. Change font

**Belongs to**

- **Category:** Text
- **Type:** Changes

**What it does**

Allows you to replace the current font with another one.

Choose the font that should replace the current font:

- To combine a font name with the preferred type and subtype, select **Search for a font by name:**
  1. Click **Select Font Name** and select the appropriate font. Click **OK**.

2. Select the preferred type and subtype.
  3. Select the **Embed** checkbox as required.
- To use an existing font, select **Select an existing font**.
    1. Click **Create Font Resource**.
    2. Select the appropriate font.
    3. Select **Embed**, **Don't embed** or **Embed Subset**.
    4. Click **OK**.

You should also indicate how the embedded composite font should be handled.

**Remark**

In case the text of which you want to change the font contains missing glyphs, PitStop is not able to change the font. You get will get the following error: Could not convert Unicode to char codes.

However, in some cases you may want to ignore this error and change the font anyway. If so, select **Ignore text reencoding errors**. PitStop will proceed with the conversion, but be aware that the conversion could produce corrupt content.

#### 4.16.1.9. Change line cap

**Belongs to**

- **Category:** LineArt;Text
- **Type:** Changes

**What it does**

Changes how the end of a vector line looks like.

**How to proceed**

- To have the line end exactly, click  **butt**.
- To put a round end on the line, click  **round**.
- To have corners projected beyond the length of the line, click  **projecting square**.

#### 4.16.1.10. Change line join

**Belongs to**

- **Category:** LineArt; Text
- **Type:** Changes

**What it does**

Changes how a corner on a vector line looks like.

**How to proceed**

- To have a sharp corner, click  **miter**.
- To put a round corner on the line, click  **round**.
- To flatten the corners, click  **bevel**.

### 4.16.1.11. Change line weight

**Belongs to**

- **Category:** LineArt;Text
- **Type:** Changes

**What it does**

Changes the thickness of a selected line to the desired line weight.

**Related Actions**

- [Normalize line weight](#) on page 133
- [Select by line weight](#) on page 457
- [Check line weight](#) on page 346

### 4.16.1.12. Change miter limit

**Belongs to**

- **Category:** LineArt; Text
- **Type:** Changes

**What it does**

Changes the length of the extension of a corner on a vector line.

The miter limit is the limit when a join switches from mitered (pointed) to beveled (squared-off). To allow “pointier” angles, you can increase the miter limit.

For more information on how to calculate the miter limit, refer to the topic "Stroke attributes: Miter limit" in [the PitStop Pro Reference Guide on the Enfocus website](#).

For more information on how to calculate the miter limit, refer to the topic "Stroke attributes: Miter limit" in the PitStop Pro Reference Guide.

### 4.16.1.13. Change point size

**Belongs to**

- **Category:** Text

- **Type:** Changes

**What it does**

Changes the point size of a selection by or to a given amount.

#### 4.16.1.14. Change stroke adjustment

**Belongs to**

- **Category:** LineArt; Text
- **Type:** Changes

**What it does**

Allows you to enable or disable stroke adjustment.

Stroke adjustment takes care of the rendering of paths on a raster device (printing device, computer monitor, etc.).

**Example**

If stroke adjustment is **turned off**, the device will draw the pixel only if it covers the path for more than 50%.

This means that a 1 pixel wide line can be drawn in different ways:

- If the line is drawn nicely on top of a pixel of the screen, the line will look fine.
- If the line is spread over 2 pixels of the screen, the width will be 2 pixels on some places and 1 pixel on other places, turning the line into an ugly, jaggy line.

If stroke adjustment is **turned on**, a correction will be made in such a way that the line looks nice and has the same width (1 pixel) everywhere.

#### 4.16.1.15. Change word spacing

**Belongs to**

- **Category:** Text
- **Type:** Changes

**What it does**

Changes the word spacing of a selected text string to a given value (in em).

#### 4.16.1.16. Consolidate fonts

**Belongs to**

- **Category:** Text
- **Type:** Changes
- **Since:** 2021

**What it does**

Removes duplicate font information that increases the size of a PDF file.

Multiple subsets of the same font can be created by the generating application, or when multiple PDF files are combined into a single file. Multiple subsets make the file overly complex and can impact the output RIP time.



**Note:** There's one important limitation: for this Action to work properly, all fonts must be installed on your system! Fonts that are not present, will remain untouched. This is also the case for fonts of which the license does not allow embedding.

The Action works as follows:

1. First, all fonts are unembedded (on condition they can be re-embedded afterwards, this is checked first, to avoid font issues).
2. Next, all font dictionaries are compared and duplicate dictionaries are removed, to make sure that the same fonts share one and the same font dictionary.
3. Finally, the fonts are subset or embedded again, depending on the chosen embedding type in the attributes of this Action.



**Note:** The option to use subsetting or embedding will only work for fonts that were originally subset or embedded. Otherwise, this Action would increase (instead of reduce) the file size.

## 4.16.1.17. Convert text to outlines

**Belongs to**

- **Category:** Text
- **Type:** Changes

**What it does**

Allows you to outline the text segments in your selection.

This means you turn the text characters into a set of compound paths. In other words, your text will no longer be a true font, but it will be replaced with a graphical representation of the characters. You can then for example change the fill or stroke color as required.

This can be useful to make sure that your text is printed exactly "as is" or, if you cannot embed the font, for example due to font licensing restrictions.



**Note:** By default, invalid characters (often represented as a small box containing an X or a question mark) are not converted, unless you select the **Outline invalid characters (.notdef glyph)** checkbox.

## 4.16.1.18. Embed font

**Belongs to**

- **Category:** Text
- **Type:** Changes

**What it does**

Embeds a selected font if it is available on the system of the machine PitStop is running on.

You can include the entire font or only embed a subset.



**Note:** By default, PitStop embeds the CMap of Type0 CID fonts. However, this may cause problems, especially on Mac, when displaying the embedded subset characters in a browser viewer. In that case, you may clear the **Embed CMap of Type0 CID fonts** checkbox to fix that problem.

**About embedding fonts**

**Embedding fonts** in a PDF document means that every character of this font is copied and stored in the PDF document. This is useful if you create PDF documents to be displayed on different systems and to be printed on different devices: these are often systems that do not contain exactly the same fonts.

Embedding a font as a **subset** means that only those characters of the font that are actually used in the text are embedded. This reduces the file size by not including superfluous font information.

**Related Actions**

- [Unembed font](#) on page 293
- [Select embedded fonts](#) on page 507
- [Check font embedding](#) on page 408

## 4.16.1.19. Find and replace text

**Belongs to**

- **Category:** Text
- **Type:** Changes
- **Since:** 2020

**What it does**

Enables you to find a particular string and replace it with another string, optionally using variables.

You can carry out a case sensitive search by selecting the **case sensitive** checkbox: in that case, PitStop takes into account the case (upper case/lower case) of the search string.

Note that font license restrictions may disallow font editing, hence block the text replacement. However, if you're sure that it's allowed to manipulate the font or if you have an agreement with the print vendor, you may consider selecting the **Skip font license restrictions** checkbox in the PitStop Pro user preferences (Fonts category).

**Note:**

- Find and replace is suitable for replacing words or small lines of text. It's not suitable for replacing text involving reflow of lines.
- Find and replace also works on text that is split in characters, as long as all characters are put on the same line.
- Find and replace does not work on subset fonts if not all characters of the matching search string are embedded.

- Non-Latin characters are also supported.

Example 1

```
Replace "MyCompany" with "MYCOMPANY"
```

- with "case sensitive" cleared, all versions of the string regardless of the case will be replaced (Mycompany, mycompany, myCompany, etc).
- with "case sensitive" selected, only the exact match ("MyCompany") will be replaced.

Example 2

```
Replace "Configurator Module" with "CONFIGURATOR MODULE"
```

When executed on the text below, only one instance (in blue) is replaced. The matching string in the left column is not replaced, because it's divided over two lines.

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Configurator<br>Module | <ul style="list-style-type: none"><li>• Allows you to use a number of third-party applications in a Switch flow, such as the Adobe Creative Suite and other applications that are often used in the graphical industry. For a list of all supported applications, refer to the <a href="#">CONFIGURATOR MODULE documentation</a>.</li><li>• For each of the supported applications, Switch offers a configurator which streamlines the connection between Switch and the application concerned, and controls the output destination of the processed files.</li></ul> |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

4.16.1.20. Fix bounding box values of Type 3 fonts

Belongs to

- **Category:** Text
- **Type:** Changes
- **Since:** 2020

What it does

Fixes embedded Type 3 fonts that have very small bounding box values.

Such Type 3 fonts are usually wrongly converted SVG fonts, i.e. fonts that are used in Illustrator, Indesign, Photoshop, ... but that are not supported by the PDF specs and most RIPs, and therefore converted to Type 3. PitStop recalculates the bounding box values, so the font can be handled by most RIPs.



**Related Actions**

[Flatten Type 3 fonts](#) on page 290

#### 4.16.1.21. Fix inconsistent Type 3 font width information

**Belongs to**

- **Category:** Text
- **Type:** Changes
- **Since:** 2022

**What it does**

Fixes inconsistent Type 3 font widths (Type 3 glyphs d0 or d1 values that are inconsistent with the font's widths array).

Type 3 fonts are usually wrongly converted SVG fonts, i.e. fonts that are used in Illustrator, Indesign, Photoshop, ... but that are not supported by the PDF specs and most RIPs, and therefore converted to Type 3. PitStop fixes this, so the font can be handled by most RIPs.

**Related Actions**

- [Check for inconsistent Type 3 font width information](#) on page 411
- [Select by inconsistent Type 3 font width information](#) on page 505

#### 4.16.1.22. Fix invalid characters (.notdef usage)

**Belongs to**

- **Category:** Text
- **Type:** Changes

**What it does**

Fixes invalid .notdef glyphs in a PDF.

.notdef glyphs are replacement characters for undefined characters in a PDF; they often look like a small box containing an X or a question mark and are not PDF/X compliant.

**Related Actions**

[Check if invalid character \(.notdef glyph\) is used](#) on page 413

#### 4.16.1.23. Fix non well-formed XMP metadata

**Belongs to**

- **Category:** Text
- **Type:** Changes

**What it does**

Corrects badly formed XMP metadata and optionally removes it, if it cannot be fixed, ensuring that PDF files can be made PDF/X-4 compliant.

**About XMP metadata**

XMP metadata is descriptive information about the file embedded in the PDF, for example the name of the author, keywords, copyright information... XMP refers to labeling technology that is used, i.e. Adobe's Extensible Metadata Platform. You can view the XMP metadata in a file's Document Properties in Acrobat (Click the **Additional Metadata** button, then select **Advanced**).

**Related Actions**

[Check if XMP metadata is well-formed](#) on page 361

## 4.16.1.24. Flatten Type 3 fonts

**Belongs to**

- **Category:** Text
- **Type:** Changes
- **New since:** PitStop 2021

**What it does**

Flattens Type 3 fonts, i.e. converts these fonts (that are often not rendered correctly in PDF) to normal page content so that they can be successfully output.

**About Type 3 fonts**

Type 3 fonts are actually bitmaps, typically emoji fonts or colorful fonts with graphic properties within a glyph.

For more information, refer to the [PitStop Pro Reference Guide](#) (Chapter: Types of fonts and their usage), available on the Enfocus website.

For more information, refer to the PitStop Pro Reference Guide (Chapter: Types of fonts and their usage).

**Related Actions**

[Fix bounding box values of Type 3 fonts](#) on page 289

## 4.16.1.25. Make TrueType fonts PDF/X compliant

**Belongs to**

- **Category:** Text
- **Type:** Changes

**What it does**

Makes TrueType fonts compliant with a particular PDF/X or PDF/A version. Options are PDF/A-1, PDF/A-2, PDF/X-4 and PDF/X-6.

This Action is useful if you have detected a TrueType font error (for example through running a Preflight Profile or an Action List).



**Note:** This fix has been added to all default PDF Preflight Profiles that check and fix compliance with a PDF Standard. That way, if non-compliant TrueType fonts are detected during a Preflight check, and the automatic fix to make the document compliant with the standard is enabled, they will be fixed automatically.

**Related Actions**

- [Check if TrueType fonts are PDF/X compliant](#) on page 413
- [Check TrueType font encoding according to PDF/A](#) on page 415
- [Select non-PDF/X or PDF/A compliant TrueType fonts](#) on page 510

## 4.16.1.26. Merge into text lines

**Belongs to**

- **Category:** Text
- **Type:** Changes

**What it does**

Allows you to merge text into text lines.

This Action merges all text that occurs on one line and has the same font into one text object. This is useful if you want to change text (e.g. the font) on a line by line basis.

**Related Actions**

- [Split in words](#) on page 293
- [Split in characters](#) on page 292

## 4.16.1.27. Remove CharSet or CIDSet

**Belongs to**

- **Category:** PDF 2.0, Text
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Removes the CharSet or CIDSet if present in the PDF.

If a font is subset, only the characters of the font that are actually used are embedded in the document. They are held in a CharSet (simple fonts) or a CIDSet (composite fonts).

CharSets and CIDSets are deprecated in PDF 2.0. That means that they are allowed, but not needed, so they can as well be removed.

**Related Actions**

[Check if a subset font contains a complete CharSet or CIDSet](#) on page 412

### 4.16.1.28. Split in characters

**Belongs to**

- **Category:** Text
- **Type:** Changes

**What it does**

Allows you to split text objects in a PDF in separate characters.

This allows you to change for example the font or format of single characters (e.g. increase the size of capital letters).

**Related Actions**

- [Split in words](#) on page 293
- [Merge into text lines](#) on page 291

### 4.16.1.29. Split in words

**Belongs to**

- **Category:** Text
- **Type:** Changes

**What it does**

Allows you to split the text objects in a PDF in separate words, for example to modify the spacing.

**Related Actions**

- [Split in characters](#) on page 292
- [Merge into text lines](#) on page 291

### 4.16.1.30. Strip OpenType embedded fonts

**Belongs to**

- **Category:** Text
- **Type:** Changes

**What it does**

Allows you to remove the font's OpenType **info** from the PDF.

An OpenType embedded font is a PDF font resource that has its font embedded in the 'FontFile3' key with as 'SubType' the value 'OpenType'. This is not supported by older software. Running this Action will convert the PDF font resource to a format that is supported by older software as well.

### 4.16.1.31. Unembed font

***Belongs to***

- **Category:** Text
- **Type:** Changes

***What it does***

Removes embedded fonts from a document.

This can make the PDF lighter for internet distribution but risks messing up formatting if the font is not present on the end user's machine.

Optionally, you can choose not to execute this Action if the resulting font is unsafe.

***About embedding fonts***

**Embedding fonts** in a PDF document means that every character of this font is copied and stored in the PDF document. This is useful if you create PDF documents to be displayed on different systems and to be printed on different devices: these are often systems that do not contain exactly the same fonts.

Embedding a font as a **subset** means that only those characters of the font that are actually used in the text are embedded. This reduces the file size by not including superfluous font information.

***Related Actions***

[Embed font](#) on page 287

## 4.16.2. Checks

---

### 4.16.2.1. Check CMap

***Belongs to***

- **Category:** Text
- **Type:** Checks

***What it does***

Checks if a PDF contains an embedded CMap, and if so, whether its name is consistent with any matching external file. This is necessary for PDF/A compliance.

***About CMaps***

CMap (Character Map) is a mapping of character codes to an ID. This ID is used to map the characters to the correct glyphs.

CMaps can be external or embedded:

- When the CMap is external, it is referenced in the PDF by a name.



**Note:** Some CMaps are shipped (as external files) along with PitStop.

- When the CMap is embedded, it's often also referenced inside the PDF.

### 4.16.2.2. Check corrupt font widths

#### ***Belongs to***

- **Category:** Text
- **Type:** Checks

#### ***What it does***

Searches a PDF for fonts that have corrupt widths. You might want to remove or replace these fonts.

By default, horizontal writing is checked, but you can also include vertical writing by selecting the **Also check metrics for vertical writing** checkbox.

Corrupt font widths may occur in a PDF, when "artificial" bold or italic was used instead of the "bold" or "italic" version of the font concerned. For example, if "Futura" is used in your PDF, the "Futura-Bold" and "Futura-Oblique" fonts should be used instead of applying bold and italics on the regular Futura font. Artificial font may cause problems when printing the PDF.

As of PitStop 2022, you can set a threshold in the **Tolerance** field. This value, expressed in 1/1000 em, specifies the maximum acceptable deviation of the standard font width. For example, if the tolerance is set to 5, a font width that deviates 5/1000 em (or less) from the normal font width will not be logged.

Some PDF standards allow font size deviations. For example, PDF/X-4 allows a deviation of 5 1/1000 em, PDF/X-6 allows a deviation of 1 1/1000 em ... This Action can be used to search for font widths that do not comply with certain PDF/X versions.

#### ***About the em as unit***

The unit used to set the tolerance is '1/1000 em'. 'em' is used because the size of an 'em' is relative to the size of the font: it denotes the point size. For example: 1 em in a 16-point typeface is 16 points, 1 em in an 8-point typeface is 8 points. As a consequence, if the tolerance is set to 1, the relative size is the same, but the absolute size differs depending on the font size.

The name 'em' comes from the width of the capital M in the typeface.

#### ***Related Actions***

- [Select corrupt font widths](#) on page 506
- [Change corrupt font widths](#) on page 281

### 4.16.2.3. Check embedded font is OpenType

#### ***Belongs to***

- **Category:** Text

- **Type:** Checks

**What it does**

Allows you to check if the embedded font is OpenType.

**About OpenType embedded fonts**

OpenType is an extension of the TrueType format that can contain TrueType and/or Type 1 font data. In PDF files it can only appear as an embedded font. It has been introduced in PDF 1.6.

**Related Actions**

- [Select embedded fonts](#) on page 507
- [Select OpenType embedded fonts](#) on page 510

#### 4.16.2.4. Check font by name

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Checks for the presence of a particular font.

Enter the name of the font you want to check for in the text field, or use the **FontPicker** button to select it.



---

**Note:** From version 12 update 2 onwards, you can use a regular expression to define the font name.

---

#### 4.16.2.5. Check font embedding

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Checks whether or not fonts are embedded.

**About embedding fonts**

**Embedding fonts** in a PDF document means that every character of this font is copied and stored in the PDF document. This is useful if you create PDF documents to be displayed on different systems and to be printed on different devices: these are often systems that do not contain exactly the same fonts.

Embedding a font as a **subset** means that only those characters of the font that are actually used in the text are embedded. This reduces the file size by not including superfluous font information.

**Related Actions**

- [Select embedded fonts](#) on page 507
- [Unembed font](#) on page 293

#### 4.16.2.6. Check font license

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Checks which operations the font's license allows without obtaining permission from the font's owner.

These operations are:

- Embed
- Subset
- Outline
- Preview and print

**Related Actions**

[Select fonts by license](#) on page 507

#### 4.16.2.7. Check font metadata

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Allows you to check if the fonts in the PDF have been added correctly to the metadata.

**About font metadata**

Font metadata is descriptive information about the fonts used in a PDF, for example the name of the font, its type and encoding. You can find the font metadata of a file in Adobe Acrobat by selecting **File > Document Properties** and switching to the **Fonts** tab.



**Related Actions**

[Add font metadata](#) on page 280

## 4.16.2.8. Check font subsetting

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Checks if fonts are subsetting or complete.

If a font is subsetting, only the characters of the font that are actually used in the text are embedded in the document. This is done to keep a file as small as possible.

**Related Actions**

- [Select subset fonts](#) on page 512
- [Check if a subset font contains a complete CharSet or CIDSet](#) on page 412

## 4.16.2.9. Check font type

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Checks for particular font types in a PDF.

You can check for:

- TrueType
- Type 1
- Type 3
- Multiple Master
- Composite TT
- Composite T1
- Composite (all types)

**About types of fonts**

Refer to the [PitStop Pro Reference Guide](#) on the Enfocus website (Chapter: Types of fonts and their usage).

Refer to the PitStop Pro Reference Guide (Chapter: Types of fonts and their usage).

**Related Actions**

[Select fonts by type](#) on page 508

#### 4.16.2.10. Check font vendor

***Belongs to***

- **Category:** Text
- **Type:** Checks

***What it does***

Checks to see if fonts from a particular vendor have been used in a PDF.

#### 4.16.2.11. Check for artificial font style

***Belongs to***

- **Category:** Text
- **Type:** Checks

***What it does***

Searches a PDF for instances of artificial font style (artificial bold, italic or outline style).

***About artificial font style***

Some fonts consist of specific **font families** for each style. The font Futura, for example, has the font families Futura (for “regular” Roman style), Futura-Bold, Futura-Oblique etc. This implies that, if you want to put text in Futura and in bold, for example, you will have to select the font family “Futura-Bold”.

Certain design programs or word processors allow you to adapt the style of these fonts artificially. You can select text and to put it in italics or in bold by selecting the respective style within this font family. Sometimes, you can even do this by means of shortcuts, e.g. Control+b for bold or Control+i for italics. Text that has been modified in this manner uses a so-called **artificial bold or italic style**.

This method may seem very handy but it is recommended to avoid it, because these artificial styles can cause problems when printing: e.g. artificial bold is created when printing two characters on top of each other, one being one point size bigger than the other.

#### 4.16.2.12. Check for city fonts

***Belongs to***

- **Category:** Text
- **Type:** Checks

***What it does***

Searches a PDF for instances of city fonts.

City fonts are bitmap fonts that tend not to produce good results when printed.

#### 4.16.2.13. Check for inconsistent Type 3 font width information

**Belongs to**

- **Category:** Text
- **Type:** Checks
- **Since:** PitStop 2022

**What it does**

Searches a PDF for Type 3 fonts that have corrupt widths (inconsistent d0 or d1 values). You might want to remove, replace or fix these fonts. Note that there's a dedicated Action to fix them.

**Related Actions**

- [Check corrupt font widths](#) on page 406
- [Fix inconsistent Type 3 font width information](#) on page 289

#### 4.16.2.14. Check if a subset font contains a complete CharSet or CIDSet

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Checks if the subset fonts embedded in the document (if any) contain a complete character or CID set.

If a font is subset, only the characters of the font that are actually used in the text are embedded in the document. This is done to keep a file as small as possible. This Action allows you to check if all characters of the font are embedded. In case of simple fonts, the complete set is referred to as "CharSet"; in case of composite fonts, it's referred to as "CIDSet".

CID (Character Identifier) fonts are a format of Type 1 fonts that are typically used for Chinese, Japanese and Korean fonts.

**Related Actions**

- [Select subset fonts](#) on page 512
- [Check font subsetting](#) on page 409

#### 4.16.2.15. Check if font contains all glyphs and metrics for all characters used

**Belongs to**

- **Category:** Text

- **Type:** Checks

**What it does**

Searches the PDF document for fonts that don't have the character set required to display and print the used characters correctly.

Optionally, you can include in your check the glyphs that were removed by subsetting fonts.

You can then replace these fonts by embedded or subset fonts that do have all required glyphs and metrics.

**Related Actions**

[Select text with missing glyphs in its font](#) on page 514

## 4.16.2.16. Check if invalid character (.notdef glyph) is used

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Checks if the PDF contains invalid characters.

.notdef glyphs are replacement characters for undefined characters in a PDF; they often look like a small box containing an X or a question mark and are not PDF/X compliant. You might want to remove or fix them.

**Related Actions**

[Fix invalid characters \(.notdef usage\)](#) on page 290

## 4.16.2.17. Check if TrueType fonts are PDF/X compliant

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Checks if TrueType fonts are compliant with a particular PDF/X version. Options are PDF/X-4 and PDF/X-6.

**About OpenType embedded fonts**

OpenType is an extension of the TrueType format that can contain TrueType and/or Type 1 font data. In PDF files it can only appear as an embedded font. It has been introduced in PDF 1.6.

**Related Actions**

- [Select non-PDF/X or PDF/A compliant TrueType fonts](#) on page 510

- [Make TrueType fonts PDF/X compliant](#) on page 291

#### 4.16.2.18. Check presence of ToUnicode map in font

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Checks if the unicode mappings of the fonts are compliant with a particular PDF/A version.

PDF/A requires that all text in the PDF file can be mapped to Unicode. Therefore, fonts used in the PDF should contain a character-to-glyph mapping that is consistent with character semantics as defined in the Unicode Standard.

This mapping is used to override the default text extraction behavior, for example when using the Acrobat text tool to copy and paste text to another application like Notepad.

#### 4.16.2.19. Check resource locations in Type 3 fonts

**Belongs to**

- **Category:** Text
- **Type:** Checks
- **Since version:** 2023 update 1

**What it does**

Detects badly structured Type 3 fonts: fonts with resource dictionaries that are located in the wrong place (not in the Type 3 font dictionary, but in a different dictionary).

This sometimes happens when Illustrator generates Type 3 fonts from SVG fonts.

#### 4.16.2.20. Check text point size

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Checks the text point size against a particular value.

**Examples**

Text point size must be equal to 5 pt.

To check the minimum text point size, select "Text point size must be more than or equal to ... pt" and enter the appropriate value.

#### 4.16.2.21. Check text x-height

***Belongs to***

- **Category:** Text
- **Type:** Checks

***What it does***

Check text x-height checks the font size by measuring the height of the lowercase x (= the x-height). The x-height refers to the distance between the baseline and the mean line in a typeface; this is typically the height of the letters x, u, v, w, and z. You can set a threshold for the text x-height expressed in points.

Note that the check only can work if at least one of the characters to be measured (x, u, v, w or z) is available in the PDF.

#### 4.16.2.22. Check that composite TrueType CIDToGIDMap is present

***Belongs to***

- **Category:** Text
- **Type:** Checks

***What it does***

Checks if the PDF contains a mapping table for composite TrueType fonts to map CID (Character IDs) to GID (Glyph IDs), and if it's correctly defined. This is required by the PDF/A specification.

CID (Character Identifier) fonts are a format of Type 1 fonts that are typically used for Chinese, Japanese and Korean fonts.

GID (Glyph Identifier) are identifiers to identify all glyphs in a font.

#### 4.16.2.23. Check TrueType font encoding according to PDF/A

***Belongs to***

- **Category:** Text
- **Type:** Checks

***What it does***

Checks whether the Truetype font used in the PDF complies with a given version of the PDF/A specification. Fonts must for example be embedded in the PDF.

***Related Actions***

- [Make TrueType fonts PDF/X compliant](#) on page 291

### 4.16.3. Informs

---

#### 4.16.3.1. Gather font information

**Belongs to**

- **Category:** Text
- **Type:** Informs

**What it does**

Collects information about fonts used in a PDF and presents it in the log.

The following information is logged:

- Font Name
- Type
- Encoding
- Embedded
- Subset

#### 4.16.3.2. Log text object properties

**Belongs to**

- **Category:** Text
- **Type:** Informs

**What it does**

Collects information about any selected text or clip text object used in a PDF and presents it in the log.

The following information is logged:

- Text content
- Baseline relative to the lower left of the media box



**Note:** The baseline is logged in the unit set in the PitStop Pro Preferences (Units & Guides category).

- Font size in pt
- Font name
- Character spacing in em
- Word spacing in em
- Leading in pt
- Horizontal scaling
- Text rise in pt
- Text rendering mode

- Text knockout
- Is clip text

## 4.16.4. Selections

---

### 4.16.4.1. Select by inconsistent Type 3 font width information

#### ***Belongs to***

- **Category:** Text
- **Type:** Selections
- **New since:** PitStop 2022

#### ***What it does***

Selects Type 3 fonts containing characters with a corrupt font width (Type 3 glyphs d0 or d1 values that are inconsistent with the font's widths array).

Type 3 fonts are usually wrongly converted SVG fonts, i.e. fonts that are used in Illustrator, Indesign, Photoshop, ... but that are not supported by the PDF specs and most RIPs, and therefore converted to Type 3. PitStop fixes this, so the font can be handled by most RIPs.

#### ***Related Actions***

- [Check for inconsistent Type 3 font width information](#) on page 411
- [Fix inconsistent Type 3 font width information](#) on page 289

### 4.16.4.2. Select clipping and non-clipping text

#### ***Belongs to***

- **Category:** Text
- **Type:** Selections

#### ***What it does***

Selects all text segments, even if they have been clipped and are not visible anymore.



**Tip:** If you want to select non-clipping text only, you can use [Select text segments](#).

### 4.16.4.3. Select corrupt font widths

#### ***Belongs to***

- **Category:** Text
- **Type:** Selections



**What it does**

Allows you to select all text with a corrupt font width.

By default, horizontal writing is checked, but you can also include vertical writing by selecting the **Also check metrics for vertical writing** checkbox.

Corrupt font widths may occur in a PDF, when "artificial" bold or italic was used instead of the "bold" or "italic" version of the font concerned. For example, if "Futura" is used in your PDF, the "Futura-Bold" and "Futura-Oblique" fonts should be used instead of applying bold and italics on the regular Futura font. Artificial font may cause problems when printing the PDF.

As of PitStop 2022, you can set a threshold in the **Tolerance** field. This value, expressed in 1/1000 em, specifies the maximum acceptable deviation of the standard font width. For example, if the tolerance is set to 5, a font width that deviates 5/1000 em (or less) from the normal font width will not be selected.

Some PDF standards allow font size deviations. For example, PDF/X-4 allows a deviation of 5 1/1000 em, PDF/X-6 allows a deviation of 1 1/1000 em ... This Action can be used to select font widths that do not comply with certain PDF/X versions.

**About the em as unit**

The unit used to set the tolerance is '1/1000 em'. 'em' is used because the size of an 'em' is relative to the size of the font: it denotes the point size. For example: 1 em in a 16-point typeface is 16 points, 1 em in an 8-point typeface is 8 points. As a consequence, if the tolerance is set to 1, the relative size is the same, but the absolute size differs depending on the font size.

The name 'em' comes from the width of the capital M in the typeface.

**Related Actions**

- [Check corrupt font widths](#) on page 406
- [Change corrupt font widths](#) on page 281

## 4.16.4.4. Select embedded fonts

**Belongs to**

- **Category:** Text
- **Type:** Selections

**What it does**

Allows you to select all embedded or unembedded fonts in a PDF document.

The selection of embedded fonts includes OpenType embedded fonts.

**About embedding fonts**

**Embedding fonts** in a PDF document means that every character of this font is copied and stored in the PDF document. This is useful if you create PDF documents to be displayed on different systems and to be printed on different devices: these are often systems that do not contain exactly the same fonts.

Embedding a font as a **subset** means that only those characters of the font that are actually used in the text are embedded. This reduces the file size by not including superfluous font information.

**About OpenType embedded fonts**

OpenType is an extension of the TrueType format that can contain TrueType and/or Type 1 font data. In PDF files it can only appear as an embedded font. It has been introduced in PDF 1.6.

**Related Actions**

- [Check font embedding](#) on page 408
- [Unembed font](#) on page 293
- [Check embedded font is OpenType](#) on page 407

## 4.16.4.5. Select fonts by license

**Belongs to**

- **Category:** Text
- **Type:** Selections

**What it does**

Allows you to select fonts that allow certain operations without obtaining permission from the font's owner.

These operations are:

- Embed
- Subset
- Outline
- Preview and print

**Related Actions**

[Check font license](#) on page 408

## 4.16.4.6. Select fonts by name

**Belongs to**

- **Category:** Text
- **Type:** Selections

**What it does**

Allows you to select all the fonts with a particular name.



**Note:** From version 12 update 2 onwards, you can use regular expressions to define the font name.

**Example**

To select all the Times, Arial, Helvetica and Courier fonts in a PDF, you could use the following sequence of Actions:

```
Select font Times
```

```
Select font Arial
OR
Select font Helvetica
OR
Select font Courier
OR
```

#### 4.16.4.7. Select fonts by type

**Belongs to**

- **Category:** Text
- **Type:** Selections

**What it does**

Selects text using a particular font type.

You can select one of the following font types:

- TrueType
- Type1
- Type3
- Multiple Master
- Composite TT
- Composite T1
- Composite (all types)

**About types of fonts**

Refer to the [PitStop Pro Reference Guide](#) (Chapter: Types of fonts and their usage), available on the Enfocus website.

Refer to the PitStop Pro Reference Guide (Chapter: Types of fonts and their usage).

**Example**

For example, to unembed TrueType fonts without unembedding any other font types, do the following:

```
Select TrueType fonts
Unembed font <!-- See Unembed font on page 293 -->
```

**Related Actions**

[Check font type](#) on page 409

#### 4.16.4.8. Select fonts that can be emulated

**Belongs to**

- **Category:** Text
- **Type:** Selections

**What it does**

Selects fonts that can be emulated.

Fonts that can be emulated are fonts that can be represented on screen, even if the font is unavailable on your system and even though it has not been embedded. If you are certain the document only needs to be viewed on screen, and will not be printed, fonts that can be emulated do not need to be embedded. This makes your PDF lighter, for example for distribution on the internet.

**Example**

To select fonts and then unembed them:

```
Select fonts that can be emulated
Unembed font <!-- See Unembed font on page 293 -->
```

#### 4.16.4.9. Select non-PDF/X or PDF/A compliant TrueType fonts

**Belongs to**

- **Category:** Text
- **Type:** Selections

**What it does**

Allows you to select a TrueType font that is not compliant with a particular PDF/X or PDF/A version, for example a symbol font. Options are PDF/A-1, PDF/A-2, PDF/X-4 and PDF/X-6.

After this selection, you might want to remove or replace this font.

**About OpenType embedded fonts**

OpenType is an extension of the TrueType format that can contain TrueType and/or Type 1 font data. In PDF files it can only appear as an embedded font. It has been introduced in PDF 1.6.

**Related Actions**

- [Check if TrueType fonts are PDF/X compliant](#) on page 413
- [Make TrueType fonts PDF/X compliant](#) on page 291

#### 4.16.4.10. Select objects that use neither stroke nor fill

**Belongs to**

- **Category:** LineArt;Text
- **Type:** Selections

**What it does**

Selects vector or path objects that contain no stroke or fill color value in a PDF.

**Related Actions**

[Select invisible objects without fill and stroke](#) on page 446 (same functionality)

## 4.16.4.11. Select OpenType embedded fonts

**Belongs to**

- **Category:** Text
- **Type:** Selections

**What it does**

Selects all embedded fonts that are OpenType, or alternatively, all embedded fonts that are not OpenType.

**About embedding fonts**

**Embedding fonts** in a PDF document means that every character of this font is copied and stored in the PDF document. This is useful if you create PDF documents to be displayed on different systems and to be printed on different devices: these are often systems that do not contain exactly the same fonts.

Embedding a font as a **subset** means that only those characters of the font that are actually used in the text are embedded. This reduces the file size by not including superfluous font information.

**About OpenType embedded fonts**

OpenType is an extension of the TrueType format that can contain TrueType and/or Type 1 font data. In PDF files it can only appear as an embedded font. It has been introduced in PDF 1.6.

**Example**

To search for all OpenType fonts and then unembed them, proceed as follows:

```
Select embedded fonts that are OpenType
Unembed font
```

**Related Actions**

- [Check embedded font is OpenType](#) on page 407
- [Unembed font](#) on page 293

## 4.16.4.12. Select rendering objects

**Belongs to**

- **Category:** LineArt;Text;Image
- **Type:** Selections

**What it does**

Selects all objects with a rendering intent.

This includes paths, text and images with any of the following rendering intents:

- Absolute Colorimetric
- Relative Colorimetric
- Perceptual
- Saturation



**Note:** This Action does not allow you to make a selection based on **one particular** rendering intent. To select objects by **one** of the listed rendering intents, use [Select by rendering intent](#) on page 427.

#### **About rendering intents**

A rendering intent is a remapping method, allowing to remap colors so that they best match the intended use. 'Remapping' means that colors from one output device's color space are mapped to the color space of another device.

For more information and examples, refer to [the PitStop Pro Reference Guide on the Enfocus website](#) (See Chapter "Rendering intents to remap colors").

For more information and examples, refer to the PitStop Pro Reference Guide (See Chapter "Rendering intents to remap colors").

#### **Related Actions**

- [Change rendering intent](#) on page 104
- [Check rendering intent](#) on page 312
- [Remove rendering intent](#) on page 117
- [Select by rendering intent](#) on page 427

### 4.16.4.13. Select required color set

#### **Belongs to**

- **Category:** Color
- **Type:** Selections
- **Since version:** 2023 update 1

#### **What it does**

Selects objects by color by excluding a certain color, for example select all objects that do not have a certain tint of green.

#### **How to proceed**

Define the color set to be excluded:

1. To exclude 100% black objects, select **Black**.



**Note:** If only black should be excluded in the PDF, **only** select the **Black** checkbox. Do not add any other color.

2. To add another color that should be excluded:
  - a. Click **New**. A new entry will appear in the text box.



**Example**

If you have the original font on your system, you could choose the subsetted fonts and embed them completely for later editing. To do so, proceed as follows:

```
Select subset fonts
Embed font
```

**Related Actions**

- [Check font subsetting](#) on page 409
- [Check if a subset font contains a complete CharSet or CIDSet](#) on page 412

## 4.16.4.16. Select text by key phrase

**Belongs to**

- **Category:** Text
- **Type:** Selections

**What it does**

Allows you to select text objects containing a particular key word or phrase.

To take into account the case of the key phrase (uppercase/lowercase as entered in the text field), select the **Case sensitive** checkbox.



**Tip:** To only select a particular key word (and not the entire text object it belongs to), you could first split the text objects, using [Split in words](#) on page 293.

To specify a match pattern instead of a fixed string, select the **Use regular expressions** checkbox.



**Note:** PitStop supports Boost Regular Expressions. For more information, refer to [http://www.boost.org/doc/libs/1\\_47\\_0/libs/regex/doc/html/boost\\_regex/syntax/perl\\_syntax.html](http://www.boost.org/doc/libs/1_47_0/libs/regex/doc/html/boost_regex/syntax/perl_syntax.html).

**Example**

The below example expression matches every text containing “PitStop” or “Enfocus”.

|                                                                                                                                                     |                                                                                                                                                                                                                     |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Properties</b><br>General Information<br>Locking Information<br><hr/> <b>Actions</b><br>Select all<br>Select text containing (PitSt Enf)o(cus p) | <b>Attributes for Select text by key phrase:</b><br>Select text containing (PitSt Enf)o(cus p)<br><input checked="" type="checkbox"/> Case sensitive<br><input checked="" type="checkbox"/> Use regular expressions |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## 4.16.4.17. Select text by point size

**Belongs to**

- **Category:** Text
- **Type:** Selections



**What it does**

Selects text in a font that is below, above or equal to a certain size (expressed in points).

This Action is useful to select text that is too small to print correctly.

#### 4.16.4.18. Select text by x-height

**Belongs to**

- **Category:** Text
- **Type:** Selections

**What it does**

Select text by x-height allows you to select text by a font size expressed in x-height. The x-height refers to the distance between the baseline and the mean line in a typeface; this is typically the height of the letters x, u, v, w, and z. You can set a threshold for the text x-height expressed in points.

Note that this Action only can work if at least one of the characters to be measured (x, u, v, w or z) is available in the PDF.

#### 4.16.4.19. Select text segments

**Belongs to**

- **Category:** Text
- **Type:** Selections

**What it does**

Selects all text objects in a PDF.



**Tip:** This Action does not select clipping text, which is not visible in the PDF. If you want to select clipping text as well, you can use [Select clipping and non-clipping text](#) on page 506.

#### 4.16.4.20. Select text with missing glyphs in its font

**Belongs to**

- **Category:** Text
- **Type:** Selections
- **Since version:** 25.07

**What it does**

Searches the PDF document for fonts that don't have the character set required to display and print the used characters correctly and selects them.

Optionally, you can include in your check the glyphs that were removed by subsetting fonts.

You can then replace these fonts by embedded or subset fonts that do have all required glyphs and metrics.

***Related Actions***

*Check if font contains all glyphs and metrics for all characters used* on page 412

## 5. Actions sorted alphabetically

---

### 5.1. A

---

#### 5.1.1. Add alternate images

---

***Belongs to***

- **Category:** Image
- **Type:** Changes

***What it does***

If you are working with PDFs that contain very high resolution images and render slowly on screen, you can speed up rendering by adding alternate images and then clicking the PitStop **Speed Up Image Display** button (available in the Enfocus View Modes toolbar (Acrobat 8 and 9) or the PitStop View Panel (Acrobat X and XI)).

You can use this Action to add low resolution alternate images.

***How to proceed***

1. Select the preferred downsampling.  
Bicubic looks best but is slowest; subsampling looks worst but is fastest.
2. Specify the preferred resolution.  
72dpi is good for screen viewing.
3. Set **Resample above** to a higher value than the dpi chosen above.  
PitStop suggests a value, but you can change it as required.
4. Select **Convert to RGB** for even faster on screen rendering, but in RGB color values.

***Related Actions***

- [Select by alternate images](#) on page 448
- [Check for alternate images](#) on page 336
- [Remove alternate images](#) on page 146

#### 5.1.2. Add background

---

***Belongs to***

- **Category:** Add
- **Type:** Changes

**What it does**

Adds a background to the selection that precedes this Action in your Action List.

You can choose a color for the background and define a size (size of one of the page boxes or the same size as the bounding box of all objects).

### 5.1.3. Add barcode

---

**Belongs to**

- **Category:** Add
- **Type:** Changes
- **Since version:** 2018

**What it does**

Adds the barcode of your choice. You can select the barcode you need from a list of common barcode types, choose the color of the back- and foreground and specify the position.

**Tabs**

| Tabs    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Barcode | <ul style="list-style-type: none"> <li>• <b>Type:</b> Select the barcode you want to add. We support over 120 barcode types.</li> <li>• <b>Value:</b> Enter the numeric value and/or a document variable by clicking the <b>Variable</b> button.<br/><br/>The <b>Variable</b> button gives access to a list of predefined variables, such as %Current Document Name%, %Document Title%, %Page Number%, ...(for the full list, see below). The current value is shown at the bottom of the dialog. Note that this list of variables is also available in the <a href="#">Add object</a> Action and the <a href="#">Change document info</a> Action.<br/><br/>If a check digit is needed, you can either enter it yourself or leave it blank and let PitStop add it.</li> </ul> <div data-bbox="486 1496 555 1563" style="border: 1px solid #ccc; padding: 5px; margin: 10px 0;">  </div> <p><b>Note:</b> Values are verified when the Action List is executed, there is no check during the configuration of the Action.</p> <ul style="list-style-type: none"> <li>• <b>Translate escape characters:</b> If selected, barcodes that support escape sequences can be used. For example, if this option is enabled, "\n" is considered an escape character instead of a plain string. For more information, refer to the documentation of your barcode library.</li> <li>• <b>Ignore check digit(s):</b> If selected, the check digit is not verified.</li> <li>• <b>Width reduction:</b> Width reduction compensates for 'dot gain': printed material looking darker than intended. In case of barcodes, it means that the bars are enlarged and the gaps reduced. To correct the barcode width, you can either enter an absolute value (e.g. 1 mm) or a relative value (e.g. 5%).</li> </ul> |

| Tabs        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|             | <ul style="list-style-type: none"> <li>• <b>Font name and size:</b> Select the font and the font size of your choice. The chosen font will be used for the numeric values below the bars. Note that the numeric values may not be readable if you select a bar code font.</li> <li>• <b>Group barcode objects:</b> If selected (default), the barcode and the numeric value are grouped, so they can be handled (e.g. moved, changed,...) as one object.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Color       | <ul style="list-style-type: none"> <li>• Choose the <b>foreground</b> color. The default color is black.</li> <li>• Select a <b>background</b> as required and pick a background color.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Position    | <ul style="list-style-type: none"> <li>• There are two options to specify the position and size of the barcode: <ul style="list-style-type: none"> <li>• <b>Use selection bounding box:</b> if selected, the barcode will be placed on the bounding box of an object in the PDF that is selected. The size of the selected object determines how big the barcode will be.</li> <li>• <b>Specify position and size:</b> Size and position can be defined independently from each other.<br/><br/>The absolute position is set by entering the X and Y coordinates.<br/><br/>The relative position is determined by the distance and position relative to one of the page boxes.<br/><br/>The size is set by entering the width and the height. If the lock icon looks closed, any changes you make to one of the dimensions changes the other dimension proportionally.</li> </ul> </li> <li>• You can use the default <b>quiet zone</b> (= default for the chosen Action) or you can determine the dimensions. The lock icon can be used to make sure proportions are kept if changes are made afterwards.</li> <li>• Barcodes can be <b>rotated</b> as required. Rotation angles are 90°, 270° and 360°.</li> </ul> |
| Data matrix | <p>Only available if the chosen barcode type is Data Matrix.</p> <p>Options:</p> <ul style="list-style-type: none"> <li>• <b>Square or Rectangle</b></li> <li>• <b>Size:</b> Choose one of the predefined sizes or 'Automatically Detect'.</li> </ul> <div data-bbox="486 1556 555 1624"> </div> <p><b>Note:</b> The list of predefined sizes depends on the length of the barcode (= the value on the Barcode tab). If 'Automatically Detect' is chosen, the barcode will get the size that best fits the length of the value.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |



**Note:** This Action supports variables in most fields.

### Document variables - Overview

This is the full list of the predefined variables that can be inserted via the **Variable** button on the Barcode tab:

- %Current Document Name%
- %Full Document Path%
- %Time%
- %UTC Time%
- %Date%
- %UTC Date%
- %User Company%
- %User Name%
- %Page Number%



**Note:** You can use the page number as it is, or increment or decrement it (so always add up or subtract a certain number). To decrement, you need to add a minus sign. For example, if the page number is '12' and you enter '-3', the value of the variable will be '9'. If you enter '3', the value of the variable will be '15'. You can also add leading zeros by defining the minimum number of digits. For example, if Total digits is set to '3', '9' will become '009' and '15' will become '015'.

- %Page Count% = total number of pages



**Note:** You can add leading zeros by defining the minimum number of digits. For example, if Total digits is set to '3', '9' will become '009' and '15' will become '015'.

- %Document Title%
- %Page Box Dimensions%



**Note:** You need to indicate which page box should be considered. For example, if you select Media Box from the Page Box list, the value of the variable will be the dimensions of the media box, for example: 210 x 297 mm (the unit depends on the unit specified in the PitStop Pro preferences).

- %Page Box Width%




**Note:** You need to indicate which page box should be considered. For example, if you select Art Box from the Page Box list, the value of the variable will be the width of the art box, for example: 210 mm (the unit depends on the unit specified in the PitStop Pro preferences).

- %Page Box Height%



**Note:** You need to indicate which page box should be considered. For example, if you select Bleed Box from the Page Box list, the value of the variable will be the height of the bleed box, for example: 210 mm (the unit depends on the unit specified in the PitStop Pro preferences).

Below is an example of the Use Variable dialog.

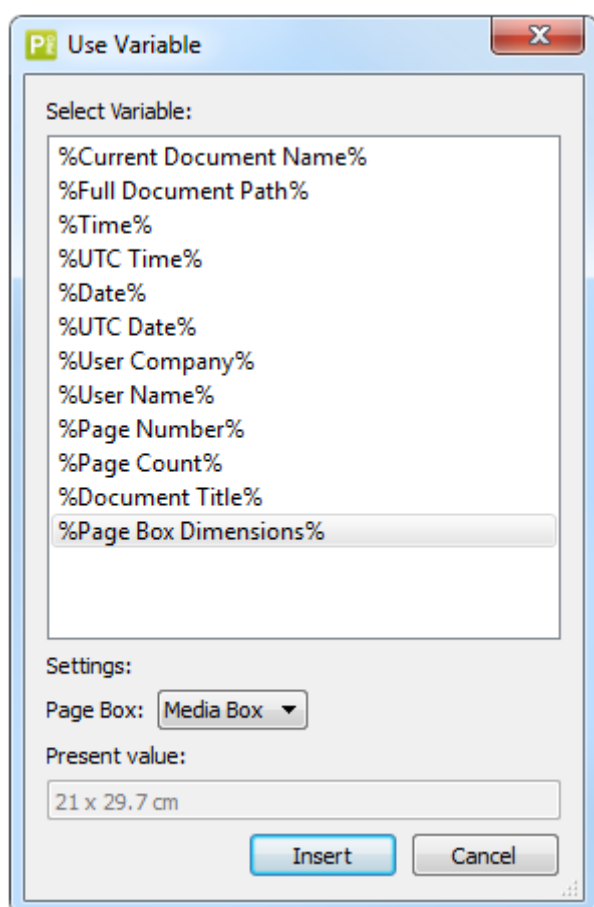

### Standard Action Lists

PitStop 2018 comes with a number of default Action Lists for generating barcodes.

Some of these Action Lists make use of smart variables; to that end a new Variable Set was added to PitStop 2018 (Smart Preflight Variable Set - PitStop Pro v1.3).

If you're not familiar with Smart Preflight, we recommend taking a short elearning course on Smart Preflight, available on the Enfocus website (<https://www.enfocus.com/learn>), or check out the [PitStop Reference Guide](#), which has a chapter on Smart Preflight too.

### Related Actions

- [Check Esko barcode value](#) on page 368
- [Check Esko barcode type](#) on page 368
- [Select Esko barcode](#) on page 478
- [Select Esko barcode type](#) on page 478

## 5.1.4. Add bleed

### Belongs to

- **Category:** Prepress

- **Type:** Changes
- **Since version:** 13

**What it does**

Allows you to add bleed all around the page, e.g. on all 4 edges if needed.



**Note:** This Action applies bleed based on the bleed box; if you don't have a bleed box yet, you can use the 'Change bleed box' Action to create one.

You may use this Action to make your file PDF/X-4 compliant.

**How to proceed**

1. Select the edge(s) you want to add bleed to. Bleed is added from the trim box edges to the bleed box.
2. Select **Add bleed in corners** as required.
3. Indicate where the bleed should start (inside the bleed box).



**Note:** By default, the same values are used on all edges; if you change one value, all other values are automatically changed as well. If you don't want this, click the Lock icon , so it changes to . You can now use different values as required.

4. Select **Mirror margins according to page binding** as required. When selected, the inner and outer instead of the left and right margins have to be set, so the amount of bleed may be different for even and odd pages.
5. By default, to add bleed, PitStop uses several techniques, such as extending clips and mirroring existing content. In some cases, it may be preferable to only use the mirroring technique. If that is the case, select **Only add bleed by mirroring content**. Note that this also helps to keep the file size down.
6. Select one of the following options as required:

| Option                                            | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Only add bleed by mirroring content               | By default, to add bleed, PitStop uses several techniques, such as extending clips and mirroring existing content. In some cases, it may be preferable to only use the mirroring technique. If that is the case, select this option. Note that this also helps to keep the file size down. <div> <b>Note:</b> We advise clearing this checkbox if line art needs to be extended. See example 3 below.</div> |
| Allow mirroring of text                           | Mirroring of text can be useful to generate fold-over flaps for banners with text near the trim edge.                                                                                                                                                                                                                                                                                                                                                                                          |
| Use all objects to fill bleed area when mirroring | By default, objects that do not touch the trim box are not used to create bleed, unless you select this option. In that case, objects near the trim box are also mirrored.                                                                                                                                                                                                                                                                                                                     |
| Retain objects in bleed area                      | By default, existing objects in the bleed area are removed, unless you select this option.                                                                                                                                                                                                                                                                                                                                                                                                     |




**Example 1**

Bleed is added in the bleed area.


**Example 2**

With this kind of image, enabling **Only add bleed by mirroring content** is not recommended.

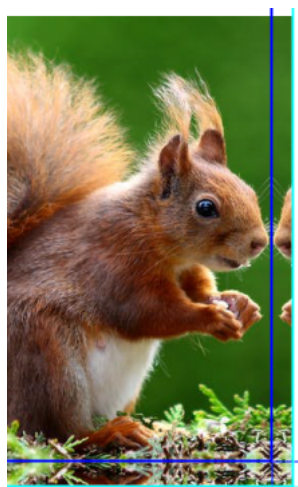**Example 3**

Line art should be extended instead of mirrored.

Running the Action with **Only add bleed by mirroring content** checkbox selected, resulted in line art not extended correctly (= the image on the left). When the **Only add bleed by mirroring content** checkbox was cleared, the result was OK (= the image on the right).

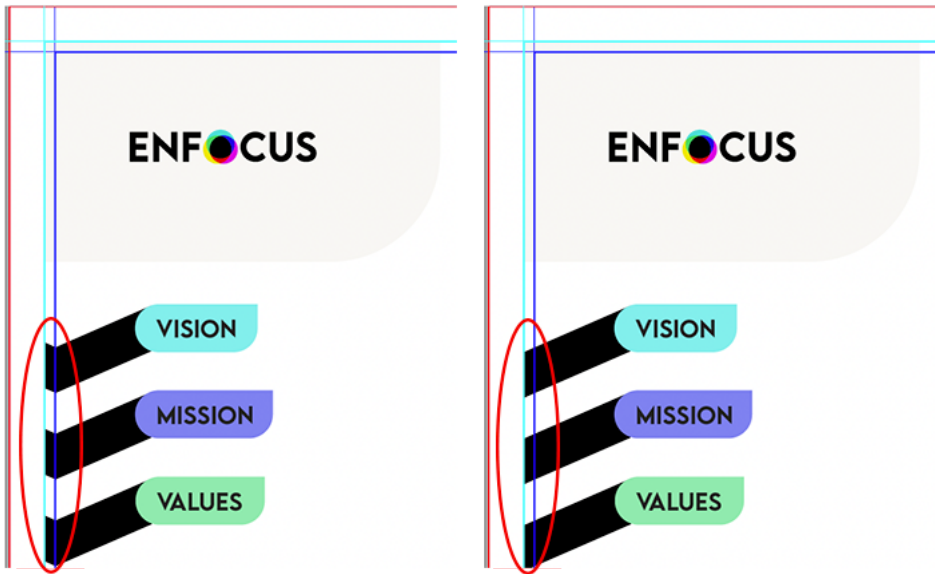

Related Actions

- [Check bleed](#) on page 294
- [Change bleed box](#) on page 202

5.1.5. Add bleed around contour

Belongs to

- **Category:** Prepress
- **Type:** Changes
- **Since version:** 2021

What it does

Allows you to add missing bleed around the contour (typically the dieline or cut line) of an object.

Note that this Action only works on selected line art that is not filled. The contour must be closed and it must be a compound path of at least 3 nodes.



**Note:** You can *detect* missing bleed around contours through the [Check bleed around contour](#) Action.


Attributes

| Attribute                                 | Description                                                                                                                                                  |
|-------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Use trim box as contour                   | If selected, bleed is added based on the trim box. The amount of bleed is based on the value set in the <b>Bleed offset</b> option, so not on the bleed box. |
| Use inner/outer according to page binding | If the trim box is used as contour, you can add bleed to the inner and/or outer contour based on the page binding. If selected, left and right               |

| Attribute                                                                                                                                                             | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                                                                       | are replaced with inner and outer in the <b>Add bleed for edges</b> option.<br><br>Example: In case of magazines, typically "inner" will be cleared.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Add bleed for edges                                                                                                                                                   | If the trim box is used as contour, this option determines the edges where bleed is added.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Add bleed in corners                                                                                                                                                  | If the trim box is used as contour, you can add bleed in the corners.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Bleed offset                                                                                                                                                          | The desired amount of bleed (starting from the contour).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Trim area margin                                                                                                                                                      | Indicates how close/far from the trim area the bleed should start. This is useful for objects near but not crossing the trim box.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Extend line art                                                                                                                                                       | <p>Extends line art. See example 2 below.</p> <div>  <p><b>Note:</b> This only works for line art that is not in a form. The line art must also not have both a stroke and a fill. If so, first <i>separate the stroke and the fill</i>.</p> </div> <p>This option is also useful for <i>clipped images (clip masks)</i>. See example 3 below. If this option is selected, the clip path is extended. The parts for which there is not enough image data can be filled using pixel cloning, if the <b>Repeat last pixel</b> option is enabled.</p> |
| Repeat last pixel                                                                                                                                                     | Repeats the last pixel of images if any.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| White threshold                                                                                                                                                       | The threshold for white makes sure that a color that is "almost white" (and looks white when printed) is considered white. The default value is 10%.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Image output:                                                                                                                                                         | Desired output properties                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <ul style="list-style-type: none"> <li>Resolution (ppi)</li> <li>Color space</li> <li>Compression</li> <li>Quality</li> <li>Convert to indexed color space</li> </ul> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

### Remark

Bleed cannot be added to overlapping or intersecting contours. In the example below, the two rectangles are separate paths. In this case, PitStop cannot determine where bleed should be added. Should bleed be added to the internal line or the external line? To solve this issue and help PitStop, you should first convert the two paths into one compound path.

**Example 1**

Missing bleed is added based on the cutter guide (in orange), both to the inner contour (the white space between the leaves that has to be cut out) and the outer contour.

**Example 2**

Example where the trim box is used as contour, with the **Extend line art** checkbox cleared:




Example where the trim box is used as contour, with the **Extend line art** checkbox selected:



### **Example 3**

Clip mask example. The bleed area is filled with clipped away image data. This is obtained by selecting the **Extend line art** checkbox.

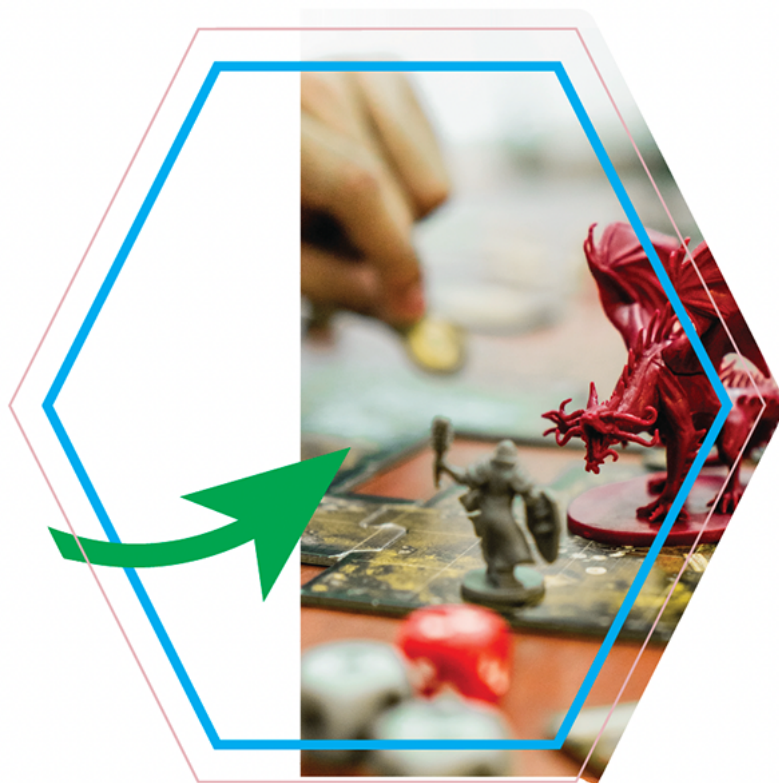**Related Actions**

- [Check bleed](#) on page 294
- [Check bleed around contour](#) on page 297

## 5.1.6. Add bookmarks

---

**Belongs to**

- **Category:** Add
- **Type:** Changes
- **Since version:** 24.03

**What it does**

Adds a bookmark to every selected page in your document.

**How to proceed**

1. Make sure to add an Action to your Action List to select the pages that should get a bookmark.
2. In the Add bookmarks Action, enter the name of the bookmark in the Bookmark field. You can use text, document variables (by clicking the Variables button) or enable variables from a variable set through the Actions menu (Enable Variable Names).
3. If the document already contains bookmarks, and you want to use these as a parent, enter the name of the parent bookmark, so PitStop knows where to put the new bookmarks. Also here, you can use text, document variables or variables from a variable set.



**Note:** If multiple parent bookmarks are found, the new bookmarks will be added to the **first** parent bookmark.

4. If wanted, you can log the result of this Action, and in case of an error, distinguish between a critical and a non-critical failure.
5. Run the Action List and check the Bookmarks tab in Acrobat.

### **Document variables - Overview**

This is the full list of the predefined variables that become available by clicking the Variables button:

- %Current Document Name%
- %Full Document Path%
- %Time%
- %UTC Time%
- %Date%
- %UTC Date%
- %User Company%
- %User Name%
- %Page Number%



**Note:**

- You can use the page number as it is, or increment or decrement it (so always add up or subtract a certain number). To decrement, you need to add a minus sign. For example, if the page number is '12' and you enter '-3', the value of the variable will be '9'. If you enter '3', the value of the variable will be '15'. You can also add leading zeros by defining the minimum number of digits. For example, if Total digits is set to '3', '9' will become '009' and '15' will become '015'.
- **Specifically for Add bookmarks:** If you add new bookmarks to a multi-page document, PitStop will start incrementing or decrementing from the first bookmark/page, preserving the order and numbering of subsequent pages.

- %Page Label%



**Note:** This document variable is **only available in the Add bookmarks Action!**

- %Page Count% = total number of pages



**Note:** You can add leading zeros by defining the minimum number of digits. For example, if Total digits is set to '3', '9' will become '009' and '15' will become '015'.

- %Document Title%
- %Page Box Dimensions%



**Note:** You need to indicate which page box should be considered. For example, if you select Media Box from the Page Box list, the value of the variable will be the dimensions of the media box, for example: 210 x 297 mm (the unit depends on the unit specified in the PitStop Pro preferences).

- %Page Box Width%



**Note:** You need to indicate which page box should be considered. For example, if you select Art Box from the Page Box list, the value of the variable will be the width of the

art box, for example: 210 mm (the unit depends on the unit specified in the PitStop Pro preferences).


- %Page Box Height%



**Note:** You need to indicate which page box should be considered. For example, if you select Bleed Box from the Page Box list, the value of the variable will be the height of the bleed box, for example: 210 mm (the unit depends on the unit specified in the PitStop Pro preferences).

### Example

In the example below, the document already had bookmarks, that were based on the page numbers (Page\_1, Page\_2, etc.). The Action List added new bookmarks below the existing ones, based on the page labels (PageLabel1, PageLabel2, etc.).

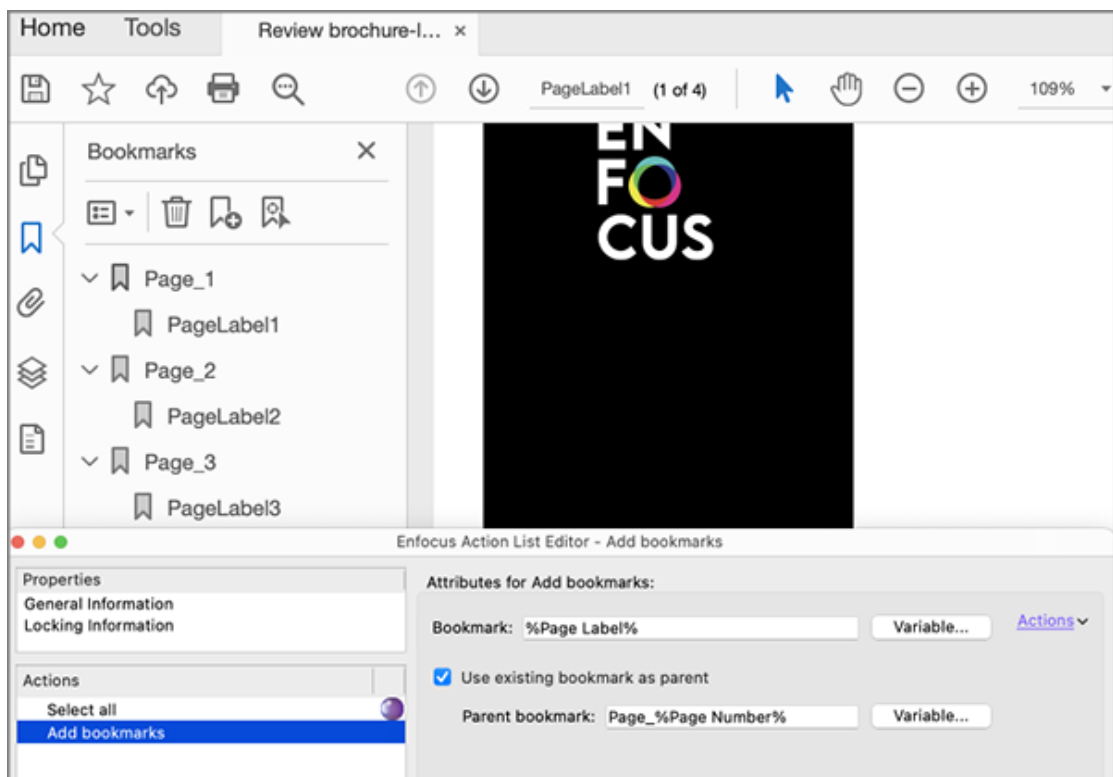

### Related Actions

- [Check bookmarks](#)
- [Select pages with bookmarks](#)
- [Remove bookmarks](#)

## 5.1.7. Add color bar

### Belongs to

- **Category:** Add



- **Type:** Changes
- **Since version:** 12 update 3

### **What it does**


Adds color patches to your PDF document. The color patches are individually created for each page and show all separations including any spot colors.

### **How to proceed**

1. On the **Color Patches** tab, indicate how many tint values per separation you want to add.  
By default, a 100% tint of the color is added.
  - To change a value, double-click it in the **Tint values (%)** box and type an alternative value.
  - To add another value, click  and enter the required value.
  - To remove a value, select it and click .
2. Enter the required size of the color patches, i.e. the preferred height or width. This depends on the device you're using.
3. Select the preferred options:
  - **Repeat color patches:** The color patches are repeated till the end of the line (= right border of the page box). If this checkbox is cleared, each tint value of each color is added only once.
  - **Don't add process colors (C, M, Y, K):** For process colors no color patches are added.
  - **Don't add if tint is 0%:** If a color is defined but not used in the PDF, no color patch will be added.
4. Switch to the **Position** tab.
5. Determine the position of the color bar relative to one of the page boxes. You can specify the edge (top, bottom, left, right), the position on the edge (left, right, center) and the distance between the page box and the color bar.

### **Examples**

**Example 1:** This document contains two spot colors, which are each added once, in 2 tint values (100% + 50%). Chosen position: relative to the top of the trim box (blue line), in the center. Process colors are not added.

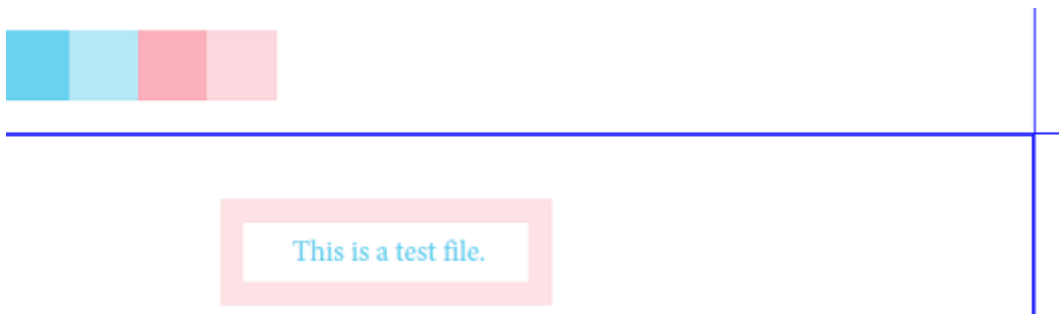

**Example 2:** Same options as in the first example, but with **Repeat color patches** enabled.



**Example 3:** This is an example where the tint value of the color patches is 100%. The position of the color bar is defined relative to the bleed box, and it's placed in the bottom right corner (Edge: right, Position on edge: bottom).



## 5.1.8. Add copied graphics

### *Belongs to*

- **Category:** Add
- **Type:** Changes

### *What it does*

Copies graphic elements and positions them on the page. The graphics can be rotated and scaled, and put in the foreground or background. You can place them at any position on the page and use the "repeat" feature to more precisely position the graphic.

### *How to proceed*

1. Select the graphic(s) from a file or by making a selection. Do one of the following:
  - Select **Use file** and select the PDF file concerned. Next, enter the number of the page you want to use. The total number of pages is mentioned in brackets.
  - Select the graphic you want to copy in your PDF using the PitStop Select Objects tool  and select **Use grabbed graphics**. Click **Grab Selection**. The selected graphic is shown in the field below the button. If the graphic should be rotated, specify a rotation angle, e.g. 45. If the graphic should be made larger or smaller, change the scale value from 100% to e.g. 90%.



**Note:** For all options, variables can be used if needed.

2. Switch to the different tabs and select the appropriate options.

### Tabs

| Tabs       | On this tab, do the following:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Graphics   | Select the graphics you want to copy (either elements you selected in the PDF or a page of a particular PDF).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Attributes | <p>Determine if the graphic should be pasted in the foreground or in the background.</p> <p>Select or clear the <b>Use page rotation</b> and <b>Use page scaling factor</b> checkbox:</p> <ul style="list-style-type: none"> <li>To take into account page rotation and/or scaling factor, select this checkbox. The Action will be applied to the actual position of the page content.</li> <li>To ignore page rotation and/or scaling factor, clear this checkbox. The Action will be applied to the original position of the page content (i.e. BEFORE applying page rotation and/or scaling factor).</li> </ul> <p>Enable <b>Share graphics between copies</b> to add the copied graphic as a shared form XObject. This means that the graphic is defined only once, but used several times, on several pages. This is an easy way to reduce the file size.</p> <hr/> <div>  <p><b>Note:</b> Only use this option if you're sure that all instances/ occurrences of the graphic will remain the same (as is the case with a logo), because changing one graphic will change them all.</p> </div> |
| Region     | <p>Determine the region where the copied graphics should (or should not) be placed, relative to the page box of your choice. Margins can easily be set by grabbing the offsets from a selected area (use the Grab Offsets button ).</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Repeat     | <p>If the graphics should be placed more than once on a page, change <b>No repeat</b> to:</p> <ul style="list-style-type: none"> <li><b>Distribute/Repeat fixed number of graphic elements</b> if you want to determine how often they should be pasted (e.g. 6 times horizontally, 4 times vertically)</li> <li><b>Distribute/Repeat graphic elements in region</b> if you want PitStop to fill the region (specified on the Region tab).</li> </ul> <p>If you want PitStop to divide the copied graphics evenly across the defined region, choose "distribute" rather than "repeat". In case of "Distribute graphic elements in region", you can choose the maximum or minimum distance between the copied graphics.</p> <p>If you choose "repeat", you should define the exact distance between the copied graphics yourself.</p> <p>The distance can be between the bounding boxes of the copied graphic (choose: <b>Between edges</b>) or from center to center (choose: <b>Between centers</b>).</p>                                                                                                                                                                             |

| Tabs     | On this tab, do the following:                                                                                                                                                                               |
|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|          |  <b>Note:</b> Remember that you can use Smart Preflight variables to define the distances.                                  |
| Position | Indicate how the graphic elements should be positioned relative to the chosen region. Note that, when adding multiple copies, the same corner should be used to position the graphic elements in the region. |

### 5.1.9. Add default color spaces for color spaces that are not compliant to the Output Intent

***Belongs to***

- **Category:** Color
- **Type:** Changes

***What it does***

If you are using an Output Intent that does not support a certain color space, you can use this Action to replace it with another color space that does comply.

You can select an alternative color space for Gray, RGB, and/or CMYK.

The following PDF/X and PDF/A standards are supported:

- PDF/X-1a:2001
- PDF/X-3:2002
- PDF/X-1a:2003
- PDF/X-3:2003
- PDF/X-4
- PDF/X-4p
- PDF/X-6
- PDF/X-6p
- PDF/A-1
- PDF/A-2

### 5.1.10. Add font metadata

***Belongs to***

- **Category:** Text
- **Type:** Changes

***What it does***

Adds font information to the PDF's metadata (based on the font resource).

**About font metadata**

Font metadata is descriptive information about the fonts used in a PDF, for example the name of the font, its type and encoding. You can find the font metadata of a file in Adobe Acrobat by selecting **File > Document Properties** and switching to the **Fonts** tab.

**Related Actions**

[Check font metadata](#) on page 409

## 5.1.11. Add hems or pockets

---

**Belongs to**

- **Category:** Page
- **Type:** Changes


**What it does**

Generates mirrored content for banners, i.e. hems or pockets between the trim and bleed box. You can choose to add them to particular sides and/or to the corners.

You can also add a margin inside the trim box. This value determines where the bleed starts from the inside of the trim box. This can be useful to avoid hairlines if the artwork is positioned close to the trim box.

**Example**

Bleed is added between the trim box (in blue) and the bleed box (in red). The line art is mirrored, not extended.

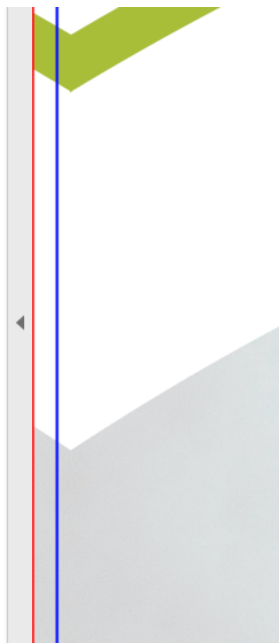

## 5.1.12. Add missing creation and modification date

---

### ***Belongs to***

- **Category:** Metadata
- **Type:** Changes

### ***What it does***

Inserts the creation and modification date.

In some legacy PDF applications it was possible to create a PDF file without a creation or modification date. This Action fixes this issue.

### ***Related Actions***

[Check creation and modification date](#) on page 351

## 5.1.13. Add object

---

### ***Belongs to***

- **Category:** Add
- **Type:** Changes

### ***What it does***

Inserts a chosen object (a line, a rectangle, an ellipse or a text) and positions it relative to one of the page boxes. This can be useful to add information to be trimmed off later.



**Note:** If you're inserting text, you can make use of predefined variables, such as the name of the document, the author, the page number, page count, the page box dimensions, ...See the list of document variables below. Note that you can also use EOL characters to insert a new line, and also variables that include an EOL character are supported.

The **Fill** and **Stroke** tabs allow you to define the color of the objects you are inserting.

### **Add rectangle**

When adding a rectangle, you can choose different corner styles, e.g. rounded corners, chamfered corners or inverted corners. You can also determine the radius (only positive values are accepted).


This option is useful for customers who want to automatically generate cutter guides or dielines for labels based on a PDF page box such as the trim box. See also the Action Lists based on this Action, which make a dieline in an overprinting spot color based on the trim box.

### ***Example***

To add the width and height of the media box to your document, proceed as follows:


1. In the attributes for the Add object Action, on the **Object and position** tab, choose **Add text in foreground**.
2. Click the **Variable** button.
3. Select **%Page Box Dimensions%**.
4. Select the page box of which you want to insert the dimensions, in this example **Media Box**. The current value is shown.
5. Click **Insert**.
6. Select a font and a font size and determine where the text must be inserted in the document, for example in the center of the media box with a particular offset.
7. Specify whether or not to take into account page rotation and page scaling factor if applicable.

Below is an example of the dialog that allows you to insert predefined text variables.

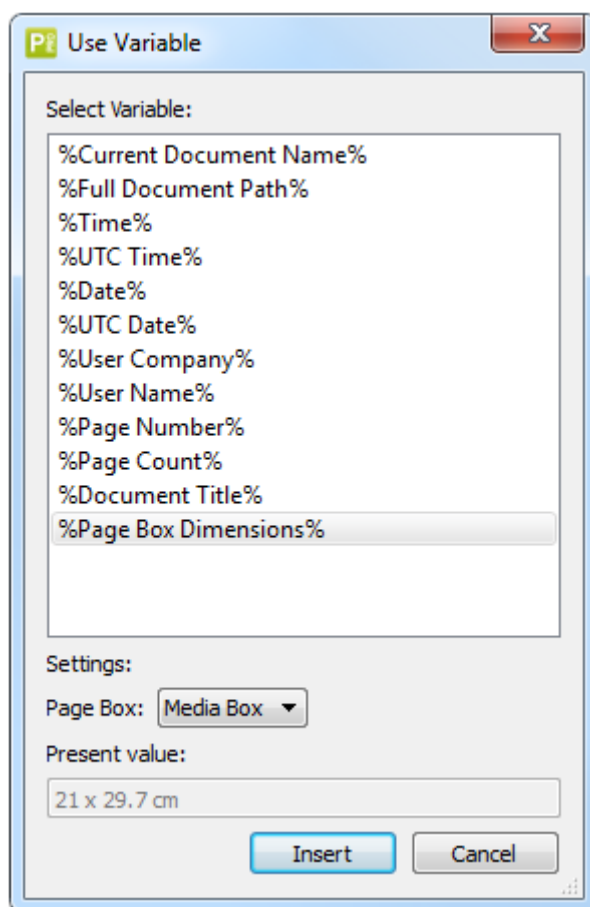

### **Document variables - Overview**

When you select 'text' on the Object and Position tab, the Variable button becomes available, which gives access to a list of predefined variables.

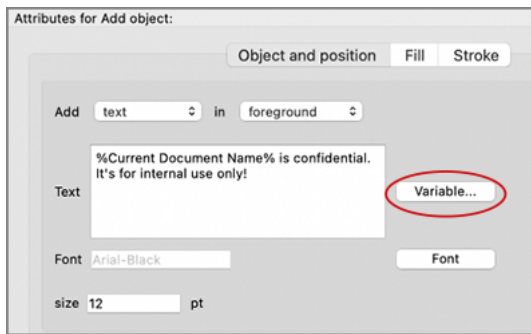

This is the full list of the predefined variables:

- %Current Document Name%
- %Full Document Path%
- %Time%
- %UTC Time%
- %Date%
- %UTC Date%
- %User Company%
- %User Name%
- %Page Number%



**Note:** You can use the page number as it is, or increment or decrement it (so always add up or subtract a certain number). To decrement, you need to add a minus sign. For example, if the page number is '12' and you enter '-3', the value of the variable will be '9'. If you enter '3', the value of the variable will be '15'. You can also add leading zeros by defining the minimum number of digits. For example, if Total digits is set to '3', '9' will become '009' and '15' will become '015'.

- %Page Count% = total number of pages



**Note:** You can add leading zeros by defining the minimum number of digits. For example, if Total digits is set to '3', '9' will become '009' and '15' will become '015'.

- %Document Title%
- %Page Box Dimensions%



**Note:** You need to indicate which page box should be considered. For example, if you select Media Box from the Page Box list, the value of the variable will be the dimensions of the media box, for example: 210 x 297 mm (the unit depends on the unit specified in the PitStop Pro preferences).

- %Page Box Width%



**Note:** You need to indicate which page box should be considered. For example, if you select Art Box from the Page Box list, the value of the variable will be the width of the art box, for example: 210 mm (the unit depends on the unit specified in the PitStop Pro preferences).

- %Page Box Height%



**Note:** You need to indicate which page box should be considered. For example, if you select Bleed Box from the Page Box list, the value of the variable will be the height of the bleed box, for example: 210 mm (the unit depends on the unit specified in the PitStop Pro preferences).



## 5.1.14. Add objects to layer

### Belongs to

- **Category:** Layers
- **Type:** Changes

### What it does

Allows you to add any selected objects to a specific layer. You can identify the layer concerned by selecting it using another Action in the same Action List.

Optionally, you can at the same time remove the added objects from the other layers.

### How to proceed

1. Add a first "select" Action to the Action List, to select the **layer** to which you want to assign the objects.
2. Add a second "select" Action to the Action List, to select the **objects** to be added.



**Note:** You don't have to specify operators in between the two "select" Actions. However, you can also use **combined** "Select" Actions to specify the layer or the objects concerned (see example 2).

3. Add **Add objects to layers** and select the **Add to selected layers** radio button.

### Examples

**Example 1:** The following Action List will add all annotations to Layer1 and remove them from the other layers:

```
Select layers by name <!-- Select layers by name on page 454 and set the layer name to Layer1 -->
Select annotations <!-- Select annotations on page 463 -->
Add objects to layers <!-- Select Remove from other layers -->
```

**Example 2:** The following Action List will add XObjects and annotations to LayerA and LayerB:

```
Select layers by name <!-- Select layers by name on page 454 and set the layer name to "equals [AB]"; enable Use regular expressions -->
Select XObjects <!-- Select XObjects on page 448 -->
Select annotations <!-- Select annotations on page 463 -->
OR
Add objects to layers
```

### Related Actions

- [Add objects to layer with name](#) on page 148
- [Add objects to layer](#) on page 149

## 5.1.15. Add objects to layer with name

### Belongs to

- **Category:** Layers

- **Type:** Changes
- **Since version:** 12 update 3

**What it does**

Allows you to add any selected objects to a specific layer. You can identify the layer concerned by entering a string (e.g. Layer1). Optionally, you can at the same time remove the added objects from the other layers.

**How to proceed**

1. Add a "select" Action to the Action List, to select the objects you want to add, for example [Select all](#) on page 477.
2. Add **Add objects to layers** to the Action List.
3. Enter the name of the layer.
4. Optionally, select **Remove from other layers**.

**Example**

To add all annotations to a particular layer and remove them from another layer, use the following Actions:

```
Select annotations <!-- Select annotations on page 463 -->
Add objects to layers <!-- Enter a name, e.g. AnnotationLayer and select Remove from
other layers-->
```

**Related Actions**

- [Add objects to layer](#) on page 149
- [Remove objects from layers](#) on page 155

## 5.1.16. Add page box marks

---

**Belongs to**

- **Category:** Add
- **Type:** Changes

**What it does**

Allows you to add trim marks and/or bleed marks to your document in the style of your preference (InDesign or QuarkXPress).

## 5.1.17. Add page number

---

**Belongs to**

- **Category:** Add
- **Type:** Changes

**What it does**

Adds page numbers (including section and chapter numbers) to a PDF.



**Note:** The Global Change **Add Page Number** provides the same functionality.

### How it works

You must first create a sample piece of text, which will be used to determine the format and style used for page numbering (font, color, size etc):

- If you want to add a page number only, the sample should only be a number, e.g. "3".
- If you want to add a page number with more information (for example: include the word "Page" and the total number of pages) add this to the sample, e.g. "Page 1 of 10".

The text strings (including spaces and punctuation) in this sample will be used as they are. For the numbers in this sample, you should indicate which one refers to the page number, hence should be considered a variable. For example, if your sample is "Page 1 of 10", "1" refers to the page number (Page %pagenr% of 10) and will be different on each page. "10" will not be changed, as it is not possible to use variables for other information than page numbers.

### How to proceed

1. Create an example piece of text.
2. Select the sample by using the PitStop Select Objects tool .
3. In the attributes of the Action, click the **Grab Sample from Selection** button.  
The sample text appears in the Sample field.
4. Specify the position of the page numbers relative to the text and one of the page boxes. You can use a default offset, manually enter offset values or grab the document's offset values.
5. To start numbering on a different page than the first page of the document, enter the page number. For example, if you want to start numbering after the table of contents, for example on the third page of the document, enter "3". Note that you can also use a variable for this (added in PitStop 2020).
6. By default, the pages are numbered consecutively based on all pages of the PDF. However, if you want to base the page numbering on a selection of pages, select **For generating page number sequence, use: Selected pages**.

### Example:

```
Select pages <!-- page range 1-3, only odd pages -->
Add page number
```

Output in case of PDF pages (default):

- Page 1: numbered 1, page 2: not numbered, **page 3: numbered 3**

Output in case of Selected pages:

- Page 1: numbered 1, page 2: not numbered, **page 3 numbered 2**

7. If your sample text contains numbers, the **Variable number sequence** list is activated. This list allows you to indicate which number should be considered a variable (indicated by "%pagenr %").

For example, if your sample text is "Page 2, Section 1", you will have three options:

- "Page 2, Section 1" will insert "Page 2, Section 1" on every page.
- "Page %pagenr%, Section 1" will insert "Page 1, Section 1" on page 1, "Page 2, Section 1" ... (Section 1 will not change)
- "Page 2, Section %pagenr%" will insert "Page 2, Section 1" on page 1, "Page 2, Section 2" ... (Page 2 will not change)

8. Switch to the **Options** tab and select the appropriate checkbox:
- **Remove any overlapping text** will remove existing page numbers.
  - **Only number pages that already have a number** will not add page numbers to pages that currently don't have any.
  - **Add white background** ensures that the page numbers are visible, even if the PDF has a dark background.

## 5.1.18. Add pages

---

### *Belongs to*

- **Category:** Add; Page
- **Type:** Changes

### *What it does*

Allows you to insert either empty pages or pages from a particular PDF file (by embedding the file or by using the file path (optionally specified by a variable)).

You can choose the number of pages to add, the location of the new pages in the PDF ...

As of PitStop 2019, you can insert pages before or after a selection you made earlier in your Action List. You could for example select all pages with a certain string and insert empty pages based on this selection. See also the example Action List below.

### *"R[number]" notation*

If you want to add pages starting from the end of the PDF, you can use the "R[number]" notation in the **Before pages/After pages** text box. R1 refers to the last page (= 1 page from the end), R2 refers to the last but one (= 2 pages from the end), ... This allows you for example to add a backup interleave page to every page in the PDF.

Attributes for Add pages:

☒ Insert empty pages  
☐ Insert pages from document

---

Insert Empty Pages:

☐ Exact number of pages: 1  
☒ Until  pages

---

Location:

☒ Before pages   
☐ After pages   
☐ Before last page  
☐ After last page  
☐ Before every  pages starting from page  to   
☐ After every  pages starting from page  to   
☐ Before selected pages  
☐ After selected pages

#### Example Action List

Suppose you have a mixed landscape/portrait document and you want to insert an empty page after every landscape page. That's possible with the following Action List.

```
Select all
Select by page orientation <!-- select if page orientation = landscape -->
Add pages <!-- select "insert empty pages" and "after selected pages" -->
```

## 5.1.19. Add pages with extracted content to document

### Belongs to

- **Category:** Add
- **Type:** Changes
- **Since version:** 24.11

### What it does

Allows you to separate cut lines and embellishments (typically Scodix separations, such as foiling, embossing, debossing, varnishing, and spot UV coating) from other page objects. The selected objects are copied and moved to a separate page. This allows the printing device to handle each part separately, improving the efficiency and accuracy of the printing process.

**Note:**


- Line art is preserved as it is, it's not converted to an image.
- Clipping paths of selected objects are always copied, even if they are not selected.

**Example Action List**


To move a cut line with spot color 'CUTTER' to a new page, create the following Action List:

```
Select spot color by name ('CUTTER')
Add pages with extracted content to document (after source page + add a page label
(%Page label% _%Colorant Name%))
Remove selection
```

The following screenshot shows that the color of the cut line is 'CUTTER' in this example.

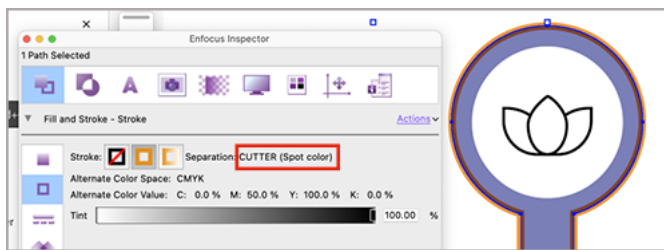

The resulting document has an extra page: the original page now contains all content without the cut line; the extra page contains the cut line only. Note the page label of the inserted page.

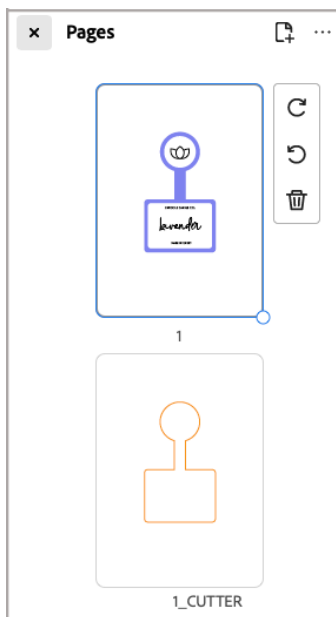

## 5.1.20. Add registration marks

**Belongs to**

- **Category:** Add
- **Type:** Changes

**What it does**

Allows you to add registration marks to your document in the style of your preference (InDesign or QuarkXPress).

Registration marks ensure that the different separations in a color document are properly aligned.

**Related Actions**

[Select registration marks](#) on page 487

## 5.1.21. Add separation names

---

**Belongs to**

- **Category:** Add
- **Type:** Changes
- **Since version:** 12 update 2

**What it does**

Allows the names of color separations to be generated and positioned within a PDF file. The separation names are individually created for each page and show all separations including any spot colors.

You have several options. You can specify:

- *How* the separation names should be displayed (stacked (i.e. one per line), inline (*reflow*) or all on top of each other (*on same location* - useful for color plates); in color or with color patches, rotated, ...). You can also determine the font and the font size.
- *Where* exactly they should be placed on the page (position of the color names relative to a page box).
- Whether or not *process colors* and *separations with 0% tint* should be displayed.
- If you have chosen to add color patches, whether or not they should have a border (*Add stroke on color patches*).

**Examples**

- Example 1: Layout: **Stack** and Color: **Separation names in black + color patches** are selected.

■ Cyan  
■ Magenta  
■ Yellow  
■ Black

- Example 2: Layout: **Overflow** and Color: **Separation names in black + color patches** are selected. The color patches have a border, because **Add stroke on color patches** is enabled.

■ Cyan ■ Magenta ■ Yellow ■ Black

- Example 3: Layout: **Overflow** and Color: **Separation names in color** are selected.

Cyan Magenta Yellow Black

5.1.22. Add separation pages to document

Belongs to

- **Category:** Add
- **Type:** Changes
- **Since version:** 24.11

What it does

Adds one page per for each separation. Each added separation page is actually a single image which is a render of the original input. You can choose the resolution of the generated images and the compression filter.

Separating colors in a PDF is useful to ensure that each color is printed accurately and consistently. By separating the colors, printers can create individual plates for each color, which helps in achieving precise color registration and alignment during the printing process. Another reason is to optimize the printing process itself. Some printing devices and finishing equipment struggle to process heavy files or complex color information. By separating the colors, the files become lighter and easier to handle, which can improve the efficiency and speed of the printing process



**Note:** This Action works on a selection. You can add separation pages for all pages of the document ("Select all") or only for some of it (e.g. only one particular page, only pages with spot colors). See the examples below.

Note that the source pages are always preserved. That is because the page may contain RGB or spot colors that you want to keep.

Attributes

| Attribute                            | Description                                                                                                                                                                                                                                               |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Insert generated separation pages    | The generated pages are inserted at the position of your choice: <ul style="list-style-type: none"><li>• After the source page</li><li>• Before the source page</li><li>• At the beginning of the document</li><li>• At the end of the document</li></ul> |
| Resolution (ppi) of generated bitmap | Resolution in ppi of the generated image.                                                                                                                                                                                                                 |
| Compression                          | Compression filter: <ul style="list-style-type: none"><li>• JPEG</li><li>• JPEG 2000</li><li>• ZIP</li><li>• None</li></ul>                                                                                                                               |



| Attribute                               | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                         | In case of JPEG or JPEG 2000, you should also select the quality.                                                                                                                                                                                                                                                                                                                                                                                                                |
| Use anti-aliasing                       | Enable anti-aliasing to reduce visual distortions when representing high-resolution images at a lower resolution.                                                                                                                                                                                                                                                                                                                                                                |
| Generate all separations in grayscale   | <p>When enabled, all separations (including spot colors) are converted to black and white. This makes it easier to inspect effects, such as knock-outs, especially with light colors.</p> <div>  <p><b>Note:</b> We recommend using the option to add page labels (e.g. with the colorant name), so you know which separation is displayed, as you cannot recognize it by its color.</p> </div> |
| Blend spot colors into CMYK separations | Enable this option to convert spot colorants to CMYK and then add them to each separation. That way, you can see what the document will look like on a CMYK press. Note that the original page is not changed.                                                                                                                                                                                                                                                                   |
| Add a page label                        | <p>Enable this option to add a page label to the new pages. This is useful to know where the new pages come from.</p> <p>You can enter any string and one or more of the following variables:</p> <ul style="list-style-type: none"> <li>• %Page Label%</li> <li>• %Page Number%</li> <li>• %Page Count%</li> </ul> <p>For example: <i>%Colorant Name% separation of page %Page Number%</i> may result in a page label like: Pantone 360 C separation of page 3.</p>             |



**Note:** When you add separation pages to a document, the **Undo** stack in PitStop is cleared. That means that changes, including previous changes to the order of the pages, the numbering of pages, etc. cannot be undone anymore through the Enfocus Undo option; you can only use the revert option in Acrobat to restore the original document if needed.

## Example 1


### Action List:

```
Select all // so processing based on the complete document
Add separation pages to document // "Insert generated image" set to:
                                "At the end of the document"
```

### Result:

In this example, the original document had only 1 page. PitStop detected 4 separations on that page, so 4 separation pages (one per separation) were inserted at the end of the document,

resulting in a 5-page document. Note that you can browse the separation pages using the Enfocus Navigator as shown in the screenshot.

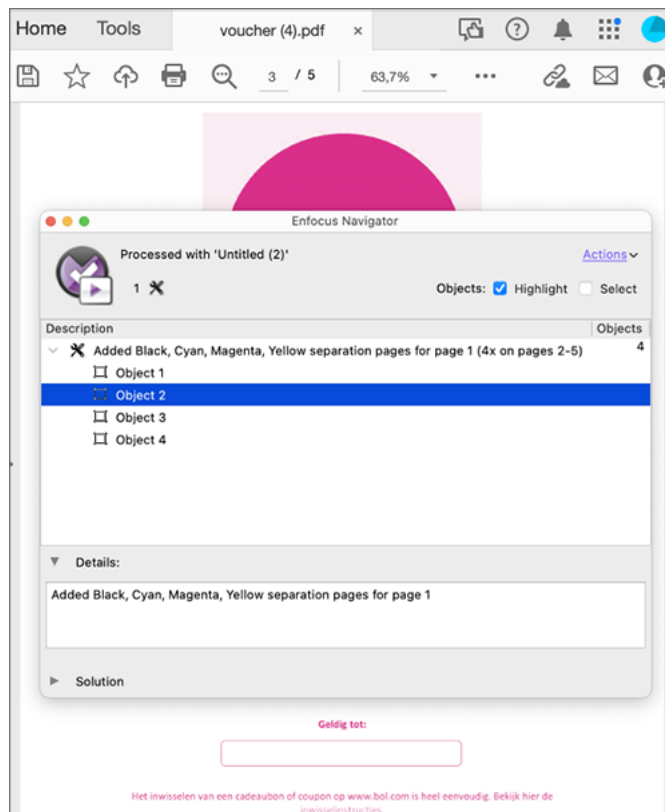

## Example 2


### Action List:

```
Select by page orientation // landscape
Add separation pages to document // "Insert generated image" set to:
    "After the selected page"
```

### Result:

In this example, the original file had 12 pages, but only one with landscape orientation: page 6.

On page 6, PitStop detected 5 separations (CMYK + 1 process color), so after the selected page, 5 extra pages were inserted (7-8-9-10-11), resulting in a 17-page document.

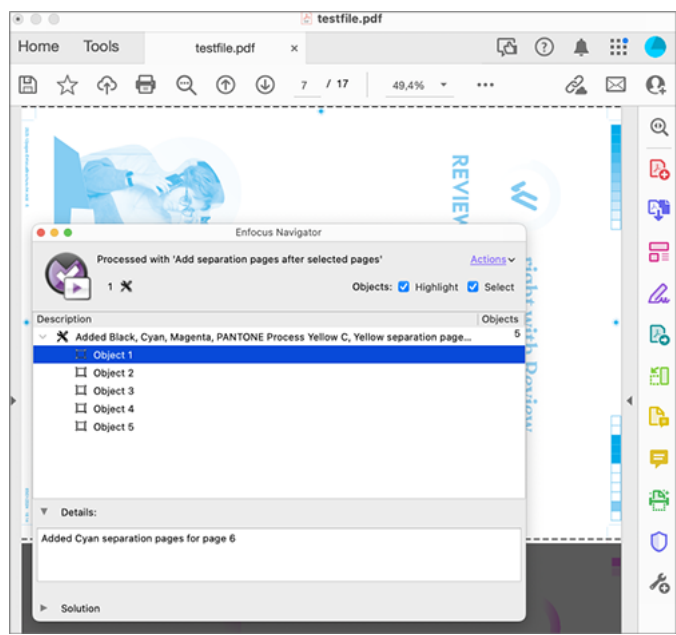

### 5.1.23. Add trace path

**Belongs to**

- **Category:** Add
- **Type:** Changes
- **Since version:** 2020

**What it does**

Generates a path or shape by tracing objects in a PDF.

This Action generates a path around everything that's not white, which enables creating vector elements to be used as cutter guides or shapes for embossing.



**Note:** This Action is also available as an option in the Inspector Line Art tab (with exception of the Use colorant selection option, which is not available through the Inspector).

**Attributes**

| Attribute             | Description                                                                                                                                                                                                     |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Scan resolution (ppi) | Default value is 300.<br><br>Increasing this value will slow down processing but improve accuracy (and vice versa).                                                                                             |
| White threshold       | Default value is 10%. This is the best value to filter out tiny pixels that are artefacts.<br><br>To change this threshold, drag the slider to right or to the left or enter the value of your choice manually. |

| Attribute                                       | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                 | Increasing the white threshold may result in light gray parts being included in the selection.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Curve optimization                              | <p>Default value is 20%.</p> <p>If you lower this value, more selection points will be taken into account to draw the curve, making the curve more accurate but less fluent.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Ignore white holes                              | <p>This option allows you to include or ignore white shapes (i.e. paths fully inside another path). If included, the white holes are cut out.</p> <p>This option is useful when making white underprints for printing on transparent substrates.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Invert trace path, use <page box> as outer edge | This option allows you to invert the created path, using the page box of your choice as an outer boundary.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Only add trace paths larger than ...            | This option allows you to remove paths that are smaller than a specified size, i.e. paths of which the width and height of the bounding box are smaller than the entered value.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Only add largest trace path                     | This option allows you to remove all smaller paths, to keep only the largest one.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Use colorant selection                          | <p>This option allows you to let the Action only trace the selected channels (e.g. only CMY), ignoring the others (e.g. K).</p> <p>This option requires two preceding "select" Actions; the first one to select the <i>channel</i>s that need to be traced, the second to select the <i>objects</i> that need to be traced.</p> <p><b>Example Action List 1</b> (path based on process colors, in this example: CMY):</p> <pre>select process colorants (CMY on) select all trace path (Use colorant selection on)</pre> <p><b>Example Action List 2</b> (path based on text segments in a particular spot color, in this example: PANTONE 3507 C):</p> <pre>select spot color PANTONE 3507 C select text segments trace path (Use colorant selection on)</pre> <p><b>Example Action List 3</b> (draws a path around magenta and PANTONE 3507 C + works on text and line art)</p> |

| Attribute | Description                                                                                                                                                                                                        |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|           | <div>Actions</div> <div>Select process colorant</div> <div>Select spot color PANTONE 3507 C</div> <div>OR</div> <div>Select line art</div> <div>Select text segments</div> <div>OR</div> <div>Add trace path</div> |

**Examples**  
Suppose you're running this Action on the below image. The generated trace path depends on the chosen options.



| Attributes                               | Result                                                                                                                                                                                          |
|------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Default values, no extra options enabled | The same balloon illustration as before, but with black trace paths overlaid on the outlines of the balloons. The paths are most visible on the white balloon and the pink balloon to the left. |

| Attributes                                                                                                                                                      | Result                                                                               |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| Default values, ignore white holes                                                                                                                              |    |
| Default values, ignore white holes, only add largest trace path; as a result, the single balloon is not traced anymore.                                         |   |
| Default values, ignore white holes, resolution of 72 ppi (iso 300)                                                                                              |  |
| Default values, ignore white holes, resolution of 72 ppi (iso 300), no extra curve optimization (selected version, so you can clearly see the selection points) |  |

| Attributes                                                                                                                                                                                                        | Result                                                                             |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| Default values, ignore white holes, resolution of 72 ppi (iso 300), with increased curve optimization (selected version, so you can see that now there are fewer selection points, resulting in a smoother curve) |  |

## 5.1.24. Add unique document IDs

### *Belongs to*

- **Category:** Document
- **Type:** Changes

### *What it does*

Adds a unique document ID (generated at random) to your document.

### *Related Actions*

[Check document unique IDs](#) on page 322

## 5.1.25. Align or distribute objects

### *Belongs to*

- **Category:** Position/Size;Page
- **Type:** Changes
- **New since:** PitStop 2021

### *What it does*

Aligns or distributes the selected objects and/or distributes spacing between them.

You can align objects relative to your selection ("Selection bounding box") or to one of the page boxes.






**Note:** This functionality is also available in the Enfocus Inspector (on the Position tab).

### *Remarks*

The 'Select all' Action, which is added automatically to a new Action List, should be removed in most cases. You can either add your own 'select' Actions or run the Action List on a user selection.

Note that you could also create your Action List by recording your actions while aligning and/or distributing objects using the Enfocus Inspector.

Examples
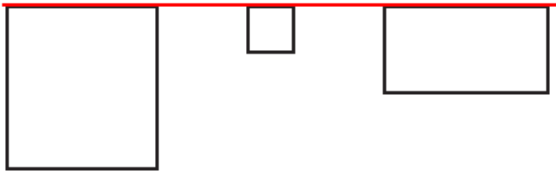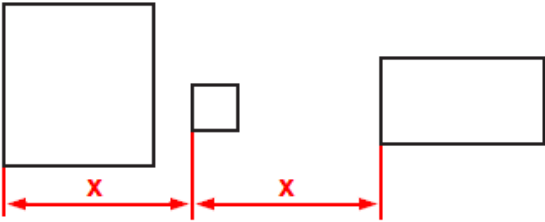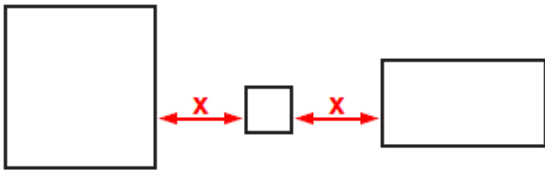
| Example                                                                            | Description                     |
|------------------------------------------------------------------------------------|---------------------------------|
|   | Aligned top edges.              |
|   | Distributed left edges.         |
|  | Distributed horizontal spacing. |

5.1.26. AND

Belongs to

- **Category:** Operators
- **Type:** Selections

What it does

AND is a logical operator. This means it is used to select a single object with more than one attribute.

Example

To select text that was Helvetica AND size 12 pt, use:

```
Select Font Helvetica
Select Text if Point Size = 12.00 pt
AND
```



**Note:** AND is NOT used to select two different objects!



For example, **the following is incorrect** because a font cannot be both Helvetica and Arial:

```
Select Font Helvetica  
Select Font Arial  
AND
```

## 5.1.27. Apply a gaussian blur to an image

---

### *Belongs to*

- **Category:** Image
- **Type:** Changes

### *What it does*

Allows you to apply a Gaussian blur to the selected images.

You can define the radius of the blur, by moving the slider. A higher radius will result in a higher amount of blur.

Applying a Gaussian blur is useful to reduce image noise and detail.

## 5.1.28. Apply CMYK curve

---


### *Belongs to*

- **Category:** Color
- **Type:** Changes
- **Since version:** 12 update 2

### *What it does*

This Action allows color curves to be applied to selected CMYK objects, either on all four channels, or on individual C, M, Y, or K channels.

Curves can be created by adding points, and dragging them to the preferred position, or by entering values in the **Input** and **Output** field below the curve.

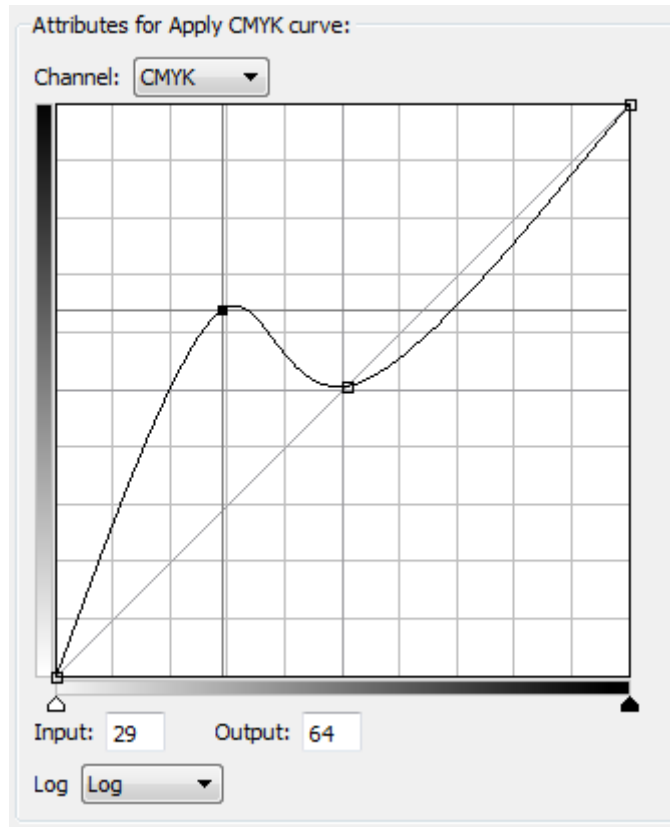**Example**

## 5.1.29. Apply color curve

---

**Belongs to**

- **Application:** PitStop Pro
- **Category:** Color
- **Type:** Changes
- **Since version:** 12 update 2

**What it does**

This Action allows color curves to be applied on separations of selected objects.

The default separations are C, M, Y, K, and Other (= all other separations in the file except for CMYK), but you can also add a curve for another spot color or varnish separation, which will be used if that color appears in the processed file.


Curves can be created by adding points, and dragging them to the preferred position, or by entering values in the **Input** and **Output** field below the curve.



**Note:** Apply color curve is also available as a Global Change!

**Example**

The + button allows you to add a curve for an additional color.

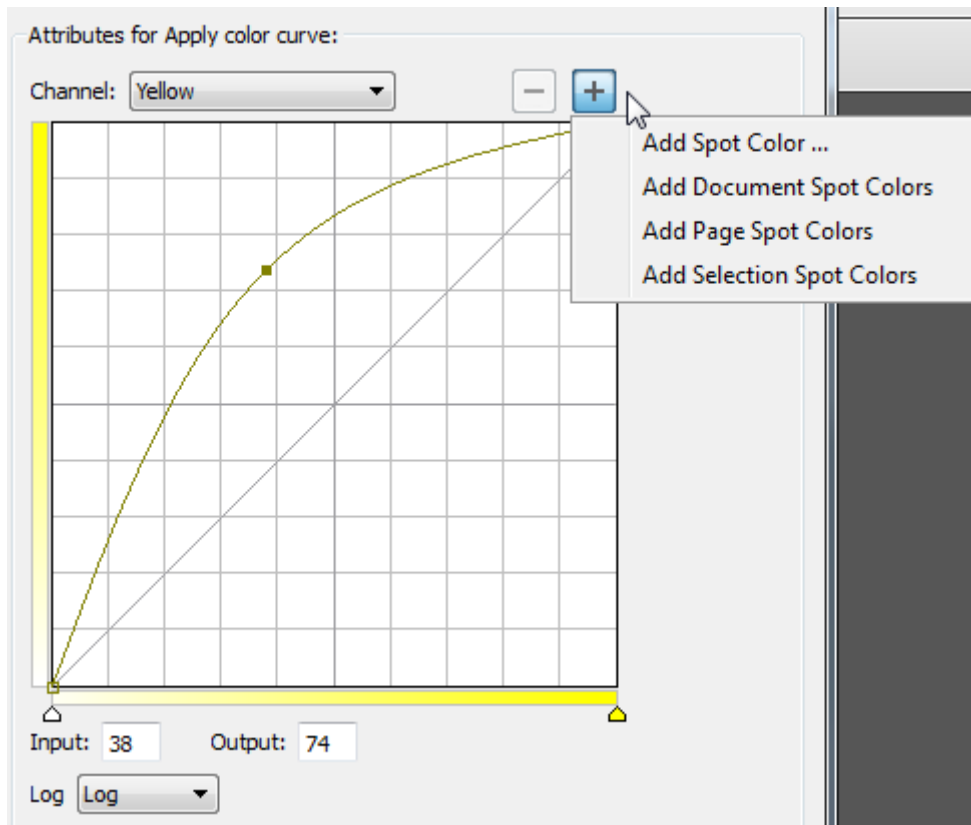

### 5.1.30. Apply DeviceLink

#### *Belongs to*

- **Category:** Color
- **Type:** Changes

#### *What it does*

Allows you to convert the color of the selected objects to Gray, CMYK or RGB using a device link profile (instead of an ICC profile).

DeviceLink profiles are device specific profiles, converting colors from one color space to another, without converting to LAB or any other device independent color space in between.

You can browse for a local DeviceLink profile or you can select one from the list; PitStop includes 40 DeviceLink profiles for CMYK-CMYK conversions and ink coverage reduction.

Note that you can convert only the stroke or fill of the objects, or both.



**Note:** If the objects concerned are tagged with an ICC profile, it must be removed first, before you can apply a DeviceLink profile. To do so, you can use [Tag object with an ICC](#)

[profile](#), with the ICC profile set to **None**. Alternatively, you can use the PitStop Inspector (**Fill and Stroke** tab, ICC profile (at the bottom of the tab) set to None).

---

### 5.1.31. Apply Gray curve

---


***Belongs to***

- **Application:** PitStop Pro
- **Category:** Color
- **Type:** Changes
- **Since version:** 12 update 2

***What it does***

This Action allows a curve to be applied to selected Gray objects.

Curves can be created by adding points, and dragging them to the preferred position, or by entering values in the **Input** and **Output** field below the curve.

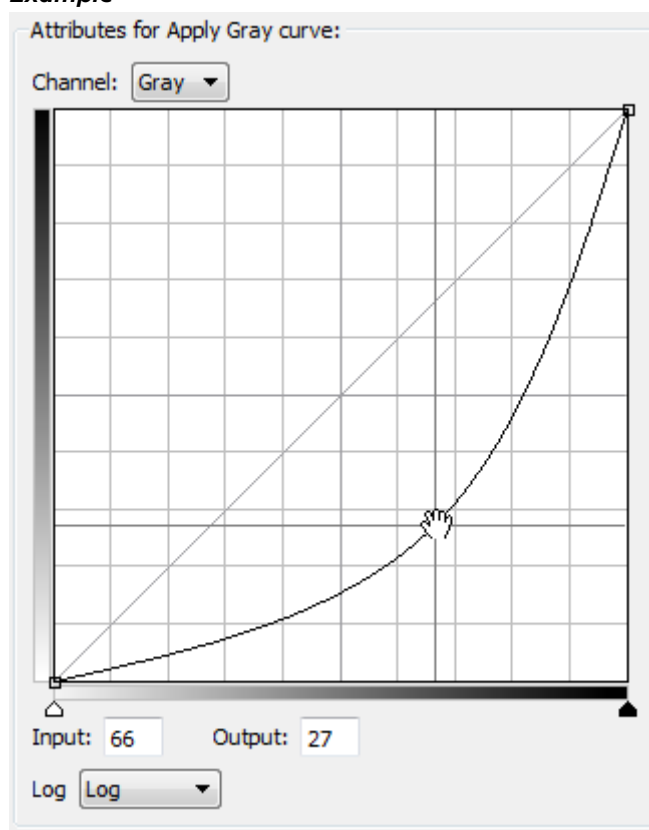**Example**

## 5.1.32. Apply Lab curve

---


***Belongs to***

- **Category:** Color
- **Type:** Changes
- **Since version:** 12 update 2

***What it does***

This Action allows color curves to be applied to selected Lab objects on individual lightness, a, or b channels.

Curves can be created by adding points, and dragging them to the preferred position, or by entering values in the **Input** and **Output** field below the curve.

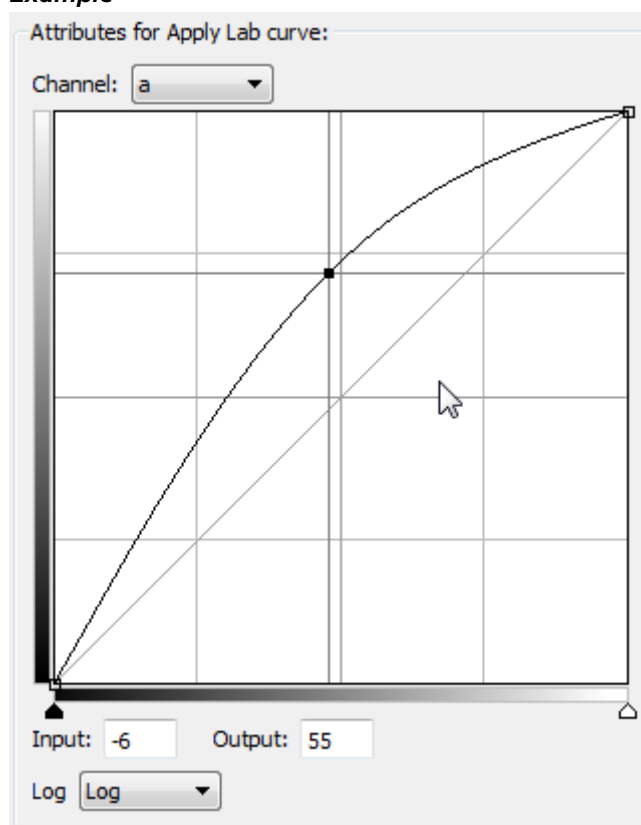**Example**

### 5.1.33. Apply page rotation

---

**Belongs to**

- **Category:** Position/Size;Page
- **Type:** Changes

**What it does**

Sets the page rotate key defined in the PDF to 0°. This may have a visual effect.

**Related Actions**

- [Check page rotation angle](#) on page 379
- [Select by page rotation angle](#) on page 481
- [Normalize Page Rotate Key](#) on page 214

### 5.1.34. Apply page scaling factor

---

**Belongs to**

- **Category:** Position/Size;Page
- **Type:** Changes

**What it does**

Apply page scaling factor removes the page scaling factor and scales the page to compensate.

A page of 10 by 10 inches and a page scaling factor 2 will be displayed and printed as a page of 20 by 20 inches. By applying the page scaling factor, the actual page size will become 20 by 20 inches.

Page scaling has been introduced in PDF 1.6. If the page scaling factor is not removed or applied, the page size can only be displayed correctly in Acrobat 7 or higher.



**Note:** When the result of applying the scaling factor exceeds the size of 200x200 inches, the page may not be displayed well. This is a limitation of Adobe Acrobat.

**Related Actions**

- [Check if page scaling factor is used](#) on page 374
- [Remove page scaling factor](#) on page 216

## 5.1.35. Apply RGB curve

---

**Belongs to**


- **Category:** Color
- **Type:** Changes
- **Since version:** 12 update 2

**What it does**

This Action allows color curves to be applied to selected RGB objects, either on all three channels, or on individual R, G, or B channels.

Curves can be created by adding points, and dragging them to the preferred position, or by entering values in the **Input** and **Output** field below the curve.

**Example**

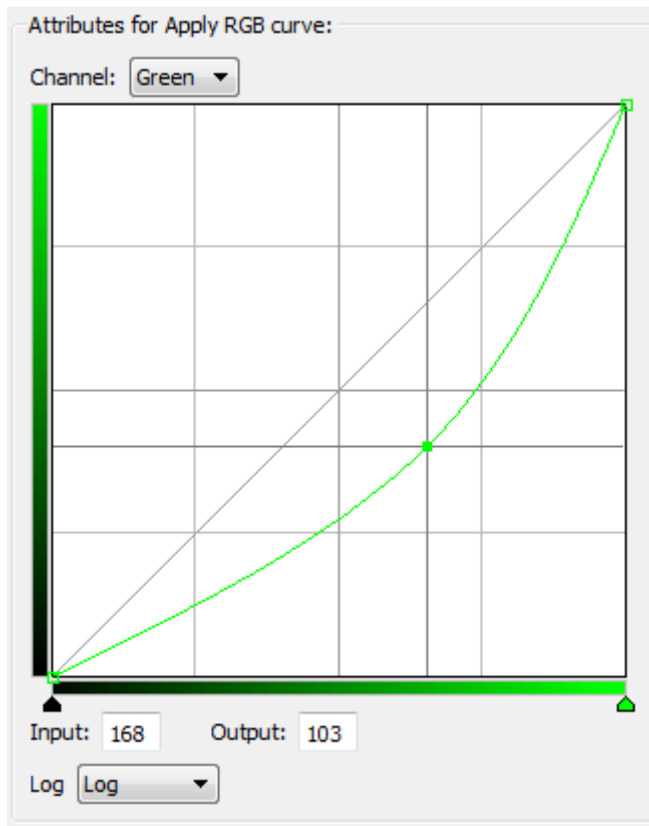

### 5.1.36. Apply transfer function

#### ***Belongs to***

- **Category:** Prepress;Text;LineArt;Color;Image
- **Type:** Changes

#### ***What it does***

Adds a transfer function to paths, text, images or all these types of objects. You can exclude spot colors or apply the transfer function on tint values or alternate values only.

Transfer functions are used for creative purposes, artistic effect and to correct the characteristics of a specific, maybe poorly calibrated, output device. For example, a file that is intended for output on a particular image setter may contain transfer functions that compensate for the dot gain inherent to that printer.



**Note:** Transfer functions are not allowed in PDF/X compliant documents.

#### ***Related Actions***

- [Check for custom transfer function](#) on page 402
- [Remove custom transfer function](#) on page 271



## 5.2. C (Part 1: Center - Change)

---

### 5.2.1. Center page content

---

***Belongs to***

- **Category:** Page;Position/Size
- **Type:** Changes

***What it does***

Places all objects in the center of the page.

You can:

- Center the objects horizontally, vertically or both.
- Center the content relative to a page box and set margins (left, right, top and bottom).
- Use page rotation and scaling factor as required.
- Only center the visible part of the content.

### 5.2.2. Change annotation flags

---

***Belongs to***

- **Category:** Metadata
- **Type:** Changes
- **New since:** PitStop 2022

***What it does***

Allows you to enable or disable the annotation flags of your choice.

Following flags can be changed:

- Invisible
- Print
- NoRotate
- ReadOnly
- ToggleNoView
- Hidden
- NoZoom
- NoView
- Locked
- LockedContents

***Related Actions***

- [Check annotation flags settings](#) on page 348

- [Check annotations print setting](#) on page 349
- [Use flags to select annotation](#) on page 469

### 5.2.3. Change annotations print setting

---

***Belongs to***

- **Category:** Metadata
- **Type:** Changes

***What it does***

Change annotations' print setting allows you to set the selected annotations to **Printing** or **Non-Printing**.

### 5.2.4. Change art box

---

***Belongs to***

- **Category:** Page
- **Type:** Changes

***What it does***

Allows you to create or resize an art box.

You must choose one of the following options:

- To create a new art box, select **Define new rectangle** and enter the required values, or grab them from a selected area using the **Grab Offsets** button . Note that boxes are defined from lower left to upper right.
- To resize the art box relative to the axes of the existing art box, select **Resize** and enter the required values.
- To re-use the dimensions from another box, select **Use box size** and select the appropriate page box.
- To determine the size of the art box based on a selection, select **Resize page box to fit the selection** and enter the offset values.

There are some additional options available:

- **Only apply if not all pages have the same size**
- **Ignore page rotation and scaling factor**
- **Always require page box to be defined**

### 5.2.5. Change binding

---

***Belongs to***

- **Category:** Metadata
- **Type:** Changes

**What it does**

Allows you to redefine a document's binding; you can set binding to the right or to the left.

Most European language documents are bound on the left.



**Note:** To check a document's binding, in Adobe Acrobat, go to **File > Properties** and switch to the **Advanced** tab. The document's binding property (Left Edge or Right Edge) is displayed under Reading Options.

**Related Actions**

- [Check binding](#) on page 350
- [Select by binding](#) on page 465

## 5.2.6. Change bleed box

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Allows you to create or resize a bleed box.

You must choose one of the following options:

- To create a new bleed box, select **Define new rectangle** and enter the required values, or grab them from a selected area using the **Grab Offsets** button . Note that boxes are defined from lower left to upper right.
- To resize a bleed box relative to the axes of the existing bleed box, select **Resize** and enter the required values.
- To re-use the dimensions from another box, select **Use box size** and select the appropriate page box.
- To determine the size of a bleed box based on a selection, select **Resize page box to fit the selection** and enter the offset values.

There are some additional options available:

- **Only apply if not all pages have the same size**
- **Ignore page rotation and scaling factor**
- **Always require page box to be defined**

## 5.2.7. Change blending color space

**Belongs to**

- **Category:** Color; Page
- **Type:** Changes

**What it does**

Allows to change the blending color space and/or the luminosity softmask blending color space (if defined in the PDF document).

You can:

- Change the color to CMYK, gray or RGB, or
- Remove the blending color space, by selecting "none" from the first list, or
- Leave one of the color spaces unchanged, by selecting **Do not change**.

**About blending color spaces**

When Adobe Acrobat interprets transparent objects and attempts to create a preview of the flattened artwork, it needs to do so using a single color space for all the items involved in the transparency group. This color space is called the **blending color space**.

The blending color space for soft masks (masks with soft transitions) is called the **luminosity softmask blending color space**. It is usually gray.

**Related Actions**

- [Check if blending color space is defined](#) on page 308
- [Select by blending color space](#) on page 424

## 5.2.8. Change character spacing

---

**Belongs to**

- **Category:** Text
- **Type:** Changes

**What it does**

Changes the amount of space between two characters in a selected text string.

The amount of space is expressed in 'em' units. An 'em' refers to the width of the capital M in the current font.

## 5.2.9. Change color

---

**Belongs to**

- **Category:** Color
- **Type:** Changes

**What it does**

Allows you to change the fill and/or stroke colors in a PDF.

**How to proceed**

Define the target colors as follows:

1. Select the appropriate checkbox, depending on what you want to change (Fill color or Stroke color).
2. Select the appropriate target color in one of the following ways:
  - a. Select an object with the PitStop Select Objects tool  and use the icon to grab the fill or stroke color  (depending on what you're defining).
  - b. Click the color picker icon  and select the appropriate color.
  - c. Select the required color space:
    - Device colors can be Gray, RGB or CMYK
    - Calibrated colors can be Gray or RGB
    - User Swatch (= user-defined colors)
3. Fine tune the color by moving the sliders.

**Related Actions**

[Match fill and stroke colors](#) on page 110

## 5.2.10. Change corrupt font widths

---

**Belongs to**

- **Category:** Text
- **Type:** Changes

**What it does**

Changes corrupt font widths.

Corrupt font widths may occur in a PDF, when "artificial" bold or italic was used instead of the "bold" or "italic" version of the font concerned. For example, if "Futura" is used in your PDF, the "Futura-Bold" and "Futura-Oblique" fonts should be used instead of applying bold and italics on the regular Futura font. Artificial font may cause problems when printing the PDF.

**Related Actions**

- [Check corrupt font widths](#) on page 406
- [Select corrupt font widths](#) on page 506

## 5.2.11. Change crop box

---

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Allows you to create or resize a crop box.

You must choose one of the following options:

- To create a new crop box, select **Define new rectangle** and enter the required values, or grab them from a selected area using the **Grab Offsets** button . Note that boxes are defined from lower left to upper right.
- To resize a crop box relative to the axes of the existing crop box, select **Resize** and enter the required values.
- To re-use the dimensions from another box, select **Use box size** and select the appropriate page box.
- To determine the size of a crop box based on a selection, select **Resize page box to fit the selection** and enter the offset values.

There are some additional options available:

- **Only apply if not all pages have the same size**
- **Ignore page rotation and scaling factor**
- **Always require page box to be defined**

## 5.2.12. Change dash pattern

---

### *Belongs to*

- **Category:** Line Art
- **Type:** Changes

### *What it does*

Changes the pattern of dashed lines or converts them to continuous lines.

### *How to proceed*

To use continuous lines, click .

To create a dashed pattern, click  and configure the following fields:

- In the **On** fields, enter the desired length of the dashes.
- In the **Off** fields, enter the desired size of the spaces between the dashes.
- In the **Phase** field, enter a value to indicate where the dash pattern should begin. For example, if you have chosen dashes of 5 cm each, if you have specified a phase of 2 cm, the first dash will have a length of 3 cm (5 cm - 2 cm).

## 5.2.13. Change default color spaces

---

### *Belongs to*

- **Category:** Color
- **Type:** Changes

**What it does**

Allows you to set the default color spaces for Gray, RGB and CMYK objects in a PDF. These spaces are chosen from the list of available profiles (or you can browse for profiles on your system) and can be applied to all objects or only to objects with absent color spaces.

## 5.2.14. Change document encoding

---

**Belongs to**

- **Category:** Document
- **Type:** Changes

**What it does**

Changes the PDF encoding to binary or ASCII.

**About document encoding**

ASCII encoding was formerly required to ensure that PDF files could be safely transported via e-mail or the Internet. However, most e-mail software in use today handles non-ASCII documents normally, eliminating the need to ASCII-encode your document.

**ASCII versus Binary encoding**

ASCII encoding may increase the file size, but allows you to edit the file manually.

Binary encoding makes the file smaller, but does not allow you to edit the file manually.

**Related Actions**

- [Check data format](#) on page 321
- [Select by document encoding](#) on page 443

## 5.2.15. Change document info

---

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Changes the document information as found in the document properties in Acrobat.

You can change, remove or replace the following details:

- Producer
- Title
- Subject
- Author
- Creator

- Keywords

If you want to replace document info, you can make use of fixed strings and/or document variables, such as the user name, company, date ... see the overview of document variables below.

### **Document variables - Overview**

This is the full list of the predefined variables that can be inserted via the **Variable** button:

- %Current Document Name%
- %Full Document Path%
- %Time%
- %UTC Time%
- %Date%
- %UTC Date%
- %User Company%
- %User Name%
- %Page Number%



**Note:** You can use the page number as it is, or increment or decrement it (so always add up or subtract a certain number). To decrement, you need to add a minus sign. For example, if the page number is '12' and you enter '-3', the value of the variable will be '9'. If you enter '3', the value of the variable will be '15'. You can also add leading zeros by defining the minimum number of digits. For example, if Total digits is set to '3', '9' will become '009' and '15' will become '015'.

- %Page Count% = total number of pages



**Note:** You can add leading zeros by defining the minimum number of digits. For example, if Total digits is set to '3', '9' will become '009' and '15' will become '015'.

- %Document Title%
- %Page Box Dimensions%



**Note:** You need to indicate which page box should be considered. For example, if you select Media Box from the Page Box list, the value of the variable will be the dimensions of the media box, for example: 210 x 297 mm (the unit depends on the unit specified in the PitStop Pro preferences).

- %Page Box Width%



**Note:** You need to indicate which page box should be considered. For example, if you select Art Box from the Page Box list, the value of the variable will be the width of the art box, for example: 210 mm (the unit depends on the unit specified in the PitStop Pro preferences).


- %Page Box Height%



**Note:** You need to indicate which page box should be considered. For example, if you select Bleed Box from the Page Box list, the value of the variable will be the height of the bleed box, for example: 210 mm (the unit depends on the unit specified in the PitStop Pro preferences).

This is an example of the dialog that allows you to insert predefined text variables.



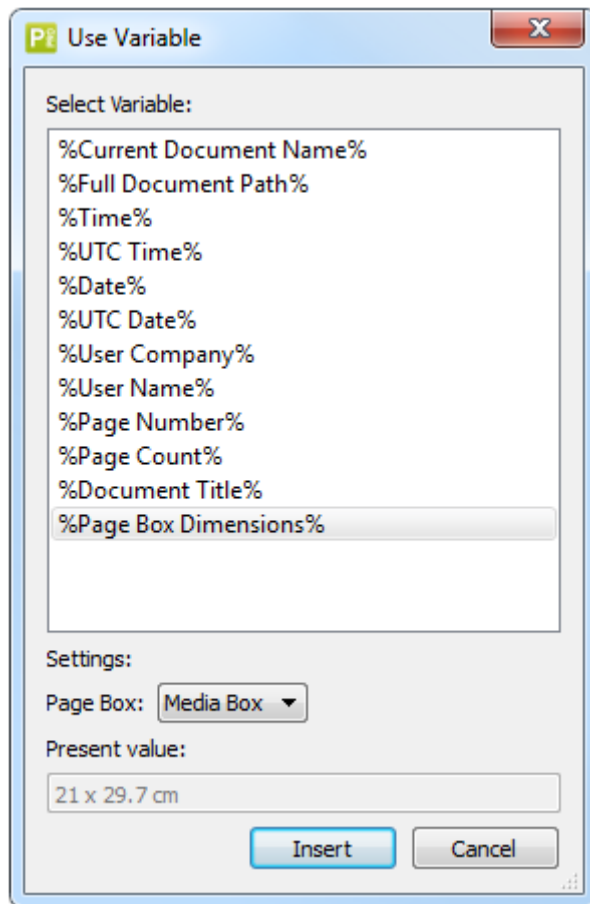

### Example Action List

To replace the current keywords in your document with the document title and the word "PDF", proceed as follows:

1. Run the Change document info Action to remove the current keywords:

```
Change document keywords <!-- select Remove -->
```

2. Run the Change document info Action to insert the new keywords:

```
Change document keywords <!-- select: Set to PDF, %Document Title% -->
```

### Related Actions

- [Check document info](#) on page 352
- [Select by document info](#) on page 465

## 5.2.16. Change document information dictionary compliance

- **Category:** Metadata, PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2021

**What it does**

Makes the information dictionary compliant with the chosen PDF version.

**About the info dictionary**

The info dictionary contains information about the file, such as the title, the author, the creation date ... and is visible through the file's Document Properties.

The specifications for the info dictionary depend on the PDF version:

- **PDF 1.7:** The info dictionary is optional. If it's present, it may contain the following entries: Title, Author, Subject, Keywords, Creator, Producer, CreationDate, ModDate and Trapped.
- **PDF 2.0:** The info dictionary is optional. If it's present, it may be empty, or contain CreationDate and/or ModDate. The other entries are deprecated.
- **PDF/X-6:** There should be no info dictionary, or if there is one, it should be empty.



**Note:** There is one exception to the above: if there is a PieceInfo dictionary in the document catalog dictionary, the info dictionary is required and must contain the ModDate entry.

Note that as of PDF 2.0, the *info* dictionary is officially called *information* dictionary.

**Options**

- **PDF 1.7:** PitStop only adds an info dictionary (including ModDate) if document level PieceInfo is present.
- **PDF 2.0:** PitStop removes deprecated entries from the info dictionary (if necessary). If document level PieceInfo is present, it makes sure there is an info dictionary that contains ModDate.
- **PDF/X-6:** PitStop removes the info dictionary if there is one, except if document level PieceInfo is present; then it makes sure there is an info dictionary that contains ModDate.
- **Current document version:** PitStop detects the current PDF version and makes sure the info dictionary is compliant with the current PDF version.
- **None (leave it unchanged):** This option prevents PitStop from interfering with the info dictionary at the time of saving the file.

## 5.2.17. Change fill and/or stroke

**Belongs to**

- **Category:** LineArt;Text
- **Type:** Changes

**What it does**

Allows you to turn on or off the fill and/or stroke for the selected objects.

## 5.2.18. Change fill type

**Belongs to**

- **Category:** LineArt;Text

- **Type:** Changes

#### **What it does**

Allows you to change the fill type of the selected objects to either Non-Zero Winding (Fill) or Even-odd (Eofill).

#### **About the fill type**

The fill type is an attribute of polygons and loops: compound paths with intersecting lines. To determine whether a point is part of the shape, two different rules can be applied:

- The **Non-Zero Winding** rule (or standard rule). This rule supposes that you draw a line from a point inside the shape to the outside of the shape, without passing through a vertex. You must now count the number of times edges wind around the point inside the shape, in a counter-clockwise direction:
  - For every edge that crosses the line from the point inside the shape in one direction, add 1 to the winding number.
  - For every edge that crosses the line in the opposite direction, subtract 1.

If the winding number is not equal to zero, the shape area to which the point belongs, is filled. For more information, refer to <http://www.wikipedia.org/wiki/nonzero-rule>.

- The **Even-odd rule**: This rule also supposes that you draw a line between a point inside the shape outline and a point outside its outline.
  - If that line crosses the line of the shape an odd number of times, the shape area to which the point belongs, is filled.
  - If the number of crossings is even, the area is not filled.

#### **Checking the fill type of line art**

To see which rule is applied, check the object's fill attributes:

1. Select the object, using the Enfocus Select tool .
2. Click  to display the Enfocus Inspector and select  > .
3. At the bottom, check which button is selected:
  - If  **Fill** is selected, the **Non-zero Winding rule** applies.
  - If  **Eofill** is selected, the **Even-odd** rule applies.

#### **Related Actions**

- [Select paths by fill type](#) on page 460

## 5.2.19. Change flatness

#### **Belongs to**

- **Category:** LineArt;Text
- **Type:** Changes

**What it does**

Allows you to set the flatness of a PostScript curve.

The flatness determines how the objects in a document are printed on a PostScript printer.

The default setting for flatness is 1. Increasing this value will speed up printing, but can reduce the print quality (resulting in visible segments in the curve). Decreasing this value will slow down printing, but will improve the print quality.

**Related Actions**

- [Check flatness](#) on page 399
- [Select flatness](#) on page 503

## 5.2.20. Change font

---

**Belongs to**

- **Category:** Text
- **Type:** Changes

**What it does**

Allows you to replace the current font with another one.

Choose the font that should replace the current font:

- To combine a font name with the preferred type and subtype, select **Search for a font by name:**
  1. Click **Select Font Name** and select the appropriate font. Click **OK**.
  2. Select the preferred type and subtype.
  3. Select the **Embed** checkbox as required.
- To use an existing font, select **Select an existing font.**
  1. Click **Create Font Resource**.
  2. Select the appropriate font.
  3. Select **Embed**, **Don't embed** or **Embed Subset**.
  4. Click **OK**.

You should also indicate how the embedded composite font should be handled.

**Remark**

In case the text of which you want to change the font contains missing glyphs, PitStop is not able to change the font. You get will get the following error: Could not convert Unicode to char codes.

However, in some cases you may want to ignore this error and change the font anyway. If so, select **Ignore text reencoding errors**. PitStop will proceed with the conversion, but be aware that the conversion could produce corrupt content.

## 5.2.21. Change Gray to CMYK Black

---

### *Belongs to*

- **Application:** PitStop Pro
- **Category:** Color
- **Type:** Changes

### *What it does*

Remaps the device grayscale color space to the device CMYK color space, keeping overprint.

## 5.2.22. Change halftone origin

---

### *Belongs to*

- **Category:** PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2022

### *What it does*


Changes the halftone origin by the entered values.

You can change the halftone origin on page or form level as required:

- The X and Y values relative to the lower-left corner of the Media Box.
- The X and Y values in the form space of the outer selected Form XObject.

This Action is typically used for packaging and labels (step and repeat), to make sure that all images have the same halftone origin, hence look identical when printed.

Note that you can view (and also manually change) the halftone origin of a selected object in the Inspector, on the Prepress - Halftone tab.

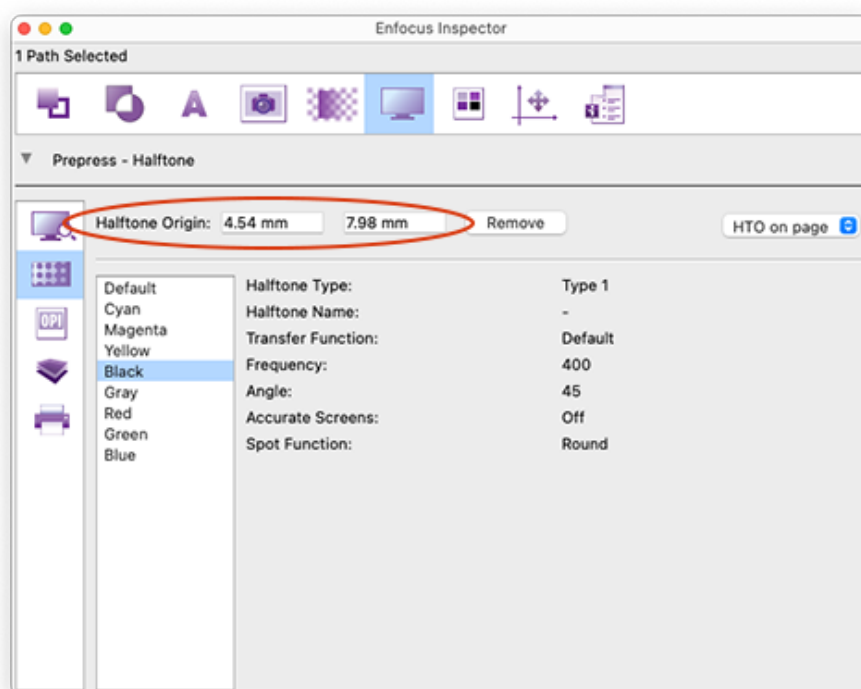

#### **Related Actions**

- [Check halftone origin](#) on page 385
- [Select by halftone origin](#) on page 490
- [Set default halftone origin](#) on page 236

## **5.2.23. Change image brightness and contrast**

---

#### **Belongs to**

- **Application:** PitStop Pro
- **Category:** Image
- **Type:** Changes

#### **What it does**

Allows you to make brightness and contrast adjustments to pixel images of all color spaces (e.g. RGB) and image types (e.g. JPEG).



**Note:** This option is also available in the PitStop Inspector (by selecting



>

## 5.2.24. Change image compression

### *Belongs to*

- **Category:** Image
- **Type:** Changes

### *What it does*

This Action changes the compression of the selected images.

- Color, grayscale and soft-mask images can be compressed with JPEG, JPEG 2000, ZIP or LZW compression (ZIP and LZW are lossless, JPEG lossy).
- Monochrome images can be compressed with CCIT Group 3 & 4, ZIP, LZW or RunLength compression.

In addition:

- An ASCII Hex or 85 filter can be applied. From the list, select the appropriate filter or choose **None**.
- An extra Flate compression filter can be applied to JPEG and JPEG 2000 images. Flate, also known as Deflate, is a lossless data compression method that can drastically reduce the file size. To enable this filter, select the **Add ZIP compression on top of JPEG or JPEG 2000** checkbox.



**Note:** Whereas the ASCII filter does not apply to soft-mask image, the Flate compression does.

## 5.2.25. Change initial view

### *Belongs to*

- **Category:** Document
- **Type:** Changes
- **Since version:** 12 update 2

### *What it does*

Allows the initial view settings of a PDF to be set or adjusted. The initial view is the way the PDF appears when it is opened in Adobe Acrobat or Adobe Reader (also when it is opened within a browser).

You can make a lot of changes, for example choose a particular page layout or magnification level, turn on or off certain window options, hide application toolbars or window controls ...



**Note:** The attributes for this Action, correspond to the Initial View options in Adobe Acrobat (See **File > Properties**, select the **Initial View** tab). If you do not change the

attributes, these settings will be used. For a detailed overview of the meaning of each option, refer to the [Adobe help files](#).

Attributes for Change initial view:

Layout and Magnification [Actions ▼](#)

Navigation tab: Don't change ▼

Page layout: Don't change ▼

Magnification: Don't change ▼

Open to page: Don't change

Window Options

Resize window to initial page: Don't change ▼

Center window on screen: Don't change ▼

Open in Full Screen mode: Don't change ▼

Show: Don't change ▼

User Interface Options

Menu bar: Don't change ▼

Tool bars: Don't change ▼

Window controls: Don't change ▼

Log Log ▼

## 5.2.26. Change inline image syntax

### ***Belongs to***

- **Category:** Image, PDF 2.0
- **Type:** Changes
- **Since version:** 2020

### ***What it does***

Allows you to change the L key (or Length key) of a PDF to comply with a particular PDF version.

The L key specifies the length of the image data and allows users to skip inline images if required.

Choices are:

- Compatibility with the current document version
- Compatibility with PDF 1.7 (no Length key)
- Compatibility with PDF 2.0 (write Length key)



- Keep presence of the Length key
- Fix the Length key (so it matches the actual inline image data length)



**Note:** The changes you make using this Action will only affect newly saved content: earlier saved content is not touched.

#### **Related Actions**

- [Change PDF text string encoding](#) on page 122
- [Check inline image syntax](#)
- [Select inline image syntax](#) on page 451

## 5.2.27. Change layer processing steps - ISO 19593-1

#### **Belongs to**

- **Application:** PitStop Pro
- **Category:** Packaging
- **Type:** Changes
- **Since Version:** 13 update 2

#### **What it does**

Allows you to change processing steps metadata of the layers of a PDF. You can either choose a different group or a different type. Processing steps metadata is defined by ISO standard 19593-1. For more information, refer to [the website of ISO \(International Organization for Standardization\)](#).

Supported groups:

- Structural
- Dimensions
- Braille
- Legend
- Positions
- White
- Varnish

You can as well define a custom group and custom step types. To do so, enter the appropriate name in the text box.

#### **Related Actions**

- [Select layers by processing steps - ISO 19593-1](#) on page 479
- [Check processing steps - ISO 19593-1](#) on page 369
- [Remove processing steps - ISO 19593-1](#) on page 277

## 5.2.28. Change layer print state

#### **Belongs to**

- **Category:** Layers

- **Type:** Changes
- **Since Version:** 2018

**What it does**

Allows you to change the print state of a layer, which determines whether or not objects on the layer are printed. Thanks to this Action, you can avoid that invisible content on a layer is printed accidentally (or the other way around).

Print state options are:

- Always prints
- Prints when visible
- Never prints

**Example**

To make sure only visible content is printed, you could use the following Action List:

```
Select layers <!-- Select layers on page 453 -->
Change layer print state <!-- with the option Print State must be: Prints when visible -->
```

**Related Actions**

- [Check layer properties](#) on page 343
- [Check layer print state](#) on page 342
- [Select layers by print state](#) on page 454

## 5.2.29. Change layer properties

---

**Belongs to**

- **Category:** Layers
- **Type:** Changes

**What it does**

Allows you to change certain properties, i.e. default visibility and presence in the Layers panel ("layer configuration") of the layers selected by another Action in the same Action List.

**Example**

To change the properties of **all** layers in the PDF, create the following Action List:

```
Select layers <!-- Select layers on page 453 -->
Change layer properties
```

**Related Actions**

- [Check layer properties](#) on page 343
- [Select objects in layers by layer properties](#) on page 455

### 5.2.30. Change line cap

---

***Belongs to***

- **Category:** LineArt;Text
- **Type:** Changes

***What it does***

Changes how the end of a vector line looks like.

***How to proceed***

- To have the line end exactly, click  **butt**.
- To put a round end on the line, click  **round**.
- To have corners projected beyond the length of the line, click  **projecting square**.

### 5.2.31. Change line join

---

***Belongs to***

- **Category:** LineArt; Text
- **Type:** Changes

***What it does***

Changes how a corner on a vector line looks like.

***How to proceed***

- To have a sharp corner, click  **miter**.
- To put a round corner on the line, click  **round**.
- To flatten the corners, click  **bevel**.

### 5.2.32. Change line weight

---

***Belongs to***

- **Category:** LineArt;Text
- **Type:** Changes

**What it does**

Changes the thickness of a selected line to the desired line weight.

**Related Actions**

- [Normalize line weight](#) on page 133
- [Select by line weight](#) on page 457
- [Check line weight](#) on page 346

## 5.2.33. Change media box

---

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Allows you to create or resize a media box.

Choose one of the following options:

- To create a new media box, select **Define new rectangle** and enter the required values, or grab them from a selected area using the **Grab Offsets** button . Note that boxes are defined from lower left to upper right.
- To resize a media box relative to the axes of the existing media box, select **Resize** and enter the required values.
- To re-use the dimensions from another box, select **Use box size** and select the appropriate page box.
- To determine the size of a media box based on a selection, select **Resize page box to fit the selection** and enter the offset values.

There are some additional options available:

- **Only apply if not all pages have the same size**
- **Ignore page rotation and scaling factor**
- **Position the page content**

The last option allows you to determine the position of the content on the page. Note that the dropdown only controls *the distance between the new page box and the content*. Options are:

- **No move:** The content stays where it was (the coordinates do not change), regardless of the new size or position of the media box. It is possible that the content does no longer fit in the media box!
- **Center:** The content will keep its position relative to the center of the mediabox. For example, if the content is placed in the bottom left corner of the media box, that will also be the case after resizing, but again: it is possible that the content does no longer fall inside the media box (e.g. if the new box is too narrow).

- **Lower left/lower right:** The content will keep its position relative to the lower left or lower right of the media box; the distance to the lower left or lower right of the media box will be kept the same. For example, if the content is placed in the rightmost corner of the media box, that will also be the case after resizing.
- **Upper left/upper right:** The content will keep its position relative to the upper left or upper right of the media box; the distance to the upper left or upper right of the media box will be kept the same. For example, if the content is placed in the rightmost corner of the media box, that will also be the case after resizing.
- **Shrink to fit:** This option makes sure that the content fits the new page box; the content may be resized as well if needed.

**Remark**

Be aware that this Action does not change the crop box; only the media box and the content (if moved along with the media box) are affected. As Acrobat uses the crop box definition for display, when opening the file in Acrobat, the content may not be visible/no longer centered due to the media box being resized and content being moved along. You can fix this by removing the crop box or by changing the crop box in the same way as the media box (see [Remove crop box](#) on page 215 or [Change crop box](#) on page 203).

If no crop box was defined, Acrobat uses the media box for display.

## 5.2.34. Change miter limit

---

**Belongs to**

- **Category:** LineArt; Text
- **Type:** Changes

**What it does**

Changes the length of the extension of a corner on a vector line.

The miter limit is the limit when a join switches from mitered (pointed) to beveled (squared-off). To allow “pointier” angles, you can increase the miter limit.

For more information on how to calculate the miter limit, refer to the topic “Stroke attributes: Miter limit” in [the PitStop Pro Reference Guide on the Enfocus website](#).

For more information on how to calculate the miter limit, refer to the topic “Stroke attributes: Miter limit” in the PitStop Pro Reference Guide.

## 5.2.35. Change object order

---

**Belongs to**

- **Category:** General
- **Type:** Changes

**What it does**

Changes the layer position of an object in a PDF.

You can choose to move the object forwards, backwards, to the front, or to the back depending on where you want your object to appear in the layer stack.

## 5.2.36. Change objects that are close to the page edge

---

### ***Belongs to***

- **Category:** Page
- **Type:** Changes

### ***What it does***

Changes objects that are close to the page edge, but do not bleed enough.

You must specify the required distance to the trim box and the distance into the bleed.

Optionally, you can choose to treat subpaths of compound paths individually. In that case, each of the subpaths will be changed separately.

See also:

- [Check if object is close to the page edge](#) on page 373
- [Select objects close to the page edge](#) on page 483

## 5.2.37. Change OPI info

---

### ***Belongs to***

- **Category:** Image
- **Type:** Changes

### ***What it does***

Updates the OPI information of the document, for example if you have changed an OPI path with the PitStop Inspector in PitStop.



**Note:** This Action is mainly meant for OEMs, who can change OPI dictionaries through the PitStop Library. If an image with OPI information is encountered during processing, PitStop Library will call the OEM's code to replace it with the OEM's values.

---

### ***About OPI***

OPI (Open Prepress Interfaces) replaces high resolution images with "preview" images; low resolution substitutes which are stored in the PDF, together with the path to the high resolution images. This facilitates data storage and data transfer of PDFs with a large number of images.

### ***Related Actions***

- [Check OPI path](#) on page 340
- [Check OPI type](#) on page 340
- [Gather OPI information](#) on page 418

- [Remove OPI](#) on page 146
- [Select images with OPI info](#) on page 450

## 5.2.38. Change Requirements

---

### ***Belongs to***

- **Category:** PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2022

### ***What it does***

Removes or adds either all document Requirements or one or more specific Requirement types (in that case you can specify which types to add or to remove).

The Requirements dictionary specifies the requirements the PDF file has. Until PDF 2.0, the only possible requirement was 'EnableJavaScripts'. As of PDF 2.0, a number of new types are allowed, such as 3D Markup, Attachment, Encryption etc.

### ***Related Actions***

- [Check if Requirements are used](#) on page 386

## 5.2.39. Change Output Intent

---

### ***Belongs to***

- **Category:** Color; Metadata
- **Type:** Changes

### ***What it does***

Changes a PDF's Output Intent to comply with a particular PDF/X or PDF/A version, using a particular ICC profile and/or ICC characterization.

Note that you can change the document Output Intent or the page level Output Intent.

### ***Related Actions***

- [Check Output Intent](#) on page 312

## 5.2.40. Change overprint

---

### ***Belongs to***

- **Category:** Prepress
- **Type:** Changes

**What it does**

Changes the overprint for a selected object's fill and/or stroke.

**How to proceed**

Proceed as follows:

1. To change the Fill/Stroke overprint, select the Fill/Stroke overprint checkbox.



**Note:** The checkbox only indicates **what** you want to change, **not how** you want it to change. If none of the checkboxes has been selected, the name of the Action will change into "Do not change overprint".

2. To enable or disable Fill/Stroke overprint, click the buttons:



Overprint is off.



Overprint is on.



**Tip:** Check the Actions field, to see if the Action is configured appropriately. For example, if you selected the Fill overprint checkbox and clicked the button next to it, the name of the Action should change into "Set fill overprint to off."

**Related Actions**

- [Check if object is set to overprint](#) on page 401
- [Select by overprint](#) on page 501

## 5.2.41. Change overprint mode

**Belongs to**

- **Category:** Prepress
- **Type:** Changes

**What it does**

Allows you to change the overprint mode of a selection to Standard overprint (OPM 0) or Illustrator overprint mode (OPM 1).

**About overprint modes**

- In **Standard overprint mode** (OPM 0), the tint value 0 of one of the CMYK inks in the foreground object has a knockout effect on the color rendering of the underlying object. In other words, a foreground ink with a C, M, Y or K value of 0 % erases the corresponding background ink. Here, the "foreground inks win" principle applies.
- In **Illustrator overprint mode** (OPM 1), the tint value 0 is neutral: it is ignored (as if it were "not specified") and has therefore no effect on the color rendering of the underlying object.

For more information and examples, refer to [the PitStop Pro Reference Guide on the Enfocus website](#).

For more information and examples, refer to the PitStop Pro Reference Guide.



**Related Actions**

- [Check overprint mode](#) on page 404
- [Select by overprint mode](#) on page 502

## 5.2.42. Change page box layout

---

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Changes the page box layout in a PDF to Press, Screen viewing or PDF/X Layout.

The attributes depend on the chosen layout:

- **Press layout** (typically used for print)

If you select this layout, the trim box will be derived from the first page box (out of the list below) that is present on the page. Use the **Up** and **Down** button to move the preferred page box to the top of the list. For example, if *bleed box* is the first item in the list, and *art box* is the second, the trim box will be derived from the bleed box, if found; if there is no bleed box found, the trim box will be derived from the art box; if there is no art box, the Action will search for the third page box in the list, and so on.

You must also define the minimum distance between the media and bleed boxes and between the bleed and trim boxes.

To get the PDF to display at the size of the media it will be printed on, select the appropriate option:

- **Crop box must equal trim box**, or
- **No crop box must be defined or the crop box equals the media box.** This means that, if the crop box is not defined yet, it will not be added by this Action; if the crop box is defined, it will get the same size and position as the media box.
- **Screen viewing**

If you select this layout, the page is defined solely by the crop box, which should have the same size as the media box. No other page boxes are allowed. The crop box/media box is derived from the first page box (out of the list below) that is present on the page. Use the **Up** and **Down** button to move the preferred page box to the top of the list. For example, if *bleed box* is the first item in the list, the crop box/media box will be derived from the bleed box if found in the PDF; if the bleed box is not found, the second page box in the list will be searched for, ...
- **PDF/X layout**

If you select this layout, the exact page box layout depends on the chosen PDF/X version.

  - If you have chosen PDF/X-1a:2003 or PDF/X-3:2003, the art box or trim box shall not extend beyond the boundaries of the bleed box and the crop box.
  - PDF/X-4 allows either a trim or an art box but forbids having both.
  - PDF/X-6 allows an art box, next to the mandatory trim box.

To define the trim box relative to the media box, define the desired margins.

**Related Actions**

[Check page box layout](#) on page 377

## 5.2.43. Change page format

---

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Snaps the page box of your choice to a multiple of either columns or rows.

This Action is useful for newspapers or magazines with content displayed in columns and rows.

**How to proceed**

To configure the Change page format Action

1. Select the page box you wish to define.
2. Select **A multiple of columns** and/or **A multiple of rows** as required.
3. Set the preferred column or row width.
4. Add column/row spacing as required.

See also [Check page format](#) on page 378

## 5.2.44. Change page labels

---

**Belongs to**

- **Category:** Page
- **Type:** Changes
- **Since Version:** 2019

**What it does**

Changes the label of a page. You can select a different number style, a different prefix and/or change the number to start with.

If you leave any of the options unselected, then the corresponding label property remains untouched (or receives the default property value, if the document did not have page labels).

**Example**

Suppose you have a document with 10 pages and inconsistent page labels (e.g. inconsistent numbering, some with and some without prefix, etc.). You could use the following Action List to make the labels consistent ( mydoc\_1, mydoc\_2, mydoc\_3 etc).

```
Select pages with page label  <!-- choose "range: 1-10" and select both odd and even
-->
Change page labels            <!-- choose "number style: decimal", "prefix: mydoc_",
start: 1" -->
```

**Related Actions**

- [Select pages with page label](#) on page 486
- [Remove page labels](#) on page 216

## 5.2.45. Change page orientation

---

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Changes the page layout to either portrait, landscape or the orientation that is used most in the PDF.

The page orientation is based on the selected page box. If you don't want to change the page orientation in case all pages have already the same orientation, enable the **Only apply if not all pages have the same orientation** checkbox.

**Related Actions**

- [Select by page orientation](#) on page 481
- [Check page orientation](#) on page 379

## 5.2.46. Change page scaling factor

---

**Belongs to**

- **Category:** Position/Size; Page
- **Type:** Changes
- **Since Version:** 2018

**What it does**

Allows you to scale the print size of a page. There are three ways to rescale:

- **Set Optimal Value Automatically:** Rescales the page based on the media box of the document and within the 200x200 inch limit - the maximum Acrobat size. If a document is larger, PitStop applies the appropriate page scaling factor to bring the size down within the limit.
- **Set Scaling Factor to:** Rescales by setting the page scaling factor to a certain value.
- **Multiply Scaling Factor by:** Rescales by multiplying the existing page scaling factor.


For example, if no page scaling factor was defined (meaning that the page scaling factor = 1):


- To print a page to half its size, set the page scaling factor to 0.5
- To print a page to twice its size, set the page scaling factor to 2.

If a page has a scaling factor of 2, to print it to twice its size, multiply the existing page scaling factor by 2 (resulting in page scaling factor 4).

Note that it is also possible to change the defined values while keeping the effective values; to do so, select the **Keep Effective Values Constant** checkbox.

Remember that the page scaling factor (and the defined values) as well as the effective values can be viewed with the Enfocus Inspector as shown below.

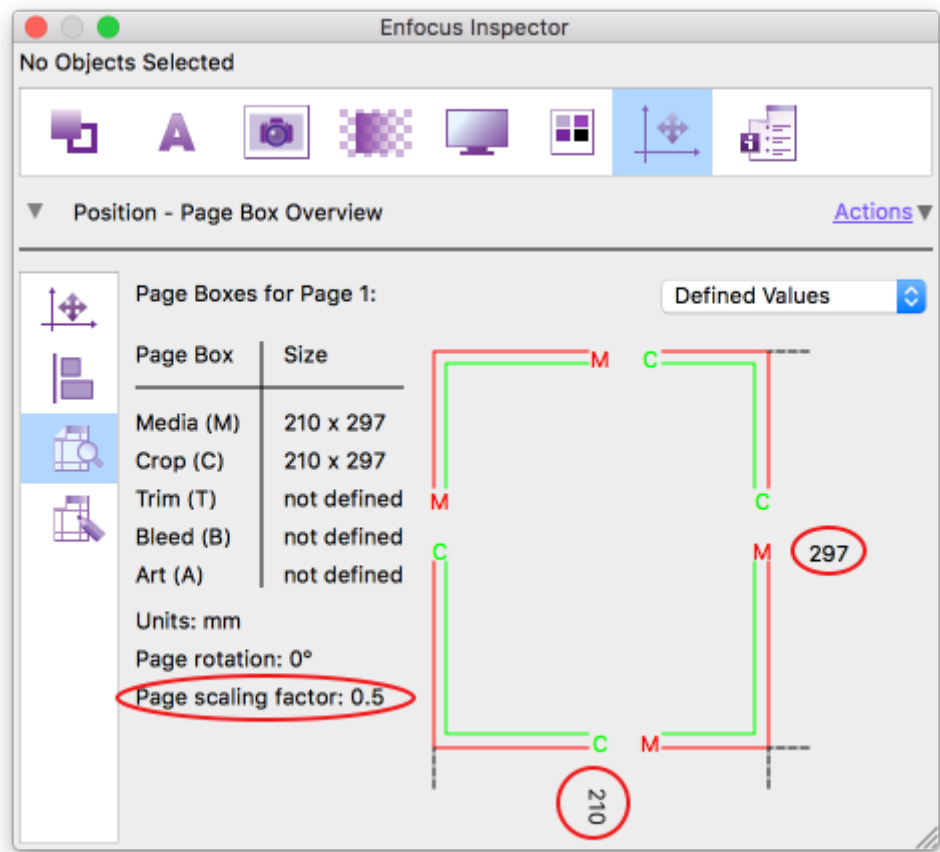

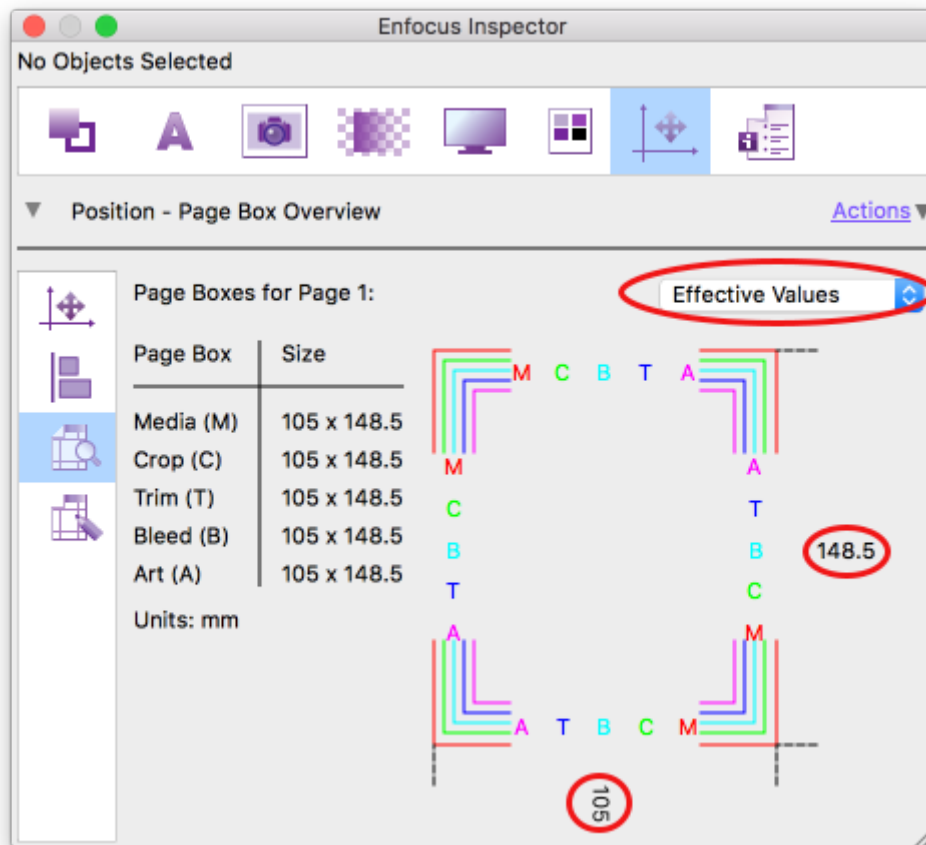

#### Related Actions

- [Check if page scaling factor is used](#) on page 374
- [Remove page scaling factor](#) on page 216
- [Apply page scaling factor](#) on page 201

## 5.2.47. Change PDF text string encoding

#### Belongs to

- **Category:** Document, PDF 2.0
- **Type:** Changes
- **Since version:** 2020

#### What it does

Allows you to change the text encoding of a PDF to comply with a particular PDF version.

Choices are compatibility with the current document version, with PDF 1.7 (PDFDocEncoding or UTF-16BE) or with PDF 2.0 (ASCII or UTF-8).



**Note:** The changes you make using this Action will only affect newly saved content: earlier saved content is not touched.

**Related Actions**

- [Change inline image syntax](#) on page 144

## 5.2.48. Change PDF/A version key

---

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Changes the version key tag in a PDF/A document to another version key.

The following version keys are supported:

- PDF/A-1a
- PDF/A-1b
- PDF/A-2a
- PDF/A-2b
- PDF/A-2u

**About PDF/A version keys**

PDF/A is a specialized subset of the PDF specification, also known as "PDF for **A**rchive".

The PDF/A version key identifies the version of the PDF/A standard the document complies with. If the version key is not set correctly, the document is not PDF/A compliant. Note that changing the **key** does not change the compliance of the document! It will only allow you to continue with your workflow.

**Related Actions**

- [Remove PDF/A version key](#) on page 193
- [Check PDF/A version key](#) on page 363

## 5.2.49. Change PDF/X version key

---

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Changes the version key tag in a PDF/X document to another version key.

The following version keys are supported:

- PDF/X-1a:2001
- PDF/X-3:2002
- PDF/X-1a:2003
- PDF/X-3:2003

- PDF/X-4
- PDFX/-4p

**About PDF/X version keys**

PDF/X is a specialized subset of the PDF specification, also known as "PDF for Exchange".

The PDF/X version key identifies the version of the PDF/X standard the document complies with. If the version key is not set correctly, the document is not PDF/X compliant. Note that changing the **key** does not change the compliance of the document! It will only allow you to continue with your workflow.

**Related Actions**

- [Check PDF/X version key](#) on page 363
- [Remove PDF/X version key](#) on page 193

## 5.2.50. Change point size

---

**Belongs to**

- **Category:** Text
- **Type:** Changes

**What it does**

Changes the point size of a selection by or to a given amount.

## 5.2.51. Change position

---

**Belongs to**

- **Category:** Position/Size
- **Type:** Changes

**What it does**

Moves selected objects to a new position.

You can define an absolute or a relative target position:

- **Move absolute to** moves either all selected objects in one go or each of the selected objects individually to a new position relative to the page they are on.
- **Move relative by** moves an object in relation to itself.

Indicate whether page rotation and/or the page scaling factor (if applicable) should be taken into account when moving the selection.

## 5.2.52. Change ProcSet resources

---

- **Category:** Metadata, PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2021

**What it does**

Adds, removes or does not change the ProcSet entry as specified in the attributes of this Action.

You can as well have PitStop make the appropriate change based on the document's PDF version (see Options).

This Action is useful to make a PDF compliant with a particular PDF version.

**About ProcSet resources**

Procedure sets are categories of related PDF operators used in content streams. The ProcSet entry in a content stream's resource dictionary holds an array that consists of the procedure sets used in that content stream, for example: /ProcSet [/PDF /Text] . Procedure sets are used only when the content stream is printed to a PostScript output device.

ProcSet resources were used in older PDF versions, but as of PDF 1.4 this feature is considered obsolete. As of PDF 2.0, this feature is deprecated.

For more details, refer to [the PDF Reference](#) (See 14.2 Procedure Sets).

**Options**

- **Add ProcSet (default)**
- **Remove ProcSet**
- **Do not change the ProcSet presence** (so if the ProcSet entry is defined, just keep it; if it's not, do not add it)
- **Add, remove or don't change ProcSet, dependent on the document's PDF version**, PitStop behaves as follows:
  - PDF 1.3 and earlier: Add ProcSet resources
  - PDF 1.4 - PDF 1.7: Do not change the ProcSet presence
  - PDF 2.0: Remove the ProcSet resources

## 5.2.53. Change rendering intent

---

**Belongs to**

- **Category:** Prepress;Color
- **Type:** Changes

**What it does**

Modifies the rendering intent of an object to one of the following:

- Absolute Colorimetric
- Relative Colorimetric
- Perceptual
- Saturation

**About rendering intents**

A rendering intent is a remapping method, allowing to remap colors so that they best match the intended use. 'Remapping' means that colors from one output device's color space are mapped to the color space of another device.



For more information and examples, refer to [the PitStop Pro Reference Guide on the Enfocus website](#) (See Chapter "Rendering intents to remap colors").

For more information and examples, refer to the PitStop Pro Reference Guide (See Chapter "Rendering intents to remap colors").

#### **Related Actions**

- [Select by rendering intent](#) on page 427
- [Check rendering intent](#) on page 312
- [Remove rendering intent](#) on page 117

## 5.2.54. Change rendering parameter

---

#### **Belongs to**

- **Category:** Prepress
- **Type:** Changes

#### **What it does**

Changes the rendering parameter of your choice to the corresponding rendering parameter of the grabbed object.

#### **Example**

To apply a transfer curve from an object to the objects of your selection in the Action List

1. Select an object in your PDF document, by using the PitStop Select Objects tool .
2. In the attributes of the Change rendering parameter Action, select Change **transfer**.
3. Click **Grab Transfer From Selection**.

## 5.2.55. Change smoothness

---

#### **Belongs to**

- **Category:** Prepress
- **Type:** Changes

#### **What it does**

Changes the value of smoothness of a selected PostScript curve.

A value of 1 is a good default.

## 5.2.56. Change spot color suffix

---

#### **Belongs to**

- **Category:** Color
- **Type:** Changes

**What it does**

Either modifies a selected spot color's suffix to one of the suffixes in the table below or removes any known spot color suffix.

This allows you to use the latest Pantone naming conventions when checking and correcting Pantone suffixes.

**About spot color suffixes**

Suffixes represent the **apparent** color of the color when printed on different types of paper. For example, PANTONE 3258 **C** and PANTONE 3258 **U** refer to the same color, but when printed on coated, respectively uncoated paper, they will look different, although the same ink formula was used.

Besides C (coated), U (uncoated) and M (matte), in software color palettes, you can find suffixes that refer to on-screen simulations of how colors will look when printed on different paper types. For example, PANTONE 3258 CVU is an on-screen indication of how PANTONE 3258 will look like when printed on uncoated paper.

**Suffix overview**

| Suffix | Meaning                                                                                           |
|--------|---------------------------------------------------------------------------------------------------|
| CV     | Computer video (electronic simulation)                                                            |
| CVC    | Computer video - coated                                                                           |
| CVU    | Computer video - uncoated                                                                         |
| CVS    | Process coated (old; now C)                                                                       |
| CVP    | Solid to process (old; now PC)                                                                    |
| C      | Coated paper                                                                                      |
| M      | Matte paper                                                                                       |
| U      | Uncoated paper                                                                                    |
| EC     | Euro process simulation, coated paper                                                             |
| PC     | Process simulation, coated paper                                                                  |
| CP     | Coated paper, process simulation (e.g. PANTONE 185 CP (used in PANTONE+ COLOR BRIDGE COATED))     |
| UP     | Uncoated paper, process simulation (e.g. PANTONE 185 UP (used in PANTONE+ COLOR BRIDGE UNCOATED)) |
| HC     | Hexachrome coated                                                                                 |
| TC     | TC Textile Cotton                                                                                 |
| TCX    | Textile Cotton eXtended                                                                           |
| TP     | Textile Paper                                                                                     |
| TPX    | TPX Textile Paper eXtended                                                                        |
| XGC    | eXtended Gamut Coated                                                                             |

**Related Actions**

- [Select by spot color suffix](#) on page 428

- [Check spot color suffix](#) on page 315

## 5.2.57. Change stroke adjustment

---

### ***Belongs to***

- **Category:** LineArt; Text
- **Type:** Changes

### ***What it does***

Allows you to enable or disable stroke adjustment.

Stroke adjustment takes care of the rendering of paths on a raster device (printing device, computer monitor, etc.).

### ***Example***

If stroke adjustment is **turned off**, the device will draw the pixel only if it covers the path for more than 50%.

This means that a 1 pixel wide line can be drawn in different ways:

- If the line is drawn nicely on top of a pixel of the screen, the line will look fine.
- If the line is spread over 2 pixels of the screen, the width will be 2 pixels on some places and 1 pixel on other places, turning the line into an ugly, jaggy line.

If stroke adjustment is **turned on**, a correction will be made in such a way that the line looks nice and has the same width (1 pixel) everywhere.

## 5.2.58. Change transparency

---

### ***Belongs to***

- **Category:** Prepress
- **Type:** Changes

### ***What it does***

Allows you to modify the transparency of the objects in a PDF file.

You can:

- Modify the alpha channel of a fill and/or stroke, by moving the sliders to the desired percentage. Note that, to gain full opacity, you should move the slider to 100%.
- Change the blending modes.

This will change the way in which the colors of a transparent object on top blend with the colors of underlying objects.

To select the blending modes you want to apply, proceed as follows:

1. Select a blending mode under **Available**.
2. Click **Add** to move it to the **Selected** list.
3. Repeat steps 1-2 as required.

The blending modes will be applied in the order as they appear in the Selected list.

- Turn on or off **Alpha is Shape** as required. This may affect anti-aliasing. (Do not turn it on, unless you really need it.)
- Turn on or off **Text Knockout**.

If Text Knockout is enabled, the inks of underlying objects, if any, will be cut out on the other separations. This option may be useful in case of overlapping characters.



**Note:** As of PitStop 2022, this Action also works on transparent annotations.

#### **Related Actions**

- [Check for transparent objects](#) on page 399
- [Select pages with transparent objects](#) on page 486
- [Select transparent objects](#) on page 504
- [Remove transparency](#) on page 274

## 5.2.59. Change transparency group settings

#### **Belongs to**

- **Category:** Prepress
- **Type:** Changes
- **Since:** 2020

#### **What it does**

Allows you to to modify the transparency group settings, on form or page level.

Remember that you can also change (and view) the transparency group settings in PitStop Pro using the Enfocus Inspector.

#### **About transparency groups**

A transparency group is a group of objects that belong together; the group can be defined on form level (a so-called XObject form) or on page level. Checking the transparency group properties may be useful to know whether an object's visual appearance has changed because it's part of a group.

#### **About the transparency group settings that can be changed using this Action**

| Setting                                      | Meaning                                                                                                                                                                                                                       |
|----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Change forms or pages to transparency groups | <ul style="list-style-type: none"> <li>• <b>On:</b> The page or form is converted to a transparency group. If it is already a transparency group, nothing changes. The other transparency settings (knockout flag,</li> </ul> |

| Setting                                                 | Meaning                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                         | <p>isolated flag, blending color space) are used to render the transparency group.</p> <ul style="list-style-type: none"> <li>• <b>Off:</b> The page or form will not/no longer be a transparency group. The objects will be rendered as if they were placed directly on the page. The other settings in this Action are grayed out (as they are not relevant if there is no transparency group).</li> </ul> |
| Change the knockout flag to                             | <ul style="list-style-type: none"> <li>• <b>On:</b> If the knockout flag is on, the objects in the transparency group are rendered as one object. Overlapping parts cannot interact with each other: the objects on top fully overwrite the objects underneath.</li> <li>• <b>Off:</b> The objects are not rendered as one object.</li> </ul>                                                                |
| Change the isolated flag to                             | <ul style="list-style-type: none"> <li>• <b>On:</b> If the isolated flag is on, the objects in the transparency group are not affected by the objects underneath.</li> <li>• <b>Off:</b> If the isolated flag is off, the objects in the transparency group can be affected by other objects.</li> </ul>                                                                                                     |
| Change the blending color space to <select from a list> | This is the blending color space that will be used to render the transparency group. Note that this option is only active in case of an isolated group (isolated flag set to On).                                                                                                                                                                                                                            |
| ICC Profile                                             | If the blending color space is Gray, RGB or CMYK, you should select the appropriate ICC Profile.                                                                                                                                                                                                                                                                                                             |

## 5.2.60. Change trapped flag

### ***Belongs to***

- **Category:** Metadata
- **Type:** Changes

### ***What it does***

Modifies the trapped flag.

### ***About trapping***

The trapped flag indicates whether or not a file has been "trapped", i.e. has been corrected for slight color misregistrations. The trapped flag must be defined in PDF/X documents.

The flag can be set to:

- **True:** the document has been trapped, or the creator of the document has decided that it should not be trapped.
- **False:** the document has not been trapped
- **Unknown:** it's not known whether or not the document has been trapped. Note that this status should be avoided.

**Related Actions**

- [Check document trapped flag](#) on page 354
- [Select by trapped flag](#) on page 466
- [Check Trapnets for PDF/X](#) on page 365

## 5.2.61. Change trim box

---

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Allows you to create or resize a trim box.

You must choose one of the following options:

- To create a new trim box, select **Define new rectangle** and enter the required values, or grab them from a selected area using the **Grab Offsets** button . Note that boxes are defined from lower left to upper right.
- To resize a trim box relative to the axes of the existing trim box, select **Resize** and enter the required values.
- To re-use the dimensions from another box, select **Use box size** and select the appropriate page box.
- To determine the size of a trim box based on a selection, select **Resize page box to fit the selection** and enter the offset values.

There are some additional options available:

- **Only apply if not all pages have the same size**
- **Ignore page rotation and scaling factor**
- **Always require page box to be defined**

## 5.2.62. Change word spacing

---

**Belongs to**

- **Category:** Text

- **Type:** Changes

**What it does**

Changes the word spacing of a selected text string to a given value (in em).

## 5.3. C (Part 2: Check - Crop)

---

### 5.3.1. Check access control

---

**Belongs to**

- **Category:** Doc
- **Type:** Checks

**What it does**

Checks whether the document is protected in any way, for example with passwords, certificate IDs or file permission settings.

As of PitStop 2022, this Action has a number of attributes. You can now either check for the presence of a permission dictionary or for the presence of certain permission types (UR, UR3, DocMDP, DocMDP with a Signature references dictionary containing DigestLocation, DigestMethod or DigestValue).

Note that this check is useful to check for PDF/X-6 compliance (which allows UR3 and DocMDP).

### 5.3.2. Check annotation flags settings

---

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Allows you to check if particular annotation flags are enabled or disabled.

Flags that can be checked:

- Invisible
- Print
- NoRotate
- ReadOnly
- ToggleNoView
- Hidden
- NoZoom
- NoView
- Locked

**How to proceed**

1. Select all flags you want to check.
2. Choose the appropriate option:
  - If **The flag must be on** is enabled, a message will be displayed if the selected flags are disabled.
  - If **The flag must be off** is enabled, a message will be displayed if the selected flags are enabled.

**Related Actions**

- [Check annotations print setting](#) on page 349
- [Use flags to select annotation](#) on page 469

### 5.3.3. Check annotations print setting

---

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Check annotations' print settings allows you to log annotations with a particular print setting (print or non-printing).

**Related Actions**

- [Check annotation flags settings](#) on page 348

### 5.3.4. Check annotations type

---

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Check annotations' type allows you to log the occurrence of particular types of annotations in a PDF, for example: text, hyperlinks, movies,...

### 5.3.5. Check appearances of annotations and interactive form fields

---

**Belongs to**

- **Category:** Metadata
- **Type:** Checks



**What it does**

Checks if the document contains annotations and interactive form fields according to the specifications of a particular PDF/X version.

This is useful if you want to print the document (as annotations and interactive form fields cannot be printed) or if your output device or PDF renderer does not support form fields.

**Related Actions**

- [Check form fields](#) on page 355
- [Flatten form fields](#) on page 188
- [Remove form fields](#) on page 191
- [Check for annotations inside art box or trim box](#) on page 370

## 5.3.6. Check article threads

---

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks for the existence of article threads in a PDF file.

Article threads are electronic threads defined by the author of the PDF. They indicate which elements in a PDF belong together as part of a single story, even if they do not follow each other sequentially in the layout of the document.

## 5.3.7. Check barcode

---

**Belongs to**

- **Category:** Packaging
- **Type:** Checks
- **Since Version:** 2019

**What it does**

Checks the presence of barcodes in your document. You can either log a message for each barcode found, or a message in case no barcodes were found in the document.

The Action also works on user selections.

**Properties Overview**

| Fields             | Meaning                                                                                                                                                              |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Barcode</b> tab | Select the barcode(s) you want to check for.                                                                                                                         |
| Select all         | Select this checkbox to check for all barcode types in the list.<br><br>Clear this checkbox to deselect all types and manually click the ones you want to check for. |

| Fields                     | Meaning                                                                                                                                                                                                                |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Value                      | Select this checkbox to check for a particular value.                                                                                                                                                                  |
| Options tab                | Select one or more options. You can use variables as required.<br> <b>Note:</b> Extra options (checkboxes) will slow down processing. |
| Scan resolution (ppi)      | Enter the scan resolution. The default is set to 300 dpi. Note that a higher resolution will slow down processing.                                                                                                     |
| Scan for multiple barcodes | When selected, the document is checked until all barcodes are found. Note that this slows down processing! If you know that there's only one barcode in the document, we recommend clearing this checkbox.             |
| Scan for rotated barcodes  | When selected, PitStop also searches for rotated barcodes.                                                                                                                                                             |
| Enhanced scan              | When selected, PitStop searches for very small barcodes too.                                                                                                                                                           |

**Note:**

- If the option **Scan for multiple barcodes** (on the Options tab) is enabled, EAN and UPC barcodes may be reported twice per barcode. This is a known issue.
- MaxiCode barcodes cannot be detected when they are rotated.

**Related Actions**

- [Check Esko barcode value](#) on page 368
- [Check Esko barcode type](#) on page 368
- [Select Esko barcode type](#) on page 478
- [Add barcode](#) on page 68

## 5.3.8. Check binding

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks if binding is left or right.

Most European language documents are bound on the left.



**Note:** To check a document's binding, in Adobe Acrobat, go to **File > Properties** and switch to the **Advanced** tab. The document's binding property (Left Edge or Right Edge) is displayed under Reading Options.

**Related Actions**

- [Select by binding](#) on page 465

- [Change binding](#) on page 179

### 5.3.9. Check black point compensation

#### **Belongs to**


- **Category:** PDF 2.0
- **Type:** Checks
- **New since:** PitStop 2022

#### **What it does**

Checks if either black point compensation is not present or has a particular value (On, Off, or Default).

The black point compensation option is a feature of Adobe Photoshop to address color conversion problems caused by differences between the darkest level of black achievable on one device and the darkest level of black achievable on another.

Note that the black point compensation attribute of a selected object can be found in the Enfocus Inspector, on the **Prepress - General** tab. Possible values are On, Off or Default. When no blackpoint compensation is set (or when multiple objects with different black point compensation values are selected), you'll see a dash.

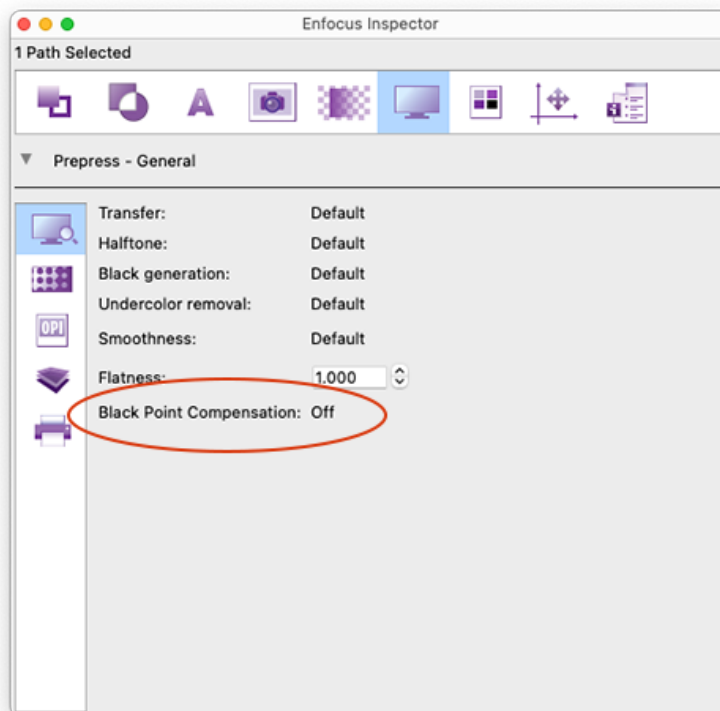

#### **Related Actions**

- [Remove black point compensation](#) on page 232
- [Select black point compensation](#) on page 489

- [Set black point compensation](#) on page 235

## 5.3.10. Check bleed

---

### ***Belongs to***

- **Category:** Prepress
- **Type:** Checks
- **Since version:** 2020

### ***What it does***

Allows you to check if bleed is missing. You should indicate the areas to be checked, that is the region(s) between the left, right, top or bottom corner of the trim box and the bleed box.

You should also specify where the bleed should start (= distance from the inside of the trim box).

Optionally you can enable the **Mirror margins according to page binding** checkbox and set a **white threshold for white** (by moving the slider or entering a value (in %)). The threshold for white makes sure that a color that is "almost white" (and looks white when printed) is considered white.

New as of PitStop 2021 is the slider to increase or decrease the **detection sensitivity**. A high bleed edge sensitivity will report missing bleed for e.g. tapered objects (because of the small gaps between them). A lower sensitivity value won't. The default value (which usually gives the best results) is 30%.



**Note:** When upgrading from older PitStop versions, existing Check bleed Actions get a detection sensitivity of 100%, because that best matches the old behavior.

The last option (**Ignore missing bleed smaller than**) allows you to ignore extremely small areas.



### **Note:**

- This is a page-based, pixel-based check: it doesn't look at individual objects, but it renders the whole page and checks the pixels.
- Text objects that cross the trim box but don't reach the bleed box do not trigger bleed errors.


**Important remark:** The document must have a *valid trim and bleed box*. This is required for PitStop to know where the bleed should start and how big it should be.

### ***Example***

Example file with page boxes (media, bleed, trim box) shown:



When 'Highlight' is enabled in the Enfocus Navigator, the white areas show where bleed is missing:

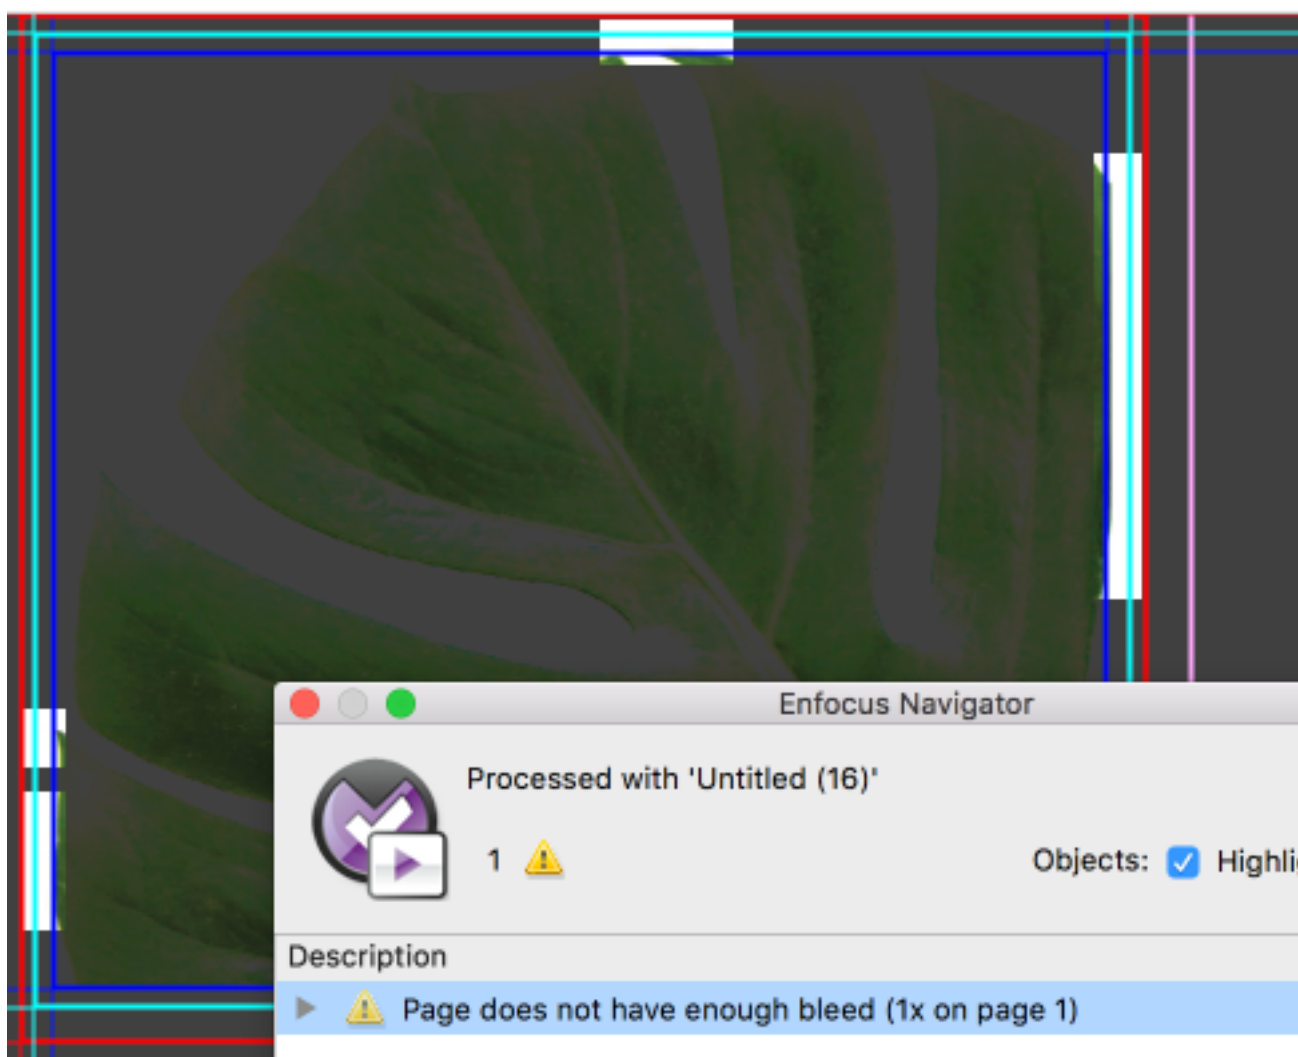

### **Remark about the corners**

By default, corners are checked for bleed if one of the touching sides is being checked. For example, if only the left side of the page should be checked, the upper and bottom left corner of the page will also be included in the bleed check.

There is one exception: if the Action is configured to NOT check the *inner* sides and the check depends on page binding (**Mirror margins according to page binding** selected), the inner corners (the bleed areas of the top and bottom that extend into the inner side) are NOT checked. This is not needed, because in that case, the corners are cut off anyway, so there's no need to check them.

### **Example: Checking bleed on a saddle-stitched (bound) book**

If you only need to have bleed on the outer edges of your document:

1. Enable **Mirror margins according to page binding**. This changes the options left/right to inner/outer.

2. Disable the "Inner" option so the check will not include the binding edge. Note that it will depend on the page binding setting of the document and page index of the checked page if the inner edge means the 'left' or 'right' edge (for that page).

**Attributes for Check bleed:**

Check bleed between these trim box edges and the bleed box:

☐ Inner

☒ Outer

☒ Top

☒ Bottom

---


Bleed must start at this distance from the inside of the trim box:

Inner

Outer

Top

Bottom



☒ Mirror margins according to page binding.

#### Related Actions

- [Check bleed around contour](#) on page 297
- [Check bleed contours](#) on page 300
- [Add bleed](#) on page 255
- [Add bleed around contour](#) on page 258

## 5.3.11. Check bleed around contour

#### Belongs to

- **Category:** Prepress
- **Type:** Checks
- **Since version:** 2021

#### What it does

Allows you to check if bleed is missing around a contour (typically a dieline or a cut line).

Note that this Action only works on *selected* line art that is not filled. The contour must be closed and it must be a compound path of at least 3 nodes. You must also indicate the color of the contour.



**Tip:** If the line art you want to check is not a closed or compound path, you can use [Close path](#) on page 162 and/or [Combine subpaths](#) on page 162 to create one.

Note that text objects that cross the trim box but don't reach the bleed box do not trigger bleed errors.

Attributes



| Attribute                               | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Bleed offset                            | The desired amount of bleed (starting from the contour).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Use different offset for inner contours | Optionally, if you want a different bleed distance value for the outside and inside of a compound shape, you can select this checkbox and enter the value of your choice for the inner contours.                                                                                                                                                                                                                                                                                                                                               |
| Trim area margin                        | Indicates how close/far from the trim area the bleed check should start.                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| White threshold                         | The threshold for white makes sure that a color that is "almost white" (and looks white when printed) is considered white. The default value is 10%.                                                                                                                                                                                                                                                                                                                                                                                           |
| Ignore missing bleed smaller than       | This option allows you to ignore extremely small objects, like jpeg artefacts.                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Overlay color                           | <p>The color used to highlight where bleed is missing (when viewing the result of the Action List through the Navigator).</p> <p>You could use this option to distinguish between 'missing bleed' (critical error, highlighted in red) and 'not enough bleed' (not critical, highlighted in orange). To get this, you need to add two instances of this Action to your Action List; one with the minimal bleed value (e.g. 2 mm) and red as overlay color, and one with the preferred bleed value (e.g. 4 mm) and orange as overlay color.</p> |

Example Action List

```
Select line art
Select spot color <!-- color of the contour -->
AND
Check bleed around contour
```

Example 1



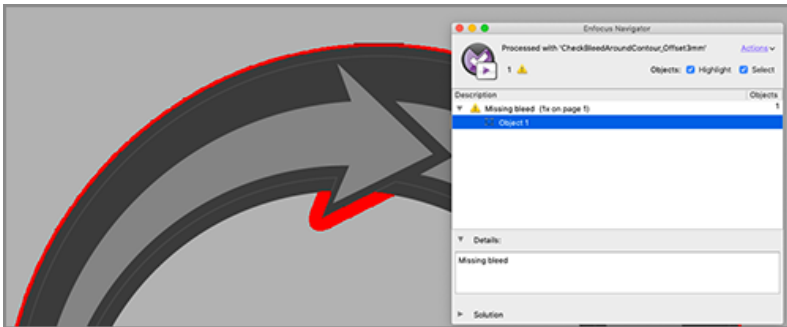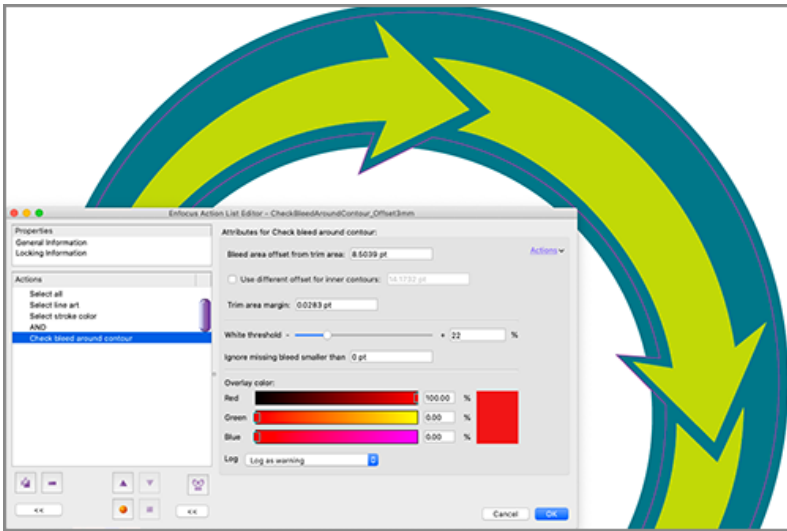

**Example 2**

This Action also works with irregular shapes. Both internal and external missing bleed are highlighted in red (= the chosen overlay color).



**Related Actions**

- [Check bleed](#) on page 294
- [Check bleed contours](#) on page 300
- [Add bleed](#) on page 255

## 5.3.12. Check bleed contours

---

**Belongs to**

- **Category:** Prepress
- **Type:** Checks
- **Since version:** 2021

**What it does**


Allows you to check if bleed contours (typically dielines or cut lines) overlap. That way you can detect if there are objects that come too close to each other. That may for example happen when several different files are merged into one document.

Note that this Action only works on selected line art that is not filled. The contour must be closed and it must be a compound path of at least 3 nodes.



**Tip:** If the line art you want to check is not a closed or compound path, you can use [Close path](#) on page 162 and/or [Combine subpaths](#) on page 162 to create one.

---

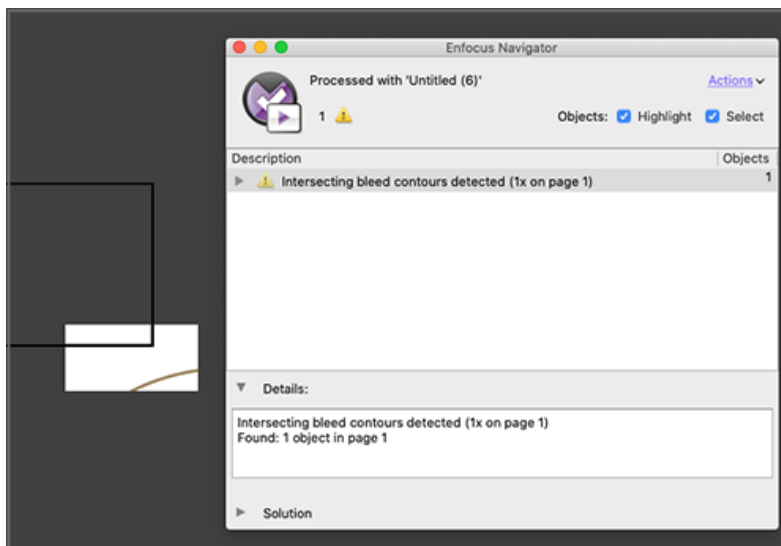**Example****Related Actions**

- [Check bleed](#) on page 294
- [Check bleed around contour](#) on page 297
- [Add bleed](#) on page 255

### 5.3.13. Check bookmarks

---

***Belongs to***

- **Category:** Metadata
- **Type:** Checks

***What it does***

Checks if the PDF contains bookmarks.

Bookmarks are links in the left hand side bar of a PDF that take you to different sections.

***Related Actions***

- [Select pages with bookmarks](#) on page 485

### 5.3.14. Check Certified PDF state

---

***Belongs to***

- **Category:** Doc
- **Type:** Checks

***What it does***

Checks the Enfocus Certified PDF status of a PDF.

You can log whether

1. The Certified Preflight Profile matches a particular Profile. You can select a Profile from the database on your computer or from your disk/network (which hasn't been imported yet in PitStop).
2. The PDF being checked is Preflighted or Preflighted without errors.
3. All saved sessions or only the last saved session must be valid.



---

**Note:** A session is invalid if it refers to changes made by an external program.

---

For more information, refer to the chapter "Working with Certified PDF documents" in [the PitStop Pro Reference Guide on the Enfocus website](#).

For more information, refer to the chapter "Working with Certified PDF documents" in the PitStop Pro Reference Guide.

**Related Actions**

See also [Remove Certified PDF workflow information](#) on page 275

## 5.3.15. Check CMap

---

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Checks if a PDF contains an embedded CMap, and if so, whether its name is consistent with any matching external file. This is necessary for PDF/A compliance.

**About CMaps**

CMap (Character Map) is a mapping of character codes to an ID. This ID is used to map the characters to the correct glyphs.

CMaps can be external or embedded:

- When the CMap is external, it is referenced in the PDF by a name.



**Note:** Some CMaps are shipped (as external files) along with PitStop.

- When the CMap is embedded, it's often also referenced inside the PDF.

## 5.3.16. Check color type

---

**Belongs to**

- **Category:** Color
- **Type:** Checks

**What it does**

Checks if a particular color space is used for particular objects.

For example, check if the **device-specific color space** is used for **text and line-art**.

You can ignore process colors in DeviceN color spaces, as required. (It may not be required to check for the presence of process colors, as they are by default available on the printer.)

In case of ICC Profile Colors, you can either check for all types or for one particular ICC space (ICC based gray, ICC based RGB, ICC based CMYK or ICC based Lab).

## 5.3.17. Check contents compression

---

**Belongs to**

- **Category:** Doc
- **Type:** Checks

**What it does**

Checks if the PDF contains streams that are not compressed with some content compression method (CCITT, Flate, DCT or JBIG2). Compression allows you to make the file smaller.

## 5.3.18. Check corrupt font widths

---

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Searches a PDF for fonts that have corrupt widths. You might want to remove or replace these fonts.

By default, horizontal writing is checked, but you can also include vertical writing by selecting the **Also check metrics for vertical writing** checkbox.

Corrupt font widths may occur in a PDF, when "artificial" bold or italic was used instead of the "bold" or "italic" version of the font concerned. For example, if "Futura" is used in your PDF, the "Futura-Bold" and "Futura-Oblique" fonts should be used instead of applying bold and italics on the regular Futura font. Artificial font may cause problems when printing the PDF.

As of PitStop 2022, you can set a threshold in the **Tolerance** field. This value, expressed in 1/1000 em, specifies the maximum acceptable deviation of the standard font width. For example, if the tolerance is set to 5, a font width that deviates 5/1000 em (or less) from the normal font width will not be logged.

Some PDF standards allow font size deviations. For example, PDF/X-4 allows a deviation of 5 1/1000 em, PDF/X-6 allows a deviation of 1 1/1000 em ... This Action can be used to search for font widths that do not comply with certain PDF/X versions.

**About the em as unit**

The unit used to set the tolerance is '1/1000 em'. 'em' is used because the size of an 'em' is relative to the size of the font: it denotes the point size. For example: 1 em in a 16-point typeface is 16 points, 1 em in an 8-point typeface is 8 points. As a consequence, if the tolerance is set to 1, the relative size is the same, but the absolute size differs depending on the font size.

The name 'em' comes from the width of the capital M in the typeface.

**Related Actions**

- [Select corrupt font widths](#) on page 506
- [Change corrupt font widths](#) on page 281

## 5.3.19. Check creation and modification date

---

**Belongs to**

- **Category:** Metadata
- **Type:** Check

**What it does**

Checks the creation and modification date.

You can indicate which metadata location should be checked, for example only the most recently changed one, or "any" metadata location (if it doesn't matter), ...

**About metadata locations in a PDF file**

There are two metadata locations in a PDF file:

- The **info dictionary** contains information about the file, such as the title, the author, the creation date ... and is visible through the file's Document properties. It's not in XML format.
- The **XMP metadata stream** also contains information about the file, but this information is represented as XMP metadata - XMP referring to Adobe's labeling technology **E**xtensible **M**etadata **P**latform. All information in the info dictionary is also represented in the XMP metadata stream dictionary, in the form of XMP properties.

Inconsistencies may occur when only one of the metadata locations has been updated.

**Related Actions**

[Add missing creation and modification date](#) on page 177

## 5.3.20. Check data format

---

**Belongs to**

- **Category:** Doc
- **Type:** Checks

**What it does**

Checks if the data format of a PDF is either Binary (=non-ASCII) or ASCII.

ASCII-encoding increases the file size, but allows files to be sent through older network protocols that cannot handle non-alphanumeric characters.

**ASCII versus Binary encoding**

ASCII encoding may increase the file size, but allows you to edit the file manually.

Binary encoding makes the file smaller, but does not allow you to edit the file manually.

**Related Actions**

- [Select by document encoding](#) on page 443
- [Change document encoding](#) on page 120

## 5.3.21. Check default color spaces

---

**Belongs to**

- **Category:** Color
- **Type:** Checks

**What it does**

Checks whether default color spaces are used and whether or not they are PDF/X-3 compliant.

## 5.3.22. Check DeviceN attributes

---

**Belongs to**

- **Category:** Color
- **Type:** Checks

**What it does**

Checks if the PDF's color space is DeviceN or NChannel with a particular attribute.

You can check the following attributes:

- Spot color definitions
- Process color mapping
- Mixing hints
- Solidities
- Printing order
- Dot gain

**Related Actions**

[Select DeviceN with attributes](#) on page 432

## 5.3.23. Check DPart metadata

---

**Belongs to**

- **Category:** PDF 2.0
- **Type:** Checks
- **New since:** PitStop 2022

**What it does**

Checks if the document contains DPart metadata.

DPart (Document Part) metadata provides information about pages or parts of a PDF, allowing PDF processors to easily identify pages or page ranges that have particular properties.

This is a PDF 2.0 feature, hence this Action is typically used to check for PDF 2.0 features.

**Related Actions**

- [Remove DPart metadata](#) on page 232

## 5.3.24. Check DeviceN colorants

---

**Belongs to**

- **Category:** Color
- **Type:** Checks

**What it does**

Checks if the non-process colors used in the DeviceN color space are defined in the colorants dictionary, so that they can be used on other devices.

**About the DeviceN color space**

The DeviceN color space is defined as a list of names. These names can refer to the process colors (CMYK, RGB or Gray) or spot colors. Spot colors can have an alternate in CMYK for output devices that do not recognize their name, or they can just be a name without color definition. If the color is just a name (for example: "Silver" or "MySpot"), it cannot be used on other devices.

**Checking the colorants dictionary**

You can use the Enfocus PitStop Inspector to check whether a particular spot color has been defined in the colorants dictionary. The colorants dictionary describes the colorants used in the DeviceN color space. Proceed as follows:

1. Select an object with the color you want to check (using the Enfocus Select Object Tool ).
2. Click  to display the Enfocus Inspector and select  > . Next to the Fill icons, you will see "DeviceN (Spot + process colors)". Below you will see the number of components and their names.
3. Click the **Actions** link (in the top right corner) and select **Color Picker**.
4. In the left part of the Color Picker dialog, navigate to the **Document Spot Colors** folder. This folder contains all spot colors used in the document (not only the ones used for the selected object).
5. Select the spot color you want to check. If the color is just a color name, without a color definition, the Alternate Color Space is Gray.

**Related Actions**

- [Select undefined DeviceN colorants](#) on page 442

## 5.3.25. Check DeviceN for process color spaces

---

**Belongs to**

- **Category:** Color
- **Type:** Checks



**What it does**

Checks whether the DeviceN process color space matches the PDF/X Output Intent color space, i.e. whether the DeviceN color space contains only process colors.

**About the DeviceN color space**

The DeviceN color space is defined as a list of names. These names can refer to the process colors (CMYK, RGB or Gray) or spot colors. Spot colors can have an alternate in CMYK for output devices that do not recognize their name, or they can just be a name without color definition. If the color is just a name (for example: "Silver" or "MySpot"), it cannot be used on other devices.

## 5.3.26. Check document info

---

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Searches for the requested document info in the document properties of the PDF.

You can check:

- Title
- Subject
- Author
- Keywords
- Producer
- Creator

Use the **Compare with** field to enter (part of) the name of the document info you are looking for.

Use the operator methods **equals** and **doesn't equal** if you are looking for an exact match; use **contain** or **doesn't contain** if the entered value is just part of the document info you are looking for.

Select the **Match case** checkbox if you want the search to take into account the lower and upper cases of the entered value.



**Note:** From version 12 update 2 onwards, you can use regular expressions to define the value in the **Compare with** field (if you select **Equals/Does not equal** as operator method).

---

**Related Actions**

- [Change document info](#) on page 179

- [Select by document info](#) on page 465

### 5.3.27. Check document information dictionary compliance

---

#### ***Belongs to***

- **Category:** Metadata; PDF 2.0
- **Type:** Checks
- **Since:** 2022

#### ***What it does***

Checks if the information dictionary is compliant with the chosen PDF version (PDF/X-6 or PDF 2.0).

For more information about the information dictionary, refer to [Change document information dictionary compliance](#) on page 181.

#### ***Related Actions***

- [Change document information dictionary compliance](#) on page 181

### 5.3.28. Check document permissions

---

#### ***Belongs to***

- **Category:** Metadata
- **Type:** Checks

#### ***What it does***

Allows you to check the permission settings of a PDF, such as (low/high resolution) printing, copying, editing, ...

#### ***About document permissions***

The table below gives an overview of the permissions that can be set in a PDF.

| Document permission   | If enabled...                                                                                   |
|-----------------------|-------------------------------------------------------------------------------------------------|
| Assembly              | Users can insert, delete and rotate pages, and create bookmarks and thumbnails.                 |
| Content accessibility | Accessibility software (such as a screen reader) is allowed to use the content of the document. |
| Fill-in or changing   | Users can fill in and change forms.                                                             |
| Annotating            | Users can make annotations.                                                                     |
| Copying               | Users can select and copy contents to the clipboard.                                            |
| Editing               | Users can make modifications to the document.                                                   |

| Document permission      | If enabled...                                                                     |
|--------------------------|-----------------------------------------------------------------------------------|
| Low resolution printing  | Users can print a low-resolution bitmapped image of the pages (for personal use). |
| High resolution printing | Users can print the document with a high resolution output.                       |
| Printing                 | Users can print the document.                                                     |

To view a summary of the document permissions, proceed as follows:

1. Open Adobe Acrobat.
2. Select **File > Properties**.
3. Switch to the **Security** tab. The document restrictions are displayed in the lower part of the dialog.

### 5.3.29. Check document security

---

***Belongs to***

- **Category:** Metadata, PDF 2.0
- **Type:** Checks

***What it does***

Checks if a particular encryption was used to secure the PDF file.

Options:

- A PDF version (1.3 - 2.0)
- A combination of "none" and a PDF version (1.3 - 2.0)
- None
- None or Standard (= no custom security)
- Custom (enter a custom name in the text field)

### 5.3.30. Check document trapped flag

---

***Belongs to***

- **Category:** Metadata
- **Type:** Checks

***What it does***

Allows you to check the value of the trapped flag in a PDF.

***About trapping***

The trapped flag indicates whether or not a file has been "trapped", i.e. has been corrected for slight color misregistrations. The trapped flag must be defined in PDF/X documents.

The flag can be set to:

- **True:** the document has been trapped, or the creator of the document has decided that it should not be trapped.
- **False:** the document has not been trapped
- **Unknown:** it's not known whether or not the document has been trapped. Note that this status should be avoided.

The trapped flag is stored in the info dictionary and/or in the XMP metadata stream, but the data can be inconsistent; that's why you must indicate where the trapped flag must be taken from, e.g. from the most recent metadata location.

**Related Actions**

- [Change trapped flag](#) on page 185
- [Select by trapped flag](#) on page 466
- [Check Trapnets for PDF/X](#) on page 365

### 5.3.31. Check document unique IDs

---

**Belongs to**

- **Category:** Doc
- **Type:** Changes

**What it does**

Allows you to check if the PDF has a unique document ID.

**Related Actions**

[Add unique document IDs](#) on page 120

### 5.3.32. Check embedded font is OpenType

---

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Allows you to check if the embedded font is OpenType.

**About OpenType embedded fonts**

OpenType is an extension of the TrueType format that can contain TrueType and/or Type 1 font data. In PDF files it can only appear as an embedded font. It has been introduced in PDF 1.6.

**Related Actions**

- [Select embedded fonts](#) on page 507

- [Select OpenType embedded fonts](#) on page 510

### 5.3.33. Check encoding of name objects

---

#### ***Belongs to***

- **Category:** General
- **Type:** Checks

#### ***What it does***

Allows you to check if the encoding of font names, separation names or structure type names is UTF8.

This may not be the case if you receive PDFs from Japanese or Chinese designers.



**Note:** This Action verifies if the name *data* is valid UTF8 data. Note that this does not necessarily mean that the name actually is UTF8 encoded. It just checks if it would be a valid string when interpreted as UTF8.

---

### 5.3.34. Check enforced viewer preferences

---

#### ***Belongs to***

- **Category:** PDF2.0
- **Type:** Checks
- **New since:** PitStop 2022

#### ***What it does***

Checks if the Enforced key is used in the Viewer preferences.

Enforcing the viewer preferences is a PDF 2.0 feature, hence this Action is typically used to find (and remove) PDF 2.0 features.

#### ***Related Actions***

- [Remove enforcements on viewer preferences](#) on page 233

### 5.3.35. Check Esko barcode value

---

#### ***Belongs to***

- **Category:** Packaging
- **Type:** Checks
- **Since Version:** 13 update 2

#### ***What it does***

Checks if the Esko barcode contains or equals a particular string. You can take into account the case of the string or use regular expressions or Smart Preflight variables as required. The actual

value of the Esko barcode is mentioned in the log, in the Navigator and in the Preflight Report, for example: Esko barcode value "1234567890128" does not contain "222".

Both the new ArtPro Plus barcodes as well as the old XMP ones are supported.

As of PitStop 25.07, the EAN-13 Iceland Foods barcode is also in the list.



**Note:** The metadata attached to the barcode is checked. If the metadata is absent, the Action won't be able to check the barcode.

#### **Related Actions**

- [Check Esko barcode type](#) on page 368
- [Select Esko barcode](#) on page 478
- [Select Esko barcode type](#) on page 478
- [Add barcode](#) on page 68

### **5.3.36. Check Esko barcode type**

#### **Belongs to**

- **Category:** Packaging
- **Type:** Checks
- **Since Version:** 13 update 2

#### **What it does**

Checks if the Esko barcode matches a particular type (chosen from a list).

Both the new ArtPro Plus barcodes as well as the old XMP ones are supported.

As of PitStop 25.07, the EAN-13 Iceland Foods barcode is also in the list.

#### **Related Actions**

- [Check Esko barcode value](#) on page 368
- [Select Esko barcode](#) on page 478
- [Select Esko barcode type](#) on page 478
- [Add barcode](#) on page 68

### **5.3.37. Check external hyperlink annotations**

#### **Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks if the annotations in the PDF contain hyperlinks to files, applications, and/or web pages.

**Related Actions**

[Check if URLs in Link Annotations are valid](#) on page 361

## 5.3.38. Check file identifiers in document XMP metadata

---

**Belongs to**

- **Category:** Doc
- **Type:** Checks

**What it does**

Checks the PDF for missing file identifiers in the document metadata, for example: VersionID, DocumentID or RenditionClass.

**About XMP metadata**

XMP metadata is descriptive information about the file embedded in the PDF, for example the name of the author, keywords, copyright information... XMP refers to labeling technology that is used, i.e. Adobe's Extensible Metadata Platform. You can view the XMP metadata in a file's Document Properties in Acrobat (Click the **Additional Metadata** button, then select **Advanced**).

**Related Actions**

- [Check presence of document metadata stream](#) on page 364
- [Check if date is present in document XMP metadata](#) on page 358
- [Set XMP file identifiers](#) on page 194

## 5.3.39. Check file specification keys

---

**Belongs to**

- **Category:** General
- **Type:** Checks

**What it does**

Searches the PDF for file specification keys.

PDF streams are holders of large amounts of data, such as image pixels, page contents, embedded fonts, etc. In some instances, the streams do not contain the data inside the PDF but point to embedded or even external files. This Action will search for this type of links and check if they contain either the required file specification keys or the PDF 2.0 specific keys.

**Related Actions**

- [Check for file specifications](#) on page 330

- [Remove file specification from streams](#) on page 140
- [Remove file specification keys](#) on page 233

### 5.3.40. Check flatness

---

**Belongs to**

- **Category:** Prepress
- **Type:** Checks

**What it does**

Allows you to check the minimum or maximum flatness of a line art curve.

The default setting to produce a smooth curve is 1. A value higher than 1 can produce a jaggy edge; lower than 1 can slow down the RIP.

**Related Actions**

- [Check flatness](#) on page 399
- [Select flatness](#) on page 503

### 5.3.41. Check font by name

---

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Checks for the presence of a particular font.

Enter the name of the font you want to check for in the text field, or use the **FontPicker** button to select it.



**Note:** From version 12 update 2 onwards, you can use a regular expression to define the font name.

---

### 5.3.42. Check font embedding

---

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Checks whether or not fonts are embedded.



**About embedding fonts**

**Embedding fonts** in a PDF document means that every character of this font is copied and stored in the PDF document. This is useful if you create PDF documents to be displayed on different systems and to be printed on different devices: these are often systems that do not contain exactly the same fonts.

Embedding a font as a **subset** means that only those characters of the font that are actually used in the text are embedded. This reduces the file size by not including superfluous font information.

**Related Actions**

- [Select embedded fonts](#) on page 507
- [Unembed font](#) on page 293

### 5.3.43. Check font license

---

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Checks which operations the font's license allows without obtaining permission from the font's owner.

These operations are:

- Embed
- Subset
- Outline
- Preview and print

**Related Actions**

[Select fonts by license](#) on page 507

### 5.3.44. Check font metadata

---

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Allows you to check if the fonts in the PDF have been added correctly to the metadata.

**About font metadata**

Font metadata is descriptive information about the fonts used in a PDF, for example the name of the font, its type and encoding. You can find the font metadata of a file in Adobe Acrobat by selecting **File > Document Properties** and switching to the **Fonts** tab.

**Related Actions**

[Add font metadata](#) on page 280

## 5.3.45. Check font subsetting

---

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Checks if fonts are subsetting or complete.

If a font is subsetting, only the characters of the font that are actually used in the text are embedded in the document. This is done to keep a file as small as possible.

**Related Actions**

- [Select subset fonts](#) on page 512
- [Check if a subset font contains a complete CharSet or CIDSet](#) on page 412

## 5.3.46. Check font type

---

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Checks for particular font types in a PDF.

You can check for:

- TrueType
- Type 1
- Type 3
- Multiple Master
- Composite TT
- Composite T1
- Composite (all types)

**About types of fonts**

Refer to the [PitStop Pro Reference Guide](#) on the Enfocus website (Chapter: Types of fonts and their usage).

Refer to the PitStop Pro Reference Guide (Chapter: Types of fonts and their usage).

**Related Actions**

[Select fonts by type](#) on page 508

### 5.3.47. Check font vendor

---

***Belongs to***

- **Category:** Text
- **Type:** Checks

***What it does***

Checks to see if fonts from a particular vendor have been used in a PDF.

### 5.3.48. Check for action dictionaries

---

***Belongs to***

- **Category:** Metadata
- **Type:** Checks

***What it does***

Checks if a PDF contains particular action dictionaries, i.e. action types.

***About action dictionaries***

Action dictionaries are actions that are executed when you click a bookmark or a link, hover over an annotation, open a file ... There are several types of actions, e.g. a music track can be played, a specific page or website can be opened ...

You may want to remove these actions, as they are not allowed in a PDF/X file. The Remove action dictionaries Action will remove the action only; the object (the bookmark, annotation) the actions are linked to will not be removed. For example, if you remove the action from a bookmark, the bookmark is still visible, but not clickable anymore.

***Related Actions***

- [Remove action dictionaries](#) on page 189
- [Check for additional actions](#) on page 356

### 5.3.49. Check for additional actions

---

***Belongs to***

- **Category:** Metadata
- **Type:** Checks

***What it does***

Checks if a PDF contains action dictionaries, i.e. action types, other than the standard ones.

**About action dictionaries**

Action dictionaries are actions that are executed when you click a bookmark or a link, hover over an annotation, open a file ... There are several types of actions, e.g. a music track can be played, a specific page or website can be opened ...

**Related Actions**

- [Remove action dictionaries](#) on page 189
- [Check for action dictionaries](#) on page 356

## 5.3.50. Check for alternate images

---

**Belongs to**

- **Category:** Image
- **Type:** Checks

**What it does**

Searches a PDF for alternate images.

Alternate images are low resolution versions of images that are used for on-screen proofing because they render more quickly. PitStop can check for the presence of all alternate images or only those that are set to print as default.

**Related Actions**

- [Add alternate images](#) on page 141
- [Select by alternate images](#) on page 448
- [Remove alternate images](#) on page 146

## 5.3.51. Check for alternate presentations

---

**Belongs to**

- **Category:** Doc
- **Type:** Checks

**What it does**

Checks whether the PDF contains alternate presentations.

This mechanism is used for slideshow displays and is therefore not desired in a print document.

## 5.3.52. Check for annotations inside art box or trim box

---

**Belongs to**

- **Category:** Page
- **Type:** Checks

**What it does**

Searches a PDF for any annotations that appear inside the art box or trim box - an undesirable location for printing.

### 5.3.53. Check for annotations inside printable area

---

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Searches a PDF for any annotations that appear in the printable area of the PDF.

### 5.3.54. Check for artificial font style

---

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Searches a PDF for instances of artificial font style (artificial bold, italic or outline style).

**About artificial font style**

Some fonts consist of specific **font families** for each style. The font Futura, for example, has the font families Futura (for “regular” Roman style), Futura-Bold, Futura-Oblique etc. This implies that, if you want to put text in Futura and in bold, for example, you will have to select the font family “Futura-Bold”.

Certain design programs or word processors allow you to adapt the style of these fonts artificially. You can select text and to put it in italics or in bold by selecting the respective style within this font family. Sometimes, you can even do this by means of shortcuts, e.g. Control+b for bold or Control+i for italics. Text that has been modified in this manner uses a so-called **artificial bold or italic style**.

This method may seem very handy but it is recommended to avoid it, because these artificial styles can cause problems when printing: e.g. artificial bold is created when printing two characters on top of each other, one being one point size bigger than the other.

### 5.3.55. Check for associated files

---

**Belongs to**

- **Category:** General, PDF2.0
- **Type:** Checks
- **New since:** PitStop 2022

**What it does**

Checks if a PDF file contains associated files.

This is a PDF 2.0 feature. If you don't want PDF 2.0 features in your file, you can remove the associated files using a dedicated [Action](#).

For more information about associated files, refer to [PDF 2.0 Application Note 002: Associated Files](#).

**Related Actions**

- [Remove associated files](#) on page 140

## 5.3.56. Check for city fonts

---

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Searches a PDF for instances of city fonts.

City fonts are bitmap fonts that tend not to produce good results when printed.

## 5.3.57. Check for custom black generation

---

**Belongs to**

- **Category:** Prepress
- **Type:** Checks

**What it does**

Checks if custom black generation curves (BG) have been included in the PDF document.

Black generation (BG) is the process of adding black ink to CMY-generated black and gray, in order to achieve a clear black color and to save valuable color ink.

**Related Actions**

[Remove black generation](#) on page 271

## 5.3.58. Check for custom halftone

---

**Belongs to**

- **Category:** Prepress
- **Type:** Checks

**What it does**

Searches a PDF for objects to which custom halftones are applied.

Halftoning is a method of printing shades using a single color ink. By varying the size or density of dots, the eye can see a shade somewhere between the solid color and the color of the background paper. Custom halftones are mostly used for screening frequency and angles.

Associated with every output device is a default halftone definition that is appropriate for that device. Only relatively sophisticated documents need to define their own halftones to achieve special effects. In general, when a PDF document provides its own halftone specifications, it sacrifices portability: they may lead to unpredictable printed output when the same document is sent to different printers. This is why they are generally undesirable.

**Related Actions**

[Remove halftone](#) on page 272

## 5.3.59. Check for custom transfer function

---

**Belongs to**

- **Category:** Prepress
- **Type:** Checks

**What it does**

Checks if a PDF contains objects to which transfer functions are applied.

Transfer functions are used for creative purposes, artistic effect and to correct the characteristics of a specific, maybe poorly calibrated, output device. For example, a file that is intended for output on a particular image setter may contain transfer functions that compensate for the dot gain inherent to that printer.



**Note:** Transfer functions are not allowed in PDF/X compliant documents.

**Related Actions**

- [Apply transfer function](#) on page 101
- [Remove custom transfer function](#) on page 271

## 5.3.60. Check for custom undercolor removal

---

**Belongs to**

- **Category:** Prepress
- **Type:** Checks

**What it does**

Checks if custom undercolor removal definitions (UCR) have been included in the PDF document.

Undercolor removal is the process of removing large percentages of cyan (C), magenta (M), and yellow (Y) ink prior to printing, and replacing them with black (K) ink, in order to achieve a clearer black color in print, and to save on color inks.

**Related Actions**

[Remove undercolor removal](#) on page 274

### 5.3.61. Check for deprecated attributes in XMP metadata

---

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks if the XMP metadata streams in the PDF contain attributes that are outdated.

**About XMP metadata**

XMP metadata is descriptive information about the file embedded in the PDF, for example the name of the author, keywords, copyright information... XMP refers to labeling technology that is used, i.e. Adobe's Extensible Metadata Platform. You can view the XMP metadata in a file's Document Properties in Acrobat (Click the **Additional Metadata** button, then select **Advanced**).

**Related Actions**

[Check if XMP metadata is well-formed](#) on page 361

### 5.3.62. Check for differences in page boxes

---

**Belongs to**

- **Category:** Page
- **Type:** Checks

**What it does**

Allows you to compare a certain page box's size with that of another page box.



**Note:** As of PitStop 2021, you can use variables to specify the difference in size.



**Example**

Check if the media box is x inch wider and y inch higher than the trim box.

### 5.3.63. Check for embedded PostScript fragments

---

**Belongs to**

- **Category:** General
- **Type:** Checks

**What it does**

Searches for fragments of embedded PostScript in a PDF document.

Embedded PostScript fragments do not show up in the screen preview, but could change the appearance of the printed document. They are generally undesirable in a print production environment.

**Related Actions**

- [Select embedded PostScript fragments](#) on page 444
- [Remove PostScript](#) on page 140

### 5.3.64. Check for empty layers

---

**Belongs to**

- **Category:** Layers
- **Type:** Checks
- **Since version:** 12 update 3

**What it does**

Allows you to check if the selected layers are empty. The Action must be preceded by another Action that selects the layer(s) concerned.

**Example**

To check if the PDF contains any empty layers:

```
Select layers <!-- Select layers on page 453 selects ALL layers -->
Check for empty layers
```

**Related Actions**

[Remove objects from layers](#) on page 155

## 5.3.65. Check for empty pages

---

**Belongs to**

- **Category:** Page
- **Type:** Checks

**What it does**

Checks if the PDF has pages without content.

Additionally, you can specify that elements outside of a specific page box should be ignored.

It's also possible to ignore visually empty pages (with paper-white and invisible (fully transparent) objects on it).

**Related Actions**

- [Remove empty page](#) on page 215
- [Select empty pages](#) on page 482

## 5.3.66. Check for external streams

---

**Belongs to**

- **Category:** General
- **Type:** Checks

**What it does**

Checks if the PDF contains links to external data.

## 5.3.67. Check for file specifications

---

**Belongs to**

- **Category:** General
- **Type:** Checks

**What it does**

Checks if the PDF contains URLs or links to embedded or external files in PDF streams.

PDF streams are holders of large amounts of data, such as image pixels, page contents, embedded fonts, etc. In some instances, the streams do not contain the data inside the PDF but point to embedded or even external files, or to websites (URLs). This Action allows you to check if the PDF contains such links.

You can check for either URL or file specifications, and search for embedded, non-embedded, or both types of links.

**Related Actions**

- [Check file specification keys](#) on page 328
- [Remove file specification from streams](#) on page 140

## 5.3.68. Check for file structure problems

---

**Belongs to**

- **Category:** Doc
- **Type:** Checks

**What it does**

Checks whether the structure of the PDF conforms to the file structure as defined by the PDF specification of your choice.

Options are:

- PDF/A-1
- PDF/A-2
- PDF/X-6

## 5.3.69. Check for flipped objects

---

**Belongs to**

- **Category:** Position/Size
- **Type:** Checks

**What it does**

Searches a PDF for objects that have been flipped, normally using QuarkXpress. These can slow down the RIP.

**Related Actions**

- [Flip content](#) on page 211
- [Flip selection](#) on page 242

## 5.3.70. Check for garbage after the PDF End-Of-File marker %EOF

---

**Belongs to**

- **Category:** Doc
- **Type:** Checks

**What it does**

Checks whether the PDF contains undesired characters after the end-of-file marker EOF.

If this is the case, the PDF is malformed. The last line of a PDF should only contain the EOF marker.

To solve this problem, you can do one of the following:

- Open the PDF in Adobe Acrobat and save it (using **File > Save As**).
- Process the PDF with PitStop Server (with the option **Full Save** enabled).

**Related Actions**

[Check for unreadable data in front of the PDF header signature](#) on page 323

## 5.3.71. Check for images with 16 bits per channel

---

**Belongs to**

- **Category:** Image
- **Type:** Checks

**What it does**

Searches a PDF for images with 16 bits per channel.

These images have a much larger color range than standard 8 bit images. Note that not all of these colors can be accurately reproduced on press.

## 5.3.72. Check for inconsistent Type 3 font width information

---

**Belongs to**

- **Category:** Text
- **Type:** Checks
- **Since:** PitStop 2022

**What it does**

Searches a PDF for Type 3 fonts that have corrupt widths (inconsistent d0 or d1 values). You might want to remove, replace or fix these fonts. Note that there's a dedicated Action to fix them.

**Related Actions**

- [Check corrupt font widths](#) on page 406
- [Fix inconsistent Type 3 font width information](#) on page 289

## 5.3.73. Check for invisible objects without fill and stroke

---

**Belongs to**

- **Category:** General

- **Type:** Checks

**What it does**

Searches the PDF document for any objects that have no fill or stroke color associated with them.



**Note:** This Action only works on vector art (paths) and text without fill and stroke.

Designers sometimes leave such objects in a document rather than deleting them.

**Related Actions**

- [Select invisible objects without fill and stroke](#) on page 446
- [Remove invisible objects without fill and stroke](#) on page 277

## 5.3.74. Check for Javascript

---

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks if a PDF contains instances of the JavaScript programming language.

This language is often used to add interactive functionality to PDF files. However, in a print production environment, these scripts serve no purpose and may result in increased file sizes.

**Related Actions**

[Remove Javascript](#) on page 191

## 5.3.75. Check for NChannel colors with non-trivial process dictionary

---

**Belongs to**

- **Category:** Color
- **Type:** Checks

**What it does**

Checks whether the PDF contains NChannel colors with non-trivial process dictionary.

**About NChannel**

NChannel is an extension of the DeviceN color space, a multi-component, device-dependent color space. NChannel color spaces give applications greater flexibility when representing colors that are not available on a target device.

NChannel is supported from PDF 1.6 (Acrobat 7.x) onwards. If you are opening a PDF in an earlier version of Adobe Acrobat, colors can print or display incorrectly.

**About process dictionaries**

NChannel requires a process dictionary which maps the names used in the colorants list to device colors. This allows giving aliases for process colors.

A "trivial" process dictionary uses aliases that are easy to understand, e.g. maps "Cyan" to the process color "Cyan".

A "non-trivial" process dictionary would use custom aliases, such as "My Process color".

**Related Actions**

- [Make DeviceN without NChannel information](#) on page 109
- [Select DeviceN with attributes](#) on page 432

## 5.3.76. Check for non-PDF/X compliant halftone

---

**Belongs to**

- **Category:** Prepress
- **Type:** Checks

**What it does**

Searches a PDF for objects with halftones that are not compliant with the PDF/X specification.

Halftoning is a method of printing shades using a single color ink. By varying the size or density of dots, the eye can see a shade somewhere between the solid color and the color of the background paper. Some of these halftones are not allowed according to the PDF/X specification.

**Related Actions**

[Remove non-PDF/X compliant halftone](#) on page 273

## 5.3.77. Check for non-standard blend modes

---

**Belongs to**

- **Category:** Prepress
- **Type:** Checks

**What it does**

Checks whether the PDF contains objects with a blend mode other than one of the standard blend modes.

Blend modes determine how colors on different layers blend with each other.

There are 16 standard blend modes described in the PDF Specifications. They can be detected using the PitStop Inspector or the [Select by blend modes](#) Action. If new blend modes would be introduced (which is theoretically possible), this Action could be used to detect them.

For more information about blend modes, visit the Adobe website (<http://www.adobe.com>) or refer to the Help or documentation of your design application (Adobe InDesign, QuarkXPress, ...)

**Related Actions**

[Select by blend modes](#) on page 500

## 5.3.78. Check for objects with negative dash pattern phase


**Belongs to**

- **Category:** LineArt
- **Type:** Checks
- **Since version:** 13

**What it does**

Detects if the document contains a dash pattern phase with a negative value.

The dash pattern phase specifies the distance into the dash pattern to start the dash. Negative values may not be supported by the RIP.

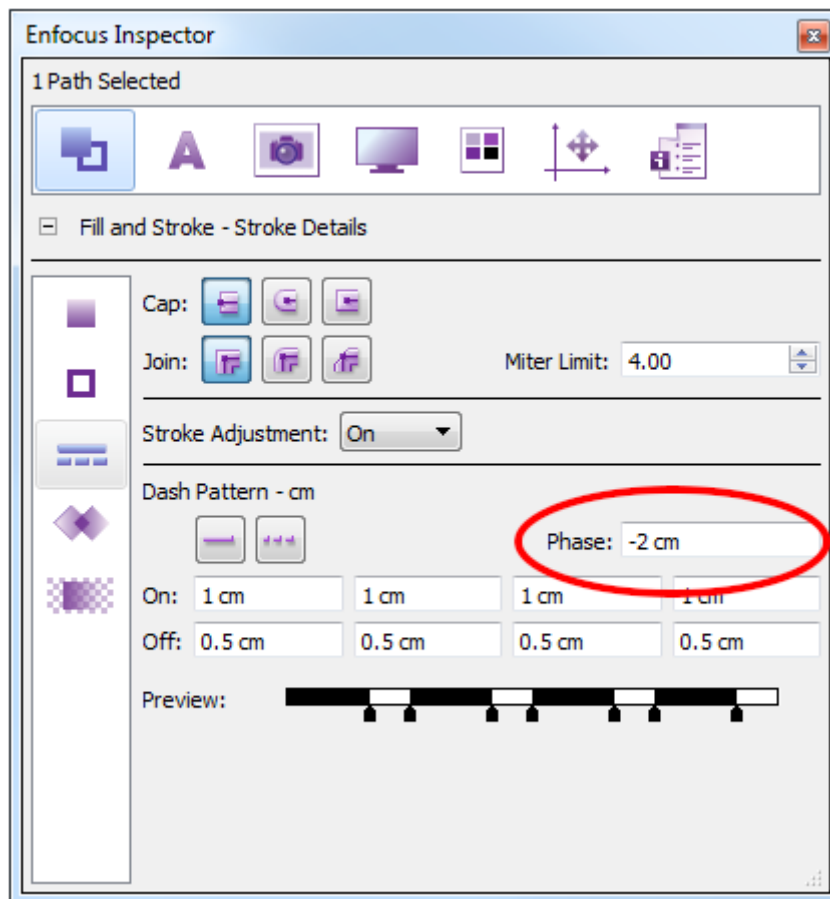**Related Actions**

- [Select objects with negative dash pattern phase](#) on page 458
- [Fix negative dash pattern phase](#) on page 169

### 5.3.79. Check for pre-separated pages

---

***Belongs to***

- **Category:** Color; Page
- **Type:** Checks

***What it does***

Checks if the PDF document contains any pages that already have been separated.

A pre-separated PDF contains pages that have been separated into their CMYK components. In offset printing each of these colors is printed with a separate plate. This means that each page in a PDF document is separated into its four constituent colors: cyan, magenta, yellow and black. For example, a pre-separated PDF file for a two-page CMYK print job, results in a PDF file with 8 pages.

This separation process is usually carried out by the RIP, and not in the source PDF document.

### 5.3.80. Check for reference Xobjects

---

***Belongs to***

- **Category:** General
- **Type:** Checks

***What it does***

Checks the PDF for the presence of XObjects.

XObjects are PostScript objects, such as background images, that are defined only once in a PDF file, but used several times (e.g. on several pages). Using XObjects can speed up printing but requires extra printer memory.

XObjects are supported as of PDF 1.4.

***Related Actions***

[Select XObjects](#) on page 448

### 5.3.81. Check for rotated objects

---

***Belongs to***

- **Category:** Position/Size
- **Type:** Checks

***What it does***

Checks if a PDF contains rotated objects. Objects can have been rotated by page layout applications such as QuarkXPress, and this may cause problems for (older) RIPs.




You can specify the non-permitted level of rotation, for example 'objects must not be rotated more than 2 degrees', optionally combined with two extra options:

- **Interpret all angles as rotations between 0 and 45 degrees from vertical or horizontal:** This option allows you to find small rotations in either direction. To decide whether or not an object is rotated, the measured angle is converted to an interval [0,45] degrees compared to the nearest horizontal or vertical page edge. As a consequence, a rotation of 88 degrees is converted to 2 (90-88) and a rotation of 271 degrees is converted to 1 (271-270). When checking for rotations smaller than 4 degrees, both rotations will be logged, whereas for example a rotation of 290 degrees (converted to 20 => 290-270) won't be logged. See example 1 below.
- **Ignore objects that are aligned horizontally or vertically:** This option allows you to exclude objects that are aligned exactly 0, 90, 180 or 270 degrees to the page edges. Such objects (rotated a multiple of 90 degrees) do not look rotated, so in most cases they should not be logged. See example 2 below.


### Remark

Note that you can check the rotation angle of an object using the PitStop Inspector.

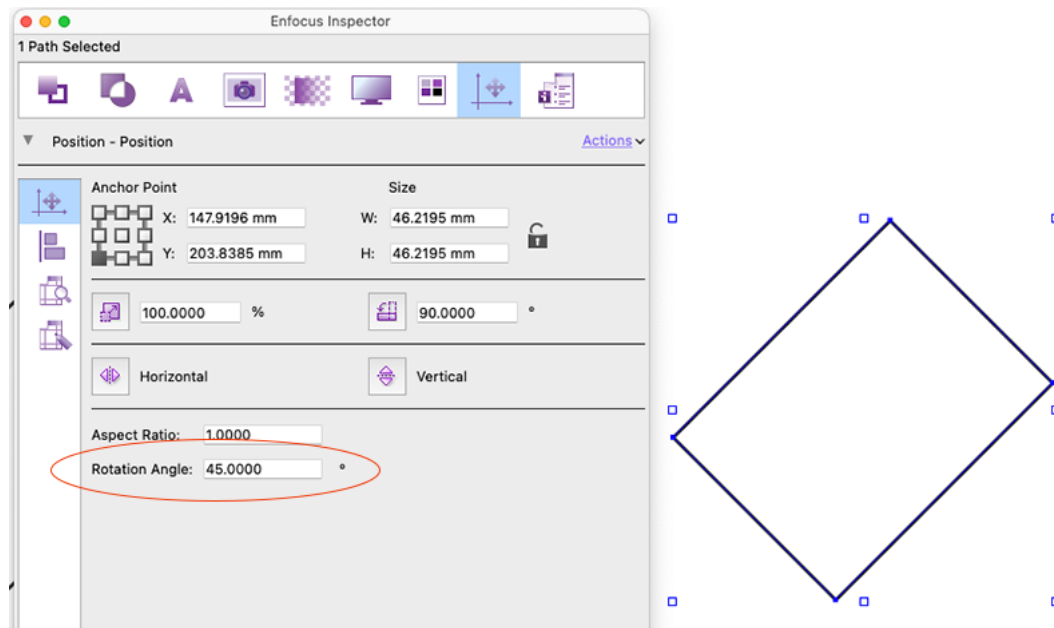


### Example 1

In the example below, all angles are interpreted as rotations between 0 and 45 degrees from vertical to horizontal (first option). The first three objects are logged because they have a rotation angle of less than 4 degrees from the nearest vertical or horizontal page edge (as explained higher).

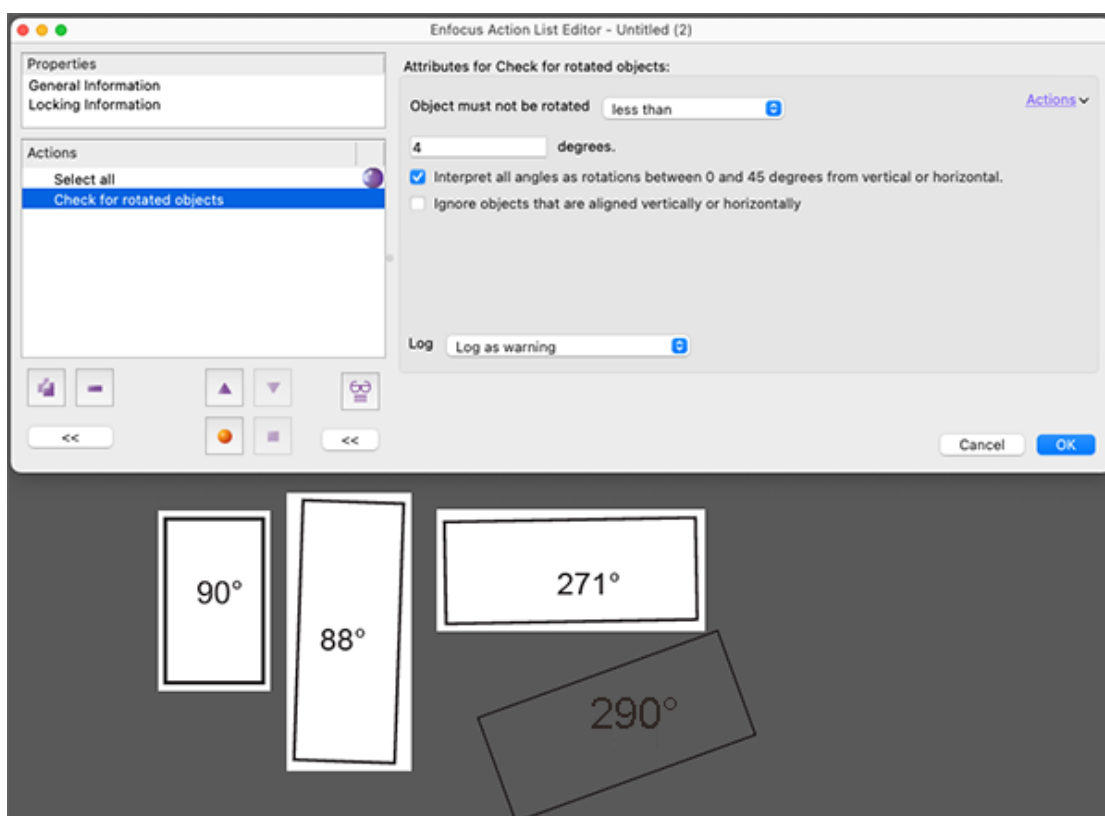

### Example 2

When the **Ignore objects that are aligned horizontally or vertically** checkbox is selected, the object that has a rotation angle of 90° is no longer logged.

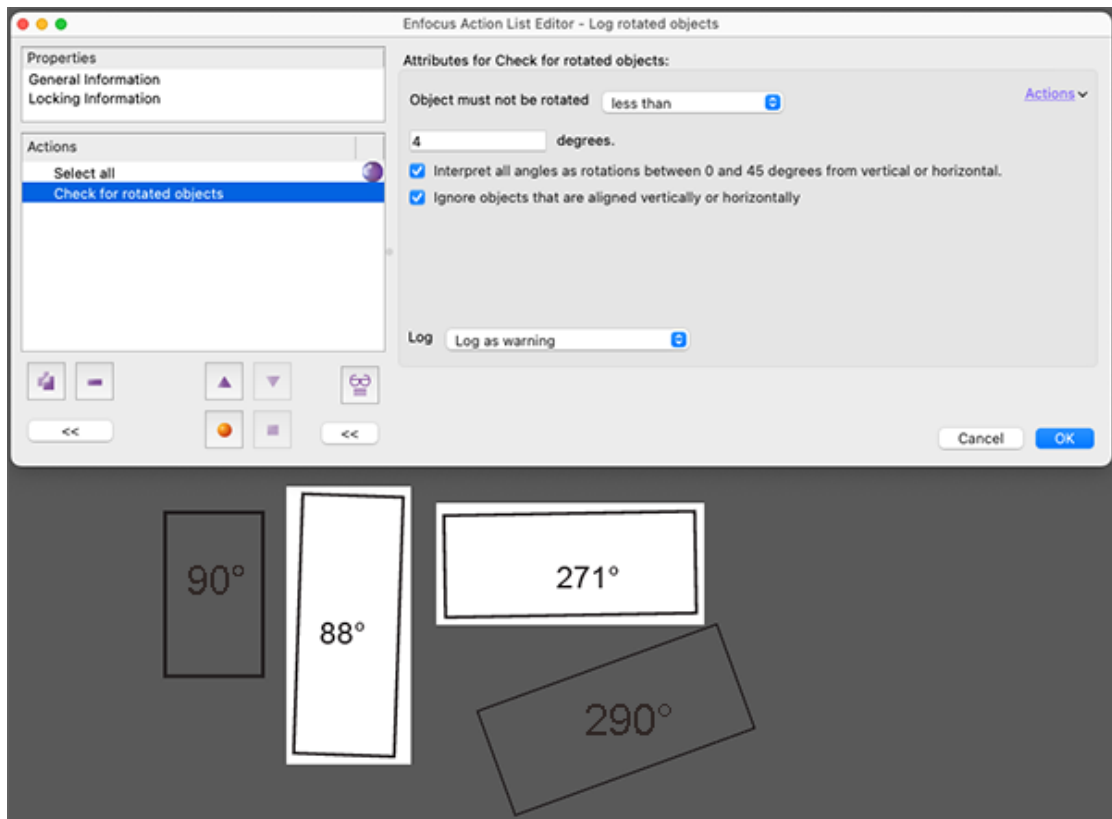

#### Related Actions

- [Rotate object](#) on page 247
- [Rotate content](#) on page 219
- [Rotate objects as group](#) on page 247
- [Select rotated objects](#) on page 497

### 5.3.82. Check for sheared objects

#### Belongs to

- **Category:** Position/Size
- **Type:** Checks

#### What it does

Checks if the PDF contains objects that have been disproportionally skewed or twisted in a page layout application such as QuarkXpress.

### 5.3.83. Check for solids and tints

#### Belongs to

- **Category:** Color; Page

- **Type:** Checks

#### **What it does**


Checks if the PDF document contains any colors that have a tint below or above a set threshold.

The threshold is set in the **Effective solidness threshold** field. The default is 100%.

It's also possible to define a threshold for considering a colorant as a tint, by selecting the **Ignore tints that cover a surface area below** checkbox and entering a value of your choice (in ppm). You can take into account the printable surface area, the surface area of the own channel, or the surface area of all channels. This option is useful to avoid that colorants on pages with for example only 1 non-solid pixel in the rendered page would be marked as a tint.

#### **Example**

In this example, the threshold was set to 90%.

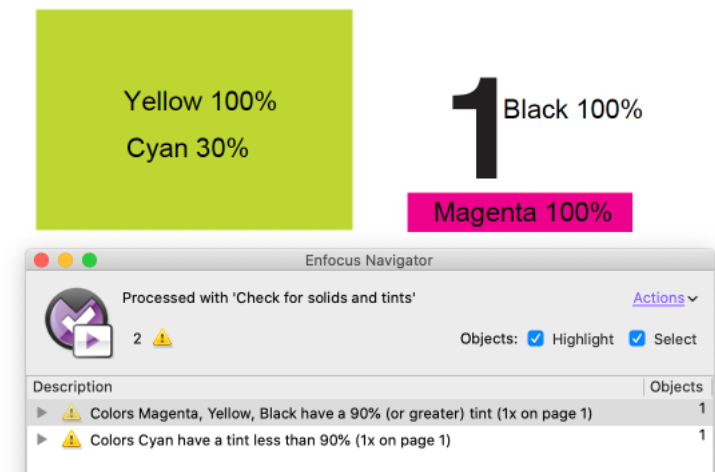

## 5.3.84. Check for spot color ambiguity

#### **Belongs to**

- **Category:** Color
- **Type:** Checks

#### **What it does**

Searches for ambiguous spot colors. Spot colors are considered ambiguous if the name of the spot color refers to more than one set of color values.

You can set a number of options, to make the check less strict. You can also include a check on DeviceN color spaces.

### 5.3.85. Check for sub-page navigation support

---

***Belongs to***

- **Category:** Page
- **Type:** Checks

***What it does***

Checks if the PDF supports sub-page navigation, i.e. the possibility to navigate from one layer to another layer on the same page.

Sub-page navigation support is not desired in documents for print.

***About page and sub-page navigation***

Page navigation allows you to navigate from one **page** to another, whereas sub-page navigation allows you to navigate from **one layer to another layer** on the same page.

***Example***

Suppose you have a single page PDF showing the slides of a presentation. Each slide is on a different layer. When the user presses the forward arrow, the next slide (on the same page, but on another layer) is shown and the previous one (on another layer) is hidden.

### 5.3.86. Check for transparent objects

---

***Belongs to***

- **Category:** Prepress
- **Type:** Checks

***What it does***

Searches the PDF document for any objects with transparency.

You can check the transparency of different elements, such as the fill or stroke, the blend modes, ... For the whole list of options, check the attributes of the Action in PitStop.

You can either search for all transparent objects or you can restrict your search to transparent objects that have *all* or *at least one* of the following *selected* properties:

- Fill is set to overprint
- Stroke is set to overprint
- Graphic element uses a spot color

***About transparency in PDF***

Transparency can cause some problems if you view documents in Adobe Acrobat 4.0 or earlier: transparent objects can be rendered incorrectly.

A transparent layer can also cause problems when you transpose the PostScript code of your PDF document to the halftone information of your printer (the 'ripping').

A typical example is saving graphics with transparent elements as PDF compatible with Acrobat 5.0 in Adobe Illustrator 9.0 or Adobe InDesign 2.0. In Adobe Acrobat 4.0, transparent objects in your PDF document are displayed and printed opaque, but transparency is not removed. If you open the same PDF document in Adobe Acrobat 5.x, the transparent objects will look (and print) fine again.

It can be useful to make the distinction between spot colors and CMYK colors when checking the transparency settings in your documents, because different rules govern the overprinting of spot colors.

#### ***Related Actions***

- [Select transparent objects](#) on page 504
- [Select pages with transparent objects](#) on page 486
- [Remove transparency](#) on page 274
- [Change transparency](#) on page 265

### **5.3.87. Check for unknown objects**

---

#### ***Belongs to***

- **Category:** General
- **Type:** Checks

#### ***What it does***

Checks if the PDF contains unknown objects.

Unknown objects in this context are objects that are not defined in the PDF 1.3 standard. The PDF/X standards require all objects in the document to be “known”, or defined in the PDF 1.3 specification.

This avoids differences in output between older and newer RIPs, for example. Older RIPs may not be able to process certain objects, and produce blank pages, whereas a more recent RIP can deal with those objects correctly and will produce the intended output.

### **5.3.88. Check for unreadable data in front of the PDF header signature**

---

#### ***Belongs to***

- **Category:** Doc
- **Type:** Checks

#### ***What it does***

Checks for unreadable data in front of the PDF header signature.

**Related Actions**

[Check for garbage after the PDF End-Of-File marker %%EOF](#) on page 323

## 5.3.89. Check for XFA forms

---

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks whether the PDF contains XFA forms.

An XFA form is a web form and is not suited for printing documents. XFA stands for XML Forms Architecture. It's an XML specification, which is rather vague and does not specify any rendering.

Optionally, you can also check if a NeedsRendering key is present in the PDF document (**log if NeedsRendering key is present**).

## 5.3.90. Check for XMP schema definitions as required by PDF/A

---

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks whether the PDF contains XMP schema definitions for identifying the document, as required by the PDF/A specification.

## 5.3.91. Check form fields

---

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Looks for the presence of form fields in a PDF.

**Related Actions**

- [Flatten form fields](#) on page 188

- [Remove form fields](#) on page 191

### 5.3.92. Check halftone origin

---

***Belongs to***

- **Category:** PDF2.0
- **Type:** Checks
- **New since:** PitStop 2022

***What it does***

Logs either objects with or without default HTO (halftone) values, or with particular HTO values.

PDF 2.0 allows specifying the halftone origin, whereas in earlier versions, the halftone origin value had to be 'Default' (= not specified). If you want to remove the halftone origin from your document, you can use the [Set default halftone origin](#) Action.

***Related Actions***

- [Select by halftone origin](#) on page 490
- [Change halftone origin](#) on page 226
- [Set default halftone origin](#) on page 236

### 5.3.93. Check halftone phase

---

***Belongs to***

- **Category:** Prepress
- **Type:** Checks

***What it does***

Checks the PDF documents for the presence of halftone phases.

A halftone phase is a shift in the alignment of halftone and pattern cells in device space, to compensate for window system operations that involve scrolling. It is no longer used, but may still be found in documents containing artwork from older source applications.

***Related Actions***

[Remove halftone phase](#) on page 272

### 5.3.94. Check ICC profile version

---

***Belongs to***

- **Category:** Color
- **Type:** Checks



**What it does**

Checks if the ICC profile version is equal to or lower than a particular version number.

**About ICC tagging**

Every input and output device reproduces color and grayscales in a slightly different way. As a result, the colors you see in a PDF file on your screen may not match the colors produced when you print the PDF to an output device.

ICC color profiles are used to avoid this. An ICC color profile is a mathematical description of the color space used by a specific device. In other words, the color profile describes how the colors produced by the device relate to the reference CIE LAB color space (a device-independent color space). As such, they allow you to set up a workflow in which all devices use color management to compensate for their individual color reproduction characteristics, based on the information in the ICC profiles.

**Related Actions**

- [Remove ICC tag](#) on page 116
- [Select by tagged ICC Profile](#) on page 429
- [Check ICC tagging](#) on page 305
- [Check if ICC profile differs from ICC profile in PDF/X Output Intent](#) on page 307
- [Select objects of which ICC profile is equal to ICC profile in PDF/X output](#) on page 433
- [Tag object with an ICC profile](#) on page 119

## 5.3.95. Check ICC tagging

---

**Belongs to**

- **Category:** Color
- **Type:** Checks

**What it does**

Checks objects to see whether or not they are ICC tagged or tagged with a particular ICC profile in a particular color space. You can check if the fill and/or stroke of the objects are ICC tagged.

**About ICC tagging**

Every input and output device reproduces color and grayscales in a slightly different way. As a result, the colors you see in a PDF file on your screen may not match the colors produced when you print the PDF to an output device.

ICC color profiles are used to avoid this. An ICC color profile is a mathematical description of the color space used by a specific device. In other words, the color profile describes how the colors produced by the device relate to the reference CIE LAB color space (a device-independent color space). As such, they allow you to set up a workflow in which all devices use color management to compensate for their individual color reproduction characteristics, based on the information in the ICC profiles.

**Related Actions**

- [Remove ICC tag](#) on page 116

- [Select by tagged ICC Profile](#) on page 429
- [Tag object with an ICC profile](#) on page 119
- [Check if ICC profile differs from ICC profile in PDF/X Output Intent](#) on page 307
- [Select objects of which ICC profile is equal to ICC profile in PDF/X output](#) on page 433
- [Check ICC profile version](#) on page 306

### 5.3.96. Check processing steps - ISO 19593-1

---

***Belongs to***

- **Application:** PitStop Pro
- **Category:** Packaging
- **Type:** Checks
- **Since Version:** 13 update 2

***What it does***

Allows you to check if particular processing steps metadata is present in a file. Processing steps metadata is defined by ISO standard 19593-1.

Note that you must select a processing steps group; a processing steps type is optional.

Supported groups:

- Structural
- Dimensions
- Braille
- Legend
- Positions
- White
- Varnish

You can as well define a custom group and/or custom step types.

***Related Actions***

- [Select layers by processing steps - ISO 19593-1](#) on page 479
- [Change layer processing steps - ISO 19593-1](#) on page 197
- [Remove processing steps - ISO 19593-1](#) on page 277

### 5.3.97. Check if a subset font contains a complete CharSet or CIDSet

---

***Belongs to***

- **Category:** Text
- **Type:** Checks

**What it does**

Checks if the subset fonts embedded in the document (if any) contain a complete character or CID set.

If a font is subset, only the characters of the font that are actually used in the text are embedded in the document. This is done to keep a file as small as possible. This Action allows you to check if all characters of the font are embedded. In case of simple fonts, the complete set is referred to as "CharSet"; in case of composite fonts, it's referred to as "CIDSet".

CID (Character Identifier) fonts are a format of Type 1 fonts that are typically used for Chinese, Japanese and Korean fonts.

**Related Actions**

- [Select subset fonts](#) on page 512
- [Check font subsetting](#) on page 409

## 5.3.98. Check if blending color space is defined

---

**Belongs to**

- **Category:** Color; Page
- **Type:** Checks

**What it does**

Checks if the page blending color space has been defined in the PDF document.

You must set the required blending color space and the required luminosity softmask blending color.

**About blending color spaces**

When Adobe Acrobat interprets transparent objects and attempts to create a preview of the flattened artwork, it needs to do so using a single color space for all the items involved in the transparency group. This color space is called the **blending color space**.

The **page blending color space** is the blending color space assigned to a page; it is used when individual artwork does not have a blending color space.

The blending color space for soft masks (masks with soft transitions) is called the **luminosity softmask blending color space**. It is usually gray.

**Related Actions**

- [Change blending color space](#) on page 103
- [Select by blending color space](#) on page 424

## 5.3.99. Check if compression filters are PDF/X compliant

---

**Belongs to**

- **Category:** Doc
- **Type:** Checks

**What it does**

Checks whether compression filters used in the PDF are compliant with a specific PDF/X version.

Select the desired PDF/X version:

- PDF/X-1a:2001
- PDF/X-3:2002
- PDF/X-1a:2003
- PDF/X-3:2003
- PDF/X-4
- PDF/X-4p
- PDF/X-6
- PDF/X-6p
- PDF/A-1
- PDF/A-2

### 5.3.100. Check if date is present in document XMP metadata

---

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks for the date in the XMP metadata of a PDF.

**About XMP metadata**

XMP metadata is descriptive information about the file embedded in the PDF, for example the name of the author, keywords, copyright information... XMP refers to labeling technology that is used, i.e. Adobe's Extensible Metadata Platform. You can view the XMP metadata in a file's Document Properties in Acrobat (Click the **Additional Metadata** button, then select **Advanced**).

**Related Actions**

- [Check file identifiers in document XMP metadata](#) on page 322
- [Check presence of document metadata stream](#) on page 364

### 5.3.101. Check if DeviceN printing order is consistent

---

**Belongs to**

- **Category:** Color
- **Type:** Checks

**What it does**

Check whether the DeviceN printing order is consistent and whether all colorants are defined in the DeviceN printing order.

### 5.3.102. Check if document does not need repair

---

***Belongs to***

- **Category:** Doc
- **Type:** Checks

***What it does***

Checks whether a PDF is damaged and needs to be repaired when it is opened.

A PDF file can be damaged, for example, if you downloaded it from the Internet and the file transfer was incomplete.

If a PDF is damaged, you can try to redistill it or save it in Adobe Acrobat, using **File > Save as**. If this doesn't solve the problem, you will have to recreate the PDF from the source file, or download it again (if the problem was caused by a corrupt download).

### 5.3.103. Check if document has enough high-ASCII bytes in the PDF header

---

***Belongs to***

- **Category:** Doc
- **Type:** Checks

***What it does***

Checks if the PDF header contains at least 4 high-ASCII bytes in the PDF header.

There are three checkboxes:

- **Check header has at least 4 high-ASCII bytes**
- **Check for single EOL character after version header**
- **Check version header format**

The PDF specs require that there should be 4 contiguous high-ASCII bytes in the PDF header, so to check the compliance with the PDF specs, the first checkbox should be selected.

The PDF/A specs require that the 4 contiguous high-ASCII bytes in the PDF header should be the first bytes immediately after the header line, so to check the compliance with PDF/A, checkbox 1 and checkbox 2 should be selected.

For PDF/A-2 and PDF/X-6, all three checkboxes should be selected.

For a check for PDF/A-1, only the first checkbox should be selected.

### 5.3.104. Check if document is optimized for Fast Web View

---

***Belongs to***

- **Category:** Doc
- **Type:** Checks

**What it does**

Verifies if the document is optimized for the Web.

A document that has been optimized for the Web often has a significantly smaller file size. This is achieved by replacing images that occur more than once in the document with pointers to the first instance of these images. Also, the PDF document is restructured to allow page-at-a-time downloading over the Internet: only the page viewed by the user is downloaded, thus avoiding long loading times for larger PDF documents.

### 5.3.105. Check if document is produced by PDFWriter

---

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks if a PDF was produced by PDFWriter.

PDFs created with PDFWriter are not suitable for high-end printing.

### 5.3.106. Check if document metadata is consistent

---

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks if metadata that is present in different metadata locations is identical.

**How it works**

There are two metadata locations in a PDF file:

- The **info dictionary** contains information about the file, such as the title, the author, the creation date ... and is visible through the file's Document properties. It's not in XML format.
- The **XMP metadata stream** also contains information about the file, but this information is represented as XMP metadata - XMP referring to Adobe's labeling technology **Extensible Metadata Platform**. All information in the info dictionary is also represented in the XMP metadata stream dictionary, in the form of XMP properties.

Inconsistencies may occur when only one of the metadata locations has been updated.

**Extra checks**

Optionally you can check if metadata in one location (selected from the list) is also present in the other location; if all metadata should be present in both locations, select **any metadata location**.

If multiple creators are not considered an inconsistency, select the **Allow multiple creators** checkbox.

**Related Actions**

- [Make document metadata consistent](#) on page 188
- [Select if document metadata is inconsistent](#) on page 469

## 5.3.107. Check if document requires PostScript LanguageLevel 3

---

**Belongs to**

- **Category:** Doc
- **Type:** Checks

**What it does**

Checks a PDF to see if it contains PostScript Level 3-specific features such as transparency or smooth shadings.

**About Adobe PostScript**

Adobe PostScript is a page describing language developed by Adobe in 1985. The language has changed over the years, resulting in different versions:

- Adobe PostScript Level 1: first, original version.
- Adobe PostScript Level 2: enhanced version; added support for different page sizes and better color printing.
- Adobe PostScript LanguageLevel 3: improved handling of graphics, supports more fonts, and speeds up printing.

For more information, refer to <http://www.adobe.com/products/postscript/pdfs/PLRM.pdf>.

## 5.3.108. Check if document XMP metadata types are valid

---

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks if metadata streams defined in a PDF conform to the XMP schema.

**About XMP metadata streams**

There are two metadata locations in a PDF file:

- The **info dictionary** contains information about the file, such as the title, the author, the creation date ... and is visible through the file's Document properties. It's not in XML format.
- The **XMP metadata stream** also contains information about the file, but this information is represented as XMP metadata - XMP referring to Adobe's labeling technology **Extensible Metadata Platform**. All information in the info dictionary is also represented in the XMP metadata stream dictionary, in the form of XMP properties.

Inconsistencies may occur when only one of the metadata locations has been updated.

**Related Actions**

- [Check if XMP metadata is well-formed](#) on page 361
- [Make document metadata consistent](#) on page 188
- [Select if document metadata is inconsistent](#) on page 469

### 5.3.109. Check if document XMP name space uses correct prefix

---

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

The XMP metadata standard (used for labeling metadata in PDFs) defines namespaces for defined sets of core properties. This Action checks if the correct prefixes are used.

**Related Actions**

[Set correct document XMP name spaces](#) on page 194

### 5.3.110. Check if font contains all glyphs and metrics for all characters used

---

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Searches the PDF document for fonts that don't have the character set required to display and print the used characters correctly.

Optionally, you can include in your check the glyphs that were removed by subsetting fonts.

You can then replace these fonts by embedded or subset fonts that do have all required glyphs and metrics.

**Related Actions**

[Select text with missing glyphs in its font](#) on page 514

### 5.3.111. Check if ICC profile differs from ICC profile in PDF/X Output Intent

---

**Belongs to**

- **Category:** Color



- **Type:** Checks

**What it does**

Checks whether the fill and/or stroke ICC profile differs from the ICC profile in the PDF/X Output Intent.

As of PitStop 2022, it's possible to compare the ICC profile either with the document Output Intents or with the effective Output Intents. The effective Output Intent is the intent that is actually used. For example, if different Output Intents are applied on different levels (document/page/object), the most specific one is applied.

You can either check the ICC profile of the fill or the stroke, or both.

**About ICC tagging**

Every input and output device reproduces color and grayscales in a slightly different way. As a result, the colors you see in a PDF file on your screen may not match the colors produced when you print the PDF to an output device.

ICC color profiles are used to avoid this. An ICC color profile is a mathematical description of the color space used by a specific device. In other words, the color profile describes how the colors produced by the device relate to the reference CIE LAB color space (a device-independent color space). As such, they allow you to set up a workflow in which all devices use color management to compensate for their individual color reproduction characteristics, based on the information in the ICC profiles.

**About PDF/X Output Intents**

Output intents specify the intended printing process and paper type as described by a corresponding ICC profile. The PDF/X Output Intents are defined by the Ghent Workgroup; only printer profiles are allowed as Output Intents, whereas PDF/A also allows monitor profiles.

Output intents are generally specified by the print service provider, but there are also a number of standard Output Intents available, which can be found in the Enfocus Output Intent Panel. For more information, refer to the PitStop Reference Guide.

Note that as of PDF 2.0 it is possible to define Output Intents on page level, whereas before, only document Output Intents were allowed.

**Related Actions**

- [Remove ICC tag](#) on page 116
- [Select by tagged ICC Profile](#) on page 429
- [Check ICC tagging](#) on page 305
- [Tag object with an ICC profile](#) on page 119
- [Select objects of which ICC profile is equal to ICC profile in PDF/X output](#) on page 433
- [Check ICC profile version](#) on page 306

## 5.3.112. Check if invalid character (.notdef glyph) is used

---

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Checks if the PDF contains invalid characters.

.notdef glyphs are replacement characters for undefined characters in a PDF; they often look like a small box containing an X or a question mark and are not PDF/X compliant. You might want to remove or fix them.

**Related Actions**

[Fix invalid characters \(.notdef usage\)](#) on page 290

### 5.3.113. Check if JPEG 2000 compressed images are PDF/X compliant

---

**Belongs to**

- **Category:** Image
- **Type:** Checks

**What it does**

Check if JPEG 2000 compressed images are PDF/X-4 or PDF/X-6 compliant.

You might want to remove or replace non-compliant images.

### 5.3.114. Check if layer is PDF/X-4 compliant

---

**Belongs to**

- **Category:** Layers
- **Type:** Checks

**What it does**

Checks if the layers in a PDF document comply with the PDF/X-4 specification.

**About layers in PDF/X-4**

The PDF/X-4 standard allows the use of layers (OCGs = Optional Content Groups) in PDF. These layers can have different states (ON or OFF). The state of all OCGs must be defined in an Optional Content Configuration Dictionary (OCCD). This dictionary must be used by compliant readers to switch on or off the layers.

### 5.3.115. Check if metadata streams do not have a compression filter

---

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks if metadata streams do not have a compression filter.

A compression filter is used to reduce the file size of a PDF. If no compression filter has been used, you may want to add one; if a compression filter has been used, you may want to check which one (e.g. to see if it complies with certain specifications).

**Related Actions**

[Check presence of document metadata stream](#) on page 364

## 5.3.116. Check if object is close to the page edge

---

**Belongs to**

- **Category:** Page
- **Type:** Checks

**What it does**

Checks whether the selected object is situated close to the page edge and might need to be enlarged.

You must specify the required distance to the trim box and the distance into the bleed. Optionally, you can choose to treat subpaths of compound paths individually. In that case, each of the subpaths will be checked separately.

See also:

- [Select objects close to the page edge](#) on page 483
- [Change objects that are close to the page edge](#) on page 205

## 5.3.117. Check if object is completely outside page box

---

**Belongs to**

- **Category:** Page; Position and size
- **Type:** Checks

**What it does**

Searches for (and optionally selects) objects that lie completely outside the selected page box.

Depending on your workflow, you may want to remove these objects before printing.

## 5.3.118. Check if object is set to knockout

---

**Belongs to**

- **Category:** Prepress
- **Type:** Checks

**What it does**

Checks if a selected object is set to knockout or not. You can distinguish between the fill and stroke being 'knocked out'.

If an object is set to knockout, the colors of this object cut out the area underneath. The background color is erased.

### 5.3.119. Check if object is set to overprint

---

**Belongs to**

- **Category:** Prepress
- **Type:** Checks

**What it does**

Checks if the fill and/or stroke of a selected object is set to overprint.

Black objects and particularly smaller text objects should be set to overprint, to compensate for misregistration and to preserve the legibility of the text.

**Related Actions**

[Change overprint](#) on page 263

### 5.3.120. Check if Output Intents are used

---

**Belongs to**

- **Category:** PDF2.0
- **Type:** Checks
- **New since:** PitStop 2022

**What it does**

Checks for the presence of Output Intents, either on page or document level.

An Output Intent describes the color characteristics of the output devices on which the PDF document might be rendered. The Output Intent may be defined on document and/or page level.

This Action can be useful if you don't want PDF2.0 features in your PDFs. You can remove Output Intents using a dedicated [Action](#).

**Related Actions**

- [Remove Output Intents](#) on page 234

### 5.3.121. Check if page box is defined

---

**Belongs to**

- **Category:** Page

- **Type:** Checks

**What it does**

Checks if the selected page box (trim, crop, art or bleed box) has been defined in the PDF.

### 5.3.122. Check if page box is too large

---

**Belongs to**

- **Category:** Page
- **Type:** Checks

**What it does**

Checks if the selected page box (art, bleed, crop, or trim box) lies inside the media box.

### 5.3.123. Check if page scaling factor is used

---

**Belongs to**

- **Category:** Page; Position and size
- **Type:** Checks

**What it does**

Checks whether the PDF uses a page scaling factor. If so, you can optionally check if a certain page scaling factor applies.

A page with scaling factor 2 will be displayed and printed twice the original size (= scaling factor 1). Page scaling has been introduced in PDF 1.6 and allows you to extend the maximum page size beyond 200 by 200 inch.

**Related Actions**

- [Apply page scaling factor](#) on page 201
- [Remove page scaling factor](#) on page 216

### 5.3.124. Check if Requirements are used

---

**Belongs to**

- **Category:** PDF2.0
- **Type:** Checks
- **New since:** PitStop 2022

**What it does**

Checks if the PDF contains a Requirements dictionary in the Catalog, or one or more specific Requirement types (in that case you can specify which types to check for).

The Requirements dictionary specifies the requirements the PDF file has. Until PDF 2.0, the only *possible* requirement was 'EnableJavaScripts'. As of PDF 2.0, a number of new types are allowed, such as 3D Markup, Attachment, Encryption etc.

**Related Actions**

- [Change Requirements](#)

### 5.3.125. Check if solidities of DeviceN colorants are consistent

---

**Belongs to**

- **Category:** Color
- **Type:** Checks

**What it does**

Check if solidities of DeviceN colorants are consistent.

Solidity refers to how spot colors are shown on screen. 100% solidity means that the colors are completely opaque on screen in areas where it is printed at 100% ink density. This Action checks if the solidities are the same for all colors in the DeviceN color space.

### 5.3.126. Check if the color spaces used match the blend colorspace

---

**Belongs to**

- **Category:** Color
- **Type:** Checks

**What it does**

Checks if the color spaces used in the PDF match the blend colorspace.

### 5.3.127. Check if trim marks match page box

---

**Belongs to**

- **Category:** Page
- **Type:** Checks

**What it does**

Checks if trim marks found in the PDF match the trim box and/or the bleed marks match the bleed box.

**How to proceed**

1. Indicate which marks you want to check: trim marks, bleed marks or both.

2. To help PitStop detect the trim marks, specify the potential color of the marks, by choosing one or more of the following:

- 400% CMYK
- Separation All (registration)
- 100% black
- A specific color

In case of a specific color, do one of the following:

- Select a color space from the list and use the sliders to select the appropriate color.
- Click  and select the appropriate color.
- Select an object with the Enfocus Selection tool and click  to grab the fill or stroke color from the selection.

3. If desired, specify how much the marks are allowed to deviate from the expected position:
  - The unit is the unit set in the PitStop Preferences (Units & Guides category), for example: cm or pt
  - The maximum value is 2.7 pt; if you enter a higher value, it is automatically reset to 2.7 pt or an equivalent value, if you're using a different unit.

### Example

In the image below, the red marks are detected as trim marks, although the position of the vertical marks in the top and bottom left corner is not as expected (they are not exactly on one vertical line). In this case, the deviation (= difference between the position of both marks) is less than the specified threshold.



### Remark

A filled path with 3 lines is accepted as a trim mark if:

- The color is as specified in the attributes of this Action.
- It has no dash pattern.
- The 4 points of the 3 lines are a rectangle.
- The path is closed.

- The width is between 0.1 and 2 pt.
- The length is between 8 and 40 pt.

**Related Actions**

- [Use trim marks to set page box](#) on page 224
- [Select trim marks](#) on page 488

## 5.3.128. Check if TrueType fonts are PDF/X compliant

---

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Checks if TrueType fonts are compliant with a particular PDF/X version. Options are PDF/X-4 and PDF/X-6.

**About OpenType embedded fonts**

OpenType is an extension of the TrueType format that can contain TrueType and/or Type 1 font data. In PDF files it can only appear as an embedded font. It has been introduced in PDF 1.6.

**Related Actions**

- [Select non-PDF/X or PDF/A compliant TrueType fonts](#) on page 510
- [Make TrueType fonts PDF/X compliant](#) on page 291

## 5.3.129. Check if URLs in Link Annotations are valid

---

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks the validity of the hyperlinks in annotations with hyperlinks to web pages, i.e. checks if the target web page exists.

If you're using a proxy server, you should enter the proxy server address and port, and your user name and password. Otherwise, the check cannot be performed.



**Related Actions**

[Check external hyperlink annotations](#) on page 355

## 5.3.130. Check if visual content exists

---

**Belongs to**

- **Category:** General
- **Type:** Checks
- **Since:** 2020

**What it does**

Enables you to check if a group of graphical shapes (e.g. an embedded image, such as a logo or line art) is visible in the PDF document. You can either check if the group of shapes is found, not found or how many times it occurs.

Note that the Action is able to find rotated shapes, partially cropped images, bigger or smaller shapes and shapes that are more or less similar (depending on the configuration, see below).



**Note:** The Action can detect all types of shapes (vector, raster, pixels, ...) embedded in the PDF. External images and simple geometric shapes are not supported.

---

**How it works**

The page the Action is running on is rasterized in the background. This may take a while. When this is finished, PitStop scans the page and searches for control points that are similar to the ones in the shape you want to check and uses this information to detect them.

Simple geometric shapes are not supported, because they do not provide enough control points.

**Use cases**

- Automatic artwork replacement
- Checking for incorrect or wrongly placed logos
- Checking for missing or invisible logos
- Also useful for packshots (for example to find outdated or old images)

**How to proceed**

1. Select the group of shapes (e.g. a logo) you want to check using the PitStop Select Objects tool .
2. In the attributes of the Action, click the **Grab selection** button. The selected image will be shown in the field above the button. Note that, if the image is too large (+15 cm) or too small (-1 cm), you'll get a warning.
3. Enter a label (e.g. "PitStop logo"). This is a mandatory field. Note that the label is only used for logging purposes.
4. From the 'Log a message' list at the top, select the appropriate option:

*Log a message ...*

- for each visual object that was found
- if no visual object was found

- if amount of visual objects meets criteria (this option allows you to set a threshold, e.g. log a message if more than one logo is found).




**Note:** If you run the Action List with the above mentioned options, the check will include rotated shapes, shapes that are somewhat bigger and somewhat smaller and shapes that have a certain visual similarity. The attributes explained below allow you to make the check more precise.

5. Configure the following options as required:

| Attribute                         | Meaning                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Scan resolution (ppi)</b>      | <p>Default value is 300, the minimal value (to get a good result) is 72.</p> <p>To use the resolution of the visual object in the document, clear this field before grabbing the visual object. The current resolution will be entered automatically.</p> <p>Note that a higher resolution will slow down processing, but increase accuracy (as more control points will be checked), whereas a lower resolution will speed up processing but decrease accuracy.</p> <p>The optimal value also depends on the complexity of the visual object: a very complicated object will be difficult to track on a low resolution.</p> |
| <b>Restrict size</b>              | <p>Make sure to enter the largest side of the visual content in the first field.</p> <p>Note that (specifically in case of a rotated object) the Action considers the sides of the object, not of the bounding box.</p> <div>  <p><b>Note:</b> Take into account that there's an error margin; the actual reported shapes may be a bit smaller or larger.</p> </div>                                                                                                                                                                      |
| <b>Restrict rotation</b>          | <p>Make sure to set the rotation to 0 degrees if you don't want to report rotated content. In all other cases, enter the value of your choice. Note that you can enter a number of values (separated by a comma) or use a range (using a hyphen) or a combination.</p> <div>  <p><b>Note:</b> Take into account that there's an error margin of 2 or 3 degrees.</p> </div>                                                                                                                                                                |
| <b>Restrict visual similarity</b> | <p>This option enables you to find objects that are partly hidden by other objects or to find objects that should not be in the document. It also works on colors, for example to find logos with a color difference; note however that there should be enough contrast for PitStop to be able to detect it.</p> <div>  <p><b>Note:</b> Take into account that there's an error margin. We advise playing with the values to find a value that is optimal for the visual content you want to detect.</p> </div>                           |

**Example**

The image below shows that the Action is able to detect a logo, even if it's slightly different in size or color, or when it's rotated, cropped or partly hidden. The marked logo is the one that was grabbed in the Action. Using the Action's attributes you can restrict the found instances.

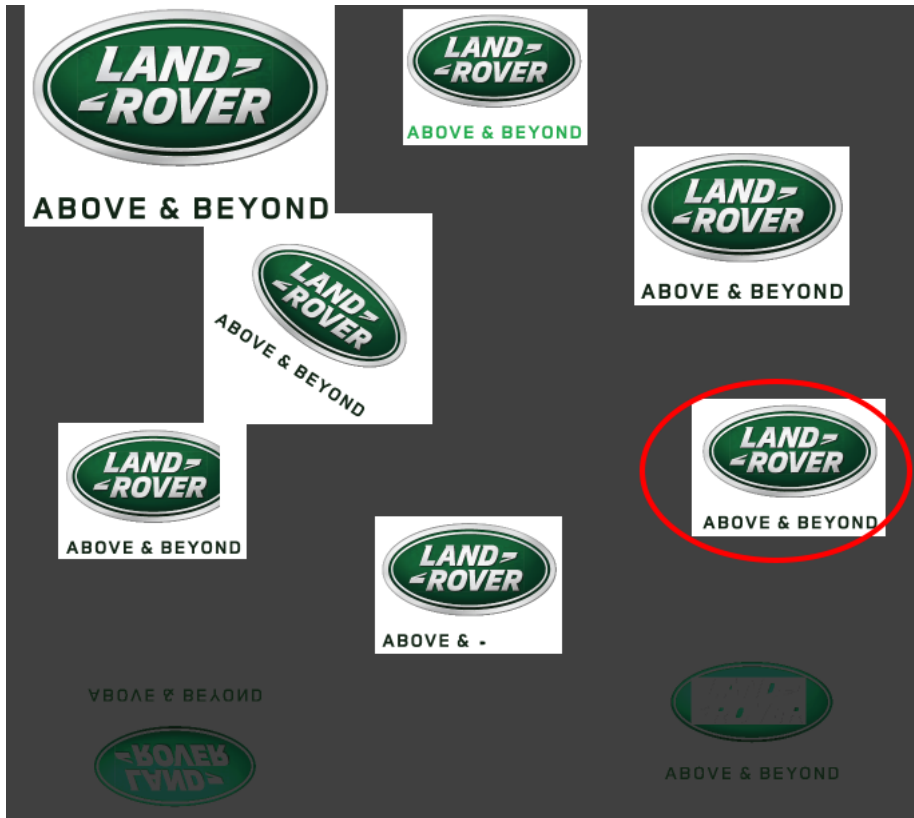

### 5.3.131. Check if XMP metadata is well-formed

---

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks if the XMP metadata streams in the PDF conform to the XMP specifications.

If the XMP metadata is not well-formed, the document cannot be made PDF/X-4 compliant.



**Tip:** PitStop provides an Action to solve these problems: [Fix non well-formed XMP metadata](#) on page 290.

**About XMP metadata**

XMP metadata is descriptive information about the file embedded in the PDF, for example the name of the author, keywords, copyright information... XMP refers to labeling technology that

is used, i.e. Adobe's Extensible Metadata Platform. You can view the XMP metadata in a file's Document Properties in Acrobat (Click the Additional Metadata button, then select Advanced).

### 5.3.132. Check image compression

---

***Belongs to***

- **Category:** Image
- **Type:** Checks

***What it does***

Checks image filters to ensure that the images in the PDF are not compressed using a particular compression method.

You can check for the following compression methods:

- CCITT
- JPEG
- ZIP
- LZW
- RunLength
- JBIG2
- JPEG 2000

By default, soft-mask images are not included, unless you select the **Also check soft-mask images** checkbox.

### 5.3.133. Check image compression ratio

---

***Belongs to***

- **Category:** Image
- **Type:** Checks

***What it does***

Checks the compression ratio of the images in a PDF against a particular threshold.

You can check the compression ratio of images compressed with one of the following compression methods:

- CCITT
- JPEG
- ZIP
- LZW
- RunLength
- JBIG2
- JPEG 2000

**Example**

If the JPEG images in your PDF should not be compressed at all, use the following values:

```
Compression ratio of JPEG images must be equal to 100      <!-- Choose JPEG -->
                                                            <!-- Choose "equal to" and "100" -->
```

A compression ratio of "100" means "no compression"; a compression ratio of "50" means "50%", ...

### 5.3.134. Check image interpolation

---

**Belongs to**

- **Category:** Image
- **Type:** Checks

**What it does**

Checks if images in the PDF have been resampled.

### 5.3.135. Check ink coverage (basic object check)

---

**Belongs to**

- **Category:** Color;Prepress
- **Type:** Checks

**What it does**

Checks the total CMYK ink coverage of the color of the **objects** in the PDF.

You can for example check if the ink coverage is at least 300%.

When including images in the ink coverage check, the threshold will determine the minimum area in which the ink coverage has to be exceeded before reporting an error or warning. For example, when entering '0', even 1 dot exceeding the maximum ink coverage will be reported.

**Related Actions**

[Select by ink coverage \(basic object check\)](#) on page 426

### 5.3.136. Check ink coverage (total page check)

---

**Belongs to**

- **Category:** Color;Prepress
- **Type:** Checks

**What it does**

Allows you to check the CMYK ink coverage either of all colors combined or per separation on a page (inside a particular page box).

You can for example check if the ink coverage in the media box is at least 300%.

In case of a separation-based check, you may exclude separations with 0% ink coverage (i.e. empty areas without content).

It's also possible to ignore small areas, for example areas smaller than 1 inch.

### 5.3.137. Check inline image syntax

---

***Belongs to***

- **Category:** Image; PDF 2.0
- **Type:** Checks
- **New since:** PitStop 2022

***What it does***

Checks the presence and/or validity of the L key (or Length key) of a PDF.

The L key specifies the length of the image data and allows users to skip inline images if required.

Choices are:

- Inline images must not have the Length key
- Inline images must have the Length key
- Inline images must have a valid Length key.

Note that PDF 2.0 allows (but does not impose) the presence of an L key, but if it's present, it must match the actual inline image data length.

***Related Actions***

- [Select inline image syntax](#)
- [Change inline image syntax](#)

### 5.3.138. Check layer print state

---

***Belongs to***

- **Category:** Layers
- **Type:** Checks
- **Since Version:** 2018

***What it does***

Allows you to check the print state of a layer, which determines whether or not objects on the layer are printed.

Print state options are:


- Always prints
- Prints when visible

- Never prints

**Example**

If you never want to print content on layers, check if all layers have the print state set to 'Never prints'. Using the following Action List, you'll get a warning if that's not the case.

```
Select all  
Check layer print state <!-- with the option Print State must be: Never prints -->
```

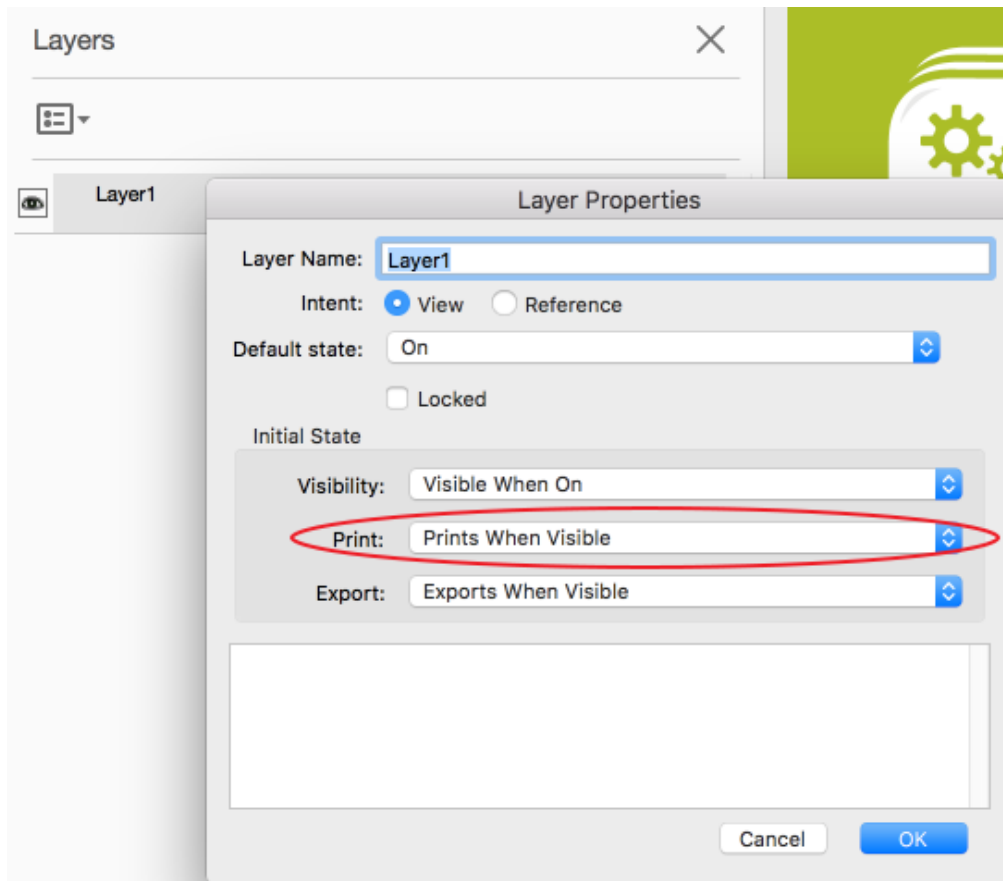**Related Actions**

- [Check layer properties](#) on page 343
- [Change layer print state](#) on page 150
- [Select layers by print state](#) on page 454

## 5.3.139. Check layer properties

**Belongs to**

- **Category:** Layers
- **Type:** Checks

**What it does**

Checks certain properties, i.e. default visibility and presence in the Layers panel ("layer configuration") of the layers selected by another Action in the same Action List.

**Example**

To check the properties of **all** layers in the PDF, create the following Action List:

```
Select layers <!-- Select layers on page 453 -->
Check layer properties
```

**Related Actions**

- [Change layer properties](#) on page 150
- [Select objects in layers by layer properties](#) on page 455

## 5.3.140. Check layers

---

**Belongs to**

- **Category:** Layers
- **Type:** Checks

**What it does**

Checks the layers in a PDF.

You can set a number of different checks, such as:

- Document must not have layers, i.e. optional content is not allowed.
- The document catalog dictionary must not contain OCPProperties key.
- Document must not have alternate layer configurations, i.e. only one Layers panel ("layers palette") is allowed.
- Layer configuration (i.e. the Layers panel) must have a name.
- Multiple layer configurations (i.e. Layers panels) must not have the *same* name.
- Layer group must not be missing from order, i.e. the Layer group must be present in the order of the Layer panel.
- Layer configuration (i.e. the Layers panel) must not contain application specific usage entry.

**About PDF layers**

Layered content usually comes from applications such as InDesign, AutoCAD or Visio. When converted to PDF, the layers are retained and can be viewed and navigated in Adobe Acrobat. However, if you print a PDF file that contains layers, only the content that is visible on-screen is printed. This may or may not be desired.

**"Conventional" layers versus PDF layers**

**Layers in digital image editing** ("conventional" layers) are used to separate the different elements of an image. Each element is drawn on exactly one layer. The different layers are stacked on top of each other, and the order of the layers defines how the image looks like.

**Layers in PDF** have a different meaning. They are used to hide or show page content:



- Turning *on* a layer, all objects on this layer are shown on-screen.
- Turning *off* a layer, all objects on this layer are hidden, i.e. they become invisible.

As such, layers are also called "optional content groups": groups of objects that can be selectively viewed or hidden by the author of the document. Objects can belong to different layers, and the order of the layers is of no importance.

To work with layers in a PDF document in Adobe Acrobat, select **View > Show/Hide > Navigation Panes > Layers**.

For more information, refer to the Adobe Acrobat help.

#### **Related Actions**

- [Change layer properties](#) on page 150
- [Select objects in layers by layer properties](#) on page 455
- [Fix layers](#) on page 151

## 5.3.141. Check line art by length

---

#### **Belongs to**

- **Category:** LineArt
- **Type:** Checks
- **Since Version:** 2019

#### **What it does**

Checks if the line art has a particular length. You can either check the length of individual line art or the total length of all line art in the document.

The exact length is mentioned in the Preflight Report and the Navigator.

#### **Use case**

Users with a cutting table may want to know the length of a cut path so they can estimate how long the job will take to cut on the table.

## 5.3.142. Check line weight

---

#### **Belongs to**

- **Category:** LineArt; Prepress
- **Type:** Checks

#### **What it does**

Checks if the line weight of the selected objects is higher or lower than a particular value.

#### **Related Actions**

- [Change line weight](#) on page 161

- [Select by line weight](#) on page 457
- [Normalize line weight](#) on page 133

### 5.3.143. Check marked content

---

***Belongs to***

- **Category:** Metadata
- **Type:** Checks

***What it does***

Logs content that has been identified with a marked content tag in a PDF.

Marked content is content tagged with special messages so that the application that opens it can read it in a particular way.

***Related Actions***

[Remove marked content](#) on page 191

### 5.3.144. Check maximum path length

---

***Belongs to***

- **Category:** Line Art
- **Type:** Checks

***What it does***

Checks for a maximum amount of nodes in a path.

### 5.3.145. Check media box origin

---

***Belongs to***

- **Category:** Page; Position and size
- **Type:** Checks

***What it does***

Checks whether the media box is set to coordinates 0,0.

The media box is the largest page box and defines the size of the physical medium on which the page will be printed or displayed. Some applications don't give the lower left 0,0 coordinates, but for example 100,100, which will cause problems when preflighting the file.

***Related Actions***

- [Select by media box origin](#) on page 480

- [Move media box to 0.0](#) on page 211

### 5.3.146. Check number of color plates (basic object check)

---

#### ***Belongs to***

- **Category:** Color
- **Type:** Checks
- **Since Version:** 13 update 2

#### ***What it does***

Checks if the PDF contains *objects* that occur on a certain number of color plates (separations). You can check the object's fill and/or stroke as required.

#### ***Related Actions***

- [Select by number of color plates](#) on page 426
- [Check number of separations \(total page check\)](#) on page 310 (checks everything on a page)

### 5.3.147. Check number of images on page

---

#### ***Belongs to***

- **Category:** Image
- **Type:** Checks
- **Since:** 2020

#### ***What it does***

Checks the number of images on a page.

#### ***Use case***

Badly created PDF files can have hundreds of images, which can take a long time to rip. This Action can help you detect the pages with more images than expected. Such pages can then be simplified using [Rasterize selection](#) or similar tools.

#### ***Related Actions***

- [Select page by number of images](#) on page 452
- [Rasterize selection](#) on page 138

### 5.3.148. Check number of pages

---

#### ***Belongs to***

- **Category:** Page;Doc
- **Type:** Checks

**What it does**

Checks the number of pages in a PDF.

You can for example check if there are less/more than x page(s), or if the PDF contains an odd/even number of pages ...

### 5.3.149. Check number of paths on page

---

**Belongs to**

- **Category:** Line Art
- **Type:** Checks

**What it does**

Checks the number of paths on one page.

You can for example log a warning if the PDF contains more than 4 paths on a page.

**Related Actions**

[Select page by number of paths](#) on page 459

### 5.3.150. Check number of separations (total page check)

---

**Belongs to**

- **Category:** Color
- **Type:** Checks

**What it does**

Checks the number of separations that occur in a PDF file. You can set a precise number (e.g. 5 separations) or a range (e.g. less than 5) and choose whether or not to exclude certain colors (e.g. CMYK plates, spot color All ...). You can also use regular expressions to indicate which separations should not be counted.



**Note:** From PitStop 2019 onwards, you can exclude C, M, Y and K separately. This is useful when checking black and white jobs, or jobs that have K and a spot color.

You can check the number of separations for the complete document, or for each page separately. The new page-based option allows you to work with a selection, so you can check specific pages, page ranges or other page based selections, for example, you could check if every even page has two color separations.

Note that this option is also useful if you want to know on which page an issue occurs, because the page number is mentioned in the Preflight Report and in the Navigator.

**Checking ICC tagged objects**

ICC tagging is a way to specify colors independent from the output device: objects are tagged with an ICC profile that contains the transformation from the object's color to a device-independent color. When outputting this on a specific device, that device-independent color is in turn converted to the output device's color space.

Because this conversion depends on the output device, and because it will rarely (if ever) result in less than 4 color plates being used, checking the number of separations on an ICC tagged object will always result in 4 separations.

For example, if you have a black (100% K) ICC tagged object, the number of separations reported by this Action will be 4 (C, M, Y, K) instead of 1 (only K) because some ink will be used on all plates in order to reproduce the color correctly.

#### **Related Actions**

- [Check number of color plates \(basic object check\)](#) on page 310 (checks the fill and/or stroke of objects)

## 5.3.151. Check number of spot colors

---

#### **Belongs to**

- **Category:** Color
- **Type:** Checks

#### **What it does**

Checks the number of spot colors in a document.

You must enter the number of spot colors the document must have.

If you select the option **Spot colors whose names differ only by their suffix are counted as one**, spot colors with the same name but with a different suffix (e.g. PANTONE 3258 C, PANTONE 3258 U, PANTONE 3258 M) are counted as one color instead of different (3 in this example) colors. For more information about suffixes, refer to [Change spot color suffix](#) on page 105.

Note that spot color "All" is also counted. This spot color appears on all printing plates (hence the name) and is used for registration and printer marks that lie outside the trim and bleed boxes.

#### **Related Actions**

- [Check number of separations \(total page check\)](#) on page 310 (this Action has an option to not count Spot Color All)

## 5.3.152. Check object compression

---

#### **Belongs to**

- **Category:** Doc
- **Type:** Checks

#### **What it does**

Checks the compression of the PDF structure (possible as of PDF 1.5).

You can also check if the compression is compliant with PDF/X.

**About object compression**

In a PDF, objects have content streams that define (a part of) the object. These content streams can be compressed in order to create smaller files, so this is mostly used if a PDF is to be put on a website. As older RIPS may have problems with this compression, this Action allows you to check if the PDF contains such compressed streams, which you can afterwards remove if required.

**Related Actions**

- [Remove object compression](#) on page 277
- [Check optimal compression](#) on page 334

## 5.3.153. Check objects by tiling pattern

---

**Belongs to**

- **Category:** Color
- **Type:** Checks
- **Since version:** 2020

**What it does**

Allows you to check for tiling patterns in the fill or stroke of text and line art, or in the fill of image masks. You can search for colored or uncolored tiling patterns or both.



**Note:** You should select at least one checkbox above the divider and one below the divider.

---

**Related Actions**

- [Select by tiling pattern](#) on page 430
- [Select tiling pattern contents according to parent object selection](#) on page 441

## 5.3.154. Check OPI path

---

**Belongs to**

- **Category:** Image
- **Type:** Checks

**What it does**

If your document contains objects with OPI information, you can use this Action to detect images that cannot be found in the location specified in the OPI pointer.

**About OPI**

OPI (Open Prepress Interfaces) replaces high resolution images with "preview" images; low resolution substitutes which are stored in the PDF, together with the path to the high resolution images. This facilitates data storage and data transfer of PDFs with a large number of images.

**Related Actions**

- [Change OPI info](#) on page 144
- [Check OPI type](#) on page 340
- [Gather OPI information](#) on page 418
- [Remove OPI](#) on page 146
- [Select images with OPI info](#) on page 450

## 5.3.155. Check OPI type

---

**Belongs to**

- **Category:** Image
- **Type:** Checks

**What it does**

Checks which OPI types are allowed in a PDF.

You can check for the following OPI types:

- None
- 1.3
- 2.0
- both 1.3 and 2.0

**About OPI**

OPI (Open Prepress Interfaces) replaces high resolution images with "preview" images; low resolution substitutes which are stored in the PDF, together with the path to the high resolution images. This facilitates data storage and data transfer of PDFs with a large number of images.

**Related Actions**

- [Check OPI path](#) on page 340
- [Change OPI info](#) on page 144
- [Gather OPI information](#) on page 418
- [Remove OPI](#) on page 146
- [Select images with OPI info](#) on page 450

## 5.3.156. Check optimal compression

---

**Belongs to**

- **Category:** General
- **Type:** Checks

**What it does**

Checks if the latest and most efficient compression mechanisms have been applied in the PDF document.

Previous versions of Adobe Acrobat (2.1, 3.0, 4.0) featured less advanced compression mechanisms.

**About object compression**

In a PDF, objects have content streams that define (a part of) the object. These content streams can be compressed in order to create smaller files, so this is mostly used if a PDF is to be put on a website. As older RIPS may have problems with this compression, this Action allows you to check if the PDF contains such compressed streams, which you can afterwards remove if required.

**Related Actions**

- [Check object compression](#) on page 326
- [Remove object compression](#) on page 277

## 5.3.157. Check Output Intent

---

**Belongs to**

- **Category:** Color
- **Type:** Checks

**What it does**

Checks if the desired color management Output Intent is used on page or document level. Note that the document can only have one Output Intent, whereas different pages in the document can have different Output Intents.

You can check for compliance with a particular PDF/X version and/or check if a particular ICC profile or ICC characterization is used.

**Related Actions**

[Change Output Intent](#) on page 104

## 5.3.158. Check Output Intents for DotGain

---

**Belongs to**

- **Category:** Prepress
- **Type:** Checks
- **New since:** PitStop 2022

**What it does**

Checks if the Output Intents contain a DotGain dictionary.

A DotGain dictionary is a PDF 2.0 feature.

## 5.3.159. Check overprint mode

---

**Belongs to**

- **Category:** Prepress



- **Type:** Checks

**What it does**

Checks if fill and/or stroke overprint is set to Standard overprint mode (OPM 0), or Illustrator overprint mode (OPM 1).

**About overprint modes**

- In **Standard overprint mode** (OPM 0), the tint value 0 of one of the CMYK inks in the foreground object has a knockout effect on the color rendering of the underlying object. In other words, a foreground ink with a C, M, Y or K value of 0 % erases the corresponding background ink. Here, the “foreground inks win” principle applies.
- In **Illustrator overprint mode** (OPM 1), the tint value 0 is neutral: it is ignored (as if it were “not specified”) and has therefore no effect on the color rendering of the underlying object.

For more information and examples, refer to [the PitStop Pro Reference Guide on the Enfocus website](#).

**Related Actions**

- [Change overprint mode](#) on page 263
- [Select by overprint mode](#) on page 502

## 5.3.160. Check page bleed box

---

**Belongs to**

- **Category:** Page
- **Type:** Checks

**What it does**

Checks and compares the size of the bleed box with the size of the trim or crop box.

As of PitStop 2022, you can indicate which side(s) should be checked (left, right, top or bottom). Also, you can enable **Mirror according to page binding**, a new option that, when selected, checks the inner and/or outer side instead of the left and/or the right side of the page. This is useful in case of books, where you may want to ignore the inner edge (which does not require bleed).

## 5.3.161. Check page boxes consistency

---

**Belongs to**

- **Category:** Page
- **Type:** Checks

**What it does**

Checks if two different page boxes (if defined) have the same size and position.

You can either compare the trim and art box, or the trim and crop box.

## 5.3.162. Check page box layout

---

### *Belongs to*

- **Category:** Page
- **Type:** Checks

### *What it does*

Checks whether the page boxes comply with the selected layout (Press, Screen viewing or PDF/X layout).

The attributes depend on the chosen layout:

- **Press layout** (typically for print)

If you select this layout, the Action derives the correct media size from the first page box that is present in the document. The order in which is searched, is fixed: first the art box, then the trim, crop, bleed and finally the media box.

You can define the minimum distance required between the media and bleed box and between the bleed and trim box, and you should choose one of the following options:

- **Crop box must equal trim box**, or
- **No crop box must be defined or the crop box equals the media box.** This means that it is OK if the crop box is not defined, but if it is defined, it should have the same size and position as the media box.
- **Screen viewing**

If you select this layout, the Action checks if the page is defined solely by the crop box, which should have the same size as the media box. No other page boxes are allowed.
- **PDF/X layout**

If you select this layout, the Action checks if the page box layout is compliant with the selected PDF/X version.

  - If you have chosen PDF/X-1a:2003 or PDF/X-3:2003, the art box or trim box shall not extend beyond the boundaries of the bleed box and the crop box.
  - PDF/X-4 allows either a trim or an art box but forbids having both.
  - PDF/X-6 allows an art box, next to the mandatory trim box.

### *Related Actions*

[Change page box layout](#) on page 206

## 5.3.163. Check page format

---

### *Belongs to*

- **Category:** Page

- **Type:** Checks

**What it does**

Ensures that the media box is defined as being the width or height of a multiple of a particular measurement. This allows you to check whether the page size of your document fits your column and/or row layout.

**Example**

To set all your page boxes to a multiple of 22cm wide

1. Select **A multiple of columns**.
2. To have pages that are always multiples of 22 cm:
  - a. Enter 22 cm as column width.
  - b. Enter 0 as column spacing.

**Related Actions**

[Change page format](#) on page 207

## 5.3.164. Check page orientation

---

**Belongs to**

- **Category:** Page
- **Type:** Checks

**What it does**

Checks if all the pages in a PDF have a given orientation (portrait, landscape, all the same orientation or the most used orientation).

The orientation is based on the selected page box.

**Related Actions**

- [Change page orientation](#) on page 208
- [Select by page orientation](#) on page 481

## 5.3.165. Check page rotation angle

---

**Belongs to**

- **Category:** Page; Position and size
- **Type:** Checks

**What it does**

Checks whether the page rotation angle is equal to a specific value.

You can check for a rotation angle of -90°, 0°, 90°, or 180° (clockwise).

**Related Actions**

- [Select by page rotation angle](#) on page 481
- [Apply page rotation](#) on page 200

## 5.3.166. Check page safe type zone

**Belongs to**

- **Category:** Page
- **Type:** Checks

**What it does**

Checks for text or objects that overlap or come close to an edge limit in a PDF.

The safe type zone is the area where you must not place any text or objects, unless these objects are intended as bleed.


**How to proceed**

1. Define the safe type zone as one of the page boxes.
2. Optionally define values for the left, right, top and/or bottom margin.
3. To make sure that even and odd pages are mirrored, select **Mirror horizontal margins**. This is recommended if the left and right margin have a different size.

Figure 3: Mirror horizontal margins illustrated

**A = Mirror horizontal margins** is not selected. Margins of odd and even pages are the same; the left margin is larger than the right margin.

**B = Mirror horizontal margins** is selected. Odd and even pages are mirrored; the outer margin is smaller than the inner margin.

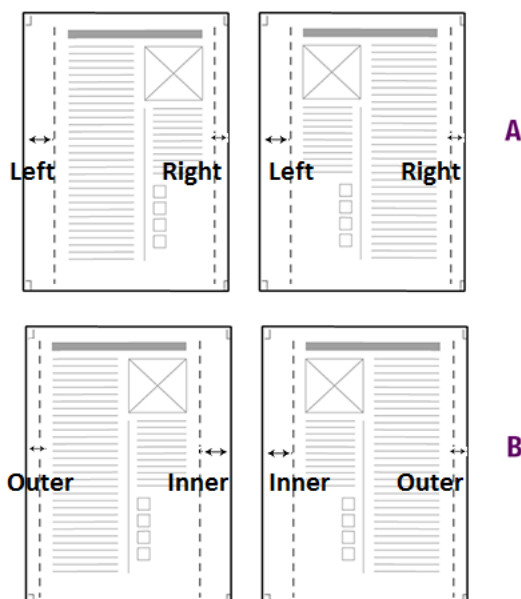

4. To only check for text in the page safe type zone, select the **Restrict this check to text** checkbox.

## 5.3.167. Check page size

---

### *Belongs to*

- **Category:** Page
- **Type:** Checks

### *What it does*

Allows you to check if the size or position of a specific page box matches the desired size or position.

### *How to proceed*

1. Do one of the following:
  - To check the coordinates of the selected page box, select **Rectangle**.
  - To check the height and width of the selected page box, select **Size**.
2. Select the page box of which you want to check the size or position.
3. Enter the required values (coordinates or width and height).
4. In the **Precision** field, indicate how much the actual size or position is allowed to deviate from the entered values.

A precision of 0 means that no deviation is allowed: the size or position needs to match exactly the entered values. For example, if you are checking for a height of 10 inch, even a very small difference (e.g. a page box height of 10.001 inch) will result in an error or warning.

5. Disable **Ignore page orientation** as required.

When enabled (default setting), the smallest value is considered the width and the largest value is considered the height. When disabled, the page orientation is taken into account, meaning that the first value is considered the width and the second the height.



**Note:** Action Lists upgraded from older versions (before this option was introduced) will have **Ignore page orientation** disabled. There's one exception: in Action Lists upgraded from version 17.1 to 2018, the checkbox will be *enabled*, and this may yield unexpected results. We advise reviewing such Action Lists before using them.

---

### *Related Actions*

[Select by page size](#) on page 481

## 5.3.168. Check pages have same size

---

### *Belongs to*

- **Category:** Page
- **Type:** Checks

**What it does**

Checks whether all pages in a PDF have the same size. The page size is based on the selected page box.

## 5.3.169. Check PDF text string encoding

---

**Belongs to**

- **Category:** Document, PDF 2.0
- **Type:** Checks
- **New since:** PitStop 2022

**What it does**

Allows you to check if the text encoding of a PDF complies with a particular PDF version. Choices are compatibility with the current document version, with PDF 1.7 (PDFDocEncoding or UTF-16BE) or with PDF 2.0 (ASCII or UTF-8).

**Related Actions**

- [Change PDF text string encoding](#) on page 122

## 5.3.170. Check PDF/A version key

---

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks the PDF/A version key.

**Related Actions**

- [Change PDF/A version key](#) on page 183
- [Remove PDF/A version key](#) on page 193

## 5.3.171. Check PDF/Acrobat compatibility

---

**Belongs to**

- **Category:** Metadata, PDF 2.0
- **Type:** Checks

**What it does**

Allows you to check if a particular Acrobat or PDF version is used in a PDF document.

You can for example check if the Acrobat version is equal to or higher/lower than a particular version.



**Note:** As of PitStop 2020, you can check a PDF 1.7 by its extension level (Adobe Extension 1, 3, 5, 6 or 8). For more details concerning the extensions, refer to [https://www.adobe.com/devnet/pdf/pdf\\_reference.html](https://www.adobe.com/devnet/pdf/pdf_reference.html).

Note that the PDF version can be specified in 3 different locations (in the PDF header, in the document catalog and in the Adobe extension). If the versions are different, PitStop uses the version from the Adobe extension. If there is no version specified in the Adobe extension, the header version or catalog version are considered, and the highest version number is taken.

## 5.3.172. Check PDF/X version key

### ***Belongs to***

- **Category:** Metadata
- **Type:** Checks

### ***What it does***

Checks the PDF/X version key.

### ***Related Actions***

- [Change PDF/X version key](#) on page 184
- [Remove PDF/X version key](#) on page 193

## 5.3.173. Check PDF/X viewer preferences

### ***Belongs to***

- **Category:** Doc
- **Type:** Checks

### ***What it does***

Checks if the PDF document complies with the viewer preferences as required by the PDF/X specifications.

PDF/X-1a:2001 and PDF/X-3:2002 have no special viewer requirements.

PDF/X-1a:2003, PDF/X-3:2003, PDF/X-4 and PDF/X-4p require the view area, view clip, print area and print clip to be set to the media (or bleed) box. If set to the bleed box, PDF/X-3:2003 requires that at least one page has a bleed box, whereas PDF/X-4(p) requires that all pages have a bleed box.

PDF/X-6 and PDF/X-6p do not allow a view area, view clip, print area or print clip.

### ***Related Actions***

[Make viewer preferences PDF/X compliant](#) on page 124

### 5.3.174. Check pdfxid prefix in XMP name space

---

***Belongs to***

- **Category:** Metadata
- **Type:** Checks

***What it does***

Checks if the pdfxid prefix in the XMP namespace is correct.

The namespace prefix is required for PDF/A.

### 5.3.175. Check presence of document metadata stream

---

***Belongs to***

- **Category:** Metadata
- **Type:** Checks

***What it does***

Checks if the PDF contains metadata, i.e. descriptive information about the file, such as the title, the author, the creation date ...

***About XMP metadata***

XMP metadata is descriptive information about the file embedded in the PDF, for example the name of the author, keywords, copyright information... XMP refers to labeling technology that is used, i.e. Adobe's Extensible Metadata Platform. You can view the XMP metadata in a file's Document Properties in Acrobat (Click the **Additional Metadata** button, then select **Advanced**).

***Related Actions***

- [Check if date is present in document XMP metadata](#) on page 358
- [Check file identifiers in document XMP metadata](#) on page 322

### 5.3.176. Check presence of ToUnicode map in font

---

***Belongs to***

- **Category:** Text
- **Type:** Checks

***What it does***

Checks if the unicode mappings of the fonts are compliant with a particular PDF/A version.

PDF/A requires that all text in the PDF file can be mapped to Unicode. Therefore, fonts used in the PDF should contain a character-to-glyph mapping that is consistent with character semantics as defined in the Unicode Standard.



This mapping is used to override the default text extraction behavior, for example when using the Acrobat text tool to copy and paste text to another application like Notepad.

### 5.3.177. Check rendering intent

---

***Belongs to***

- **Category:** Color; Prepress
- **Type:** Checks

***What it does***

Allows you to check the rendering intent of particular objects (Paths, Text, Paths or Text, Images, or all Rendering objects) in a PDF.

You can check whether or not they use rendering, and if they do, which type:

- Absolute Colorimetric
- Relative Colorimetric
- Perceptual
- Saturation

***About rendering intents***

A rendering intent is a remapping method, allowing to remap colors so that they best match the intended use. 'Remapping' means that colors from one output device's color space are mapped to the color space of another device.

For more information, refer to the chapter "Rendering intents to remap colors" in [the PitStop Pro Reference Guide on the Enfocus website](#).

For more information, refer to the chapter "Rendering intents to remap colors" in the PitStop Pro Reference Guide.

***Related Actions***

- [Select by rendering intent](#) on page 427
- [Change rendering intent](#) on page 104
- [Remove rendering intent](#) on page 117

### 5.3.178. Check required color set

---

***Belongs to***

- **Category:** Color
- **Type:** Checks

***What it does***

Checks for a restrictive range of tints in a PDF.

***How to proceed***

Define the color set to be checked:

1. To allow the use of 100% black, select **Black**.



**Note:** If only black is allowed in the PDF, **only** select the **Black** checkbox. Do not add any other color.

2. To add another color that is allowed in the PDF:
  - a. Click **New**. A new entry will appear in the text box.
  - b. To allow a spot color (optionally), select the **Spot color** checkbox and type the name of the spot color in the text field. You should define a CMYK equivalent too (see next step). The name of the spot color will be shown in the text box.
  - c. Enter the required values for CMYK (expressed in %) in the fields below the New/Remove button. Your changes will be shown in the text box.
3. If slight color deviations are allowed, enter a value in **Maximum ... % of color deviation of each channel**. The default value is 0.01%.
4. If only one color should be used for images, select that color from the **Images must use only** list.

#### **Related Actions**

- [Snap color to color set](#) on page 118
- [Select required color set](#) on page 436

## 5.3.179. Check resolution

#### **Belongs to**

- **Category:** Image
- **Type:** Checks

#### **What it does**

Checks the resolution of particular image types (color or grayscale images, 1-bit images or any images) against a particular value, e.g. checks if the resolution is not more/less/... than x ppi.

This Action checks for the **effective** resolution; if the image has been resized, this is the resolution after scaling.

As of PitStop 2018 you can disregard any soft-mask images that are used in the PDF, by selecting the **Ignore soft-masks** option. The resolution of a soft-mask image can be lower than what it acceptable for images, but as this does not affect the end result, it's safe to exclude them from the resolution check.

Note that the log message also mentions the resolution of the matching images.

#### **Related Actions**

- [Select by image resolution](#) on page 449

## 5.3.180. Check resource locations in Type 3 fonts

#### **Belongs to**

- **Category:** Text

- **Type:** Checks
- **Since version:** 2023 update 1

***What it does***

Detects badly structured Type 3 fonts: fonts with resource dictionaries that are located in the wrong place (not in the Type 3 font dictionary, but in a different dictionary).

This sometimes happens when Illustrator generates Type 3 fonts from SVG fonts.

## 5.3.181. Check Spectral Data in Output Intent

---

***Belongs to***

- **Category:** PDF 2.0
- **Type:** Checks
- **New since:** PitStop 2022

***What it does***

Checks if the document contains an Output Intent on document or page level that contains the Spectral Data dictionary. Note that only the presence of the dictionary, not the contents is checked.

The Spectral Data dictionary provides information about the spectral characteristics and the opacity properties of spot colors.

## 5.3.182. Check spot color by alternate color space

---

***Belongs to***

- **Category:** Color
- **Type:** Checks

***What it does***

Searches for spot colors with an alternate color space definition.

You can search for the following alternate color spaces:

- Device CMYK
- Device gray
- Device RGB
- ICC tagged gray
- ICC tagged RGB
- ICC tagged CMYK
- ICC tagged Lab
- Calibrated gray
- Calibrated RGB
- Lab

## 5.3.183. Check spot color by name

---

### *Belongs to*

- **Category:** Color
- **Type:** Checks

### *What it does*

Checks if one or more particular spot colors are present in the document.



#### **Note:**

- From version 12 update 2 onwards, you can use regular expressions to define the spot color name.
  - From version 13 update 1 onwards, there is an extra option to search for spot color(s) based on a list of names. This new option is useful if different spot color names refer to the same color. It also allows you to check for different spot colors in one go.
- 

### *How to proceed*

In the attributes of the Check spot color Action, proceed as follows:

1. Select the appropriate option from the list:
  - If you choose **Check all spot colors**, no other options have to be set.
  - If you choose one of the other options, you have to specify the name of the spot color(s) that have to be checked. Proceed with step 2.
2. Enter the name of the spot color(s) concerned:
  - In case of **Check spot color by regular expression**, you can use regular expressions. PitStop supports Boost Regular Expressions. For an overview of the options, refer to [http://www.boost.org/doc/libs/1\\_55\\_0/libs/regex/doc/html/boost\\_regex/syntax/perl\\_syntax.html](http://www.boost.org/doc/libs/1_55_0/libs/regex/doc/html/boost_regex/syntax/perl_syntax.html).
  - In case of **Check spot color by name** or **Check spot color by name from list**, you can simply type the name of the spot color(s) concerned or use the color picker  or the Grab color button . Note that, in case of a list, you must enter the names one by one, each on a separate line. It is for example not possible to select two colors in the document, and select them in one go, using the Grab color button . Instead, you must select the first color, grab it, then select the second color, and grab it and so on.
3. If the case of the spot color name (upper or lower case letters) does not matter, select the **Ignore case** checkbox.

**Related Actions**

[Select spot color](#) on page 437

## 5.3.184. Check spot color by PANTONE library

---

**Belongs to**

- **Category:** Color
- **Type:** Checks
- **Since Version:** 2018

**What it does**

Checks if the spot colors in the PDF are (are not) part of the selected PANTONE library.

The PANTONE libraries are by default installed with PitStop Pro and PitStop Server.

Extra options are:

- **Ignore non PANTONE spot color names** (to only consider the color type and to ignore differences with respect to the subcategory)
- **Check alternate color values** (to take into account the CMYK/LAB values)

**Use case**

You can use this Action to identify any "strange" colors of which you do not know how to print them.

**Related Actions**

- [Normalize PANTONE library names](#) on page 111
- [Select spot color](#) on page 437

## 5.3.185. Check spot color suffix

---

**Belongs to**

- **Category:** Color
- **Type:** Checks

**What it does**

Checks whether the spot colors in the PDF have a given suffix. It's also possible to check for unknown suffixes.

You can find an overview of the available suffixes in the table below.

**About spot color suffixes**

Suffixes represent the **apparent** color of the color when printed on different types of paper. For example, PANTONE 3258 **C** and PANTONE 3258 **U** refer to the same color, but when printed on

coated, respectively uncoated paper, they will look different, although the same ink formula was used.

Besides C (coated), U (uncoated) and M (matte), in software color palettes, you can find suffixes that refer to on-screen simulations of how colors will look when printed on different paper types. For example, PANTONE 3258 CVU is an on-screen indication of how PANTONE 3258 will look like when printed on uncoated paper.

#### Suffix overview

| Suffix | Meaning                                                                                           |
|--------|---------------------------------------------------------------------------------------------------|
| CV     | Computer video (electronic simulation)                                                            |
| CVC    | Computer video - coated                                                                           |
| CVU    | Computer video - uncoated                                                                         |
| CVS    | Process coated (old; now C)                                                                       |
| CVP    | Solid to process (old; now PC)                                                                    |
| C      | Coated paper                                                                                      |
| M      | Matte paper                                                                                       |
| U      | Uncoated paper                                                                                    |
| EC     | Euro process simulation, coated paper                                                             |
| PC     | Process simulation, coated paper                                                                  |
| CP     | Coated paper, process simulation (e.g. PANTONE 185 CP (used in PANTONE+ COLOR BRIDGE COATED))     |
| UP     | Uncoated paper, process simulation (e.g. PANTONE 185 UP (used in PANTONE+ COLOR BRIDGE UNCOATED)) |
| HC     | Hexachrome coated                                                                                 |
| TC     | TC Textile Cotton                                                                                 |
| TCX    | Textile Cotton eXtended                                                                           |
| TP     | Textile Paper                                                                                     |
| TPX    | TPX Textile Paper eXtended                                                                        |
| XGC    | eXtended Gamut Coated                                                                             |

#### Related Actions

- [Select by spot color suffix](#) on page 428
- [Change spot color suffix](#) on page 105

## 5.3.186. Check text point size

#### Belongs to

- **Category:** Text
- **Type:** Checks

**What it does**

Checks the text point size against a particular value.

**Examples**

Text point size must be equal to 5 pt.

To check the minimum text point size, select "Text point size must be more than or equal to ... pt" and enter the appropriate value.

## 5.3.187. Check text x-height

---

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Check text x-height checks the font size by measuring the height of the lowercase x (= the x-height). The x-height refers to the distance between the baseline and the mean line in a typeface; this is typically the height of the letters x, u, v, w, and z. You can set a threshold for the text x-height expressed in points.

Note that the check only can work if at least one of the characters to be measured (x, u, v, w or z) is available in the PDF.

## 5.3.188. Check that composite TrueType CIDToGIDMap is present

---

**Belongs to**

- **Category:** Text
- **Type:** Checks

**What it does**

Checks if the PDF contains a mapping table for composite TrueType fonts to map CID (Character IDs) to GID (Glyph IDs), and if it's correctly defined. This is required by the PDF/A specification.

CID (Character Identifier) fonts are a format of Type 1 fonts that are typically used for Chinese, Japanese and Korean fonts.

GID (Glyph Identifier) are identifiers to identify all glyphs in a font.

## 5.3.189. Check thumbnails

---

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks if the PDF contains thumbnails.

## 5.3.190. Check total number of nodes on page

---

**Belongs to**

- **Category:** Line Art
- **Type:** Checks
- **Since version:** 13 update 1

**What it does**

Checks how many nodes are present on each page, depending on the set threshold (e.g. less than/more than (...) the set number of nodes). This Action is useful to detect complex pages, which may take a considerable amount of time to rip and therefore may cause a production bottleneck.

**Related Actions**

- [Select page by total number of nodes](#) on page 460

## 5.3.191. Check Trapnets for PDF/X

---

**Belongs to**

- **Category:** Metadata
- **Type:** Checks

**What it does**

Checks whether trapnet information in a PDF is compliant with PDF/X-1, PDF/X-3 or PDF/X-6 standards.

**About trapping**

In printing, even the slightest misregistration of the plates can cause gaps or color shifts between colored objects to appear. **Trapping** is a technique that compensates for misregistration by expanding adjacent colored objects so that they overlap. Trapping can be performed by the source application, in the PDF, by dedicated trapping tools, or during the RIP-process.

If the traps in a document were added before the PDF document was created, they are included in the PDF file as **trap networks**. A page may have more than one trap network, e.g. one for each intended output device, but all the different trap networks are stored in the same trap network, also called **trapnet annotation**. When printed, the trapnet annotation provides all the required trapping information for the page.

**About the PDF/X Requirements for trapping**

When trapnet annotations are found in the document, **PDF/X-1a:2001** requires that:

- The **trapped flag** in the document is set to either True or False (Unknown is not allowed).



- If the trapped flag is **False**, the document does not contain trapnet annotations.
- If the trapped flag is **True**, the document is completely trapped, and the document contains trapnet annotations.
- **Font substitution** is not used.
- The **CMYK** color space is used.

When trapnet annotations are found in the document, **PDF/X-3:2002** requires that:

- Trapping occurs only when all the **fonts in the document are embedded**.
- The **CMYK** color space is used.

In **PDF/X-6** and **PDF/X-6p**, trapnet annotations are not allowed.

#### **Related Actions**

- [Check document trapped flag](#) on page 354
- [Select by trapped flag](#) on page 466
- [Change trapped flag](#) on page 185

## 5.3.192. Check TrueType font encoding according to PDF/A

---

#### **Belongs to**

- **Category:** Text
- **Type:** Checks

#### **What it does**

Checks whether the Truetype font used in the PDF complies with a given version of the PDF/A specification. Fonts must for example be embedded in the PDF.

#### **Related Actions**

- [Make TrueType fonts PDF/X compliant](#) on page 291

## 5.3.193. Check unused destinations

---

#### **Belongs to**

- **Category:** Metadata
- **Type:** Checks

#### **What it does**

Destinations identify locations or views in a PDF you can point to using bookmarks or links. As destinations increase the file size, you may want to check for and remove destinations that are not used.

This Action allows you to **verify** if there are any unused destinations in a PDF document.

The Action [Remove unused destinations](#) allows you to **remove** them from the PDF.

### 5.3.194. Check usage of device color spaces for PDF/X

---

***Belongs to***

- **Category:** Color
- **Type:** Checks
- **New since:** PitStop 2022

***What it does***

Checks whether the device color space maps to the document Output Intent for the chosen PDF/X version (PDF/X-4 or PDF/X-6).

### 5.3.195. Check version compatibility with PDF/A-2

---

***Belongs to***

- **Category:** PDF 2.0, Metadata
- **Type:** Checks
- **New since:** PitStop 2022

***What it does***

Checks if the version of the PDF complies with PDF/A-2.

Note that the PDF version can be specified in 3 different locations (in the PDF header, in the document catalog and in the Adobe extension). PDF/A-2 requires that both the version specified in the header and the version specified in the document catalog are 1.x (so the version should be lower than 2.0).

***Related Actions***

- [Fix version compatibility with PDF/A-2](#) on page 186

### 5.3.196. Check version compatibility with PDF/X-6

---

***Belongs to***

- **Category:** PDF 2.0, Metadata
- **Type:** Checks
- **New since:** PitStop 2022

***What it does***

Checks if the version of the PDF complies with PDF/X-6 or PDF/X-6p.

Note that the PDF version can be specified in 3 different locations (in the PDF header, in the document catalog and in the Adobe extension). PDF/X-6 and PDF/X-6p require that both the version specified in the header and the version specified in the document catalog are 2.0 (or higher).

**Related Actions**

- [Fix version compatibility with PDF/X](#)

## 5.3.197. Check XY scaling difference

---

**Belongs to**

- **Category:** Position/Size
- **Type:** Checks

**What it does**

Checks the proportional scaling of a selected object.

If the XY scaling difference is 0%, the object is scaled proportionally, i.e. the height-to-width ratio is maintained. The object is enlarged or reduced both horizontally (X) and vertically (Y) with the same percentage.

In some cases, a small XY scaling difference is allowed, for example in line art (e.g. a rectangle in one color); in images this may cause distortions.

## 5.3.198. Clean up unused resources

---

**Belongs to**

- **Category:** Prepress
- **Type:** Changes

**What it does**

Removes resources that are not used, for example embedded images or fonts, to reduce the file size.

## 5.3.199. Clip bleed around contour

---

**Belongs to**

- **Category:** Prepress
- **Type:** Changes
- **Since version:** 2021

**What it does**

Allows you to clip away existing bleed around the contour (typically the dieline or cut line) of an object. This can be necessary if the bleed contour is not as desired. Once you have clipped away the bleed, you can add new bleed using the [Check bleed around contour](#) on page 297 Action.

Note that this Action only works on selected line art that is not filled. The contour must be closed and it must be a compound path of at least 3 nodes.



**Tip:** If the line art you want to check is not a closed or compound path, you can use [Close path](#) on page 162 and/or [Combine subpaths](#) on page 162 to create one.

You can also clip away bleed from the page edges by selecting the **Use trim box as contour** checkbox.

**Related Actions**

- [Check bleed](#) on page 294
- [Check bleed contours](#) on page 300
- [Check bleed around contour](#) on page 297
- [Add bleed around contour](#) on page 258

## 5.3.200. Close path

---

**Belongs to**

- **Category:** Line Art
- **Type:** Changes

**What it does**

Joins the connection between the first and the last anchor point of a path (as required).

## 5.3.201. Combine subpaths

---

**Belongs to**

- **Category:** Line Art
- **Type:** Changes

**What it does**

Combines two selected paths.

**About subpaths**

A path is considered the combination of the path itself which represents most graphic state properties such as color, line-weight, etc. and the subpaths which represent the lines. For example, a doughnut is a single path with a single fill and stroke color, which consists of two subpaths (=two circles).

**Related Actions**

- [Select subpaths](#) on page 462
- [Split in subpaths](#) on page 176

## 5.3.202. Combine and divide shapes

---

**Belongs to**

- **Category:** Line Art
- **Type:** Changes
- **Since version:** 2018

What it does

Allows you to combine the selected objects into one shape or vice versa, divide a shape in multiple parts.

In case of combining shapes, you should indicate how the overlapping parts should be handled:

- **Unite:** Combines the selected objects into a single shape.
- **Intersect:** Keeps the areas where objects are stacked on top of each other.
- **Exclude:** Keeps the areas where an odd number of objects are stacked on top of each other.
- **Minus front:** Keeps the areas of the bottom shape which are not overlapping with the overlying shapes.
- **Minus back:** Keeps the areas of the top shape which are not overlapping with the underlying shapes.

If you want to keep the original shapes, select **Create copy**. The changes will be made on the copy and the original shapes will be kept as they are.

**Combine/Divide Shapes** is also an option in the PitStop Pro > Object menu and in the context menu when you make a selection, and a tab in the PitStop Inspector.



**Note:** If used on 'open' paths, the paths are closed before the operation is executed. The result may be unexpected.

Examples

```
Select line art
Combine and divide shapes <!-- Choose an option -->
```

Suppose you're running this Action List on a file with the following 3 partly overlapping objects:



The table below shows the result of each of the options.

| Chosen option | Result                                                                                                                                                |
|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Unite         | <br>Note that the new shape gets the color of the front/top shape. |
| Intersect     | As there is no part where all three objects are stacked on each other, the intersection is empty and all shapes are removed.                          |
| Exclude       |                                                                    |

| Chosen option | Result                                                                                                                                                                                                                                                |
|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Minus front   |                                                                                                                                                                      |
| Minus back    |                                                                                                                                                                      |
| Divide        | <div><p>Once divided, you can for example move the different parts apart.</p></div> |

Related Actions

Select line art on page 457

5.3.203. Compare gamuts

Belongs to

- **Category:** Color
- **Type:** Checks
- **New since:** 25.03

What it does

Renders pages with two different output profiles, calculates the color differences, and stores the result in a heatmap that shows the distance from the threshold through colors.

This Action is typically used to check how colors would look if printed using a different output profile. This is useful to identify potential color conversion issues before they occur, ensuring color accuracy and consistency.



**Note:** This option is also available in the Enfocus Inspector (Prepress > Compare gamuts).

Attributes

| Attributes               | Meaning                                                                               |
|--------------------------|---------------------------------------------------------------------------------------|
| Reference Output Profile | Click the list to select the appropriate profile from the list or from your computer. |

| Attributes                          | Meaning                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                     | Once selected, you can click the info icon for an overview of the ICC profile information.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Output intent overrides the profile | Select this checkbox if the output intent - if there is one, either on document or page level - should override the selected reference profile.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Target Output Profile               | Click the list to select the appropriate profile from the list or from your computer.<br><br>Once selected, you can click the info icon for an overview of the ICC profile information.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Spot Color Policy                   | <p>As colors can only be compared in the process color space, determine how spot colors should be handled:</p> <ul style="list-style-type: none"> <li>• <b>Only use the process color space, ignoring spot colors:</b> Render the page as if all spot colors were removed from the PDF. For example, a spot color overprinting CMYK will have no effect; knockout will result in white.</li> </ul> <hr/> <p> <b>Note:</b> This option is useful if you have the exact spot colors on your printing press, or if they are technical colors which will never be printed.</p> <hr/> <ul style="list-style-type: none"> <li>• <b>Combine the process color space and the spot colors:</b> Blend the spot colors into the process color space and after that check the color differences.</li> </ul> <hr/> <p> <b>Note:</b> This option is useful if you don't have the spot colors on your press, so they must be converted (probably to CMYK), and hence the gamut compare Action can be used to check the color difference different profiles would give when doing so. Note that this Action indicates the difference between the reference CMYK and the target CMYK, after spot conversion. It is NOT the difference between the pure spot and its CMYK conversion.</p> <hr/> |
| Color Difference Metric             | A color difference metric determines how the color differences are calculated. Different metrics exist, which may lead to                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

| Attributes                 | Meaning                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                            | <p>slightly different results. See all <a href="https://en.wikipedia.org/wiki/Color_difference">https://en.wikipedia.org/wiki/Color_difference</a>.</p> <p>Choose the metric of your choice:</p> <ul style="list-style-type: none"> <li>• Delta E (CIE 1976)</li> <li>• Delta E (CIE 1994)</li> <li>• Delta E (CIE 2000) (default)</li> <li>• CMC l:c</li> <li>• BFD</li> </ul>                                                                                                                                                            |
| Color Difference Threshold | <p>Determine the threshold.</p> <ul style="list-style-type: none"> <li>• 0 = No difference allowed</li> <li>• 1 = Slight difference allowed, just noticeable for the human eye.</li> <li>• 2 = Some more difference allowed</li> <li>• 3 = Acceptable difference allowed for printing (default)</li> <li>• 4 and more ... = More difference allowed</li> </ul> <p>Only if the threshold is exceeded, the difference is logged and a heatmap is generated.</p>                                                                              |
| Ignore areas smaller than  | <p>Sometimes a color difference exceeding the threshold only occurs in a very small area. To avoid that such differences have a big impact, you can filter them out.</p> <div>  <p><b>Note:</b> This option does not have an impact on how the heatmap looks. It only determines whether or not the color difference is logged.</p> </div> <p>Determine the size of the areas with color differences exceeding the threshold, for example: 1 point.</p> |

### Heatmap

If the color difference exceeds the set threshold, a heatmap is shown. The colors indicate the distance from the threshold: the darker the color, the more difference. Colors go from yellow and orange to red, purple, and blue.

White means no difference. Gray is a desaturated transparent view of the document.



**Note:** The heatmap is also shown in Annotated Reports.

### Example



**Note:** The heatmap is visible when *Objects: Highlight* is enabled in the Enfocus Navigator as shown in the screenshot below.





### 5.3.204. Consolidate fonts

#### *Belongs to*

- **Category:** Text
- **Type:** Changes
- **Since:** 2021

#### *What it does*

Removes duplicate font information that increases the size of a PDF file.

Multiple subsets of the same font can be created by the generating application, or when multiple PDF files are combined into a single file. Multiple subsets make the file overly complex and can impact the output RIP time.



**Note:** There's one important limitation: for this Action to work properly, all fonts must be installed on your system! Fonts that are not present, will remain untouched. This is also the case for fonts of which the license does not allow embedding.

The Action works as follows:

1. First, all fonts are unembedded (on condition they can be re-embedded afterwards, this is checked first, to avoid font issues).
2. Next, all font dictionaries are compared and duplicate dictionaries are removed, to make sure that the same fonts share one and the same font dictionary.
3. Finally, the fonts are subset or embedded again, depending on the chosen embedding type in the attributes of this Action.



**Note:** The option to use subsetting or embedding will only work for fonts that were originally subset or embedded. Otherwise, this Action would increase (instead of reduce) the file size.

### 5.3.205. Convert alternate color space to CMYK

#### *Belongs to*

- **Category:** Color
- **Type:** Changes

***What it does***

Changes the alternate color space for a spot to CMYK.

If you want to change all alternate color spaces except for gray, select the **Do not convert if alternate color space is gray** checkbox.

***About alternate color spaces***

The alternate color space is used as a 'backup' color space when the original spot color is not available on a specific output device, and when converting the spot color into CMYK. If this alternate color space is defined as anything other than CMYK or plain gray, the output results may not be up to standards.

## 5.3.206. Convert color

---

***Belongs to***

- **Category:** Color
- **Type:** Changes

***What it does***

Changes the color space of an object to gray, RGB, CMYK or a given spot color.

You can convert the fill and/or stroke color as required.

## 5.3.207. Convert color to shading color space

---

***Belongs to***

- **Category:** Color
- **Type:** Changes

***What it does***

Converts the colors in a PDF to their shading counterparts.

## 5.3.208. Convert fill to stroke

---

***Belongs to***

- **Category:** Line Art
- **Type:** Changes
- **Since version:** 24.03

***What it does***

Converts a filled path to a stroke.



**Note:** This option is also available in the Enfocus Inspector (Line Art Editing > Convert Fill To Stroke).

Sometimes it is not possible to convert a filled path, without having a small visual deviation. In that case you should enable the **Maximum visual deviation** option and choose a value. 0.01% (of the surface area of the original filled path) is the default value.

### Use cases

Sometimes strokes get converted to fills during processing of the file, with unwanted consequences.

For example if the stroke was to be used as guide for a cutting table, this is not possible anymore, because the shape of the original center line is lost. The convert fill to stroke Action can fix this.


The same goes for stroked registration marks; if they are converted to fills, they are no longer recognized by the software.




**Note:** Often this Action results in a path with a lot of nodes. Note that PitStop provides an Action and an option in the Inspector to simplify such paths! The name of the Action is [Simplify line art](#) and the option in the Inspector can be found in the Line art editing tools.

### Example

**Before:** The selected line art has no stroke, only a fill.

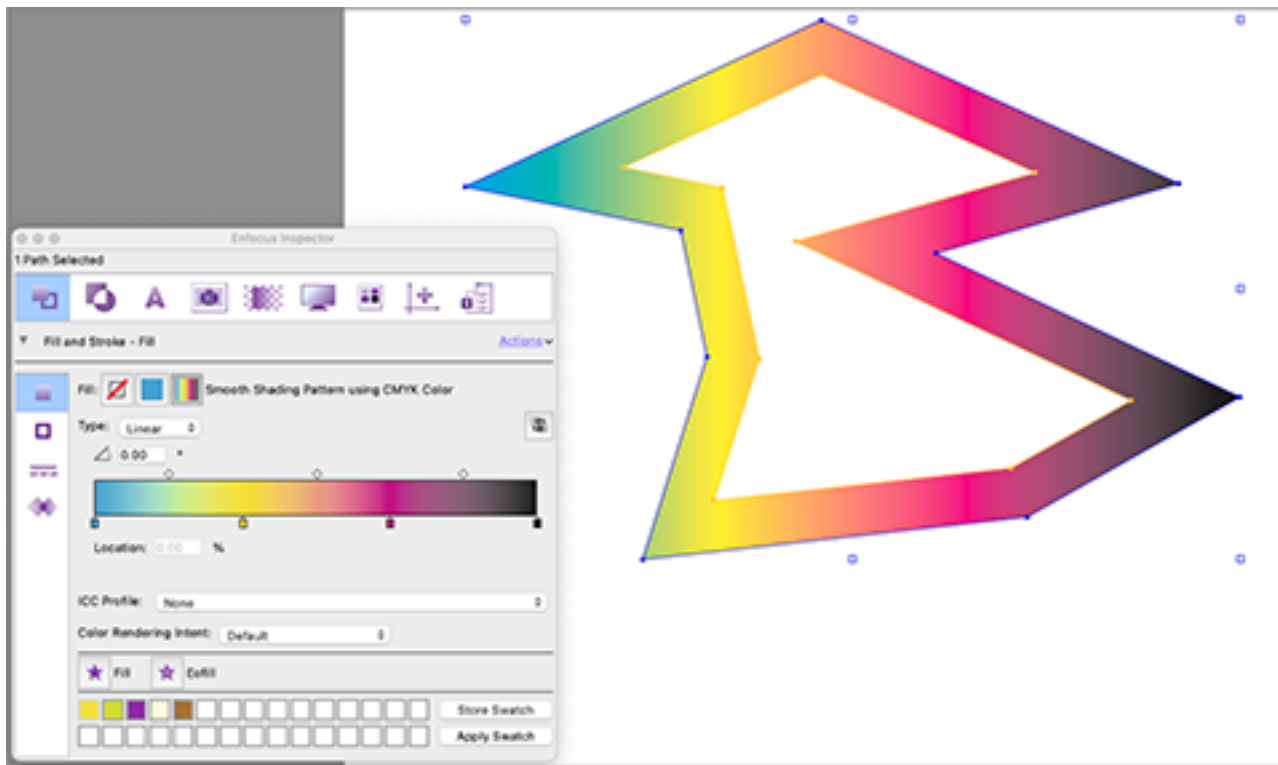

**After:** The selected line art has been converted into a stroke.

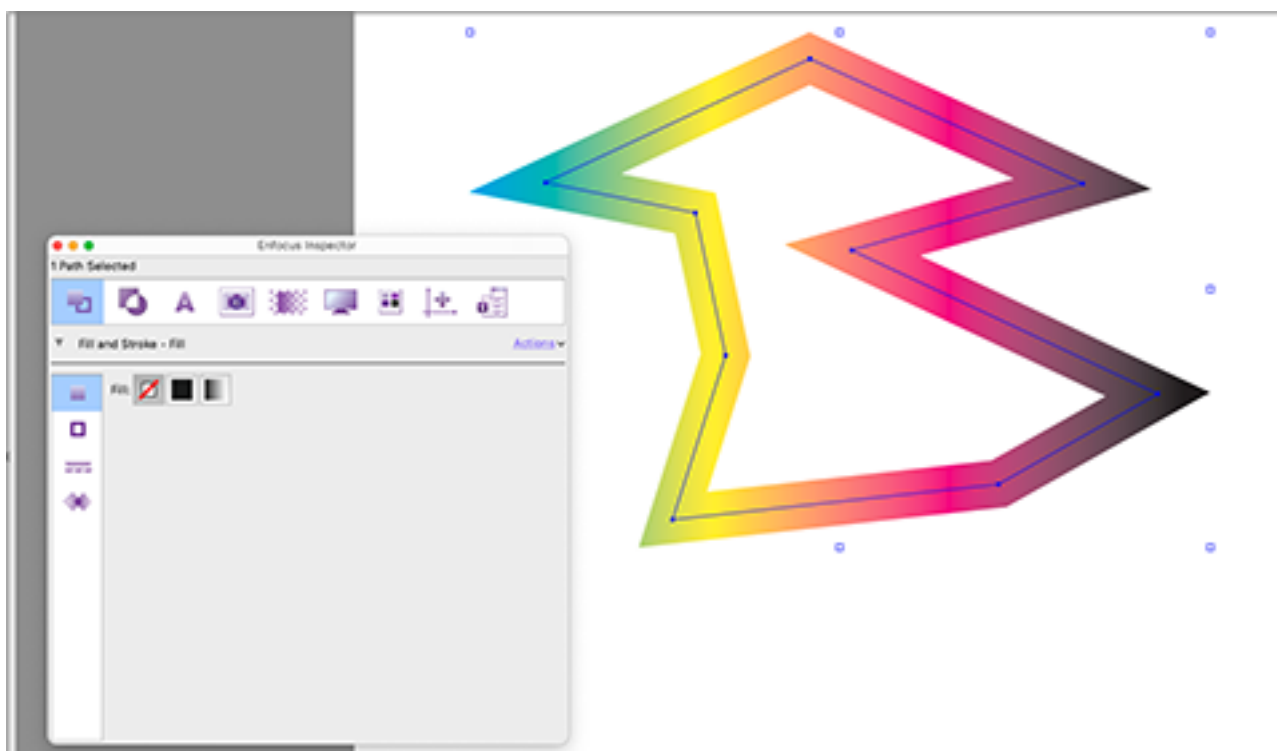

#### **Related Actions**

- [Convert stroke to fill](#) on page 166

## **5.3.209. Convert images to indexed color space**

---

#### ***Belongs to***

- **Category:** Color;Image
- **Type:** Changes

#### ***What it does***

Changes the color of images to the indexed color space.

#### ***About the indexed color space***

The indexed color space uses no more than 256 colors, and is as such particularly suited for use in Web applications. Images are typically converted to indexed color mode in order to **decrease their file sizes**. When an image is converted to indexed color, a color lookup table is created, in

which the colors that were used in the image are stored and indexed. Using an indexed color table lets you reduce the file size of an image while maintaining the visual quality that you need.

### 5.3.210. Convert indexed color space to base color space

---

***Belongs to***

- **Category:** Color
- **Type:** Changes

***What it does***

Changes the indexed color space back to the original colors.

***About the indexed color space***

The indexed color space uses no more than 256 colors, and is as such particularly suited for use in Web applications. Images are typically converted to indexed color mode in order to **decrease their file sizes**. When an image is converted to indexed color, a color lookup table is created, in which the colors that were used in the image are stored and indexed. Using an indexed color table lets you reduce the file size of an image while maintaining the visual quality that you need.

### 5.3.211. Convert PDF/X-4p Output Intent to PDF/X-4

---

***Belongs to***

- **Category:** Prepress
- **Type:** Changes

***What it does***

Converts PDF/X-4p Output Intent to PDF/X-4.

PDF/X-4p is used when the ICC profile in the Output Intent is supplied externally.

In PDF/X-4, the ICC profile in the Output Intent must be supplied internally, so this Action embeds the external ICC profile.

### 5.3.212. Convert process to DeviceN

---

***Belongs to***

- **Category:** Color
- **Type:** Changes

***What it does***

Converts all instances of device CMYK to DeviceN.

You must indicate what is most important to you:

- Reducing the number of color plates to a minimum, or

- Keeping the overprint settings

### 5.3.213. Convert shading color space to solid color

---

#### ***Belongs to***

- **Category:** Color
- **Type:** Changes

#### ***What it does***

Converts shading colors ("gradients") in the corresponding solid colors. You can convert the fill, the stroke or both as required.

Shadings represent complex mathematical functions. That's why certain output devices may not be able to correctly interpret them. Shadings can also cause problems during color conversions.

#### ***Related Actions***

[Select shading objects](#) on page 437

### 5.3.214. Convert shading to images

---

#### ***Belongs to***

- **Category:** Prepress
- **Type:** Changes
- **Since Version:** 13 update 2

#### ***What it does***

Converts shadings and shading color spaces to images, in order to improve the performance of RIPs that have difficulties handling shadings.

This Action is able to handle *objects, text and masks* with shadings, as well as *shaded color spaces in the fill and stroke* of paths, text, and image masks. In case of image masks, the *combined visible area* of all selected objects that use shading is converted to an image which is used as a coloured tiling pattern.

If the shading is tagged with an ICC profile, the resulting image will be tagged with the same ICC profile; if the shading does not have an ICC profile attached, the resulting image won't have one either.



**Tip:** As only the *visible content* of the shading is replaced, we recommend performing all conversions that change the bounding box (e.g. changes to the font size or the width of the stroke) BEFORE running this Action.

Note that due to this conversion, the file size will increase.

#### ***Options***

In the attributes of this Action, you can determine:

- The preferred **resolution** of the resulting images (by default: 300 ppi)
- The **compression type** (JPEG, JPEG 2000, ZIP or none)

- The **quality** of the images.

### 5.3.215. Convert shading to path

---

#### ***Belongs to***

- **Category:** Prepress
- **Type:** Changes
- **Since Version:** 25.03

#### ***What it does***


Converts selected shading *objects* (so not shading pattern color spaces) into paths filled with the same shading (as a shading pattern color space). This means that you can keep the line art and change its graphic properties.

#### ***Example***


In this example, after the conversion to path, the shading color space is converted to a solid color.

```
Select all
Convert shading to path
Select last added objects
Convert shading color space to solid color
```

#### **Before:**

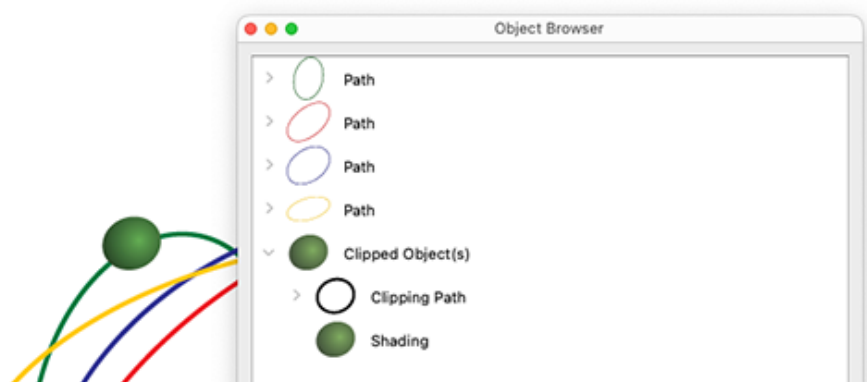

#### **After:**

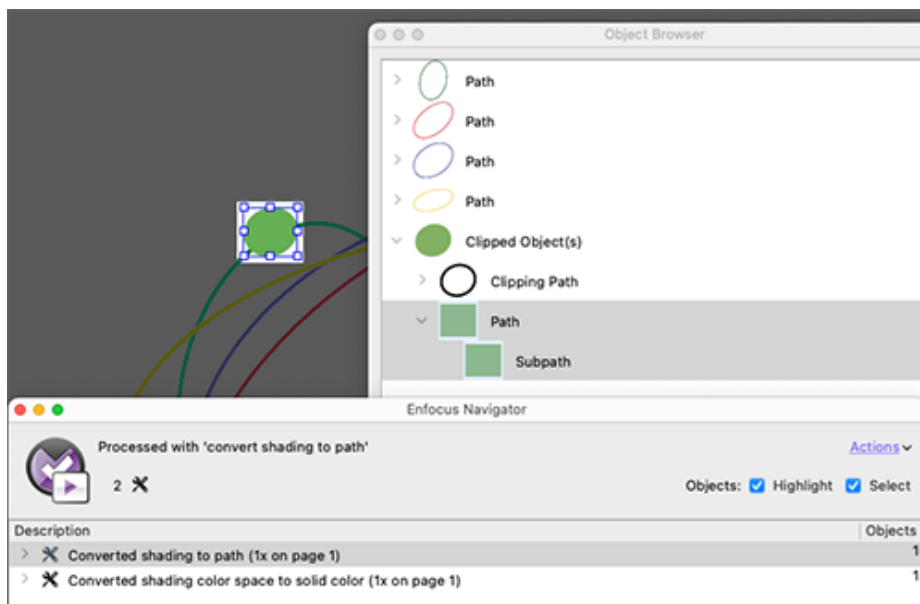

### 5.3.216. Convert spot color to equivalent CMYK color

#### *Belongs to*

- **Category:** Color
- **Type:** Changes

#### *What it does*

Changes the color of a spot color object to its CMYK equivalents (for example to save on ink).

You can do this for all spot colors, or only for spot colors of which the alternate color is CMYK or Gray (less risk of getting small color variations).

### 5.3.217. Convert stroke to fill

#### *Belongs to*

- **Category:** Line Art
- **Type:** Changes
- **Since version:** 2018

#### *What it does*

Converts a stroked path to a filled path.

The stroke properties become the fill properties of the newly created object.

There are two methods to make the conversion:

- **Placing the objects with stroke or fill in a knockout group** This method puts everything in a form. This may be undesirable; if so, you can select the second option.



**Clipping the object with fill by the object with stroke** This method works in a different way, without knockout groups, it simply cuts away the stroked object. Note that exceptionally small hairlines may be visible (depending on the renderer used).

In most cases, there will be no visual difference between both methods.



**Note:** This option is also available in the Enfocus Inspector (Line Art Editing > Convert Stroke To Fill).

### Examples

Some examples where this Action can be useful:

- You want to combine shapes ([Combine and divide shapes](#) on page 163). This is not possible with objects that have no fill.
- You want to remove one dash of a dashed line. This is only possible after you have converted the stroke to a filled path.

### Related Actions

- [Convert fill to stroke](#) on page 164

## 5.3.218. Convert text to outlines

### Belongs to

- **Category:** Text
- **Type:** Changes

### What it does

Allows you to outline the text segments in your selection.

This means you turn the text characters into a set of compound paths. In other words, your text will no longer be a true font, but it will be replaced with a graphical representation of the characters. You can then for example change the fill or stroke color as required.

This can be useful to make sure that your text is printed exactly "as is" or, if you cannot embed the font, for example due to font licensing restrictions.



**Note:** By default, invalid characters (often represented as a small box containing an X or a question mark) are not converted, unless you select the **Outline invalid characters (.notdef glyph)** checkbox.

## 5.3.219. Copy attributes of selected objects

### Belongs to

- **Category:** General
- **Type:** Changes
- **Since Version:** 25.07

**What it does**

Allows you to copy the attributes of the selected objects to a clipboard. You should give the clipboard a name (by default: Untitled 1), to avoid confusion when copy-and-pasting different selections in one Action List. You can use up to 1,000 clipboards if you wish, however it is important to realize that these clipboards are not saved; they are only used while the Action List in which they are used is run.

This Action should be preceded by a selection (i.e. to select the object you want to copy the attributes from) and followed by *Paste attributes to selected objects* in the same Action List. You cannot copy attributes to a clipboard in one Action List and then paste them within another Action List.

**How to proceed?**

1. Create a new Action List.
2. Add a select Action that select the objects of which you want to copy the attributes.
3. Add a *Copy attributes of selected objects* Action to your Action List and enter a name for the clipboard to which the attributes will be copied.
4. Add an Action to select the objects that should get the attributes that are copied to the clipboard.
5. Add a *Paste attributes to selected objects* Action and determine which attributes should be pasted to the selected objects.

**Example Action List**

The following Action List copies the attributes of the purple colored line art to a clipboard (CLIP1) and pastes the fill color attribute to all other line art and to all text.

```
Select fill color -- purple
Select line art
AND
copy attributes of selected objects to clipboard CLIP1
Select line art
Paste attributes from CLIP1 -- select Fill - Fill color
Select text segments
Paste attributes from CLIP1 -- select Fill - Fill color
```

**Before:**

After:



### 5.3.220. Copy or cut objects to clipboard

---

***Belongs to***

- **Category:** General, Operators
- **Type:** Changes
- **Since Version:** 13 update 1

***What it does***

Allows you to cut or copy the selected objects to a clipboard. You should give the clipboard a name (by default: Untitled 1), to avoid confusion when copy-and-pasting different selections in one Action List. You can use up to 1,000 clipboards if you wish, however it is important to realize that these clipboards are not saved; they are only used while the Action List in which they are used is run.

This Action should be preceded by a selection (i.e. to select the object you want to cut or copy) and followed by [Paste objects from clipboard](#) on page 93 in the same Action List. You cannot cut or copy something to a clipboard in one Action List and then paste it within another Action List.

***How to proceed?***

1. Create a new Action List.
2. Add a select Action that select the objects you want to cut or copy.
3. Add a *Cut or copy objects to clipboard* Action to your Action List and set the attributes (select Cut or Copy and type an appropriate name).
4. Add a [Select pages](#) on page 484 Action to indicate the pages on which the selection should be pasted (if not yet selected in step 1, e.g. if you added "Select all" in step 1).
5. Add a [Paste objects from clipboard](#) on page 93 Action and set the attributes on the different tabs (e.g. to define the position of the pasted objects).



**Note:**

- Action Lists are executed page after page. As a consequence, you can only paste objects to the following pages. For example, if you copy an object that is present on page 3, you can paste it on page 3, 4, 5, ... but not on page 1 or 2.

- If there is nothing to select to cut or copy (i.e. the select Action of step 2 in the above procedure result in an empty selection), the content of the clipboard is not overwritten with an "empty" set of objects! The previous content (if any) is preserved and will be pasted once more. If you do not want this, you can select the **Clear clipboard after paste** checkbox in the attributes of [Paste objects from clipboard](#) on page 93 Action.
- 

**Related Action**

- [Paste objects from clipboard](#) on page 93

### 5.3.221. Create varnish

---

**Belongs to**

- **Category:** Color
- **Type:** Changes

**What it does**

Creates a varnish on top of the selected object.

This varnish is a user-defined spot color with the same shape of the selected object.

**How to proceed?**

Enter a name to recognize this spot color by, and indicate whether or not you wish to set it to overprint.

### 5.3.222. Crop images

---

**Belongs to**

- **Category:** Image
- **Type:** Changes

**What it does**

Allows you to crop images to match a clip mask and/or a particular page box.

**New in 13 update 1:** You can now remove the unwanted white borders (e.g. of scanned images), by selecting the **Crop white borders of image** checkbox. This option also works on stencil marks and is particularly useful as it enables subsequent Actions to work on the size of visible objects.

### 5.3.223. Crop line art

---

**Belongs to**

- **Category:** Line Art
- **Type:** Changes
- **Since version:** 2018

**What it does**

Performs a hard crop on line art.

This is useful to remove redundant data, for example content that is masked away. This reduces the complexity and makes the file faster to process and easier to edit. Note that PitStop 2018 comes with a standard Action List "Clean Up Content" that makes use of this Action.

There are three ways to crop line art:


- **Crop line art to clip mask** Allows you to "execute" clipping masks on line art: the objects are cropped to their clipping mask, while the clipping path itself and anything that was clipped away is removed, without causing any visual difference. During this process, strokes are contourized (converted to fill paths). As a consequence, 'redundant' (because invisible) line art is removed, which reduces the file size and speeds up the rendering and processing of your artwork files.
- **Crop line art to the page box of your choice:** Removes all line art outside the specified page box.
- **Crop line art to forms:** Removes all line art outside the form (if applicable).

In case of knockout behavior, there are two methods to crop the line art:

- **Placing the stroke and fill objects in a knockout group** This method puts everything in a form. This may be undesirable; if so, you can select the second option.
- **Clipping the fill object by the stroke object** This method works in a different way, by cutting away the stroked object. No forms/knockout groups are created. Note that exceptionally small hairlines may be visible (depending on the renderer used).



In most cases, there will be no visual difference between both methods.


**Example 1**

|                                                                                     |                                                                                            |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|
|  | Clipped image. There is no visual difference before and after cropping/running the Action. |
|  | Clipped image in wireframe mode BEFORE cropping/running the Action.                        |

|                                                                                   |                                                                    |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------|
|  | Clipped image in wireframe mode AFTER cropping/running the Action. |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------|

Example 2
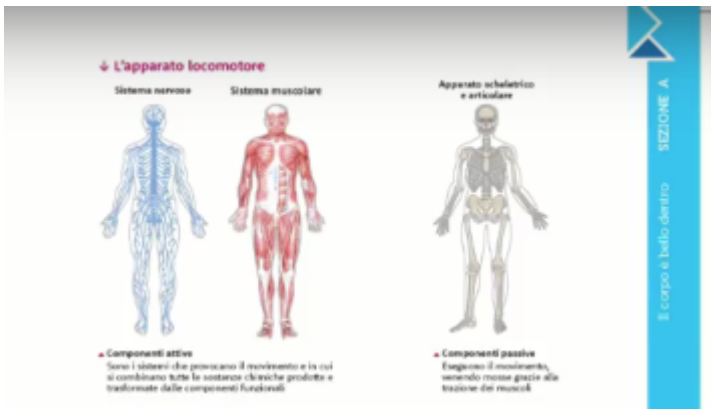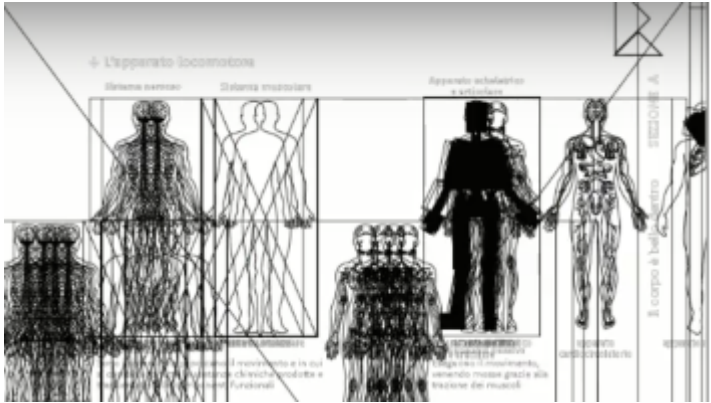
|                                                                                      |                                                                                                 |
|--------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
|   | How the page looks. There is no visual difference before and after cropping/running the Action. |
|  | Page in wireframe mode BEFORE cropping/running the Action.                                      |

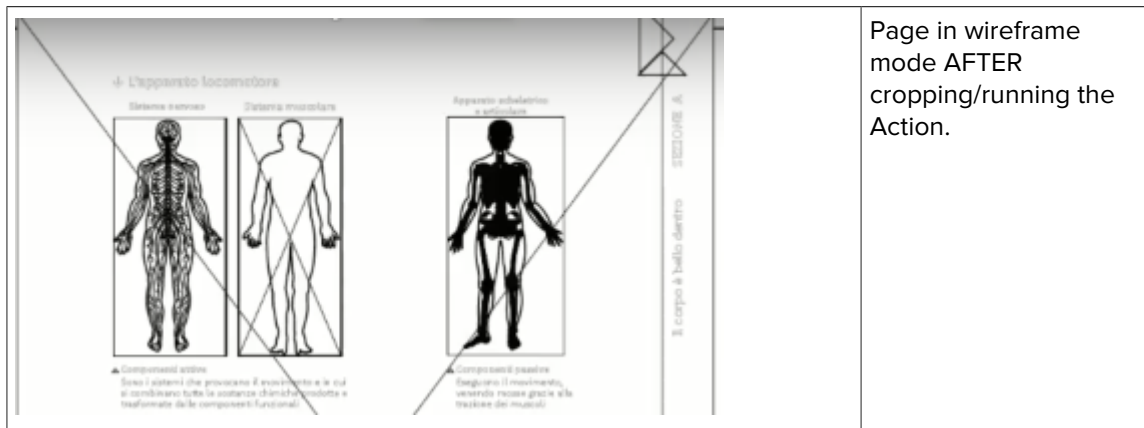

Page in wireframe mode AFTER cropping/running the Action.

### Want to know more?

There is a nice movie explaining this Action. Check it out on our learning platform ([www.enfocus.com/learn](http://www.enfocus.com/learn)): [PitStop 2018 features](#).

## 5.4. D

### 5.4.1. Duplicate top of selection stack

#### Belongs to

- **Category:** Operator
- **Type:** Selections

#### What it does

Duplicate top of selection stack is a logical operator. It is used to **duplicate** the top of the current Action list stack. It's typically combined with the [Remove top of selection stack](#) ("delete") operator.

#### For internal use only

Both "Duplicate top of selection stack" and [Remove top of selection stack](#) are only used internally by PitStop.

When running a Preflight Profile, PitStop turns this Profile into an Action List; the more checks and fixes there are in the Preflight Profile, the longer and more elaborate its Action List representation. In order to avoid having to perform complex selections multiple times, PitStop optimizes the internal Action List by duplicating these selections when they are needed multiple times.

## 5.5. E

---

### 5.5.1. Embed font

---

***Belongs to***

- **Category:** Text
- **Type:** Changes

***What it does***

Embeds a selected font if it is available on the system of the machine PitStop is running on.

You can include the entire font or only embed a subset.



**Note:** By default, PitStop embeds the CMap of Type0 CID fonts. However, this may cause problems, especially on Mac, when displaying the embedded subset characters in a browser viewer. In that case, you may clear the **Embed CMap of Type0 CID fonts** checkbox to fix that problem.

---

***About embedding fonts***

**Embedding fonts** in a PDF document means that every character of this font is copied and stored in the PDF document. This is useful if you create PDF documents to be displayed on different systems and to be printed on different devices: these are often systems that do not contain exactly the same fonts.

Embedding a font as a **subset** means that only those characters of the font that are actually used in the text are embedded. This reduces the file size by not including superfluous font information.

***Related Actions***

- [Unembed font](#) on page 293
- [Select embedded fonts](#) on page 507
- [Check font embedding](#) on page 408

## 5.6. F

---

### 5.6.1. Find and replace text

---

***Belongs to***

- **Category:** Text



- **Type:** Changes
- **Since:** 2020

**What it does**

Enables you to find a particular string and replace it with another string, optionally using variables.

You can carry out a case sensitive search by selecting the **case sensitive** checkbox: in that case, PitStop takes into account the case (upper case/lower case) of the search string.

Note that font license restrictions may disallow font editing, hence block the text replacement. However, if you're sure that it's allowed to manipulate the font or if you have an agreement with the print vendor, you may consider selecting the **Skip font license restrictions** checkbox in the PitStop Pro user preferences (Fonts category).

**Note:**

- Find and replace is suitable for replacing words or small lines of text. It's not suitable for replacing text involving reflow of lines.
- Find and replace also works on text that is split in characters, as long as all characters are put on the same line.
- Find and replace does not work on subset fonts if not all characters of the matching search string are embedded.
- Non-Latin characters are also supported.

**Example 1**

Replace "MyCompany" with "MYCOMPANY"

- with "case sensitive" cleared, all versions of the string regardless of the case will be replaced (Mycompany, mycompany, myCompany, etc).
- with "case sensitive" selected, only the exact match ("MyCompany") will be replaced.

**Example 2**

Replace "Configurator Module" with "CONFIGURATOR MODULE"

When executed on the text below, only one instance (in blue) is replaced. The matching string in the left column is not replaced, because it's divided over two lines.

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Configurator<br>Module | <ul style="list-style-type: none"> <li>• Allows you to use a number of third-party applications in a Switch flow, such as the Adobe Creative Suite and other applications that are often used in the graphical industry. For a list of all supported applications, refer to the <a href="#">CONFIGURATOR MODULE documentation</a>.</li> <li>• For each of the supported applications, Switch offers a configurator which streamlines the connection between Switch and the application concerned, and controls the output destination of the processed files.</li> </ul> |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## 5.6.2. Fix bounding box values of Type 3 fonts

***Belongs to***

- **Category:** Text
- **Type:** Changes
- **Since:** 2020

***What it does***

Fixes embedded Type 3 fonts that have very small bounding box values.

Such Type 3 fonts are usually wrongly converted SVG fonts, i.e. fonts that are used in Illustrator, Indesign, Photoshop, ... but that are not supported by the PDF specs and most RIPs, and therefore converted to Type 3. PitStop recalculates the bounding box values, so the font can be handled by most RIPs.

***Related Actions***

[Flatten Type 3 fonts](#) on page 290

### 5.6.3. Fix inconsistent Type 3 font width information

---

***Belongs to***

- **Category:** Text
- **Type:** Changes
- **Since:** 2022

***What it does***

Fixes inconsistent Type 3 font widths (Type 3 glyphs d0 or d1 values that are inconsistent with the font's widths array).

Type 3 fonts are usually wrongly converted SVG fonts, i.e. fonts that are used in Illustrator, Indesign, Photoshop, ... but that are not supported by the PDF specs and most RIPs, and therefore converted to Type 3. PitStop fixes this, so the font can be handled by most RIPs.

***Related Actions***

- [Check for inconsistent Type 3 font width information](#) on page 411
- [Select by inconsistent Type 3 font width information](#) on page 505

### 5.6.4. Fix invalid characters (.notdef usage)

---

***Belongs to***

- **Category:** Text
- **Type:** Changes

***What it does***

Fixes invalid .notdef glyphs in a PDF.

.notdef glyphs are replacement characters for undefined characters in a PDF; they often look like a small box containing an X or a question mark and are not PDF/X compliant.

#### **Related Actions**

[Check if invalid character \(.notdef glyph\) is used](#) on page 413

## 5.6.5. Fix layers

---

#### **Belongs to**

- **Category:** Layers
- **Type:** Changes

#### **What it does**

Allows you to perform a number of fixes to the layers in a PDF.

#### **Options:**

- Remove alternate layer configurations, only keep default configuration
- Add missing layer configuration names (e.g. "config\_1", "config\_2", ...)
- Make layer configuration names unique
- Remove order from layer configuration if layers are missing
- Remove AS (AutoState) entry from layer configurations. (AutoState entries are application specific usage entries).



---

**Note:** Layer configuration refers to the Layers panel.

---

#### **About PDF layers**

Layered content usually comes from applications such as InDesign, AutoCAD or Visio. When converted to PDF, the layers are retained and can be viewed and navigated in Adobe Acrobat. However, if you print a PDF file that contains layers, only the content that is visible on-screen is printed. This may or may not be desired.

#### **"Conventional" layers versus PDF layers**

**Layers in digital image editing** ("conventional" layers) are used to separate the different elements of an image. Each element is drawn on exactly one layer. The different layers are stacked on top of each other, and the order of the layers defines how the image looks like.

**Layers in PDF** have a different meaning. They are used to hide or show page content:

- Turning *on* a layer, all objects on this layer are shown on-screen.
- Turning *off* a layer, all objects on this layer are hidden, i.e. they become invisible.

As such, layers are also called "optional content groups": groups of objects that can be selectively viewed or hidden by the author of the document. Objects can belong to different layers, and the order of the layers is of no importance.

To work with layers in a PDF document in Adobe Acrobat, select **View > Show/Hide > Navigation Panes > Layers**.

For more information, refer to the Adobe Acrobat help.

**Related Actions**

[Check layers](#) on page 344

## 5.6.6. Fix missing DeviceN colorants

---

**Belongs to**

- **Category:** Color
- **Type:** Changes
- **Since version:** 13

**What it does**

Adds missing DeviceN colorants to the colorants dictionary.

PitStop searches in the processed document for a real separation space that matches the missing colorant space by name. If such a color space is not found in the document, PitStop can derive the missing colorant space from the DeviceN tint function. If you want this, select **If the colorant cannot be found in the processed document, generate colorant from DeviceN alternate and tint transform**.

You may use this Action to make your file PDF/X-4 compliant.

**Related Actions**

[Check DeviceN colorants](#) on page 302

## 5.6.7. Fix negative dash pattern phase

---


**Belongs to**

- **Category:** LineArt
- **Type:** Changes
- **Since version:** 13

**What it does**

Converts a negative dash pattern phase into a positive phase without any visual change.

The dash pattern phase specifies the distance into the dash pattern to start the dash. Negative values may not be supported by the RIP.

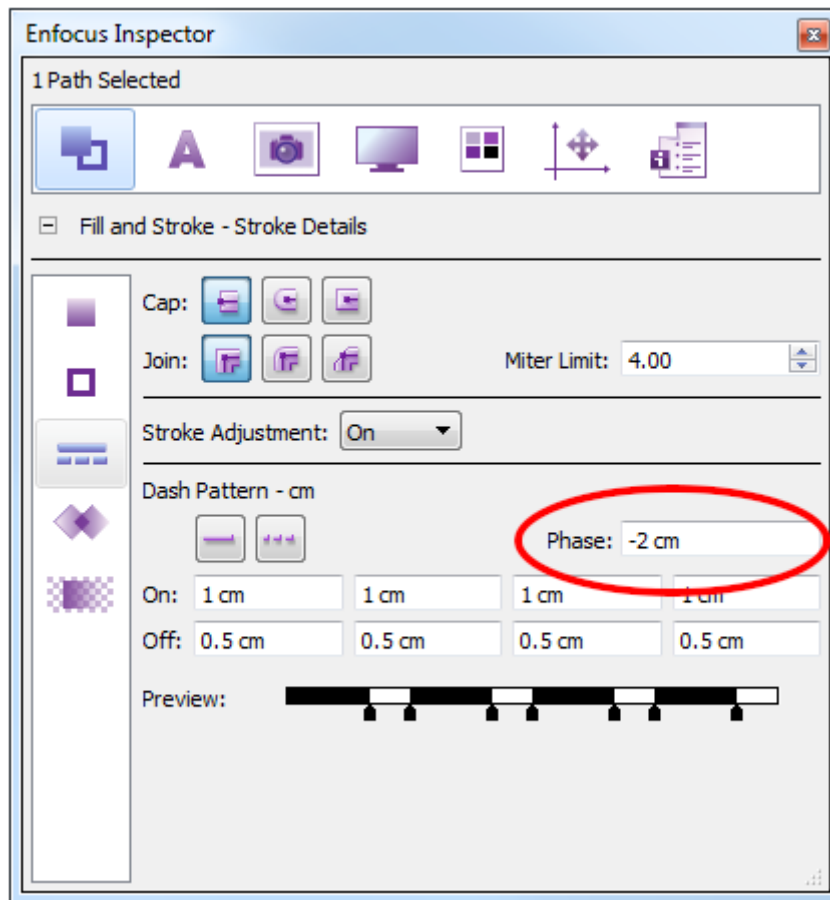**Example:**

Applying this Action to the dashed pattern in the above example (phase = - 2 cm) will result in a new phase of 4 cm. This positive value is calculated by adding the total length of the dash pattern (6 cm) to the negative phase (-2 cm).

**Related Actions**

- [Select objects with negative dash pattern phase](#) on page 458
- [Fix negative dash pattern phase](#) on page 169

## 5.6.8. Fix non well-formed XMP metadata

---

**Belongs to**

- **Category:** Text
- **Type:** Changes

**What it does**

Corrects badly formed XMP metadata and optionally removes it, if it cannot be fixed, ensuring that PDF files can be made PDF/X-4 compliant.

**About XMP metadata**

XMP metadata is descriptive information about the file embedded in the PDF, for example the name of the author, keywords, copyright information... XMP refers to labeling technology that is used, i.e. Adobe's Extensible Metadata Platform. You can view the XMP metadata in a file's Document Properties in Acrobat (Click the **Additional Metadata** button, then select **Advanced**).

**Related Actions**

[Check if XMP metadata is well-formed](#) on page 361

## 5.6.9. Fix PDF/A extension schema definitions in document XMP metadata

---

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Fixes issues with the PDF/A extension schema definitions in document XMP metadata.

**About XMP metadata**

XMP metadata is descriptive information about the file embedded in the PDF, for example the name of the author, keywords, copyright information... XMP refers to labeling technology that is used, i.e. Adobe's Extensible Metadata Platform. You can view the XMP metadata in a file's Document Properties in Acrobat (Click the **Additional Metadata** button, then select **Advanced**).

**About XMP schema definitions**

PDF/A supports the predefined schema definitions of the XMP 2004 specification. However, as these only cover general metadata requirements, custom XMP schemas ("extension schemas") are also supported to meet company- or industry-specific requirements, on condition that a description of these extension schemas is embedded in the XMP.

## 5.6.10. Fix version compatibility with PDF/A-2

---

**Belongs to**

- **Category:** Metadata
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Fixes the header and catalog version of the PDF to make it compliant with PDF/A-2.

**Related Actions**

- [Check version compatibility with PDF/A-2](#)

## 5.6.11. Fix version compatibility with PDF/X-6

### *Belongs to*

- **Category:** Metadata
- **Type:** Changes
- **New since:** PitStop 2022

### *What it does*

Fixes the header and catalog version of the PDF to make it compliant with PDF/X-6 or PDF/X-6p.

### *Related Actions*

- [Check version compatibility with PDF/X-6](#)

## 5.6.12. Flatten annotations

### *Belongs to*


- **Category:** Metadata
- **Type:** Changes
- **Since version:** 12 update 3

### *What it does*


Allows you to flatten the annotations in a PDF document. The annotations (often interactive elements such as sound clips, callouts, stamps,...) are converted to simple graphics that can be selected, changed, removed, ...

### *Example*

**Before:** The PDF contains five annotations: a stamp, a sticky note, a sound clip, a text note and an attachment.

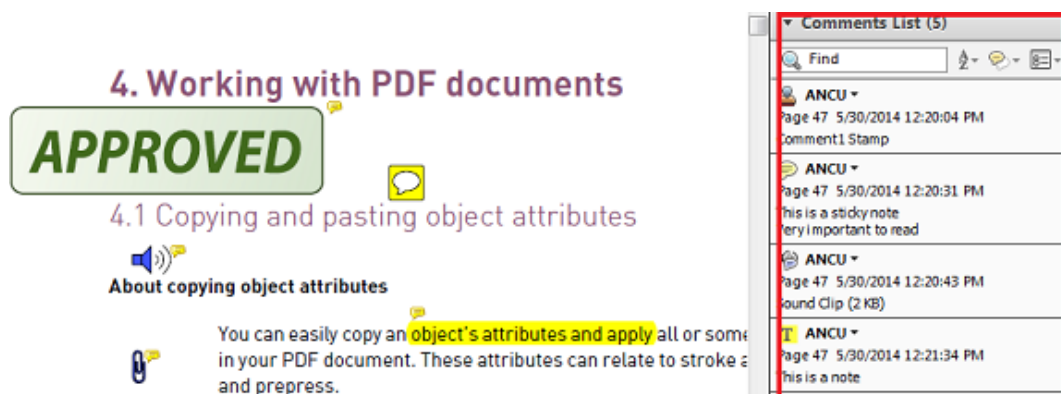

**After:** The PDF does not contain any annotations anymore; the Comments List is empty. The graphics in the PDF can be selected and removed or modified (e.g. the color, size,...) as required. Note that the callouts are removed.

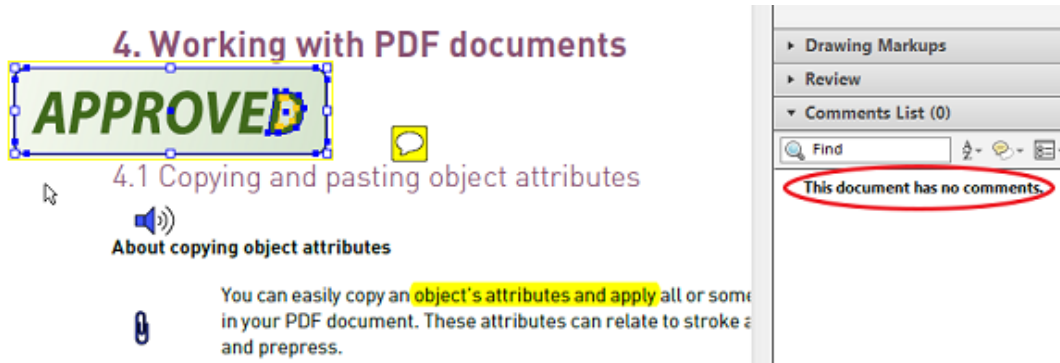

### 5.6.13. Flatten form fields

#### *Belongs to*

- **Category:** Metadata
- **Type:** Changes

#### *What it does*

Allows you to convert form fields to normal objects in a document.

This Action is useful if you have output issues with form fields as content, for example because the output device or the PDF renderer does not support form fields.

#### *Related Actions*

- [Check form fields](#) on page 355
- [Remove form fields](#) on page 191

### 5.6.14. Flatten forms

#### *Belongs to*

- **Category:** General
- **Type:** Changes
- **Since Version:** 2023 update 1

#### *What it does*

Flattens forms into the page or parent content.



**Note:** Forms will not be flattened when there are transparency side effects, like overprint or knockout, because that would change how the file looks. See the example below.



Note that using forms, you can reference objects instead of storing them multiple times in a document. Hence, flattening forms may increase file size and memory consumption, especially when this Action is run on complex files.


### About forms

Forms are rectangular frames in a PDF which contain objects, for example an image or a placed PDF. Forms do not have a fill or stroke, but they can have transparency settings that determine how the objects inside the form look (e.g. a knockout setting).

For more information, refer to [the PitStop Pro Reference Guide on the Enfocus website](#) (See Chapter "Editing forms").

### Example

The example below is an example of a form that is a transparency group. The Flatten forms Action does not work on this type of forms.

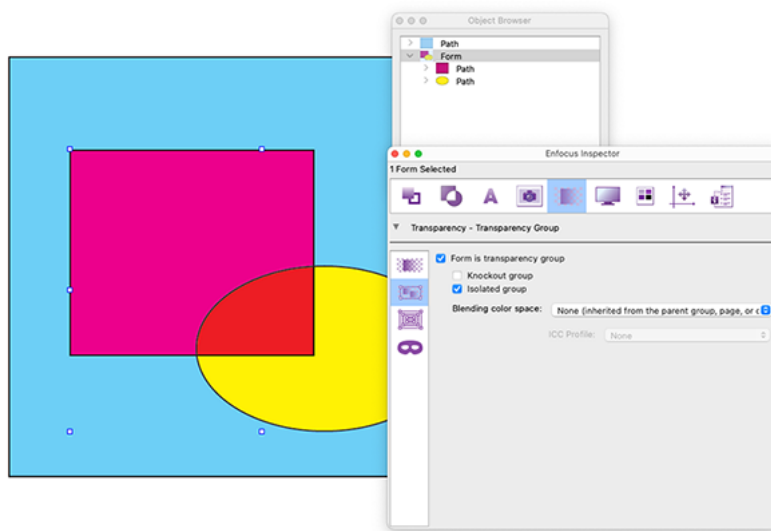

## 5.6.15. Flatten layers

### Belongs to

- **Category:** Layers
- **Type:** Changes

### What it does

Removes the selected layers. You can choose whether or not to remove the objects on these layers as well:

- To keep all objects, regardless of their visibility, select **Make all elements visible**. All objects (including hidden objects) will become visible after the layers have been removed.
- To keep all objects **based on their default visibility**, select **Preserve the initial view of the PDF**. Objects on layers with **default** visibility turned on are preserved (and remain visible). All other objects (i.e. by default hidden objects) are removed.

- To keep all objects **based on their current visibility**, select **Preserve the current view of the PDF**. Objects on visible layers are preserved, regardless of their default visibility state. All other objects (i.e. currently hidden objects) are removed.

#### **About PDF layers**

Layered content usually comes from applications such as InDesign, AutoCAD or Visio. When converted to PDF, the layers are retained and can be viewed and navigated in Adobe Acrobat. However, if you print a PDF file that contains layers, only the content that is visible on-screen is printed. This may or may not be desired.

#### **"Conventional" layers versus PDF layers**

**Layers in digital image editing** ("conventional" layers) are used to separate the different elements of an image. Each element is drawn on exactly one layer. The different layers are stacked on top of each other, and the order of the layers defines how the image looks like.

**Layers in PDF** have a different meaning. They are used to hide or show page content:

- Turning *on* a layer, all objects on this layer are shown on-screen.
- Turning *off* a layer, all objects on this layer are hidden, i.e. they become invisible.

As such, layers are also called "optional content groups": groups of objects that can be selectively viewed or hidden by the author of the document. Objects can belong to different layers, and the order of the layers is of no importance.

To work with layers in a PDF document in Adobe Acrobat, select **View > Show/Hide > Navigation Panes > Layers**.

For more information, refer to the Adobe Acrobat help.

#### **Related Actions**

[Flatten objects in layer](#) on page 153

## 5.6.16. Flatten objects in layer

---

#### **Belongs to**

- **Category:** Layers
- **Type:** Changes
- **Since version:** 12 update 3

#### **What it does**

Removes the selected objects from ALL layers and at the same time removes all empty layers.

You can choose whether or not to remove hidden objects:

- To keep all objects, regardless of their visibility, select **Make all elements visible**. All objects (including hidden objects) will become visible after the layers have been removed.
- To keep all objects **based on their default visibility**, select **Preserve the initial view of the PDF**. Objects on layers with **default** visibility turned on are preserved (and remain visible). All other objects (i.e. by default hidden objects) are removed.
- To keep all objects **based on their current visibility**, select **Preserve the current view of the PDF**. Objects on visible layers are preserved, regardless of their default visibility state. All other objects (i.e. currently hidden objects) are removed.

**About PDF layers**

Layered content usually comes from applications such as InDesign, AutoCAD or Visio. When converted to PDF, the layers are retained and can be viewed and navigated in Adobe Acrobat. However, if you print a PDF file that contains layers, only the content that is visible on-screen is printed. This may or may not be desired.

**"Conventional" layers versus PDF layers**

**Layers in digital image editing** ("conventional" layers) are used to separate the different elements of an image. Each element is drawn on exactly one layer. The different layers are stacked on top of each other, and the order of the layers defines how the image looks like.

**Layers in PDF** have a different meaning. They are used to hide or show page content:

- Turning *on* a layer, all objects on this layer are shown on-screen.
- Turning *off* a layer, all objects on this layer are hidden, i.e. they become invisible.

As such, layers are also called "optional content groups": groups of objects that can be selectively viewed or hidden by the author of the document. Objects can belong to different layers, and the order of the layers is of no importance.

To work with layers in a PDF document in Adobe Acrobat, select **View > Show/Hide > Navigation Panes > Layers**.

For more information, refer to the Adobe Acrobat help.

**Related Actions**

[Flatten layers](#) on page 152

## 5.6.17. Flip content

---

**Belongs to**

- **Category:** Page;Position/Size
- **Type:** Changes

**What it does**

Flips the contents of a selected object horizontally or vertically.

You can flip the content relative to the center of one of the page boxes. Note that you can take page rotation into account as required.

**Related Actions**

- [Check for flipped objects](#) on page 389
- [Flip selection](#) on page 242

## 5.6.18. Flip selection

---

**Belongs to**

- **Category:** Position/Size
- **Type:** Changes

- **Since version:** 2020

**What it does**

Flips a selected object horizontally or vertically.

You can flip the content relative to the center of the selection bounding box or to the visible area of selection. This last option is relevant if part of a selected image has been clipped away.

Note that you can take page rotation into account as required.

**Example**

This Action is useful to flip images while keeping text untouched.

```
select image  
flip selection
```

**Related Actions**

- [Check for flipped objects](#) on page 389
- [Flip content](#) on page 211

## 5.7. G

---

### 5.7.1. Gather color information

---

**Belongs to**

- **Category:** Color
- **Type:** Informs

**What it does**

Collects information about the color spaces used in a PDF and presents it in the log.

### 5.7.2. Gather filters information

---

**Belongs to**

- **Category:** Doc
- **Type:** Informs

**What it does**

Collects information about:

- The data format of the file (ASCII/binary)
- Whether or not compression is used
- The compression filters (if any), for example: ZIP, JPEG, LZW, ...

This information is presented in the Preflight Report under **General File Information > Compression**.

**Related Actions**

[Check data format](#) on page 321

[Check contents compression](#) on page 321

### 5.7.3. Gather font information

---

**Belongs to**

- **Category:** Text
- **Type:** Informs

**What it does**

Collects information about fonts used in a PDF and presents it in the log.

The following information is logged:

- Font Name
- Type
- Encoding
- Embedded
- Subset

### 5.7.4. Gather image information

---

**Belongs to**

- **Category:** Image
- **Type:** Informs

**What it does**

Collects information about the images used in a PDF and presents it in the log.

The following information is logged:

- Type
- Color Space
- Physical Resolution
- Effective Resolution
- Page found
- Angle
- Skew
- Flipped
- Custom Transfer
- Custom Halftone
- Custom BG (black generation)

- Custom UCR (undercolor removal definitions)

## 5.7.5. Gather ink information

---

### ***Belongs to***

- **Category:** Color
- **Type:** Informs

### ***What it does***

Calculates the amount of each color separation needed to print a page, and a complete document, i.e. how much of each page is actually covered by each ink.

This Action reports the result in % of the page size and also as inch<sup>2</sup>, cm<sup>2</sup> or mm<sup>2</sup> depending on your unit preferences. The ink usage report is also included as part of the Preflight Profile editor, so it can be generated within a Preflight Report by checking the **Inks** checkbox (at the bottom of the General section in the Preflight Profile editor). This check is off by default (because the calculation is time consuming).

## 5.7.6. Gather layer information

---

### ***Belongs to***

- **Category:** Layers
- **Type:** Informs
- **Since Version:** 2017

### ***What it does***

Collects information about the layers used in a PDF and presents it in a report.

You will get a clickable tree view (representing the sequence of the layers), followed by an overview of all layers (listed alphabetically) with their attributes.



PITSTOP

PRO

ENFOCUS

Layer Information

Objects

Background

Visuals

Background

Intent

Default State

Locked

Initial State

Visibility

Print

Export

Empty

Objects

Intent

Default State

Locked

Initial State

Visibility

Print

Export

Empty

View

on

no

visible when on

prints when visible

exports when visible

yes

View

on

no

visible when on

prints when visible

exports when visible

yes

5.7.7. Gather OPI information

Belongs to

- **Category:** Image
- **Type:** Informs

What it does

Collects information about the OPI (Open Prepress Interface) used in a PDF and presents it in the log.

About OPI

OPI (Open Prepress Interfaces) replaces high resolution images with "preview" images; low resolution substitutes which are stored in the PDF, together with the path to the high resolution images. This facilitates data storage and data transfer of PDFs with a large number of images.

Related Actions

- [Check OPI path](#) on page 340
- [Check OPI type](#) on page 340
- [Change OPI info](#) on page 144
- [Remove OPI](#) on page 146

- [Select images with OPI info](#) on page 450

## 5.7.8. Gather Output Intent information

---

### ***Belongs to***

- **Category:** Doc
- **Type:** Informs

### ***What it does***

Collects information about the Output Intents used in a PDF document and presents it in the log.

In the report, you can find the following information (if Output Intents are used):

- ICC profile or ICC characterization name
- Registry name
- Additional information

## 5.7.9. Gather page box information

---

### ***Belongs to***

- **Category:** Page
- **Type:** Informs

### ***What it does***

Collects information about the page boxes used in a PDF document and presents it in the log.

In the report file (under Page boxes), each page box layout is represented by 2 drawings:

- One to show the page boxes that were defined in the document ("defined" page boxes)
- One to show the actual position of the page ("effective" page boxes).

Below these drawings, an overview of all page boxes and their sizes is listed:

- The pages this page box layout applies to
- The start position of the media box
- The page rotation
- The page scaling factor

## 5.7.10. Gather pages information

---

### ***Belongs to***

- **Category:** Metadata; Page
- **Type:** Informs

### ***What it does***

Collects information about the pages (number of pages and range) in a PDF and presents it in the log.



## 5.7.11. Group Actions

---

### *Belongs to*

- **Category:** Operator
- **Type:** Selections

### *What it does*

Allows you to group several Actions within an Action List.

This Action is useful to organize and document your Action List.



**Note:** Instead of using the Group Actions Action, you can as well right-click an Action in the Action List and select **Make Group** from the context menu.

---


### *How to proceed*

1. Double-click **Group Actions** to add it to the Action List.
2. Specify a meaningful name for your Action group and enter a description.
3. Move **Group Actions** to the desired position. You can drag and drop it, or use the options in the context menu (**Move Up**, **Move Down**).
4. Add the required Actions to your Action List and drag them to your group.

### *Example*

The screenshot below shows the **Add my Printer Marks and Enlarge** Action List (by default provided with PitStop). This Action List contains 3 Action groups (preceded by an icon: ▴ if the group is expanded; ▾ if the group is collapsed):

- The **Registration marks** group contains the different Actions required to add registration marks to the top, bottom, left and right of the page.
- The **Color bars** group contains the Actions to create two color bars.
- The **Trim marks** group contains the Actions to set the trim marks (using [Add object](#) on page 77).

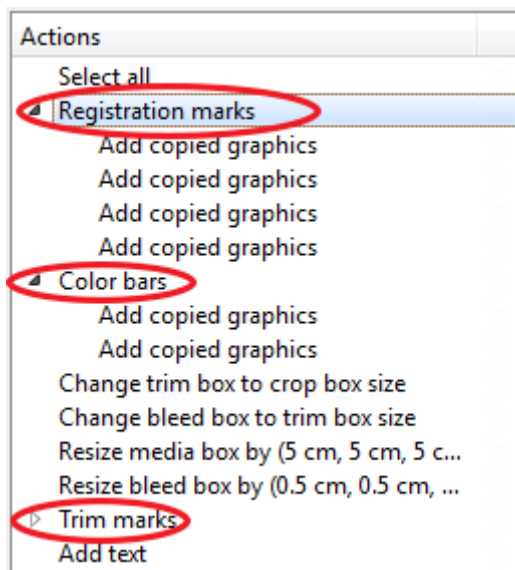

## 5.8. 1

---

### 5.8.1. Impose document

---

#### ***Belongs to***

- **Category:** Document
- **Type:** Changes
- **Since version:** 2021

#### ***What it does***

Allows you to arrange the pages of the document so that once the printed signature sheets are folded and trimmed, the pages appear in the correct order.



#### **Note:**

- This Action expects that the number of pages of the input document is a multiple of 4. If that is not the case, empty pages will be added. For example, if the input PDF has 18 pages, 2 empty pages will be added. The imposed file will have 10 sheets in total (of which one is empty).
- If there are pages of different size, the sheet size is based on the largest page size.

#### ***Important remark***

If you want to make changes to the resulting imposed document (for example add bleed), you can do so in the same Action List on condition that the additional Actions are preceded by a [Split Action List](#) Action.

**Attributes**

| Attribute                      | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Layout tab</b>              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Clip source page to <page box> | Determines what part of the source page should be visible on the imposed result. By default, this is the bleed box.                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Spread type                    | <p>Determines the order in which the pages will be arranged.</p> <p>Options:</p> <ul style="list-style-type: none"> <li>• <b>Printer:</b> Pages are arranged in such a way that when the document is <i>printed</i>, trimmed and assembled, the pages appear consecutively.</li> <li>• <b>Reader:</b> Pages are arranged in consecutive order, like when you <i>read</i> a book.</li> </ul>                                                                                                                                                                        |
| Binding edge                   | <p>Options:</p> <ul style="list-style-type: none"> <li>• <b>Get from document</b> (default)</li> <li>• <b>Left</b></li> <li>• <b>Right</b></li> </ul> <p>This option allows handling documents that have content in right-to-left script (like Arabic).</p>                                                                                                                                                                                                                                                                                                        |
| <b>Finishing tab</b>           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Gutter width ...               | Width of the space or margin between the pages on the resulting sheets. This value applies to all pages of the document.                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Limit bleed into gutter to ... | <p>Maximum amount of bleed allowed in the margin between the pages on the resulting sheets. If no limit is set, the entire gutter is used.</p> <p>This option can be useful to avoid issues with milling and gluing.</p> <hr/> <div>  <p><b>Note:</b></p> <ul style="list-style-type: none"> <li>• The maximum amount of bleed in the gutter area is limited to 1/2 of the gutter size.</li> <li>• If the gutter width is 0, this option is grayed out.</li> </ul> </div> <hr/> |
| Define sheet size manually     | <p>Allows you to determine the size of (the media box of) the imposed document. This can be useful if you want to add space for the printing marks, colorbars, gripper edge, etc.</p> <hr/> <div>  <p><b>Note:</b> The source pages are not automatically scaled to make them fit nicely on the new sheet size. If needed, you can run the <a href="#">Scale to fit page size</a> Action to do that (before imposing the document).</p> </div> <hr/>                            |

| Attribute                                   | Description                                                                                                                                                                                                                                          |
|---------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Marks tab                                   |                                                                                                                                                                                                                                                      |
| Insert print marks (trim, gutter, and fold) | <div>Puts print marks on the sheets.</div> <div> <b>Note:</b> If there were print marks on the original sheets, they are removed (regardless of this option).</div> |

Example

- Input file: A PDF file with 6 pages (1-6).
- Resulting printer spread (4 sheets):



- Resulting reader spread (4 sheets):



5.9. L

5.9.1. Log selection

Belongs to

- **Category:** General
- **Type:** Checks

What it does

Allows you to log the presence or absence of a selection you made with another Action in the same Action list.

This Action is useful if you want to check something for which no "Check" Action is available. For example, if you want to check if the PDF contains red text, you can first select all red text, and then use Log selection to display a message either if the document does or does not contain red text.

Note that you can also log the presence or absence of layers.

**How to proceed**

1. From the list at the top of the pane, choose the appropriate option:
  - To display a message if the selection was found, select *Log a message if objects are selected*.
  - To display a message if the selection was NOT found, select *Log a message if no objects are selected*.
2. Indicate whether or not the following information should be logged as well (if applicable):
  - The type of page and document objects
  - The annotation objects



**Note:** By default, annotations aren't logged. Even if Log selection applies to a selection made by *Select annotations*, nothing will be logged, unless the **Report the annotation objects** checkbox is selected.

3. Enter the message that should appear in the Report if the selection was found/not found (depending on the choice made in step1).



**Note:** You can configure different descriptions for different languages (for example: *JPEG images* in English versus *JPEG afbeeldingen* in Dutch). The language shown in the log file depends on the PitStop Pro language (See **Edit > Preferences > PitStop Pro Preferences**).

4. Select the desired log level.



**Note:** In this case, it doesn't make sense to choose "Don't log", since the result of this Action is always shown in the Enfocus Navigator.

**Example**

To check for the presence of red text in a document, you could create the following Action List:

```
Select fill and stroke color
  <!-- Add Select color on page 430. Select fill and stroke and determine the
    color you want to check for, for example using the Grab fill and Grab stroke icon -->
Select text segments
  <!-- Select text segments on page 514 -->
AND
  <!-- AND on page 470 : necessary to combine the two previous Actions -->
Log selection
  <!-- Choose "Log a message if objects are selected".
    Configure an English message, for example "This document contains some
    text in red".
    Select "Log as warning". -->
```

If you run this Action List, all red text will be selected and logged as a warning. In the Enfocus Navigator, if you select an object in the Description field, you will see the description ("Red text") under Details. You will also find a warning in the Preflight Report (e.g. "This document contains some text in red (x times on pages y-z)").

Alternatively, if you only want a warning if no red text is found, in the attributes of **Log selection**, choose "Log a message if no objects are selected" and configure a message such as "This document does not contain any red text".

## 5.9.2. Log text object properties

---

### ***Belongs to***

- **Category:** Text
- **Type:** Informs

### ***What it does***

Collects information about any selected text or clip text object used in a PDF and presents it in the log.

The following information is logged:

- Text content
- Baseline relative to the lower left of the media box



**Note:** The baseline is logged in the unit set in the PitStop Pro Preferences (Units & Guides category).

- Font size in pt
- Font name
- Character spacing in em
- Word spacing in em
- Leading in pt
- Horizontal scaling
- Text rise in pt
- Text rendering mode
- Text knockout
- Is clip text

## 5.10. M

---

### 5.10.1. Make DeviceN without NChannel information

---

#### ***Belongs to***

- **Category:** Color
- **Type:** Changes

#### ***What it does***

Converts the color space to DeviceN without NChannel information.

**About NChannel**

NChannel is an extension of the DeviceN color space, a multi-component, device-dependent color space. NChannel color spaces give applications greater flexibility when representing colors that are not available on a target device.

NChannel is supported from PDF 1.6 (Acrobat 7.x) onwards. If you are opening a PDF in an earlier version of Adobe Acrobat, colors can print or display incorrectly.

**About converting NChannel to DeviceN**

This Action will convert NChannel to DeviceN, so the object looks as it will be printed when using devices not supporting PDF 1.6 features.

Note that there are three options. You can convert the color space to:

- **DeviceN**
- **NChannel with regular DeviceN color information only**
- **NChannel with color information additional to regular DeviceN**



**Note:** This Action will have no visual effect if all colors are available on the target device.

PitStop provides an Action List with the same functionality: Convert NChannel Color Space to DeviceN

**Related Actions**

- [Check for NChannel colors with non-trivial process dictionary](#) on page 303
- [Select DeviceN with attributes](#) on page 432

## 5.10.2. Make document metadata consistent

---

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Makes sure that the metadata in the different metadata locations has the same values. In case of inconsistencies, the most recent value is used.

If multiple creators are not considered an inconsistency, select the **Allow multiple creators** checkbox. In that case, the "Creator" property will not be changed, even if it is not the same in the different metadata locations.

**How it works**

There are two metadata locations in a PDF file:

- The **info dictionary** contains information about the file, such as the title, the author, the creation date ... and is visible through the file's Document properties. It's not in XML format.
- The **XMP metadata stream** also contains information about the file, but this information is represented as XMP metadata - XMP referring to Adobe's labeling technology **Extensible Metadata Platform**. All information in the info dictionary is also represented in the XMP metadata stream dictionary, in the form of XMP properties.

Inconsistencies may occur when only one of the metadata locations has been updated.

**Related Actions**

- [Check if document metadata is consistent](#) on page 359
- [Select if document metadata is inconsistent](#) on page 469

### 5.10.3. Make mask

---

**Belongs to**

- **Category:** Prepress
- **Type:** Changes

**What it does**

Creates a mask from at least two selected objects (line art or text).

**Related Actions**

[Release mask](#) on page 271

### 5.10.4. Make viewer preferences PDF/X compliant

---

**Belongs to**

- **Category:** Document
- **Type:** Changes

**What it does**

Allows you to change the viewer preferences of the PDF document, to make them PDF/X compliant.

PDF/X-1a:2003 and PDF/X-3:2003 require the view area, view clip, print area and print clip to be set to the media (or bleed) box.

As of PitStop 2022 it's also possible to remove the viewer preferences (all or only the one(s) of your choice).

**Related Actions**

[Check PDF/X viewer preferences](#) on page 327

### 5.10.5. Match fill and stroke colors

---

**Belongs to**

- **Category:** Color; LineArt
- **Type:** Changes
- **Since version:** 12 update 3



**What it does**

Changes the stroke color to match the fill color or vice versa.

**Use case**

Suppose you want to print very small text. To improve the readability, you convert the text to outlines and add a stroke. However, the stroke color is black by default. This may not be desired, e.g. if your text is in color. In that case, you can run this Action with the option **Change the stroke color to match the fill color**.

**Related Actions**

[Change color](#) on page 102

## 5.10.6. Merge into text lines

---

**Belongs to**

- **Category:** Text
- **Type:** Changes

**What it does**

Allows you to merge text into text lines.

This Action merges all text that occurs on one line and has the same font into one text object. This is useful if you want to change text (e.g. the font) on a line by line basis.

**Related Actions**

- [Split in words](#) on page 293
- [Split in characters](#) on page 292

## 5.10.7. Move media box to 0.0

---

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Changes the coordinates of the media box, so that the lower left corner of the media box is located at coordinates 0,0. This won't change the way the file looks.

The media box is the largest page box and defines the size of the physical medium on which the page will be printed or displayed. Some applications don't give the lower left 0,0 coordinates, but for example 100,100, which will cause problems when preflighting the file.

**Related Actions**

- [Check media box origin](#) on page 376

- [Select by media box origin](#) on page 480

### 5.10.8. Move objects into the page box

---

***Belongs to***

- **Category:** Page;Position/Size
- **Type:** Changes

***What it does***

Moves the selected objects into a particular page box.  
You can include annotations as required.

***Related Actions***

- [Move objects to corner](#) on page 243
- [Move objects out of the page box](#) on page 212

### 5.10.9. Move objects out of the page box

---

***Belongs to***

- **Category:** Page; Position/Size
- **Type:** Changes

***What it does***

Moves the selected objects out of a particular page box.  
You can include annotations as required.

***Related Actions***

- [Move objects to corner](#) on page 243
- [Move objects into the page box](#) on page 212

### 5.10.10. Move objects to corner

---

***Belongs to***

- **Category:** Position/Size
- **Type:** Changes

***What it does***

Moves the selected graphic elements to the defined corner of the selected page box.

***How to proceed***

Proceed as follows:

1. Select the anchor point of the object you want to use for positioning the object, for example "upper left".
2. Select the anchor point of the specified page box you want to use for positioning, for example "center".
3. Select the page box itself, for example "crop box".
4. Select the **Use page rotation** checkbox as required.

### Example

To move the images in your document to the lower right corner of the page, without cutting off the images, use:

```
Select images
Move objects to corner
  <!-- settings (example): Place the lower right corner of the graphic elements
relative to the lower right corner of the trim box -->
```

If you have chosen to place the center of the graphic elements relative to the lower right corner of the trim box, the center point of the image will be positioned on the lower right corner point of the trim box, meaning that the right hand side and lower half of the image will lie outside of the trim box.

### Related Actions

- [Move objects out of the page box](#) on page 212
- [Move objects into the page box](#) on page 212

## 5.10.11. Move page box

---

### Belongs to

- **Category:** Page
- **Type:** Changes

### What it does

Allows you to move one of the page boxes to the desired position.

You can choose which page you want to move, and define the target position in one of the following ways:

- By specifying the position relative to one of the other page boxes, based on the anchor point.
- By specifying the target X and Y coordinates.
- By specifying the values by which the X and Y axis should be moved.

You can take into account page rotation and scaling factor as required.

## 5.10.12. Move page content

---

### Belongs to

- **Category:** Page; Position/Size
- **Type:** Changes

**What it does**

Moves the contents of a page in the preferred direction (horizontally or vertically) by the specified distance:

- A positive value, e.g. "1 cm" will move the content to the right (horizontally) or to the top of the page (vertically).
- A negative value, e.g. "-1 cm" will move the content to the left (horizontally) or to the bottom of the page (vertically).



**Note:** Remember that the unit used in Actions (in this example "cm") is defined in the PitStop Pro Preferences (Units & Guides Category).

You can choose whether or not to take into account page rotation and scaling factor (if applicable).

## 5.10.13. Move page content to corner

**Belongs to**

- **Category:** Page; Position/Size
- **Type:** Changes

**What it does**

Moves the contents of a page to a chosen corner.

This Action does not center the object on the corner but moves the closest objects to that corner and moves the other objects by the same distance towards the corner (horizontally or vertically).

**Example**

To move the page content to the lower left

1. Select Move page content horizontally to **Left Side**.
2. Select Move page content vertically to **Bottom Side**.
3. Select the page box to be used as a reference, for example the **media box**.
4. Optionally, set **margins** to be added to the media box.
5. Select the **Use page rotation and scaling factor** checkbox, if page rotation and scaling factor should be taken into account.

## 5.10.14. Make TrueType fonts PDF/X compliant

**Belongs to**

- **Category:** Text
- **Type:** Changes

**What it does**

Makes TrueType fonts compliant with a particular PDF/X or PDF/A version. Options are PDF/A-1, PDF/A-2, PDF/X-4 and PDF/X-6.

This Action is useful if you have detected a TrueType font error (for example through running a Preflight Profile or an Action List).



**Note:** This fix has been added to all default PDF Preflight Profiles that check and fix compliance with a PDF Standard. That way, if non-compliant TrueType fonts are detected during a Preflight check, and the automatic fix to make the document compliant with the standard is enabled, they will be fixed automatically.

#### **Related Actions**

- [Check if TrueType fonts are PDF/X compliant](#) on page 413
- [Check TrueType font encoding according to PDF/A](#) on page 415
- [Select non-PDF/X or PDF/A compliant TrueType fonts](#) on page 510

## 5.11. N

---

### 5.11.1. Normalize line weight

---

#### **Belongs to**

- **Category:** General; LineArt; Position and size
- **Type:** Changes

#### **What it does**

Normalizes paths where a transformation matrix caused distortions, by removing the distortion, giving the path a uniform line weight equal to the average reported in the Inspector. The Action also works on sheared paths.

#### **Related Actions**

- [Change line weight](#) on page 161
- [Select by line weight](#) on page 457
- [Check line weight](#) on page 346

### 5.11.2. Normalize page boxes

---

#### **Belongs to**

- **Category:** Page
- **Type:** Changes

#### **What it does**

Normalizes page boxes, i.e. makes sure they are all positioned correctly and are placed in the right order, e.g. the media box should be the largest box, the bleed box should be inside the bleed marks, ...

### 5.11.3. Normalize Page Rotate Key

---

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Allows you to manipulate page rotate keys in a PDF.

You can do one of the following:

- Flatten a rotate key into the page content (no visual effect)
- Introduce a rotate key for landscape pages and flatten it for portrait pages.

You can indicate which page box determines the page orientation. For example, if you select "trim box" and the trim box is 4 units wide and 3 units tall, the page is considered to have a landscape orientation.

- Remove a rotate key without flattening it into the page content. This may have a visual effect.

**Related Actions**

- [Check page rotation angle](#) on page 379
- [Select by page rotation angle](#) on page 481
- [Apply page rotation](#) on page 200

### 5.11.4. Normalize PANTONE library names

---

**Belongs to**

- **Category:** Color
- **Type:** Changes
- **Since version:** 2018

**What it does**

Allows you to rename old or faulty PANTONE spot color names to match the new, correct naming conventions.

You can choose one or more of the following methods:

- **Replace PMS with PANTONE:** PMS stands for *Pantone Matching System* and was used in the past. Using this method, the old color name *PMS Yellow C* will become *PANTONE Yellow C*.
- **Fix upper/lower case mismatches:**
  - **Only make PANTONE name upper case:** "PANTONE" is not always spelled correctly. Using this method, you can fix this part of the color names. For example, *Pantone Yellow C* will be changed to *PANTONE Yellow C*.
  - **Fix all mismatches:** If selected, all mismatches will be fixed, for example *Pantone yellow C* will be changed to *PANTONE Yellow C*.

- **Add suffix if not present:** <suffix of your choice>: If suffixes are missing, you can tell PitStop which suffix to add. Note that only the current suffixes can be selected; old suffixes are not in the list.
- **Remove extra spaces:** Removes redundant spaces in PANTONE library names.



**Note:** This option does not remove spaces in incorrect names, unless they have been corrected by one of the other normalization methods. For example, "Pantone Yellow C" will only be changed into "PANTONE Yellow C" if both "Make PANTONE uppercase" and "Remove extra spaces" are selected.

- **Add missing spaces:** Adds a space after the name PANTONE (if it's missing), and/or before the suffix (C, U, CP, UP) (if it's missing).

PitStop checks if the normalization method results in an existing PANTONE color. If that is the case, the color name is changed.

If no replacement is found, for example because the spot color name in the document is unknown/incorrect or no PANTONE Spot color, you will get a warning. This is also the case if renaming a colorant in the DeviceN space would result in a duplicate (as it's not possible to have twice the same name in a DeviceN space).

#### **Related Actions**

- [Check spot color by PANTONE library](#) on page 314
- [Select spot color](#) on page 437
- [Change spot color suffix](#) on page 105

## 5.11.5. NOT

#### **Belongs to**

- **Category:** Operators
- **Type:** Selections

#### **What it does**

NOT is a logical operator. It is used to exclude objects according to their attributes.

#### **Example**

To select all the text in a document that was not Arial, you need to exclude Arial from your selection.

```
Select Text
Select Font Arial
NOT <!-- NOT only applies to the immediately preceding item in the list of selections
-->
AND
```

## 5.12. O

### 5.12.1. Offset path

**Belongs to**

- **Category:** Line Art
- **Type:** Changes
- **Since version:** 2018

**What it does**

Grows or shrinks a path by the value defined in the attributes of this Action. This way you can make larger or smaller versions of an object.

Attributes are:

- **Offset:** Determines how much the path will grow or shrink; this value denotes the distance between the original and the new path. Use negative values to make the path smaller, positive values to make it larger.
- **Join:** Determines the path's angles. Choices are:
  - miter (pointed corner) - in that case you can also determine a miter limit, to make the corners sharper (high value) or less sharp (low value)
  - round (rounded corner)
  - bevel (flat corner).
- **Create copy:** Makes sure the original path is kept, in addition to the offset path.

This Action also works on clipping paths and curved paths.

Open paths are automatically closed before growing or shrinking.

**Examples**

**Original object**



| Chosen options                             | Result                                                                              |
|--------------------------------------------|-------------------------------------------------------------------------------------|
| Offset: 5 mm<br>Join: Miter<br>Create copy |  |



| Chosen options                             | Result                                                                            |
|--------------------------------------------|-----------------------------------------------------------------------------------|
| Offset: 5 mm<br>Join: Round<br>Create copy |  |
| Offset: 5 mm<br>Join: Bevel<br>Create copy |  |
| Offset: 5 mm<br>Join: Bevel<br>No copy     |  |

5.12.2. Open path

*Belongs to*

- **Category:** Line Art
- **Type:** Changes

*What it does*

Removes the connection between the first and the last anchor point of a path.

5.12.3. Optimize document structure

*Belongs to*

- **Category:** Document
- **Type:** Changes

**What it does**

Guarantees that the underlying document structure of your PDF is efficient, for example by improving the compression of the document as required.

## 5.12.4. Optimize stream compression

---

**Belongs to**

- **Category:** Document
- **Type:** Changes
- **Since:** 25.07

**What it does**

Ensures that all content streams are efficiently compressed. This may reduce the file size of a document.

## 5.12.5. OR

---

**Belongs to**

- **Category:** Operator
- **Type:** Selections

**What it does**

OR is a logical operator. It is used to select objects that share attributes.

**Example**

To select all text that is either Helvetica or Arial, use the following:

```
Select Font Helvetica
Select Font Arial
OR
```



**Note:** Do not use OR to exclude objects!

For example, the following will select all 12pt AND 14pt fonts:

```
Select Text if point size = 12.00 pt
Select Text if point size = 14.00 pt
OR
```

## 5.12.6. Overlay PDF

---

**Belongs to**

- **Category:** Document
- **Type:** Changes

- **Since:** 2020

### What it does

Enables you to use a PDF as overlay or underlay in another document.



#### Note:

- This Action provides the same functionality as the Place PDF tool (part of the PitStop Edit toolset) in PitStop Pro.
- There's also an Overlay PDF app that can be used in a Switch workflow. It's available for download on the [Enfocus Appstore](#).

### Tabs

| Tabs   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source | <p>The <b>Source File</b> is the file that will be added to the currently opened PDF. It will be placed on top of the current PDF, unless you have selected the <b>Put source page content behind target page content</b> checkbox on the Misc tab.</p> <p>You should specify the source file via the <b>PDF file path</b>, which refers to the location of the PDF. You can browse to the PDF file or you can enter the file path, optionally using variables.</p> <p><b>Use page box</b> allows you to set the page box that you want to use.</p> <p>Finally, you should choose the preferred behavior (<b>Repetition Policy</b>) in case the added PDF file has fewer pages than the target PDF file. There are three options:</p> <ul style="list-style-type: none"> <li>• <b>Stop overlaying after last source page is used</b> (default option): if selected, the last page(s) of the target document won't have an overlay.</li> <li>• <b>Repeat last page</b>: the last page of the source file will be used as overlay for the last page(s) of the target document (until all pages have an overlay).</li> <li>• <b>Repeat all pages</b>: PitStop will add overlay pages, starting again from the beginning of the source file until all pages have an overlay.</li> </ul> |
| Target | <p>The <b>Target Area</b> indicates where the overlay should be placed. You can enter the coordinates of the area (manually, or grab from a selection), or you can specify the target page box.</p> <p>The <b>Scaling options</b> allow you to specify how the page should be scaled, if the added PDF file has a different page size than the target file. Options are:</p> <ul style="list-style-type: none"> <li>• Do not scale</li> <li>• Scale to fit, preserving aspect ratio</li> <li>• Fit width / fit height, preserving aspect ratio</li> <li>• Scale to fill, preserving aspect ratio (scales the source page enough to fit the larger dimension of the target page while preserving the source page's aspect ratio)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

| Tabs |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|      | You can also determine how the source content should be <b>aligned</b> to the target area (center, top, bottom, upper left, right, ...)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Misc | <p>On this tab, you have three options:</p> <ul style="list-style-type: none"> <li>• <b>Change the opacity</b> of the source by moving the slider to the left. The default is 100% opacity.</li> <li>• <b>Put source page content behind target page content</b> to have an underlay instead of an overlay.</li> <li>• <b>Place as isolated transparency group</b> to avoid that objects in the transparency group are affected by objects underneath.</li> </ul> <p>The content of the source page is put in a form. By default this form is a non-isolated transparency group, meaning that overprint, knock-out, ... will have an affect. If you don't want this, so if you want to preserve the initial view of the added PDF, you should enable this checkbox. For an example, see below.</p> |

#### Remark



**Note:** The target page content for both overlays and underlays includes the content generated by previous runs of the Action. This is important in the case of underlays where, for an Action list with multiple underlays, the drawing order of the content generated by the instances of this Action is the reverse of the order in which the Actions themselves appear in the Action List.

#### Example:

The following Action List is run on a cover page which only contains a title in white. Both Actions have **Put source page content behind target page content** enabled.


```
Overlay PDF      (source file: PDF with an image of green clover, 80% opaque)
Overlay PDF      (source file: PDF with an image of roses, 100% opaque)
```

The result is a PDF with an image of roses in the background and the green clover on top of it.




***Example of the "Place as isolated transparency group" option***


In this example, the added PDF contains the following CMYK objects:

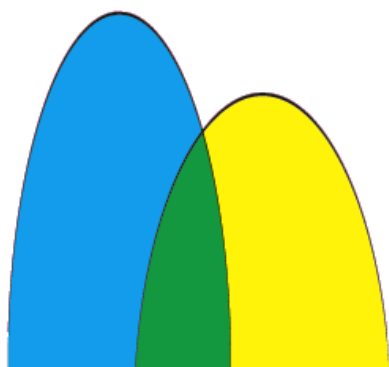

Below you can see how the result will look when the added PDF is placed on a magenta background. This is the default situation, so with **Place as isolated transparency group** unchecked. There is interaction with the magenta background, so the objects in the added PDF now look different than in the original PDF.

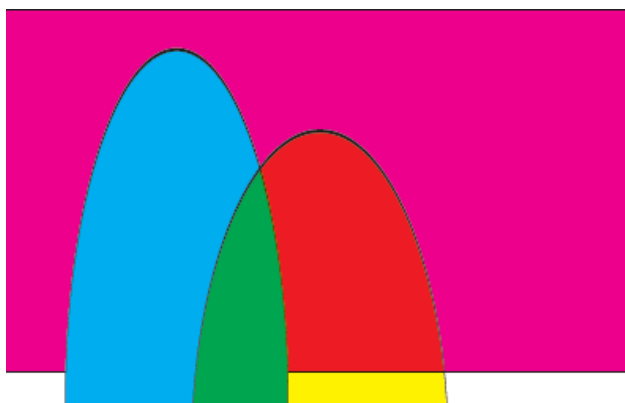

However, if the same PDF is added, but with **Place as isolated transparency group** selected in the Overlay PDF Action, there is no interaction with the magenta background, and the objects look the same as in the original PDF.

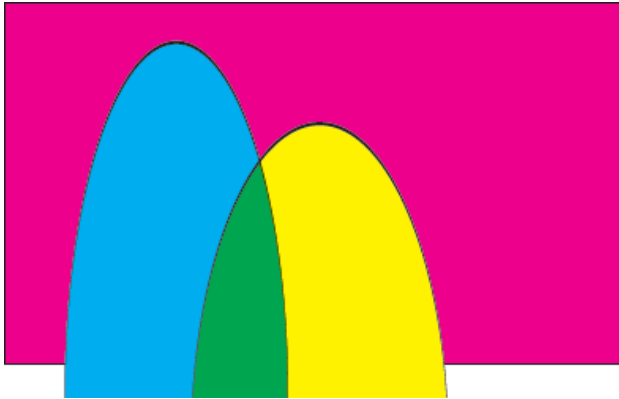

### 5.12.7. Overprint on all separations

---

***Belongs to***

- **Category:** Prepress
- **Type:** Changes

***What it does***

Ensures that if an object is set to overprint, it overprints on all separations. You can apply the overprint to the fill color and/or the stroke color.

The overprint rules in PDF are clearly defined but sometimes very surprising. For example, a gray object that is set to overprint will overprint on underlying Pantone colors, but it will not overprint on Cyan, Magenta and Yellow. This Action will ensure that the document will still print as Black, but with overprint on CMY.

### 5.12.8. Override color management settings

---

***Belongs to***

- **Category:** Color; General
- **Type:** Settings

***What it does***

Replaces any color management settings from the PDF Profile or general PitStop preferences with the settings defined here. These settings will be used when converting colors.

### 5.12.9. Override default image recompression

---

***Belongs to***

- **Category:** General; Image

- **Type:** Settings

**What it does**

Overrides the default recompression quality setting (used by PitStop when changing images) with the one defined in this Action.

**How it works**

If PitStop is used to change images (e.g. to convert the color, to resample the image...), the images are decompressed first, then changed, and afterwards recompressed according to the default settings (maximum for JPEG, lossless for JPEG 2000). With these default settings, files may grow to an unacceptable size compared to the original input PDF file. In that case, you can use Override default image recompression to make the files smaller.

## 5.12.10. Override page box defaults

---

**Belongs to**

- **Category:** General; Page
- **Type:** Settings

**What it does**

Replaces the default order (Media > Crop > Art - Bleed - Trim) of the page boxes in a PDF document with the order defined in this Action.

## 5.12.11. Override rounding rules

---

**Belongs to**

- **Category:** General
- **Type:** Settings

**What it does**

Replaces the default rules used for comparing text size, line weight and/or coordinates to the ones set in this Action.

You have the choice to:

- Leave text size, line weight and/or coordinates unchanged
- Use the default rules, or
- Use decimals.

**Example**

PitStop applies a number of rounding rules when comparing the actual values in a PDF to the ones set in a check (Profile check or "check" Action). For example, if you want to check if the text point size is equal to 10 points, PitStop will give a warning if there is a difference of 0.1 point.

If you don't want to log such small differences, use this Action to overrule the default behavior.  
Example of such an Action List:

```
Select all
Override rounding rules <!-- Select: Text size: decimals 0 -->
Check if text point size is equal to 10.0 pt <-- Check text point size on page 414 -->
```

**Remark**

We recommend using points as measurement unit because in the background, PitStop Pro converts all the different measurement units (p, in, cm, mm) into points and applies the rounding rules to this value (with its decimals).

## 5.13. P

---

### 5.13.1. Put selection in form

---

**Belongs to**

- **Category:** Add
- **Type:** Changes

**What it does**

Allows you to gather all selected objects in a form (a so-called XObject form).

Forms are rectangular frames in a PDF document that contain objects. The way in which you edit these forms and the objects inside them is different from regular objects in a PDF document. For example, you can select a regular object and move it to a random position on the page in your PDF document. Objects in forms can only be moved inside the form and thus, you can use the form to crop the object.

Note that you can use PitStop's Edit Form tool in order to edit the form and the objects it contains.

### 5.13.2. Paste objects from clipboard

---

**Belongs to**

- **Category:** Add, General, Operators
- **Type:** Changes
- **Since Version:** 13 update 1

**What it does**

Allows you to paste objects from the clipboard to one or more selected pages. You can paste them multiple times (with fixed distances or distributed across a distance) as required and indicate where they should be placed.

This Action must be preceded by a "copy/cut" Action (that moves the objects to the clipboard) and a "select" Action (that indicates where the objects should be pasted) in the same Action List.



If there are several "copy/cut" Actions in the Action List, you may want to give each of the clipboards an appropriate name, to make sure the different objects are pasted on the correct pages.

## How to proceed?

1. Create a new Action List.
2. Add a select Action that select the objects you want to cut/copy-and-paste.
3. Add a [Copy or cut objects to clipboard](#) on page 131 Action to your Action List and set the attributes (select Cut or Copy and type an appropriate name).
4. Add a [Select pages](#) on page 484 Action to indicate the pages on which the selection should be pasted (if not yet selected in step 2 -if you added "Select all" in step 2, step 4 is redundant).
5. Add a *Paste objects from clipboard* Action and select the name of the clipboard (as entered in step 2). Switch to the different tabs to define the region and the position of the copied objects (see table below).



**Note:** Action Lists are executed page after page. As a consequence, you can only paste objects to the following pages. For example, if you copy an object that is present on page 3, you can paste it on page 3, 4, 5, ... but not on page 1 or 2.

## Tabs

| Tabs       | On this tab, do the following:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Graphics   | <p>Select the clipboard that contains the objects to be pasted.</p> <p>Determine whether or not the clipboard should be cleared after the object was pasted. This option determines what happens if there are no objects to be copied (= if the select Action in step 2 of the above procedure results in an empty selection).</p> <ul style="list-style-type: none"> <li>• If checked, the clipboard will be empty, so nothing will be pasted.</li> <li>• If cleared, the clipboard will still contain content from the previous page and that content will be pasted.</li> </ul>                                                               |
| Attributes | Determine if the objects should be pasted in the foreground or in the background of the document.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Region     | <p>Determine the region where the objects should be moved to. The region is defined based on the page box of your choice and you can define margins within that page box, by grabbing the offsets from a selected area (using the <b>Grab position</b> button ).</p> <p>You can also specify a specific area the objects should not be placed in, also based on a page box and with the option to set margins.</p> <div> <p><b>Note:</b> The settings on this tab are only used if <b>Move graphic elements</b> is selected on the Position tab. If this is not the case, the original location of the graphic elements is preserved.</p> </div> |
| Repeat     | If the objects should be pasted more than once on a page, change <b>No repeat</b> to:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

| Tabs     | On this tab, do the following:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|          | <ul style="list-style-type: none"> <li>• <b>Distribute/Repeat fixed number of graphic elements</b> if you want to determine how often the copied objects should be pasted (e.g. 6 times horizontally, 4 times vertically)</li> <li>• <b>Distribute/Repeat graphic elements in region</b> if you want PitStop to fill the region (specified on the Region tab).</li> </ul> <p>If you want PitStop to divide the pasted objects evenly across the defined region, choose "distribute" rather than "repeat". In case of "Distribute graphic elements in region", you can choose the maximum or minimum distance between the pasted objects.</p> <p>If you choose "repeat", you should define the exact distance between the pasted objects yourself.</p> <p>The distance can be between the bounding boxes of the pasted objects (choose: <b>Between edges</b>) or from center to center (choose: <b>Between centers</b>).</p> <hr/> <div data-bbox="564 842 635 913"> </div> <div data-bbox="655 851 1390 913"> <p><b>Note:</b> Remember that you can use Smart Preflight variables to define the distances.</p> </div> <hr/> |
| Position | <p>If the selected objects should be moved, select <b>Move graphic elements</b>. Indicate how the objects should be positioned relative to the chosen region. Note that, when adding multiple copies, the same corner should be used to position the graphic elements in the region.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

**Related Action**

- [Copy or cut objects to clipboard](#) on page 131
- [Add copied graphics](#) on page 76

## 5.14. R

### 5.14.1. Rasterize page content, keeping text

**Belongs to**

- **Category:** General
- **Type:** Changes

**What it does**

Allows you to rasterize complex graphics in PDF, for example to reduce the rendering complexity for a file for viewing on the iPad.

You can set the resolution of the generated bitmap (ppi), the preferred compression (JPEG, JPEG 2000, ZIP, None), the required quality (maximum, high...), and decide whether or not to keep line art unchanged.

New since PitStop 13 update 2 is the option to turn off anti-aliasing. This is useful to avoid thin white lines that may appear when rasterizing images.

5.14.2. Rasterize selection

Belongs to

- **Category:** General
- **Type:** Changes
- **Since Version:** 2019

What it does

Allows you to rasterize selected content.

Rasterizing objects means converting them to an image. This is typically done to reduce the complexity of a file to speed up processing.

Note that it may not be possible to convert multiple objects to one image: PitStop tries to create as few images as possible without changing how the file looks. To achieve this, it takes into account layers, color space, position of the objects etc. For example, rasterizing two objects with two different color spaces, will result in two images; objects on different layers will result in different images, and objects that do not overlap will only become one image if no other objects are inbetween (because this would change how the file looks).

Note that this functionality is also integrated in PitStop Pro (accessible through the menu bar (**PitStop Pro > Object > Rasterize selection**) or the context menu of a selection).

Options

By default, rasterizing does not affect the way the objects look. However, in some cases it may be acceptable to have a slightly different look; in that case you may enable (some of) the advanced options (for example: conversion to a different color space). These options are marked with a warning icon to indicate that using them may change the appearance of the file.

| Option                                   | Choices                                                                                                                                                                                                                                                                                                                             |
|------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Resolution (ppi) of the generated bitmap | <div>Enter the value of your choice.</div> <div> <b>Note:</b> Do not misuse this Action to change the resolution of an image; the result will be far better when using a dedicated Action like <a href="#">Resample image</a> on page 147.</div> |
| Compression                              | <div>Choices are:</div> <ul style="list-style-type: none"><li>• JPEG</li><li>• JPEG 2000</li><li>• ZIP</li><li>• None</li></ul>                                                                                                                                                                                                     |
| Quality                                  | <div>Choices are:</div> <ul style="list-style-type: none"><li>• Minimum</li><li>• Low</li></ul>                                                                                                                                                                                                                                     |

| Option                                                | Choices                                                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                       | <ul style="list-style-type: none"> <li>• Medium</li> <li>• High</li> <li>• Maximum</li> </ul>                                                                                                                                                                                                                                                                                                                          |
| Use anti-aliasing                                     | <p>Select or clear the checkbox.</p> <p>Turning off anti-aliasing may be useful to avoid thin white lines that may appear when rasterizing images.</p>                                                                                                                                                                                                                                                                 |
| Convert new resulting image(s) to indexed color space | Select or clear the checkbox.                                                                                                                                                                                                                                                                                                                                                                                          |
| Blend to                                              | <p>This option allows specifying a color space conversion on the selected objects, which may slightly change the appearance of the document. Choices are:</p> <ul style="list-style-type: none"> <li>• Page blending space</li> <li>• Gray</li> <li>• RGB</li> <li>• CMYK</li> </ul>                                                                                                                                   |
| Ignore blend and overprint restrictions               | <p>Select or clear the checkbox.</p> <p>Normally, overprint and blend spaces are respected when creating a single, merged image. However, if this is not possible (because it might change the appearance), an error will be reported. In that case, you may decide to ignore the blend and overprint restrictions, especially if they do not offer much added value.</p>                                              |
| Ignore original layer structure                       | <p>Select or clear the checkbox.</p> <p>Normally, the layer structure is preserved and images remain on the same layer as the original object. If you enable this option, the layer structure and the layer properties are ignored, meaning that hidden layers and layers that do not print are also included in the new image. The new image will not be on any layer. The layers themselves will not be removed.</p> |
| Force into single image                               | <p>Select or clear the checkbox.</p> <p>If selected, all the above options are enabled in order to force the selected objects into one single image.</p>                                                                                                                                                                                                                                                               |
| Force into separate images                            | <p>Select or clear the checkbox.</p> <p>If selected, the selected objects will be rasterized and saved as separate images. This</p>                                                                                                                                                                                                                                                                                    |

| Option                                                         | Choices                                                                                                                                                                                                         |
|----------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                | option is compatible with the <b>Blend to (color space)</b> option.                                                                                                                                             |
| Keep the original content and place the new resulting image(s) | Choices are: <ul style="list-style-type: none"> <li>• at the front of the page</li> <li>• at the back of the page</li> <li>• in front of the original content</li> <li>• behind the original content</li> </ul> |

### 5.14.3. Release mask

---

***Belongs to***

- **Category:** Prepress
- **Type:** Changes

***What it does***

Removes a selected mask.

In PitStop masks refer to clipping paths, i.e. objects (line art or text) of which the shape (partly) masks other artwork. Only areas inside the clipping objects are visible. This Action allows you to remove the mask, so that the different objects become visible again.

***Related Actions***

[Make mask](#) on page 270

### 5.14.4. Remap all PANTONE library colors

---

***Belongs to***

- **Category:** Color
- **Type:** Changes
- **Since version:** 2018

***What it does***

Remaps all colors to the PANTONE library of your choice, changing not only the suffix, but also the alternate color space to a different PANTONE definition (CMYK to Lab).

Choices are for example PANTONE+CMYK coated, PANTONE+CMYK uncoated, PANTONE+Color Bridge Coated, ...

This Action is useful to resolve issues with naming conventions.

***Related Actions***

- [Check spot color by PANTONE library](#) on page 314
- [Remap PANTONE library colors](#) on page 115

- [Normalize PANTONE library names](#) on page 111

### 5.14.5. Remap alternate color space to CMYK

---

#### ***Belongs to***

- **Category:** Color
- **Type:** Changes

#### ***What it does***

Remaps the alternate color spaces of the chosen spot colors to the preferred CMYK values.

#### ***How to proceed***

1. To add the spot colors of which you want to remap the alternate color space, do one of the following:
  - To select the desired spot color from the list of spot colors (Spot color picker)
    1. Click .
    2. Select the preferred spot color and click **OK**. The selected color is shown in the table, with the corresponding CMYK values.
  - To define a new spot color
    1. Click the **Add New Color** button.
    2. In the table, in the first column (Name), replace "Color name" with the name of the new spot color.
  - To select the desired spot color from the Spot library picker
    1. Click the **Add Colors** button.
    2. Select the preferred spot color and click **OK**. The selected color is shown in the table, with the corresponding CMYK values.
2. Add or change the CMYK values as required.
3. To remove colors from the table
  - Use the **Remove All** button, or
  - Select a color and click  to remove only the selected color.

### 5.14.6. Remap color

---

#### ***Belongs to***

- **Category:** Color
- **Type:** Changes

#### ***What it does***

Remap color is a complex but powerful Action that allows the remapping of colors from one color space to another.

For each color in the document you can specify whether or not you want to map it to another color (by means of "remapping rules"), and whether or not the overprint settings should change.

**Note:**

- Use the **Analyze page** or **Analyze document** buttons to get an overview of the colors in the document being processed.
- To change a remapping rule, click **Change** and make the required changes; to add a new one, click **Add**.
- Keep in mind that the order of the rules is important. You can change the order by selecting a rule and clicking **Up** or **Down**. The rules are evaluated from top to bottom. Every matching rule is executed, until a matching rule is found that is set to Keep for both To and Overprint. In that case, no further rules are evaluated (see also example 2 below).
- You can remap colors, color spaces, color ranges and channels.
- This Action works on text, line art, shadings, and stencil masks. It also works on images if you remap a color *space*, but not if you remap a color or a color range (as an image typically consists of a variety of colors).

**New as of PitStop 2022**

When mapping Device Gray to Device CMYK, you can now disable color management by selecting the **Force gray to keep same intensity** checkbox. That way, the gray value will only be mapped to the black component of the CMYK color space. In other words, the Gray brightness becomes equivalent K screen value.

Example: 30% gray will be remapped to 70% K, instead of a mix of C, M, Y and K.

**Example 1**

Suppose you have a CMYK PDF that you want to print in a single spot color, MySpot.cv.

**To remap all the colors to this spot:**

1. Under Attributes for Remap color, select the row that mentions **All other** and click **Change**.
2. In the **Color Remap Rule** popup, under **To:**, select **Color**.
3. Select the repository color MySpot.cv. You should have specified this color earlier in PitStop.
4. Select the desired overprint setting:
  - **Keep** the overprint settings as they are, do not change.
  - Enable overprint: **On**
  - Disable overprint: **Off**
5. Click **OK**.

To remap everything except, for example, 100% black text and objects to the selected target color MySpot.cv, you need a slightly more elaborated action:

1. Click **Add**.
2. Under **Remap**, select **Color** and **Device CMYK**.
3. Set the values to: C 0% M 0% Y 0% K 100%.
4. Under **To:**, select **Keep**.

5. Select the desired overprint setting.
6. Click **OK**.
7. Select **Add**.
8. In the **Color Remap Rule** popup, under **Remap**, select **Device CMYK**.
9. Under **To:**, select **Color**.
10. Select the repository color MySpot.cv. You should have specified this color earlier in PitStop.
11. Click **OK**.

The above Actions must be performed in the correct order. Under **Attributes for Remap color**, you should have three lines:


- The rule for "keep 100% Black" at the top
- Then the rule for "remap to MySpot.cv"
- "All other" at the bottom

### Example 2

Suppose your document contains a rectangle in CMYK (100K).

When running the below Action, the rectangle won't be remapped: it will remain 100K, because of the first rule (= keep the color space). As a consequence, the other rules won't be checked anymore.

If the first rule would be removed (or placed at the bottom), the color of the rectangle would be remapped from 100K to 100C.

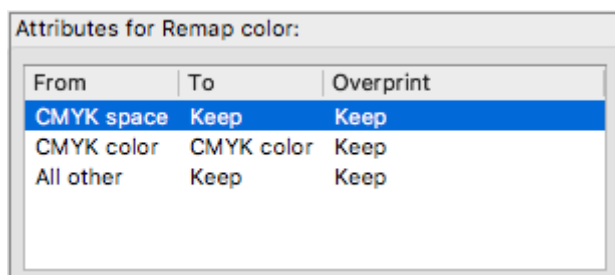

## 5.14.7. Remap PANTONE library colors


### Belongs to

- **Category:** Color
- **Type:** Changes
- **Since version:** 2018

### What it does

Remaps colors in a PANTONE Library, switching from coated to uncoated, or from CMYK to Lab, and vice versa.



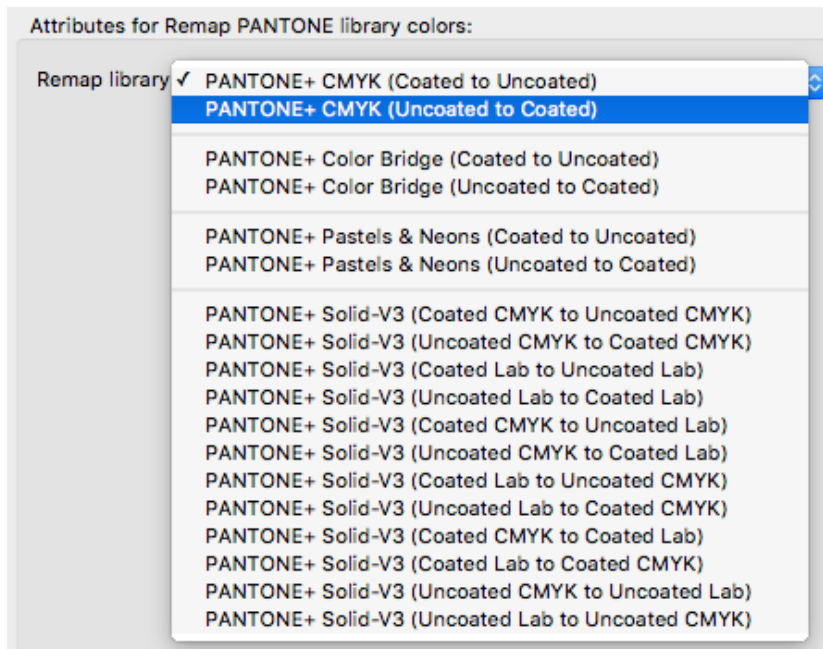

#### Related Actions

- [Check spot color by PANTONE library](#) on page 314
- [Remap all PANTONE library colors](#) on page 112
- [Normalize PANTONE library names](#) on page 111

## 5.14.8. Remap spot color

#### Belongs to

- **Category:** Color
- **Type:** Changes

#### What it does

Allows you to remap all spot colors in a document, or one particular spot color to:

- Gray
- The color's CMYK equivalent
- A custom CMYK equivalent
- Another spot color

You can apply the Action to either the fill or stroke color, or to both.



#### Note:

- From version 12 update 2 onwards, you can use regular expressions to define the color that should be remapped.
- From version 2021 onwards, you can use variables to define the CMYK values.

### 5.14.9. Remove action dictionaries

---

***Belongs to***

- **Category:** Metadata
- **Type:** Changes

***What it does***

Removes action dictionaries ("actions") from a PDF.

***About action dictionaries***

Action dictionaries are actions that are executed when you click a bookmark or a link, hover over an annotation, open a file ... There are several types of actions, e.g. a music track can be played, a specific page or website can be opened ...

You may want to remove these actions, as they are not allowed in a PDF/X file. The Remove action dictionaries Action will only remove the **action**; the object (the bookmark, annotation) the actions are linked to will not be removed. For example, if you remove the action from a bookmark, the bookmark is still visible, but not clickable anymore.

***Related Actions***

[Check for action dictionaries](#) on page 356

### 5.14.10. Remove additional actions

---

***Belongs to***

- **Category:** Metadata
- **Type:** Changes
- **Since:** 2022

***What it does***

Removes additional action entries from Root, Page, Widget and Field dictionaries.

This is a fix for PDF/X-6, as PDF/X-6 does not support additional actions.

### 5.14.11. Remove alternate images

---

***Belongs to***

- **Category:** Image
- **Type:** Changes

***What it does***

Removes alternate images from a PDF.

If you are working with PDFs that contain very high resolution images and render slowly on screen, you can speed up rendering by adding alternate images and then clicking the PitStop **Speed Up Image Display** button (available in the Enfocus View Modes toolbar (Acrobat 8 and 9) or the PitStop View Panel (Acrobat X and XI)).

As these alternate images are not necessary for print, you may use this Action to remove them and only keep one version. You have three options:

- **Default for printing** only preserves the images that are marked "default for printing" (recommended if you know that the alternate images have been correctly marked for printing)
- **Lowest resolution** only preserves the version with the lowest resolution, regardless of the printing setting (best for print production)
- **Highest resolution** only preserves the version with the highest resolution, regardless of the printing setting (best for on-screen viewing)

#### ***Related Actions***

- [Check for alternate images](#) on page 336
- [Select by alternate images](#) on page 448
- [Add alternate images](#) on page 141

## 5.14.12. Remove alternate presentations

---

#### ***Belongs to***

- **Category:** Document
- **Type:** Changes
- **Since:** 2022

#### ***What it does***

Removes the AlternatePresentations entry from the name dictionary of the selected document.

This is a fix for PDF/X-6, as PDF/X-6 does not allow alternate presentations.

## 5.14.13. Remove alternative blend modes

---

#### ***Belongs to***

- **Category:** PDF 2.0, Prepress, Remove
- **Type:** Changes
- **New since:** PitStop 2022

#### ***What it does***

Removes alternative blend modes in case of multiple blend modes, because using multiple blend modes is deprecated in PDF 2.0. Only the first blend mode is kept.


Note that you can check the blend modes using the PitStop Inspector (Transparency - General).

Blend modes determine how colors on different layers blend with each other. For more information about blend modes, visit the Adobe website (<http://www.adobe.com>) or refer to the Help or documentation of your design application (Adobe InDesign, QuarkXPress, ...)

### Example

In this example, three blend modes are selected: Multiply, Saturation and Colorburn.

Running this Action will remove Saturation and Colorburn and only keep the first blend mode in the list: Multiply.

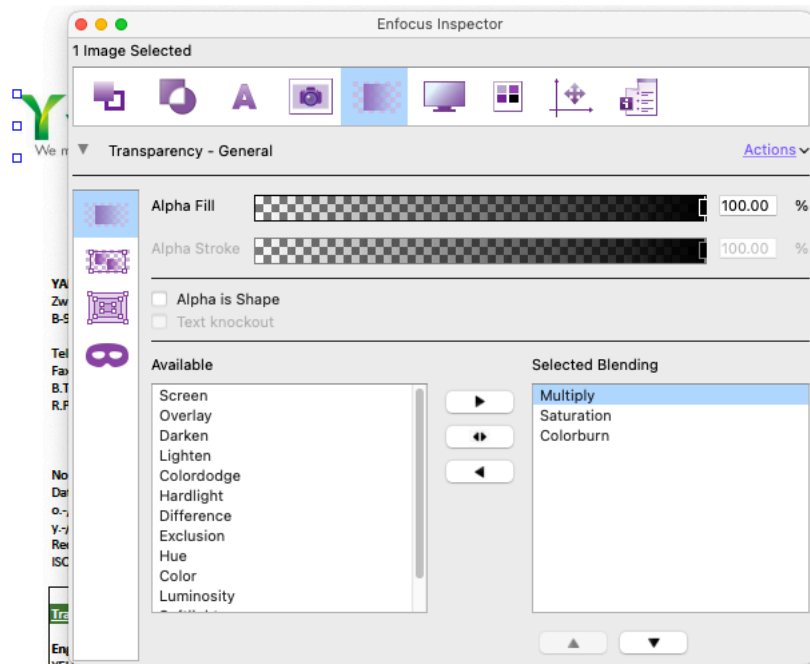

**Note:** As of PitStop 2022, it will no longer be possible to add multiple blend modes to a selected object using the Enfocus Inspector. However, if an object already has multiple blend modes, they will still be shown.

### Related Actions

- [Select by blend modes](#) on page 500
- [Check for non-standard blend modes](#) on page 403

## 5.14.14. Remove art box

### Belongs to

- **Category:** Page
- **Type:** Changes

### What it does

Removes the art box from a PDF.

The art box delimits the size a PDF will display in a page layout application like QuarkXPress. An art box is not essential to a PDF's structure and may be removed.

## 5.14.15. Remove associated files

---

### ***Belongs to***

- **Category:** General, PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2022

### ***What it does***

Removes associated files.

This fix can be used to make PDF files compliant with PDF 2.0.

### ***Related Actions***

- [Check for associated files](#) on page 329

## 5.14.16. Remove black generation

---

### ***Belongs to***

- **Category:** Prepress
- **Type:** Changes

### ***What it does***

Allows you to remove black generation settings.

Black generation is a custom setting that tries to replace CMYK-mixed blacks and grays with a greater percentage of black to save on colored ink and give a clearer black. As many printers prefer to set these settings themselves, they can use this Action to remove them from a PDF.

### ***Related Actions***

- [Check for custom black generation](#) on page 401

## 5.14.17. Remove black point compensation

---

### ***Belongs to***

- **Category:** PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2022

### ***What it does***

Removes objects that have a black point compensation attribute (regardless of its value).

The black point compensation option is a feature of Adobe Photoshop to address color conversion problems caused by differences between the darkest level of black achievable on one device and the darkest level of black achievable on another.

**Related Actions**

- [Check black point compensation](#) on page 381
- [Select black point compensation](#) on page 489
- [Set black point compensation](#) on page 235

## 5.14.18. Remove bleed box

---

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Removes the bleed box from a PDF.

The bleed box delimits the size the area beyond the final cut size of a document onto which ink may be printed in order to provide a bleed effect (which is where ink goes right to the edge of the page). A bleed box is not essential to a PDF's structure and may be removed.

## 5.14.19. Remove bookmarks

---

**Belongs to**

- **Category:** Metadata
- **Type:** Changes
- **Since version:** 24.03

**What it does**

Removes bookmarks from the PDF. You can remove:

- All bookmarks, or
- The bookmarks below a certain level, or
- Bookmarks that link to another document, or
- Bookmarks that link to to a removed page (= invalid bookmarks), or
- Bookmarks that contain neither a link nor an action (for example the title of a group of bookmarks). This last option was added in 24.07.

You can see in the Bookmarks panel in Acrobat that the bookmarks have been removed.



**Note:** Sometimes, empty dictionaries are present in the PDF structure (as metadata), without a visible bookmark in Acrobat's Bookmarks panel. Note that these empty dictionaries are also deleted by the Remove bookmarks Action.

---

**Important remark**

Note that clicking **Edit > Enfocus Undo Execute Action List** does NOT restore the bookmarks that were removed using this Action.

**Related Actions**

- [Check bookmarks](#)
- [Select pages with bookmarks](#)
- [Add bookmarks](#)

## 5.14.20. Remove CharSet or CIDSet

---

**Belongs to**

- **Category:** PDF 2.0, Text
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Removes the CharSet or CIDSet if present in the PDF.

If a font is subset, only the characters of the font that are actually used are embedded in the document. They are held in a CharSet (simple fonts) or a CIDSet (composite fonts).

CharSets and CIDSets are deprecated in PDF 2.0. That means that they are allowed, but not needed, so they can as well be removed.

**Related Actions**

[Check if a subset font contains a complete CharSet or CIDSet](#) on page 412

## 5.14.21. Remove Certified PDF workflow information

---

**Belongs to**

- **Category:** Remove
- **Type:** Changes

**What it does**

Removes Certified PDF workflow information from a PDF.

Certified PDF workflow information is extra information that is added to a PDF when it's processed as part of an Enfocus Certified PDF workflow. This information can include save states of previous versions, a PDF Profile and other metadata.

For more information and examples, refer to [the PitStop Pro Reference Guide](#) (Chapter: Working with Certified PDF documents).

**Related Actions**

See also [Check Certified PDF state](#) on page 320

## 5.14.22. Remove concealed segments from line art

---

### *Belongs to*

- **Category:** Remove
- **Type:** Changes
- **Since:** 25.07

### *What it does*

Removes segments from not-filled line art that are hidden by other items in the same selection.

This can be useful to remove overlapping paths.

Note that the removed parts are reported in the Enfocus Navigator.

### *Related Actions*

- [Select concealed objects](#) on page 493

## 5.14.23. Remove crop box

---

### *Belongs to*

- **Category:** Page
- **Type:** Changes

### *What it does*

Removes the crop box from a PDF.

The crop box is the PDF page box that defines the frame of a PDF as it is displayed on screen. If you remove this box, the PDF will display at Media Box size.

## 5.14.24. Remove custom transfer function

---

### *Belongs to*

- **Category:** Prepress
- **Type:** Changes

### *What it does*

Remove a custom transfer function applied to an object in a PDF.

Transfer functions are used for creative purposes, artistic effect and to correct the characteristics of a specific, maybe poorly calibrated, output device. For example, a file that is intended for output on a particular image setter may contain transfer functions that compensate for the dot gain inherent to that printer.





---

**Note:** Transfer functions are not allowed in PDF/X compliant documents.

---

#### **Related Actions**

- [Apply transfer function](#) on page 101
- [Remove custom transfer function](#) on page 271

## 5.14.25. Remove DPart metadata

---

#### **Belongs to**

- **Category:** PDF 2.0, Text
- **Type:** Changes
- **New since:** PitStop 2022

#### **What it does**

Removes DPart metadata from a PDF if present.

DPart (Document Part) metadata provides information about pages or parts of a PDF, allowing PDF processors to easily identify pages or page ranges that have particular properties.

This is a PDF 2.0 feature, hence this Action is typically used to check for PDF 2.0 features.

#### **Related Actions**

[Check DPart metadata](#) on page 383

## 5.14.26. Remove empty layers

---

#### **Belongs to**

- **Category:** Remove; Layers
- **Type:** Changes

#### **What it does**

Removes empty layers selected by another Action in the same Action List.

#### **Example**

The following Action List will remove **all** empty layers in the PDF:

```
Select layers <!-- Select layers on page 453 -->
Remove empty layers
```

To remove Layer1 and 2, if they are empty:

```
Select layers by name <!-- Select layers by name on page 454 - Choose "equals Layer
[12]" and "Use regular expressions" -->
```

Remove empty layers

### About PDF layers

Layered content usually comes from applications such as InDesign, AutoCAD or Visio. When converted to PDF, the layers are retained and can be viewed and navigated in Adobe Acrobat. However, if you print a PDF file that contains layers, only the content that is visible on-screen is printed. This may or may not be desired.

### "Conventional" layers versus PDF layers

**Layers in digital image editing** ("conventional" layers) are used to separate the different elements of an image. Each element is drawn on exactly one layer. The different layers are stacked on top of each other, and the order of the layers defines how the image looks like.

**Layers in PDF** have a different meaning. They are used to hide or show page content:

- Turning *on* a layer, all objects on this layer are shown on-screen.
- Turning *off* a layer, all objects on this layer are hidden, i.e. they become invisible.

As such, layers are also called "optional content groups": groups of objects that can be selectively viewed or hidden by the author of the document. Objects can belong to different layers, and the order of the layers is of no importance.

To work with layers in a PDF document in Adobe Acrobat, select **View > Show/Hide > Navigation Panes > Layers**.

For more information, refer to the Adobe Acrobat help.

### Related Actions

[Remove objects from layers](#) on page 155

## 5.14.27. Remove empty page

---

### Belongs to

- **Category:** Page
- **Type:** Changes

### What it does

Deletes any pages in a PDF document that contain no objects.

You can specify that elements outside of a specific page box should be ignored. This way you can make sure that pages containing only registration marks (which are graphic elements outside the visible or printable page area, i.e. the trim box) are considered empty.

You can also ignore visually empty pages (i.e. paper-white and invisible (fully transparent) objects).



**Tip:** When you've removed the empty pages, check whether the page numbering is still consistent. If necessary, you can correct the page numbering using [Add page number](#) on page 81. Also check other references to page numbers such as the table of contents, the index or cross-references. If these page numbers are incorrect, you will need to update your source files and create a new PDF document.

---

**Related Actions**

- [Check for empty pages](#) on page 370
- [Select empty pages](#) on page 482

## 5.14.28. Remove enforcements on viewer preferences

---

**Belongs to**

- **Category:** PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Removes the Enforced key if it is used in the Viewer preferences.

Enforcing the viewer preferences is a PDF 2.0 feature, hence this Action is typically used to remove PDF 2.0 features.

**Related Actions**

- [Check enforced viewer preferences](#) on page 384

## 5.14.29. Remove file specification from streams

---

**Belongs to**

- **Category:** General
- **Type:** Changes

**What it does**

Removes links to embedded or external files from PDF streams.

PDF streams are holders of large amounts of data, such as image pixels, page contents, embedded fonts, etc. In some instances, the streams do not contain the data inside the PDF but point to embedded or even external files. This Action will remove the link to these files.

**Related Actions**

- [Check file specification keys](#) on page 328
- [Check for file specifications](#) on page 330

## 5.14.30. Remove file specification keys

---

**Belongs to**

- **Category:** PDF 2.0
- **Type:** Changes

- **New since:** PitStop 2022

**What it does**

Removes PDF 2.0 specific file specification keys.

PDF streams are holders of large amounts of data, such as image pixels, page contents, embedded fonts, etc. In some instances, the streams do not contain the data inside the PDF but point to embedded or even external files. This Action will remove the PDF 2.0 specific file specification keys, such as Thumb, AFRelationship and EP.

**Related Actions**

[Check file specification keys](#) on page 328

## 5.14.31. Remove form fields

---

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Removes any PDF form fields from a document.

You may lose data if you do this.

**Related Actions**

- [Check form fields](#) on page 355
- [Flatten form fields](#) on page 188

## 5.14.32. Remove halftone

---

**Belongs to**

- **Category:** Prepress
- **Type:** Changes

**What it does**

Removes any custom halftone information from a document.

Halftoning is a method of printing shades using a single color ink. By varying the size or density of dots, the eye can see a shade somewhere between the solid color and the color of the background paper. Custom halftones are mostly used for screening frequency and angles.

Associated with every output device is a default halftone definition that is appropriate for that device. Only relatively sophisticated documents need to define their own halftones to achieve special effects. In general, when a PDF document provides its own halftone specifications, it sacrifices portability: they may lead to unpredictable printed output when the same document is sent to different printers. This is why they are generally undesirable.

**Related Actions**

[Check for custom halftone](#) on page 401

## 5.14.33. Remove halftone phase

---

**Belongs to**

- **Category:** Prepress
- **Type:** Changes

**What it does**

Removes all halftone phases from a PDF document.

A halftone phase is a shift in the alignment of halftone and pattern cells in device space, to compensate for window system operations that involve scrolling. It is no longer used, but may still be found in documents containing artwork from older source applications.



**Note:** It may be interesting to remove halftone phases, because halftone curves, when defined, overrule general transfer curves.

**Related Actions**

[Check halftone phase](#) on page 400

## 5.14.34. Remove ICC tag

---

**Belongs to**

- **Category:** Color
- **Type:** Changes

**What it does**

Removes the ICC tags either from the selected objects or from the whole document (if no selection is defined). You can remove the ICC tags from fill and/or stroke colors as required.

**About ICC tagging**

Every input and output device reproduces color and grayscales in a slightly different way. As a result, the colors you see in a PDF file on your screen may not match the colors produced when you print the PDF to an output device.

ICC color profiles are used to avoid this. An ICC color profile is a mathematical description of the color space used by a specific device. In other words, the color profile describes how the colors produced by the device relate to the reference CIE LAB color space (a device-independent color space). As such, they allow you to set up a workflow in which all devices use color management to compensate for their individual color reproduction characteristics, based on the information in the ICC profiles.

In some workflows, e.g. without color management, ICC profiles are unwanted and may cause inconsistent color reproduction. In that case, you can use this Action to remove the ICC tags.

**Related Actions**

- [Check ICC tagging](#) on page 305
- [Select by tagged ICC Profile](#) on page 429
- [Tag object with an ICC profile](#) on page 119
- [Check if ICC profile differs from ICC profile in PDF/X Output Intent](#) on page 307
- [Select objects of which ICC profile is equal to ICC profile in PDF/X output](#) on page 433
- [Check ICC profile version](#) on page 306

## 5.14.35. Remove invisible objects without fill and stroke

---

**Belongs to**

- **Category:** Remove
- **Type:** Changes

**What it does**

Removes objects that have no fill or stroke color associated with them.

Designers sometimes leave such objects in a document rather than deleting them.



**Note:** This Action only works on vector art (paths) and text without fill and stroke.

**Related Actions**

- [Check for invisible objects without fill and stroke](#) on page 330
- [Select invisible objects without fill and stroke](#) on page 446

## 5.14.36. Remove Javascript

---

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Removes JavaScript code (which might perform unwanted actions) from a PDF.

This language is often used to add interactive functionality to PDF files. However, in a print production environment, these scripts serve no purpose and may result in increased file sizes.

**Related Actions**

[Check for Javascript](#) on page 357

## 5.14.37. Remove marked content

---

### ***Belongs to***

- **Category:** Metadata
- **Type:** Changes

### ***What it does***

Strips PDF generator defined content from a PDF.

Marked content is content tagged with special messages so that the application that opens it can read it in a particular way.

### ***Related Actions***

[Check marked content](#) on page 362

## 5.14.38. Remove metadata

---

### ***Belongs to***

- **Category:** Metadata
- **Type:** Changes

### ***What it does***

Removes the selected metadata from a PDF. This is typically done to reduce the file size.

You can remove the following types of metadata:

- Annotations
- Thumbnails
- Article threads
- Page labels
- Acrobat capture info
- Bookmarks
- Structural information (= removes all tags, including Tagged PDF tags)
- PieceInfo
- Job ticket
- Named destinations (includes annotations and bookmarks)
- Metadata streams (to reduce the size of the file) - new option since PitStop 13 update 2



**Note:** In PitStop 2019, the 'Remove structural information' checkbox has been split up into two separate checkboxes: 'Structural information' and 'PieceInfo'. Action Lists from

earlier versions with 'Remove structural information' enabled, will have both checkboxes selected.

---

## 5.14.39. Remove name from XObjects

---

### ***Belongs to***

- **Category:** Metadata, PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2022

### ***What it does***

Removes Name from form XObject and image XObject stream dictionaries. This is typically done to fix deprecated PDF 1.x features.

## 5.14.40. Remove non-PDF/X compliant halftone

---

### ***Belongs to***

- **Category:** Prepress
- **Type:** Changes

### ***What it does***

Removes any instances of halftones that are not compliant with the PDF/X specification.

Halftoning is a method of printing shades using a single color ink. By varying the size or density of dots, the eye can see a shade somewhere between the solid color and the color of the background paper. Some of these halftones are not allowed according to the PDF/X specification, which is why you might want to remove them.

### ***Related Actions***

[Check for non-PDF/X compliant halftone](#) on page 403

## 5.14.41. Remove object compression

---

### ***Belongs to***

- **Category:** Remove
- **Type:** Changes

### ***What it does***

Removes the object compression from a PDF.

### ***About object compression***

In a PDF, objects have content streams that define (a part of) the object. These content streams can be compressed in order to create smaller files, so this is mostly used if a PDF is to be put



on a website. As older RIPS may have problems with this compression, this Action allows you to remove this compression.

#### **Related Actions**

- [Check object compression](#) on page 326
- [Check optimal compression](#) on page 334

## 5.14.42. Remove objects from layers

---

#### **Belongs to**

- **Category:** Layers
- **Type:** Changes

#### **What it does**

Allows you to remove objects from the selected layers in a PDF document.

#### **About PDF layers**

Layered content usually comes from applications such as InDesign, AutoCAD or Visio. When converted to PDF, the layers are retained and can be viewed and navigated in Adobe Acrobat. However, if you print a PDF file that contains layers, only the content that is visible on-screen is printed. This may or may not be desired.

#### **"Conventional" layers versus PDF layers**

**Layers in digital image editing** ("conventional" layers) are used to separate the different elements of an image. Each element is drawn on exactly one layer. The different layers are stacked on top of each other, and the order of the layers defines how the image looks like.

**Layers in PDF** have a different meaning. They are used to hide or show page content:

- Turning *on* a layer, all objects on this layer are shown on-screen.
- Turning *off* a layer, all objects on this layer are hidden, i.e. they become invisible.

As such, layers are also called "optional content groups": groups of objects that can be selectively viewed or hidden by the author of the document. Objects can belong to different layers, and the order of the layers is of no importance.

To work with layers in a PDF document in Adobe Acrobat, select **View > Show/Hide > Navigation Panes > Layers**.

For more information, refer to the Adobe Acrobat help.

#### **How to proceed**

1. Add a first "select" Action to the Action List, to select the **layer** from which you want to remove objects.
2. Add a second "select" Action to the Action List, to select the **objects** to be removed.



**Note:** You don't have to specify operators in between the two "select" Actions. However, you can also use **combined** "select" Actions to specify the layer or the objects concerned (see example 2).

3. Add **Remove objects from layers**.

**Examples**

**Example 1:** The following Action List will remove all objects from Layer1:

```
Select layers by name <!-- Select layers by name on page 454 and set the layer name to Layer1 -->
Select all <!-- Select all on page 477 -->
Remove objects from layers
```

**Example 2:** The following Action List will remove XObjects and annotations from LayerA and LayerB:

```
Select layers by name <!-- Select layers by name on page 454 and set the layer name to equals [AB]; enable "Use regular expressions" -->
Select XObjects <!-- Select XObjects on page 448 -->
Select annotations <!-- Select annotations on page 463 -->
OR
Remove objects from layers
```

**Related Actions**

- [Add objects to layer with name](#) on page 148
- [Add objects to layer](#) on page 149

## 5.14.43. Remove OPI

---

**Belongs to**

- **Category:** Image
- **Type:** Changes

**What it does**

Removes OPI (Open Prepress Interface) information from a PDF.

OPI images are treated special as they are assumed to be preview images. They will for example not be preflighted as other images would be. If you don't use OPI in your workflow, run this Action to remove irrelevant OPI information and get correct editing and preflighting of documents.

**About OPI**

OPI (Open Prepress Interfaces) replaces high resolution images with "preview" images; low resolution substitutes which are stored in the PDF, together with the path to the high resolution images. This facilitates data storage and data transfer of PDFs with a large number of images.

**Related Actions**

- [Check OPI path](#) on page 340
- [Check OPI type](#) on page 340
- [Gather OPI information](#) on page 418
- [Change OPI info](#) on page 144
- [Select images with OPI info](#) on page 450

## 5.14.44. Remove Output Intents

---

### *Belongs to*

- **Category:** PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2022

### *What it does*

Removes the Output Intents from the document and/or the individual pages.

An Output Intent describes the color characteristics of the output devices on which the PDF document might be rendered. The Output Intent may be defined on document and/or page level.

### *Related Actions*

- [Check if Output Intents are used](#) on page 385

## 5.14.45. Remove pages

---

### *Belongs to*

- **Application:** PitStop Pro
- **Category:** Remove
- **Type:** Changes
- **Since Version:** 2017

### *What it does*

Deletes pages.

This Action has no attributes of its own; it needs to be preceded by a [Select pages](#) Action to define the pages you wish to remove.

### *Example*

The following Action List will delete all even pages from the PDF:

```
Select pages (attributes: All pages - even)
Remove pages
```

### *Related Actions*

- [Select pages](#) on page 484

## 5.14.46. Remove page scaling factor

---

### *Belongs to*

- **Category:** Page; Position and size
- **Type:** Changes

**What it does**

Removes the page scaling factor and reverts the page to its original size.

A page of 10 by 10 inches and a page scaling factor 2 will be displayed and printed as a page of 20 by 20 inches. By removing the page scaling factor, the page size will be at 10 by 10 inches again.

Page scaling has been introduced in PDF 1.6. If the page scaling factor is not removed or applied, the page size can only be displayed correctly in Acrobat 7 or higher.

**Related Actions**

- [Check if page scaling factor is used](#) on page 374
- [Apply page scaling factor](#) on page 201

## 5.14.47. Remove PDF/A version key

---

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

This Action removes the PDF/A version key from the PDF file.

**Related Actions**

- [Change PDF/A version key](#) on page 183
- [Remove PDF/A version key](#) on page 193

## 5.14.48. Remove PDF/X version key

---

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

This Action removes the PDF/X version key from the PDF file.

**Related Actions**

- [Change PDF/X version key](#) on page 184
- [Check PDF/X version key](#) on page 363

## 5.14.49. Remove PostScript

---

**Belongs to**

- **Category:** General

- **Type:** Changes

**What it does**

Removes all fragments of embedded PostScript in a PDF document.

Embedded PostScript fragments do not show up in the screen preview, but could change the appearance of the printed document. They are generally undesirable in a print production environment.

**Related Actions**

See also

- [Check for embedded PostScript fragments](#) on page 329
- [Select embedded PostScript fragments](#) on page 444

## 5.14.50. Remove processing steps - ISO 19593-1

---

**Belongs to**

- **Application:** PitStop Pro
- **Category:** Packaging
- **Type:** Changes
- **Since Version:** 13 update 2

**What it does**

Allows you to remove processing steps metadata from the layers of a PDF. Processing steps metadata is defined by ISO standard 19593-1. For more information, refer to [the website of ISO \(International Organization for Standardization\)](#).

**Related Actions**

- [Select layers by processing steps - ISO 19593-1](#) on page 479
- [Check processing steps - ISO 19593-1](#) on page 369
- [Change layer processing steps - ISO 19593-1](#) on page 197

## 5.14.51. Remove rendering intent

---

**Belongs to**

- **Category:** Color; Prepress
- **Type:** Changes

**What it does**

Strips rendering intents from color managed objects in a PDF.

**About rendering intents**

A rendering intent is a remapping method, allowing to remap colors so that they best match the intended use. 'Remapping' means that colors from one output device's color space are mapped to the color space of another device.

For more information and examples, refer to [the PitStop Pro Reference Guide on the Enfocus website](#) (See Chapter "Rendering intents to remap colors").

For more information and examples, refer to the PitStop Pro Reference Guide(See Chapter "Rendering intents to remap colors").

**Related Actions**

- [Select by rendering intent](#) on page 427
- [Check rendering intent](#) on page 312
- [Change rendering intent](#) on page 104

## 5.14.52. Remove selection

---

**Belongs to**

- **Category:** Remove
- **Type:** Changes

**What it does**

Removes any currently selected object in a PDF.



**Note:** If forms are selected (for example with the "Select forms" Action), they are not removed, unless they are empty.

---

## 5.14.53. Remove specific Output Intent keys

---

**Belongs to**

- **Category:** PDF 2.0
- **Type:** Changes
- **New since:** PitStop 2022

**What it does**

Removes either the Mixing Hints or Spectral Data key, or both if they are available in the Output Intents (on page or document level) of the PDF.

These keys are PDF 2.0 specific, hence this Action is typically used to removed PDF 2.0 features.

**Related Actions**

- [Check Missing Hints in Output Intent](#)

- [Check Spectral Data in Output Intent](#)

## 5.14.54. Remove sub-page navigation support

---

### ***Belongs to***

- **Category:** Page
- **Type:** Changes
- **Since Version:** 2022

### ***What it does***

Removes the PresSteps entry from a selected page's dictionary.

This is a fix for PDF/X-6, as PDF/X-6 does not support sub-page navigation.

## 5.14.55. Remove top of selection stack

---

### ***Belongs to***

- **Category:** Operator
- **Type:** Selections

### ***What it does***

**Deletes** the top of the current Action list stack. It's typically combined with the [Duplicate top of selection stack](#) operator.

### ***For internal use only***

Both "Remove top of selection stack" and [Duplicate top of selection stack](#) are only used internally by PitStop.

When running a Preflight Profile, PitStop turns this Profile into an Action List; the more checks and fixes there are in the Preflight Profile, the longer and more elaborate its Action List representation. In order to avoid having to perform complex selections multiple times, PitStop optimizes the internal Action List by duplicating these selections when they are needed multiple times.

## 5.14.56. Remove transparency

---

### ***Belongs to***

- **Category:** Remove; Prepress
- **Type:** Changes

### ***What it does***

Removes transparency from the objects in a PDF file.

You can remove transparency from **all** objects in the PDF, or from objects for which:

- Fill is set to overprint, and/or

- Stroke is set to overprint, and/or
- Spot colors are used.



**Note:** As of PitStop 2022, this Action also removes transparent annotations.

### **About transparency in PDF**

Transparency can cause some problems if you view documents in Adobe Acrobat 4.0 or earlier: transparent objects can be rendered incorrectly.

A transparent layer can also cause problems when you transpose the PostScript code of your PDF document to the halftone information of your printer (the 'ripping').

A typical example is saving graphics with transparent elements as PDF compatible with Acrobat 5.0 in Adobe Illustrator 9.0 or Adobe InDesign 2.0. In Adobe Acrobat 4.0, transparent objects in your PDF document are displayed and printed opaque, but transparency is not removed. If you open the same PDF document in Adobe Acrobat 5.x, the transparent objects will look (and print) fine again.

It can be useful to make the distinction between spot colors and CMYK colors when checking the transparency settings in your documents, because different rules govern the overprinting of spot colors.

### **Related Actions**

- [Check for transparent objects](#) on page 399
- [Select pages with transparent objects](#) on page 486
- [Select transparent objects](#) on page 504
- [Change transparency](#) on page 265

## **5.14.57. Remove trim box**

### **Belongs to**

- **Category:** Page
- **Type:** Changes

### **What it does**

Removes the trim box from a PDF document. The trim box defines the final cut size of a printed PDF document.

## **5.14.58. Remove undercolor removal**

### **Belongs to**

- **Category:** Prepress
- **Type:** Changes

### **What it does**

Removes any custom undercolor removal information from a PDF.



Undercolor removal is the process of removing large percentages of cyan (C), magenta (M), and yellow (Y) ink prior to printing, and replacing them with black (K) ink, in order to achieve a clearer black color in print, and to save on color inks.

**Related Actions**

[Check for custom undercolor removal](#) on page 402

## 5.14.59. Remove unused destinations

---

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Destinations identify locations or views in a PDF you can point to using bookmarks or links. As destinations increase the file size, you may want to remove the destinations that are not used, to reduce the file size.

See also: [Check unused destinations](#) on page 366

## 5.14.60. Rename layer

---

**Belongs to**

- **Category:** Layers
- **Type:** Changes
- **Since version:** 12 update 3

**What it does**


Allows you to change the name of the layers in a document.



**Note:** You can also use regular expressions to define the source and target layer name.

**Example**


Suppose you want to rename the layers that are visible in your document, in this example Layer1 and Layer3 (but not Layer2, Layer12 or any other layer).

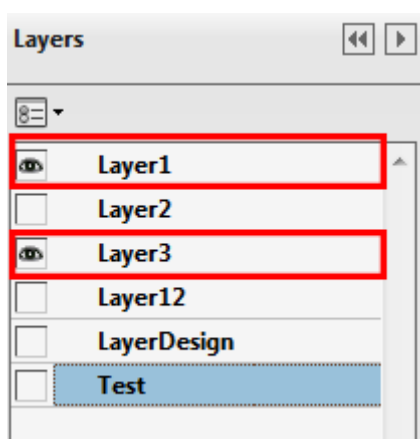

Proceed as follows:

1. Select the **Rename Layer** Action.
2. Under Attributes for Rename layer, configure the source and target layer as follows:
  - **From:** Layer([13])
  - **To:** VisibleLayer\$1
3. Select the **Use regular expessions** checkbox.
4. Click **OK**.
5. Run the Action List.

**Result:**

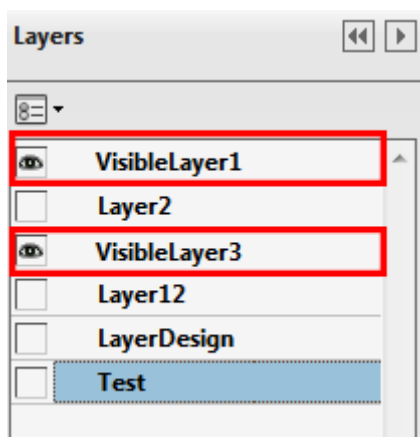

## 5.14.61. Rename spot color

*Belongs to*

- **Category:** Color
- **Type:** Changes

**What it does**

Allows you to change the name of spot colors in a document.



**Note:** You can use regular expressions to define the source and target color. This is useful to rename variants of the same color, e.g. to rename "Varnish0", "Varnish1", "Varnish23" (i.e. "Varnish" followed by one or more digits) to "Varnish" (without any digits). To do so, build a rule that renames "Varnish([0-9])+" to "Varnish".

**How to proceed**

In the attributes of the Rename spot color Action, do the following:

1. In the left part (under **From**), enter the name of the spot color that should be renamed.

**Note:**

- You can type the name (and optionally use regular expressions), select the color through the spot color database, or you can grab the color from a selection (using the PitStop selection tool). You can also use variables.
- If applicable, select the **Use regular expressions** checkbox.

2. In the right part (under **To**), enter a new new name for the selected spot color.
3. To create another rule (i.e. to rename another spot color), click the + button and repeat steps 2 and 3.

**Important:**

- The rules are executed one after the other.
- A blank From field means that all colors that are not renamed by previous rules in this Action will be renamed by this rule. For example, if there is only one rule and the From field is empty, all selected spot colors will be renamed according to that rule. In the example below, it means that all spot colors will get the name 'SPOT'. Be careful when using this!

**Example**

The first rule will rename *Pantone* to *Separation* in spot color names like Pantone 101 UP (which will then become Separation 101 UP).

The second rule will rename all other spot colors to *OtherSpotColor*.

### 5.14.62. Reorder pages

**Belongs to**

- **Category:** Page; Document
- **Type:** Changes
- **Since Version:** 2017

**What it does**

Allows you to change the order of the pages in a document.

There are three preconfigured options:

- Reverse pages (first page becomes last etc)
- Swap first and last page
- Swap even and odd pages

When you select one of these options, you can immediately see the new page order in the Preview section at the bottom of the pane.

Apart from that, you can configure for each individual page what the new page number should be. To do so, you should select 'Custom' from the list of options and enter the page numbers in the preferred order (one by one, or using the notation explained in the GUI).



**Note:**

- Any 'forgotten' pages (not listed in the custom order), will be added at the end.
- If a page is by accident listed twice, the first occurrence counts.

By default, page labels are re-ordered together with the pages, unless you clear the **Move page labels** checkbox.

**Examples**

In the table below you can find some examples. Remember that you can enter any combination you want; you're warned about syntax errors and you can preview the page order for a document of up to 1000 pages.

| Notation                                              | Meaning                                                                                                                                         |
|-------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| One single page number<br>5                           | Put this page first, then add the other pages without changing the order.<br><b>5, 1, 2, 3, 4, 6, 7, 8, 9, 10</b>                               |
| R followed by one page number<br>R5                   | Put this page counting from the back first, then add the other pages without changing the page order.<br><b>6, 1, 2, 3, 4, 5, 7, 8, 9, 10</b>   |
| One single page number followed by three dots<br>5... | Put this page first, add the following pages till the end of the document, finally add the missing pages (all without changing the page order). |

| Notation                                                             | Meaning                                                                                                                                                                                                                      |
|----------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                      | 5, 6, 7, 8, 9, 10, <b>1, 2, 3, 4</b>                                                                                                                                                                                         |
| R number followed by three dots<br>R5...<br>R1...                    | Put this page counting from the back first, then put the following pages counting from the back of the document, finally add the other pages (7-10)<br>6, 5, 4, 3, 2, 1, <b>7, 8, 9, 10</b><br>10, 9, 8, 7, 6, 5, 4, 3, 2, 1 |
| (number, number) ...<br>(2,1)...<br>(6,5)...                         | Swap the pages in between the brackets and do the same for the rest of the document. Other pages are added at the end.<br>2, 1, 4, 3, 6, 5, 8, 7, 10, 9<br>6, 5, 8, 7, 10, 9, <b>1, 2, 3, 4</b>                              |
| R number (number-number) number (number, number)<br>R1 (3-6) 2 (8,7) | Put the last page first (10), then a page range (pages 3 to 6), then a particular page (2), then swap even and odd pages (swap 8 and 7), add leftover pages (1, 9).<br>10, 3, 4, 5, 6, 2, 8, 7, <b>1, 9</b>                  |

**Use case**

When receiving PDFs in spreads, after having split the pages and added marks and bleeds, page 1 (which is actually the back cover) should be moved to the last page. Using this Action, that's very easy.

**Remark**

Due to a refresh issue in Adobe Acrobat, sometimes the page order seems not to be changed after successfully running the Action. Saving and reopening the document may solve the issue.

## 5.14.63. Replace page content by bitmap

**Belongs to**

- **Category:** General
- **Type:** Changes

**What it does**

Converts the page content to a bitmap. You can choose the resolution of the generated bitmap (ppi), the compression method (JPEG, JPEG 2000, ZIP, none) and the quality level.

New since PitStop 13 update 2 is the option to turn off anti-aliasing. This is useful to avoid white lines in flattened PDF files.

Other options are:

- **Apply overprint** to take into account the overprint settings

- **Blend to ...** to specify a color space conversion, which may slightly change the appearance of the document. Choices are: the page blending space, Gray, RGB and CMYK.

## 5.14.64. Resample image

---

### *Belongs to*

- **Category:** Image
- **Type:** Changes

### *What it does*

Resamples, i.e. changes the resolution of the selected image(s).

### *How to proceed*

1. Select the preferred resampling or interpolation method:
  - **Average Resampling:** computes the average pixel color of the pixels in the sample area, and replaces the entire area with this average.
  - **Bicubic resampling:** calculates the values of the new dots on the basis of a weighted average of the pixels in the same area.
  - **Bicubic B-Spline resampling:** is a modified bicubic interpolation with more sharpening effects and is recommended for upsampling.
  - **Bilinear resampling:** uses weighted interpolation between 4 pixels in the original image.



**Note:** Bicubic gives the best result for photographs (but takes the longest to compute).

2. Enter the preferred resolution, for example 72 ppi for screen viewing.
3. To only resample images with a resolution below a particular threshold, select the **Resample above ... ppi** checkbox and enter a value.

For example, if you enter 150 ppi, only images with a resolution above 150 ppi will be resampled.

## 5.14.65. Restore previous color management settings

---

### *Belongs to*

- **Category:** Color; General
- **Type:** Settings

### *What it does*

Allows you to revert to the previous color management settings (if you have changed them before, in the same Action List).

### *Related Actions*

[Save color management settings](#) on page 515

## 5.14.66. Restore selection

---

### *Belongs to*

- **Category:** Operators
- **Type:** Selections
- **Since version:** 13

### *What it does*

Restores a previously saved selection, so that it can be re-used in the Action List.

The selection must have been saved using the [Save selection](#) on page 476 Action; if this is the case, you will find it in the **Restore selection from list**.

If the selection is no longer available (for example because it has been removed from the Action List), you will get a warning: "Restoring unknown selection".

### *Example*

Suppose you have a document with both CMYK and RGB objects. The following Action List allows you to:

- Select all CMYK objects
- Save this selection (i.e. all CMYK objects in the PDF) and name it "CMYK objects"
- Convert all CMYK objects to RGB
- Select all objects in the document
- Apply a curve on all RGB objects
- Restore the original selection (i.e. all objects that were originally in CMYK)

```
Select by color space <!-- Select by color space on page 425 Select CMYK -->
Save selection <!-- Type "As CMYK objects" -->
Convert to RGB objects <!-- Convert color on page 106 -->
Select all <!-- Select all on page 477 -->
Apply RGB curve Select by color space on page 425
Restore selection <!-- From the list, select "CMYK objects" -->
```

### *Related Actions*

[Save selection](#) on page 476

## 5.14.67. Reverse path

---

### *Belongs to*

- **Category:** Line Art
- **Type:** Changes
- **New Since:** PitStop 2022

### *What it does*

Changes the direction of the starting and ending point of the selected path.

## 5.14.68. ROLL

---

### ***Belongs to***

- **Category:** Operators
- **Type:** Selections
- **Since version:** 13 update 2

### ***What it does***

Allows you to change the order of the selections in the stack.

You must set:

- The *number of selections* to be taken into account, for example "3" if you want to change the order of the 3 last selections preceding the ROLL operator.
- The *distance*, i.e. the number of positions to move the items in the stack. If distance is set to "1", all selections in the stack move up one position. The selection on top moves down to the bottom of the stack.

Just like the other operators, ROLL must be placed after the selections in the Action List. The affected selections will be highlighted with a green indicator. Refer to [Using operators in Action Lists](#) on page 40.

### ***For advanced use only***

This Action may be used in advanced and complex Action Lists by users who are familiar with the ROLL operator in PostScript (which has the same functionality).

### ***Example***

Suppose you have a document with text, line art and images.

The following Action List results in a stack with the text segments at the bottom and images at the top.

```
Select text segments
Select line art
Select images
```

With Roll added (number of selection set to 3 and distance to 1), images will move to the bottom of the stack, line art to the top and images will be inbetween.


```
Select text segments
Select line art
Select images
Roll                                <!-- Selection set to 3, distance is 1 -->
```



**Tip:** You can test this by adding Log selections to your Action List and checking the result in the Enfocus Navigator as shown in the screenshot below.

---



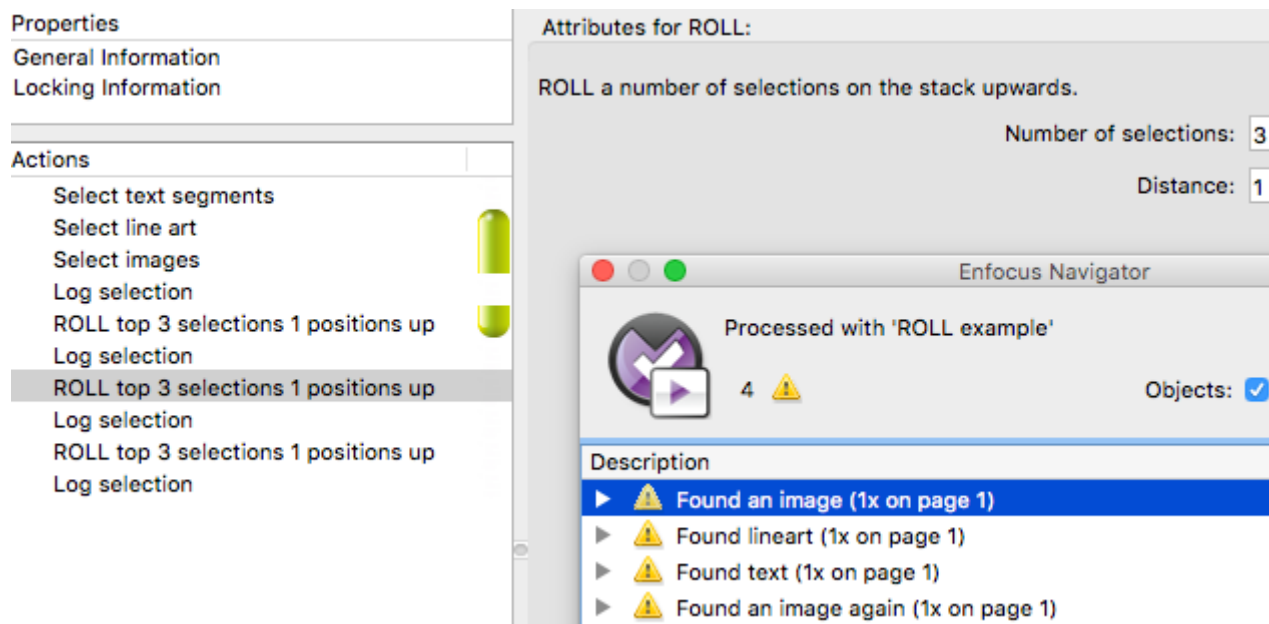

## 5.14.69. Rotate content

### ***Belongs to***

- **Category:** Page; Position/Size
- **Type:** Changes

### ***What it does***

Rotates the page content at a particular angle around a particular point.

You could for example rotate the page content at an angle of 90° relative to the center of the media box.

You can choose whether or not to take into account page rotation.

### ***Related Actions***

- [Check for rotated objects](#) on page 389
- [Rotate object](#) on page 247
- [Rotate objects as group](#) on page 247

## 5.14.70. Rotate object

### ***Belongs to***

- **Category:** Position/Size
- **Type:** Changes

**What it does**

Rotates an object at a certain amount of degrees around a particular point.

**Related Actions**

- [Check for rotated objects](#) on page 389
- [Rotate content](#) on page 219
- [Rotate objects as group](#) on page 247

## 5.14.71. Rotate objects as group

---

**Belongs to**

- **Category:** Position/Size
- **Type:** Changes

**What it does**

Rotates a selection of objects at a particular angle around a particular point.

You could for example rotate the selection around the center of the media box at an angle of 90 degrees.



**Note:** Rotating objects as a group means that all of the selected objects act as one large object during the rotation.

---

**How to proceed**

1. Select what specific place in the page box you want to use as the rotation point (center, lower left ...).
2. Specify the page box of your choice or choose "selection bounding box" or "visible area of selection". This last option is relevant if part of a selected image has been clipped away.
3. Define the rotation angle.
4. Select the **Use page rotation** checkbox as required.

**Related Actions**

- [Check for rotated objects](#) on page 389
- [Rotate content](#) on page 219
- [Rotate object](#) on page 247

## 5.14.72. Rotate page

---

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Allows you to set page rotation to -90, 0, 90 or 180 degrees (clockwise).

**Related Actions**

[Rotate content](#) on page 219

## 5.15. S

---

### 5.15.1. Save color management settings

---

**Belongs to**

- **Category:** Color; General
- **Type:** Settings

**What it does**

Allows you to save the current color management settings (changed in the Action List).

**Related Actions**

[Restore previous color management settings](#) on page 515

### 5.15.2. Save selection

---

**Belongs to**

- **Category:** Operators
- **Type:** Selections
- **Since version:** 13

**What it does**

Preserves the currently selected objects (line art, text, docs... = whatever is selectable in a PDF) for later use in the same Action List.

You should choose a name for your saved selection, for example "Save selection as: CMYK objects".

**Remark**

**This Action does not preserve the saved Actions, only the resulting selection.** For example, if you have selected all text and save this selection, you can use [Restore selection](#) on page 474 to re-use this text later on in the Action List. However, if you added text later (after saving the selection), the added text will not be included in the saved selection.

**Example**

Suppose you have a document with both CMYK and RGB objects. The following Action List allows you to:

- Select all CMYK objects
- Save this selection (i.e. all CMYK objects in the PDF) and name it "CMYK objects"

- Convert all CMYK objects to RGB
- Select all objects in the document
- Apply a curve on all RGB objects
- Restore the original selection (i.e. all objects that were originally in CMYK)

```
Select by color space <!-- Select by color space on page 425 Select CMYK -->
Save selection <!-- Type "As CMYK objects" -->
Convert to RGB objects <!-- Convert color on page 106 -->
Select all <!-- Select all on page 477 -->
Apply RGB curve Select by color space on page 425
Restore selection <!-- From the list, select "CMYK objects" -->
```

#### Related Actions

[Restore selection](#) on page 474

### 5.15.3. Scale page boxes

---

#### Belongs to

- **Category:** Page; Position and size
- **Type:** Changes

#### What it does

Allows you to scale all page boxes simultaneously.

Specify X and Y scaling percentages. You can anchor the page boxes at a certain corner in the PDF, for instance at the lower left corner of the media box. You can also choose whether or not to use the page rotation.



**Note:** If you want to scale the page boxes proportionally, you need to specify the same values for X and Y.

#### Related Actions

- [Scale page content to fit](#) on page 221
- [Scale to fit page size](#) on page 222
- [Scale page content](#) on page 220
- [Shrink page content to fit](#) on page 223

### 5.15.4. Scale page content

---

#### Belongs to

- **Category:** Page; Position/Size
- **Type:** Changes

#### What it does


Scales page content along the X and/or Y axis by a certain percentage.



**Note:** If you want to scale the page content proportionally, you need to specify the same values for X and Y.

### Example

Suppose you have an A4-size PDF document (210 x 297 mm). You want to keep the page size “as is”, but need to make the page content narrower. You also wish to move the page content to the upper right corner of the crop box.

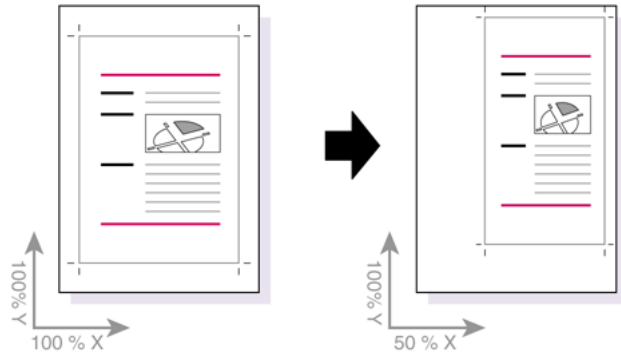

### How to proceed

1. Enter the preferred scaling percentage for the X and Y axis.
2. Do one of the following:
  - To define an anchor point, select **Anchored at**.
  - To define the target position of the page contents, select **Moving page content to**.
3. Define the anchor point or target position, for example (anchored at/moving to) the upper right of the crop box.

### Related Actions

- [Scale page content to fit](#) on page 221
- [Scale to fit page size](#) on page 222
- [Scale page boxes](#) on page 219
- [Shrink page content to fit](#) on page 223

## 5.15.5. Scale page content to fit

### Belongs to

- **Category:** Page; Position/Size
- **Type:** Changes

### What it does

Scales the page content to fit the size of a particular page box. You can add extra margins, if necessary.


You should also define the target position of the page content inside the page box, e.g. "page content should move to the upper right".

You can choose whether or not to take into account the page rotation and scaling factor.

Scaling is by default restricted to the visible elements of the page (unless you clear the **Use only visible part of content** checkbox), to avoid that hidden content leads to incorrect results.

### Example

In the example below, the page content is scaled to fit the size of the trim box (A).

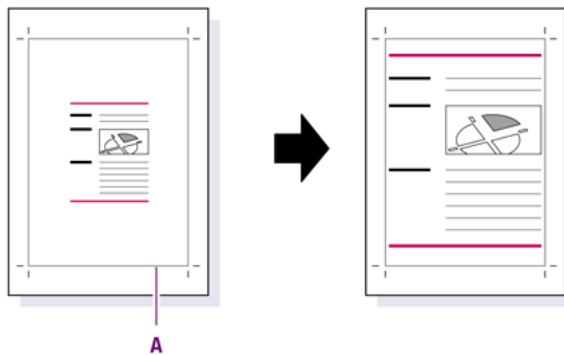

### Related Actions

- [Scale page content](#) on page 220
- [Scale to fit page size](#) on page 222
- [Scale page boxes](#) on page 219
- [Shrink page content to fit](#) on page 223

## 5.15.6. Scale selection

### Belongs to

- **Category:** Position/Size
- **Type:** Changes
- **Since Version:** 2017

### What it does


Resizes one or more selected objects.

You can set the width and height using fixed values, variables, percentages or page boxes, proportional or not. You can also determine the anchor point of the object being scaled and the direction in which the object will resize.

Note that the reference for the anchor point is the bounding box of the selection.

### Example 1: One object selected

**Object before scaling:**




Result of the Action depending on the chosen options:

| Chosen options                                                                                                                  | Result |
|---------------------------------------------------------------------------------------------------------------------------------|--------|
| <div>Width <div>Scale by percentage</div> 50 %</div> <div>Height <div>Keep proportional to width</div></div> <div>Anchor </div> |        |
| <div>Width <div>Scale by percentage</div> 50 %</div> <div>Height <div>Keep proportional to width</div></div> <div>Anchor </div> |        |
| <div>Width <div>Scale by percentage</div> 50 %</div> <div>Height <div>Keep proportional to width</div></div> <div>Anchor </div> |        |

| Chosen options                                                                                 | Result |
|------------------------------------------------------------------------------------------------|--------|
| <div><div>WidthAdjust by value-10 mm</div><div>HeightDon't change</div><div>Anchor</div></div> |        |

Example 2: Two objects selected


Objects before scaling:



Result of the Action depending on the chosen options:

| Chosen options                                                                                                | Result |
|---------------------------------------------------------------------------------------------------------------|--------|
| <div><div>WidthScale by percentage120 %</div><div>HeightScale by percentage120 %</div><div>Anchor</div></div> |        |



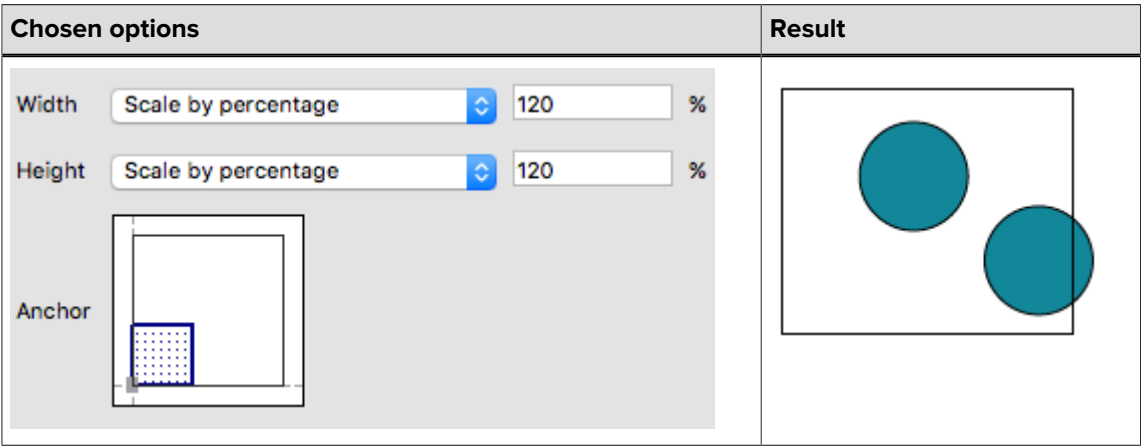

### 5.15.7. Scale to fit page size

**Belongs to**

- **Category:** Position/Size; Page
- **Type:** Changes

**What it does**

Scales all page boxes (and optionally all page content as well) until the specified page box fits the target size.


The target size should be specified by defining the target width and height either as a value, a percentage of the original value or proportionally relative to the other dimension.

Note that for both the page content and the page boxes you can separately decide whether or not to scale proportionally to match the target page size.

**Remark**

In case of proportional scaling (=default, **Allow non-proportional scaling** checkbox NOT selected), it may happen that the requested target width and height cannot be achieved without changing the aspect ratio; in that case, the target size serves as a frame in which the resized page box should fit.

For example, if the original page box is a rectangle and the requested width and height result in a square, the page box will be scaled to fit in the square (and vice versa). See the image below; the blue object represents the requested target dimensions.

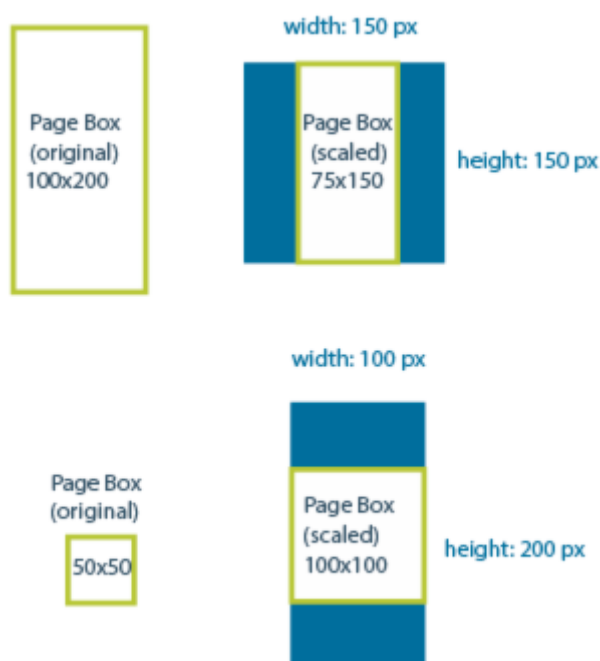

#### Related Actions

- [Scale page content to fit](#) on page 221
- [Scale page content](#) on page 220
- [Scale page boxes](#) on page 219
- [Shrink page content to fit](#) on page 223

## 5.15.8. Select all

#### Belongs to

- **Category:** Operator
- **Type:** Selections

#### What it does

Allows you to select every object in a PDF document.

#### Example

To delete every object in a PDF:

```
Select all  
Remove selection
```

#### Remark

Note that objects that are clipped away (hence are invisible) are selected as well. If you don't want this, we recommend removing them first. You can use [Select objects that are completely clipped away](#) on page 496 and [Remove selection](#) on page 278 to do so.

### 5.15.9. Select annotations

---

***Belongs to***

- **Category:** Metadata
- **Type:** Selections

***What it does***

Selects annotations of a particular type in a PDF document.

***Example***

To delete all annotations of the type "Movie" and "Sound" in a PDF, configure the following Action List:

```
Select annotations <!-- select Movie and Sound -->
Remove selection
```

### 5.15.10. Select annotations appearance streams contents according to annotation selection

---

***Belongs to***

- **Category:** Metadata
- **Type:** Selections

***What it does***

Allows you to select content based on the selected annotations.

***About annotation appearance streams***

An appearance stream determines the visual appearance of an annotation (e.g. borders, colors,...). Different from [Select annotations](#) on page 463 (which only selects the annotation **content**), this Action allows you to also include the appearance stream in your selection, so that other actions can be applied to it. You could for example check for RGB objects only inside appearance streams.

This Action has two options:

- **Select the annotation content if the annotation is selected:** If the annotation is selected, all the PDF objects in the appearance stream will be selected too.
- **Select everything except the annotation content of annotations that are not selected:** This is the inverse of the first option; everything in the PDF is selected, except for the objects inside appearance streams of unselected annotations.

**Example**

To select all annotations of the type "Text" and change their color, configure the following Action List:

```
Select annotations <!-- select Text only - See Select annotations on page 463 -->
Select annotations' appearance streams contents according to annotation selection <!--
choose first option -->
Change color <!-- Pick the desired fill/stroke color - See Change color on page 102 --
>
```

To select and change the color of the whole document, including text annotations but excluding video, sound, ... configure the following Action List:

```
Select annotations <!-- select Text only - See Select annotations on page 463-->
Select annotations' appearance streams contents according to annotation selection <!--
choose the second option -->
Change color <!-- Pick the desired fill/stroke color - See Change color on page 102 --
>
```

## 5.15.11. Select annotations by print setting

---

**Belongs to**

- **Category:** Metadata
- **Type:** Selections

**What it does**

Selects annotations based on their print setting.

**Example**

To select all printing annotations and remove them

```
Select annotations by print setting <!--Option: Select annotations if set to print -->
Remove selection
```

To select all printing annotations and set them to non-printing

```
Select annotations by print setting <!-- Option: Select annotations if set to print --
>
Change annotations' print setting <!-- Option: Set annotation to Non-Printing -->
```

See also: [Change annotations print setting](#) on page 178

## 5.15.12. Select black & white objects

---

**Belongs to**

- **Category:** Color
- **Type:** Selections
- **Since Version:** 2018

**What it does**

Selects black and white images.

You can set a tolerance (an allowed deviation from '100% gray', default tolerance is '3') and tell PitStop how to determine what black and white is:

- **Calculate image average:** Take the color value of each pixel of the image (color and gray values) and calculate the average of this; decide based on this value whether or not it is "black and white".
- **Look for colored areas:** Search for colored areas and take only the values of colored pixels to decide whether or not it is "black and white". If most of the colored values are gray (or close to gray/taking into account the chosen tolerance), the image will be considered black and white; otherwise it will be considered a color image. This method will detect images that are mainly black and white but with a small colored area.

**Remarks**

- This Action works on all color spaces, on images, text and linear and radial shadings.
- Spot colors are always considered colored images, regardless of their name (e.g. even spot colors with the name 'black' will be considered colors).

**Use Cases**

- In digital printing, to save on ink, black and white images are preferably printed using black ink only. This Action provides an extra check to distinguish between black and white images with minor color tints (safe to use black) and black and white images with colored areas that definitely need color ink.
- Black text or thin lines (coming from CMYK) can be safely remapped to black only, thanks to this Action, which allows to filter real black text from colored text. Example Action List:

```
select text
select black & white objects
AND
remap color <!-- target color black -->
```

**Examples**

The following image will be considered 'black and white' based on the average image calculation, but 'colored' based on the area calculation.



The image below is clearly 'black and white' and will be selected, regardless of the calculation method.



### 5.15.13. Select black point compensation

---

***Belongs to***


- **Category:** PDF 2.0
- **Type:** Selections
- **New since:** PitStop 2022

***What it does***

Selects objects based on the presence of black point compensation (regardless of its value) or based on a particular value (On, Off, or Default).

The black point compensation option is a feature of Adobe Photoshop to address color conversion problems caused by differences between the darkest level of black achievable on one device and the darkest level of black achievable on another.

Note that the black point compensation attribute of a selected object can be found in the Enfocus Inspector, on the **Prepress - General** tab. Possible values are On, Off or Default. When no blackpoint compensation is set (or when multiple objects with different black point compensation values are selected), you'll see a dash.

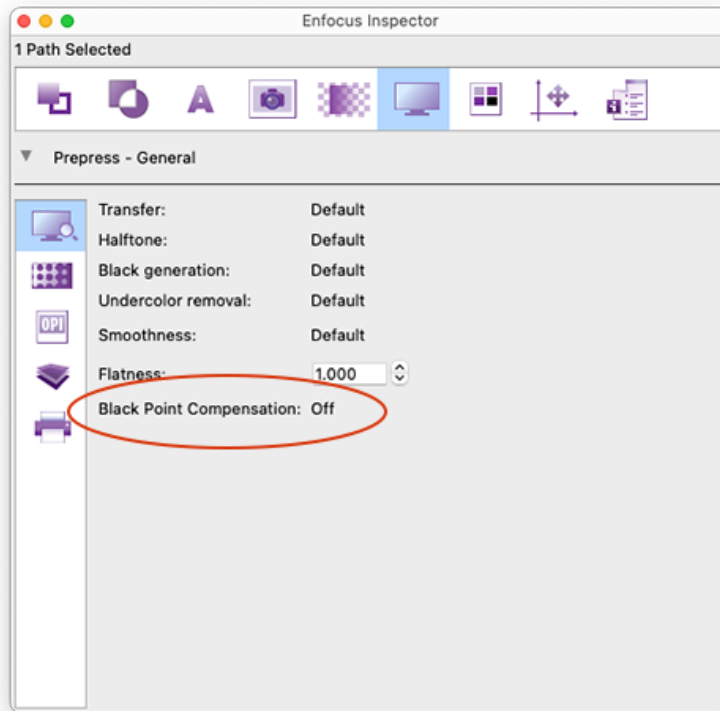

#### **Related Actions**

- [Check black point compensation](#) on page 381
- [Remove black point compensation](#) on page 232
- [Set black point compensation](#) on page 235

## **5.15.14. Select by alternate images**

---

#### **Belongs to**

- **Category:** Image
- **Type:** Selections

#### **What it does**

Selects either **all images with alternates** or **all images with alternates that are default for printing**.

An alternate can be a high resolution version of an image that is used in the PDF to preview the image on screen. If you want to make sure that the correct image is set to print, choose **all images with alternates that are default for printing**.

#### **Related Actions**

- [Add alternate images](#) on page 141
- [Check for alternate images](#) on page 336

- [Remove alternate images](#) on page 146

### 5.15.15. Select by binding

---

**Belongs to**

- **Category:** Metadata
- **Type:** Selections

**What it does**

Allows the selection of a PDF based on its binding (left-edge or right-edge binding).

Most European language documents are bound on the left.



**Note:** To check a document's binding, in Adobe Acrobat, go to **File > Properties** and switch to the **Advanced** tab. The document's binding property (Left Edge or Right Edge) is displayed under Reading Options.

---

**Related Actions**

- [Check binding](#) on page 350
- [Change binding](#) on page 179

### 5.15.16. Select by blend modes

---

**Belongs to**

- **Category:** Prepress
- **Type:** Selections

**What it does**

Allows you to select objects with or without one or more specific blend modes.

Blend modes determine how colors on different layers blend with each other. For more information about blend modes, visit the Adobe website (<http://www.adobe.com>) or refer to the Help or documentation of your design application (Adobe InDesign, QuarkXPress, ...)

**Related Actions**

- [Check for non-standard blend modes](#) on page 403
- [Remove alternative blend modes](#) on page 230

### 5.15.17. Select by blending color space

---

**Belongs to**

- **Category:** Color; Page
- **Type:** Selections



**What it does**

Makes a selection based on the blending color space.

You must set the required blending color space and the required luminosity softmask blending color (or select the option **Undefined**).

**About blending color spaces**

When Adobe Acrobat interprets transparent objects and attempts to create a preview of the flattened artwork, it needs to do so using a single color space for all the items involved in the transparency group. This color space is called the **blending color space**.

The blending color space for soft masks (masks with soft transitions) is called the **luminosity softmask blending color space**. It is usually gray.

**Related Actions**

- [Change blending color space](#) on page 103
- [Check if blending color space is defined](#) on page 308

## 5.15.18. Select by color space

---

**Belongs to**

- **Category:** Color
- **Type:** Selections

**What it does**

Selects line art (fill and/or stroke) and/or other objects according to their color space.

**Example**

To select all ICC line art, proceed as follows:

```
Select by color space
<!-- Options:
1. Select both Fill and stroke color space.
2. For both, select "ICC tagged". Optionally, indicate the preferred number of color
   components.
3. Make sure the checkbox under Other objects is cleared
-->
Log selection
```

## 5.15.19. Select by color space in PDF/X Output Intent

---

**Belongs to**

- **Category:** Color
- **Type:** Selections

**What it does**

Allows you to make a selection based on the color space in the PDF/X Output Intent.

As of PitStop 2022 you should make clear which Output Intents should be taken into account. Options are:

- Document Output Intents (before PDF/X-6)
- Effective Output Intents (since PDF/X-6)
- Document Output Intents (PDF/A-2)

You can choose one of the following color spaces:

- CMYK
- RGB
- Gray
- Unknown

## 5.15.20. Select by document encoding

---

### ***Belongs to***

- **Category:** Doc
- **Type:** Selections

### ***What it does***

Selects a document based on its encoding (binary or ASCII).

### ***About document encoding***

ASCII encoding was formerly required to ensure that PDF files could be safely transported via e-mail or the Internet. However, most e-mail software in use today handles non-ASCII documents normally, eliminating the need to ASCII-encode your document.

### ***ASCII versus Binary encoding***

ASCII encoding may increase the file size, but allows you to edit the file manually.

Binary encoding makes the file smaller, but does not allow you to edit the file manually.

### ***Related Actions***

- [Check data format](#) on page 321
- [Change document encoding](#) on page 120

## 5.15.21. Select by document info

---

### ***Belongs to***

- **Category:** Metadata
- **Type:** Selections

### ***What it does***

Allows you to make selections based on document info, such as the title, subject, author, keywords, producer or creator of the PDF. You can specify where the information must be taken from, and what the expected value is.



**Note:** From version 12 update 2 onwards, you can use regular expressions to define the value in the **Compare with** field (if you select **Equals/Does not equal** as operator method).

### Example

Suppose you want to select a document of which the author is Anne Banks. It doesn't matter where this information is taken from.

#### Attributes:

- Document info: author
- Read value from: any metadata location



**Note:** If you select **Both metadata locations**, the name of the author will be searched for in both the XMP metadata stream and the info dictionary; if you select **Most recent metadata location**, only the most recently changed metadata location will be checked.

- Operator method: equals
- Compare with: Anne Banks

If you are not sure about the spelling of the name *Anne* (spelled Ann or Anne?), you could select the **Use regular expressions** checkbox and enter "Ann(e)? Banks" in the **Compare with** field.

### Related Actions

- [Change document info](#) on page 179
- [Check document info](#) on page 352

## 5.15.22. Select by halftone origin

### Belongs to

- **Category:** PDF 2.0
- **Type:** Selections
- **New since:** PitStop 2022

### What it does

Selects objects either with or without default HTO (halftone origin) values, or with particular HTO values.

PDF 2.0 allows specifying the halftone origin, whereas in earlier versions, the HTO value had to be 'Default' (= not specified).

### Related Actions

- [Check halftone origin](#) on page 385
- [Change halftone origin](#) on page 226
- [Set default halftone origin](#) on page 236

## 5.15.23. Select by graphic state attributes

---

### ***Belongs to***

- **Category:** Prepress
- **Type:** Selections

### ***What it does***

Allows you to select objects based on their graphic state attributes.

You can select one of the following object types:

- Objects with non-PDF/X-1 compliant halftone info
- Objects with transfer function info
- Objects with halftone info
- None

### ***Viewing the graphic state attributes of an object***

Proceed as follows:

1. Select the object, using the PitStop Select Objects tool .
2. Click  to display the Enfocus Inspector.
3. Select  (**Prepress**) >  (General) or  (**Halftone**).

### ***Related Actions***

- [Check for non-PDF/X compliant halftone](#) on page 403
- [Check for custom transfer function](#) on page 402

## 5.15.24. Select by ICC tag subtype

---

### ***Belongs to***

- **Category:** Color
- **Type:** Selections

### ***What it does***

Allows to make a distinction between ICC-based RGB, ICC-based gray and ICC-based Lab.

[Select by color space in PDF/X Output Intent](#) and [Check color type](#) allow to make the distinction between DeviceRGB, DeviceCMYK and ICC-based color spaces, but they treat all ICC-Based spaces as a single group. This Action allows to make the distinction between ICC-based CMYK and ICC-based RGB objects.

[Check color type](#) allows you to make the distinction between DeviceRGB, DeviceCMYK and ICC-based color spaces, but it treats all ICC-Based spaces as a single group. This Action allows to make the distinction between ICC-based CMYK and ICC-based RGB objects.

**Related Actions**

- [Select by color space in PDF/X Output Intent](#) on page 425
- [Check color type](#) on page 301

## 5.15.25. Select by image resolution

---

**Belongs to**

- **Category:** Image
- **Type:** Selections

**What it does**

Makes a selection of images based on their resolution, for example all images with a resolution between 320 and 400 ppi.

You can select all images, or limit your selection to color or gray scale images, or to monochrome images only.



**Note:** This Action checks for the **effective** resolution; if the image has been resized, this is the resolution after scaling.

---

**Related Actions**

[Check resolution](#) on page 341

## 5.15.26. Select by image size

---

**Belongs to**

- **Category:** Image
- **Type:** Selections

**What it does**

Allows you to select images by their width or height (expressed in pixels).

You can for example select images with a width or height equal to (or more or less than) 64 pixels.

## 5.15.27. Select by inconsistent Type 3 font width information

---

**Belongs to**

- **Category:** Text
- **Type:** Selections
- **New since:** PitStop 2022

**What it does**

Selects Type 3 fonts containing characters with a corrupt font width (Type 3 glyphs d0 or d1 values that are inconsistent with the font's widths array).

Type 3 fonts are usually wrongly converted SVG fonts, i.e. fonts that are used in Illustrator, Indesign, Photoshop, ... but that are not supported by the PDF specs and most RIPs, and therefore converted to Type 3. PitStop fixes this, so the font can be handled by most RIPs.

**Related Actions**

- [Check for inconsistent Type 3 font width information](#) on page 411
- [Fix inconsistent Type 3 font width information](#) on page 289

## 5.15.28. Select by ink coverage (basic object check)

---

**Belongs to**

- **Category:** Color; Prepress
- **Type:** Selections

**What it does**

Makes a selection of all objects that meet your ink coverage criteria.

You can for example select objects only if the ink coverage is at least 300%.

When including images in this selection, the threshold will determine the minimum area in which the ink coverage criteria have to be met in order to be selected. E.g. when entering '0', even an image of which only 1 dot meets the ink coverage requirement will be selected.

**Related Actions**

[Check ink coverage \(basic object check\)](#) on page 309

## 5.15.29. Select by intersecting bounding boxes

---

**Belongs to**

- **Category:** Position and Size
- **Type:** Selections

**What it does**

Selects the objects defined by a first selection, that overlap the objects defined by a second selection (within the same Action List).

In order to define the first and second selection, this Action needs to be preceded by 2 other selection Actions.

**Example**

Suppose you have two magenta filled line art objects and two yellow filled line art objects. One of the two magenta objects physically overlaps 1 of the 2 yellow objects; that's the object you want to select and log.

To do so, proceed as follows:

```
Select color <!-- settings: Fill - CMYK - 100% M -->
Select color <!-- settings: Fill - CMYK - 100% Y -->
Select by intersecting bounding boxes
Log selection <!-- Choose user-defined text, for example: Magenta objects overlapping
yellow objects have been found -->
```

## 5.15.30. Select by line weight

---

### ***Belongs to***

- **Category:** Line Art
- **Type:** Selections

### ***What it does***

Selects objects with a particular line weight.

For example, select objects with line weight *less than 0.0123* inch.

### ***Related Actions***

- [Normalize line weight](#) on page 133
- [Select by line weight](#) on page 457
- [Check line weight](#) on page 346

## 5.15.31. Select by media box origin

---

### ***Belongs to***

- **Category:** Page
- **Type:** Selections

### ***What it does***

Allows you to select pages of which the lower left corner is not located at coordinates 0,0.

The media box is the largest page box and defines the size of the physical medium on which the page will be printed or displayed. Some applications don't give the lower left 0,0 coordinates, but for example 100,100, which will cause problems when preflighting the file.

### ***Related Actions***

- [Check media box origin](#) on page 376
- [Move media box to 0.0](#) on page 211

## 5.15.32. Select by number of color plates

---

### ***Belongs to***

- **Category:** Color

- **Type:** Selections

#### **What it does**

Selects objects that occur on a certain number of color plates (separations). You can make the selection based on the object's fill and/or stroke.

#### **Example**

You could for example search for objects with 4 color plates (dark gray), and afterwards change gray to CMYK Black. This will reduce the number of plates from 4 plates to 1 plate.

```
Select by number of color plates <!-- Choose 4 -->
Change Gray to CMYK Black <!-- Change Gray to CMYK Black on page 103 -->
```

#### **Related Actions**

[Check number of color plates \(basic object check\)](#) on page 310

## 5.15.33. Select by overprint

---

#### **Belongs to**

- **Category:** Prepress
- **Type:** Selections

#### **What it does**

Selects objects based on the overprint mode of their fill and/or stroke.

#### **How to proceed**

Proceed as follows:

1. To select objects based on their fill/stroke overprint, select the corresponding checkbox. For example, to select object based on the overprint mode of their stroke, select **Stroke overprint**.
2. Indicate whether overprint must be enabled or disabled for the options selected in step 1, by clicking the buttons.

-  Overprint is off.
-  Overprint is on.



**Tip:** Check the Actions field, to see if the Action is configured appropriately. For example, if you selected the Stroke overprint checkbox and clicked the button next to it, the name of the Action should change into "Select if stroke overprint is off."

#### **Related Actions**

- [Check if object is set to overprint](#) on page 401
- [Change overprint](#) on page 263



## 5.15.34. Select by overprint mode

---

### ***Belongs to***

- **Category:** Prepress
- **Type:** Selections

### ***What it does***

Allows you to select objects based on the overprint mode of their fill and/or stroke color.

### ***About overprint modes***

- In **Standard overprint mode** (OPM 0), the tint value 0 of one of the CMYK inks in the foreground object has a knockout effect on the color rendering of the underlying object. In other words, a foreground ink with a C, M, Y or K value of 0 % erases the corresponding background ink. Here, the “foreground inks win” principle applies.
- In **Illustrator overprint mode** (OPM 1), the tint value 0 is neutral: it is ignored (as if it were “not specified”) and has therefore no effect on the color rendering of the underlying object.

For more information and examples, refer to [the PitStop Pro Reference Guide on the Enfocus website](#).

For more information and examples, refer to the PitStop Pro Reference Guide.

### ***Related Actions***

- [Change overprint mode](#) on page 263
- [Check overprint mode](#) on page 404

## 5.15.35. Select by page orientation

---

### ***Belongs to***

- **Category:** Page
- **Type:** Selections

### ***What it does***

Allows you to select pages by orientation.

Choose either Portrait, Landscape, Same orientation or Most used orientation to select all pages with this orientation, and select the page box the orientation must be based on.

### ***Related Actions***

- [Change page orientation](#) on page 208

- [Check page orientation](#) on page 379

## 5.15.36. Select by page rotation angle

---

### ***Belongs to***

- **Category:** Page; Position and Size
- **Type:** Selections

### ***What it does***

Selects pages with a certain rotation angle.

You can choose a rotation angle of -90°, 0°, 90°, or 180° (clockwise).

### ***Related Actions***

- [Check page rotation angle](#) on page 379
- [Apply page rotation](#) on page 200

## 5.15.37. Select by page size

---

### ***Belongs to***

- **Category:** Page
- **Type:** Selections

### ***What it does***

Allows you to select pages based on the size of one of the page boxes.

You can for example select pages with a trim box of 21x29 cm.

The precision indicates how much the actual size is allowed to differ from the specified size. A precision of 0 means that no deviation is allowed: the size needs to match exactly the entered values.

### ***Related Actions***

- [Check page size](#) on page 380

## 5.15.38. Select by PDF version

---

### ***Belongs to***

- **Category:** Metadata, PDF 2.0
- **Type:** Selections

### ***What it does***

Allows you to make a selection based on the PDF's Acrobat or PDF version.

The Acrobat version is the sum of the two numbers that make up the PDF version, for example: PDF 1.4 = Acrobat 5. This is not true anymore for PDF 2.0, as from this version onwards there is no link anymore between the Acrobat and the PDF version.



**Note:** As of PitStop 2020, you can select a PDF 1.7 by its extension level (Adobe Extension 1, 3, 5, 6 or 8). For more details concerning the extensions, refer to [https://www.adobe.com/devnet/pdf/pdf\\_reference.html](https://www.adobe.com/devnet/pdf/pdf_reference.html).

### Example

To select PDFs with Acrobat version higher than 7.0, proceed as follows:

```
Select by PDF version <!-- options: Acrobat version must be more than 7.0 -->
```

### Related Actions

- [Change PDF version](#) on page 183
- [Check PDF/Acrobat compatibility](#) on page 362

## 5.15.39. Select by rendering intent

### Belongs to

- **Category:** Color;Prepress
- **Type:** Selections

### What it does

Selects color managed objects based on a particular rendering intent.

You can select paths, text, images, or all rendering objects, with one of the the following rendering intents:

- Absolute Colorimetric
- Relative Colorimetric
- Perceptual
- Saturation

### About rendering intents

A rendering intent is a remapping method, allowing to remap colors so that they best match the intended use. 'Remapping' means that colors from one output device's color space are mapped to the color space of another device.

For more information and examples, refer to [the PitStop Pro Reference Guide on the Enfocus website](#) (See Chapter "Rendering intents to remap colors").

For more information and examples, refer to the PitStop Pro Reference Guide (See Chapter "Rendering intents to remap colors").

### Related Actions

- [Change rendering intent](#) on page 104
- [Check rendering intent](#) on page 312

- [Remove rendering intent](#) on page 117
- [Select rendering objects](#) on page 452

## 5.15.40. Select rotated objects

---

### ***Belongs to***

- **Category:** Position and Size
- **Type:** Selections
- **Since Version:** PitStop 2022

### ***What it does***

Selects objects that are rotated.


Objects can have been rotated by page layout applications such as QuarkXPress, and this may cause problems for (older) RIPs.

You can specify the required level of rotation, for example 'objects that are rotated more than 2 degrees', optionally combined with two extra options:

- **Interpret all angles as rotations between 0 and 45 degrees from vertical or horizontal:** This option allows you to find small rotations in either direction. To decide whether or not an object is rotated, the measured angle is converted to an interval [0,45] degrees compared to the nearest horizontal or vertical page edge. As a consequence, a rotation of 88 degrees is converted to 2 (90-88) and a rotation of 271 degrees is converted to 1 (271-270). When checking for rotations smaller than 4 degrees, both rotations will be selected, whereas for example a rotation of 290 degrees (converted to 20 => 290-270) won't be selected. See example 1 below.
- **Ignore objects that are aligned vertically or horizontally:** This option allows you to exclude objects that are aligned exactly 0, 90, 180 or 270 degrees to the page edges. Such objects (rotated a multiple of 90 degrees) do not look rotated, so in most cases they should not be selected. See example 2 below.


### ***Example 1***

Suppose you have a PDF file with the following 4 rotated objects. You want to select and remove the objects that have a rotation angle of less than 4 degrees.

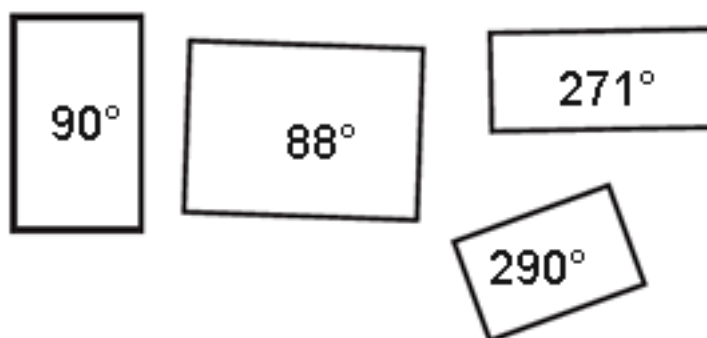


In the example below, all angles are interpreted as rotations between 0 and 45 degrees from vertical to horizontal (first option). The first three objects are selected and removed because they

all have a rotation angle of less than 4 degrees from the nearest vertical or horizontal page edge (as explained higher).

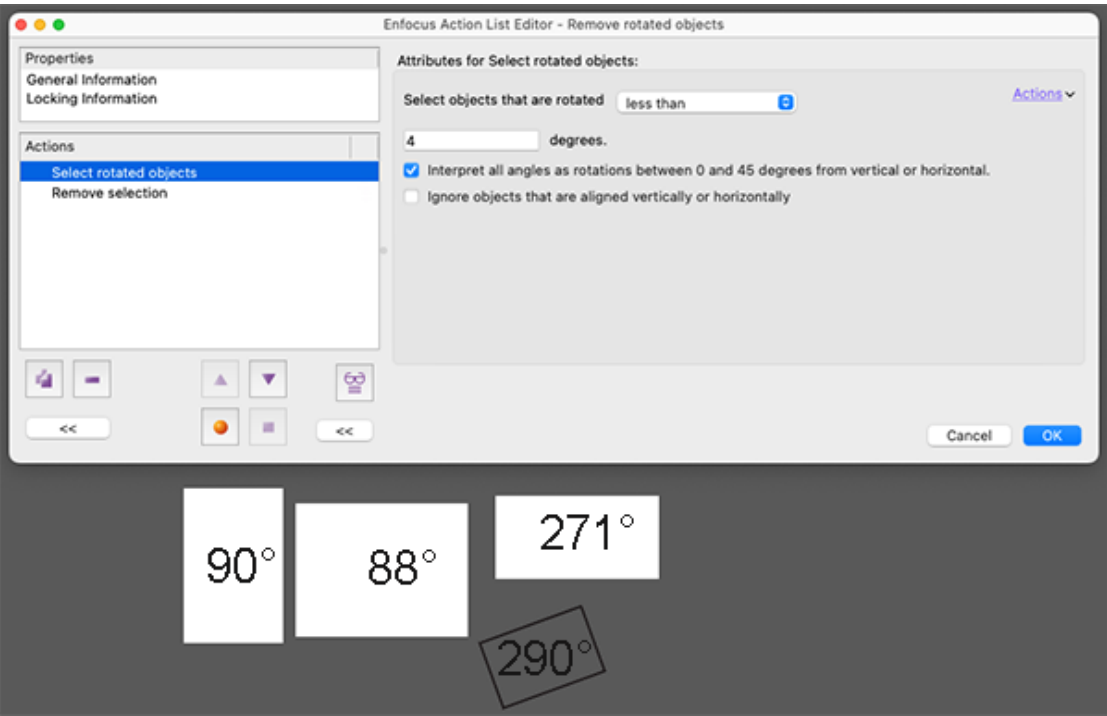

Example 2

When the **Ignore objects that are aligned vertically or horizontally** checkbox is selected, the object that has a rotation angle of 90° is no longer selected nor removed.

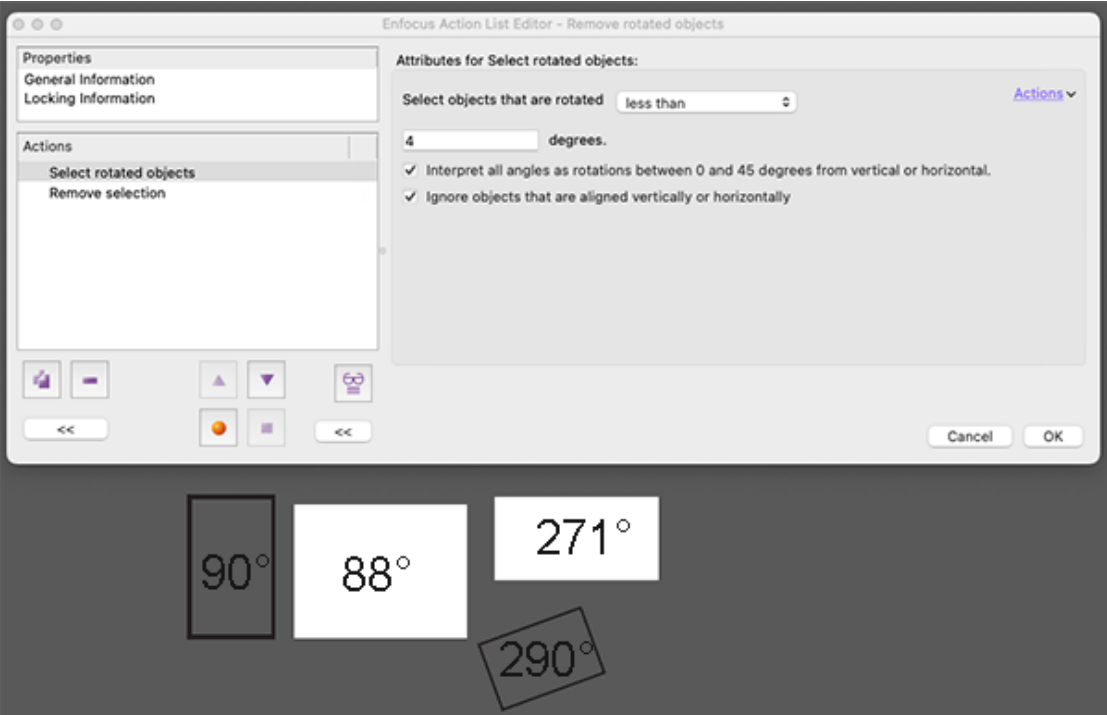

**Related Actions**

- [Check for rotated objects](#) on page 389

## 5.15.41. Select by spot color suffix

---

**Belongs to**

- **Category:** Color
- **Type:** Selections

**What it does**

Selects objects with spot colors that use a spot color with either a known suffix or a known suffix which is not of a particular type.

You can find an overview of the available suffixes in the table below.

**About spot color suffixes**

Suffixes represent the **apparent** color of the color when printed on different types of paper. For example, PANTONE 3258 **C** and PANTONE 3258 **U** refer to the same color, but when printed on coated, respectively uncoated paper, they will look different, although the same ink formula was used.

Besides C (coated), U (uncoated) and M (matte), in software color palettes, you can find suffixes that refer to on-screen simulations of how colors will look when printed on different paper types. For example, PANTONE 3258 CVU is an on-screen indication of how PANTONE 3258 will look like when printed on uncoated paper.

**Suffix overview**

| Suffix | Meaning                                                                                           |
|--------|---------------------------------------------------------------------------------------------------|
| CV     | Computer video (electronic simulation)                                                            |
| CVC    | Computer video - coated                                                                           |
| CVU    | Computer video - uncoated                                                                         |
| CVS    | Process coated (old; now C)                                                                       |
| CVP    | Solid to process (old; now PC)                                                                    |
| C      | Coated paper                                                                                      |
| M      | Matte paper                                                                                       |
| U      | Uncoated paper                                                                                    |
| EC     | Euro process simulation, coated paper                                                             |
| PC     | Process simulation, coated paper                                                                  |
| CP     | Coated paper, process simulation (e.g. PANTONE 185 CP (used in PANTONE+ COLOR BRIDGE COATED))     |
| UP     | Uncoated paper, process simulation (e.g. PANTONE 185 UP (used in PANTONE+ COLOR BRIDGE UNCOATED)) |
| HC     | Hexachrome coated                                                                                 |

| Suffix | Meaning                    |
|--------|----------------------------|
| TC     | TC Textile Cotton          |
| TCX    | Textile Cotton eXtended    |
| TP     | Textile Paper              |
| TPX    | TPX Textile Paper eXtended |
| XGC    | eXtended Gamut Coated      |

**Related Actions**

- [Check spot color suffix](#) on page 315
- [Change spot color suffix](#) on page 105

## 5.15.42. Select by tagged ICC Profile

---

**Belongs to**

- **Category:** Color
- **Type:** Selections

**What it does**

Allows you to select objects which have (not) been tagged with an ICC profile, or objects with a specific color space and a specific ICC profile.

You can distinguish between stroke and fill color, for example select objects of which the stroke color is ICC tagged.

**About ICC tagging**

Every input and output device reproduces color and grayscales in a slightly different way. As a result, the colors you see in a PDF file on your screen may not match the colors produced when you print the PDF to an output device.

ICC color profiles are used to avoid this. An ICC color profile is a mathematical description of the color space used by a specific device. In other words, the color profile describes how the colors produced by the device relate to the reference CIE LAB color space (a device-independent color space). As such, they allow you to set up a workflow in which all devices use color management to compensate for their individual color reproduction characteristics, based on the information in the ICC profiles.

**Related Actions**

- [Check ICC tagging](#) on page 305
- [Select by tagged ICC Profile](#) on page 429
- [Tag object with an ICC profile](#) on page 119
- [Check if ICC profile differs from ICC profile in PDF/X Output Intent](#) on page 307
- [Select objects of which ICC profile is equal to ICC profile in PDF/X output](#) on page 433

- [Check ICC profile version](#) on page 306

## 5.15.43. Select by tiling pattern

---

### ***Belongs to***

- **Category:** Color
- **Type:** Selections
- **Since version:** 2020

### ***What it does***

Allows you to select text, line art and/or image masks with a tiling pattern. You can select only colored or uncolored tiling patterns, or both.



**Note:** You should select at least one checkbox above the divider and one below the divider.

---

### ***Related Actions***

- [Check objects by tiling pattern](#) on page 311
- [Select tiling pattern contents according to parent object selection](#) on page 441

## 5.15.44. Select by trapped flag

---

### ***Belongs to***

- **Category:** Metadata
- **Type:** Selections

### ***What it does***

Allows the selection of a PDF based on the value of the trapped flag.

### ***About trapping***

The trapped flag indicates whether or not a file has been "trapped", i.e. has been corrected for slight color misregistrations. The trapped flag must be defined in PDF/X documents.

The flag can be set to:

- **True:** the document has been trapped, or the creator of the document has decided that it should not be trapped.
- **False:** the document has not been trapped
- **Unknown:** it's not known whether or not the document has been trapped. Note that this status should be avoided.

The trapped flag is stored in the info dictionary and/or in the XMP metadata stream, but the data can be inconsistent; that's why you must indicate where the trapped flag must be taken from, e.g. from the most recent metadata location.



**Related Actions**

- [Check document trapped flag](#) on page 354
- [Select by trapped flag](#) on page 466
- [Check Trapnets for PDF/X](#) on page 365

## 5.15.45. Select clipping and non-clipping text

---

**Belongs to**

- **Category:** Text
- **Type:** Selections

**What it does**

Selects all text segments, even if they have been clipped and are not visible anymore.



**Tip:** If you want to select non-clipping text only, you can use [Select text segments](#).

## 5.15.46. Select clipping objects

---

**Belongs to**

- **Category:** General
- **Type:** Selections

**What it does**

Selects clipping objects, i.e. objects of which the shape masks other artwork. Only areas inside the clipping objects are visible.

You could use this Action to select clip text of which you want to change the font.

**Related Actions**

[Select objects that are completely clipped away](#) on page 496

## 5.15.47. Select closed paths

---

**Belongs to**

- **Category:** Line Art
- **Type:** Selections
- **Since Version:** 2018

**What it does**

Selects the closed paths in a file.

*Use case:* To be able to manipulate the contents of a file based on the dieline (closed paths), you may select the dieline from within a PDF file containing other paths of the same color and width.

#### **Related Actions**

- [Select subpaths](#) on page 462

## **5.15.48. Select color**

---

### **Belongs to**

- **Category:** Color
- **Type:** Selections

### **What it does**

Selects objects by their fill or stroke color, or both.

### **How to proceed**

Define the colors you want to select as follows:

1. Select the appropriate checkbox, depending on what you want to define (Fill color or Stroke color).



**Note:** If both checkboxes are selected, objects that match both fill and stroke colors will be selected. This is equivalent to combining separate actions with the AND operator.

2. Select the appropriate color in one of the following ways:
  - a. Select an object with the PitStop Select Objects tool  and use the icon to grab the fill or stroke color  (depending on what you're defining).
  - b. Click the color picker icon  and select the appropriate color.
  - c. Select the required color space:
    - Device colors can be Gray, RGB or CMYK
    - Calibrated colors can be Gray or RGB
    - User Swatch (= user-defined colors)
3. Fine tune the color by moving the sliders.

## **5.15.49. Select color bars**

---

### **Belongs to**

- **Category:** Page
- **Type:** Selections

### **What it does**

Allows you to select color bars with a certain color patch border and patch size.

Color bars (also called color control bars or color control strips) are small squares of color representing CMYK inks and tints of gray, that are used by press operators to control ink density, dot gain, print contrast, ...



**Note:** PitStop provides an Action List to add color bars.

### Example

You could combine this Action with another Action to, for example, delete all color bars at once:

```
Select color bars
Remove selection <!-- Remove selection on page 278 -->
```

## 5.15.50. Select color range

### Belongs to

- **Category:** Color
- **Type:** Selections

### What it does

Allows you to select objects with a specific color, by specifying the color range of the fill and/or stroke color.

The available options depend on the chosen color space:

- Gray, CMYK or RGB: **search in converted values of other color spaces** (If selected, the result of the conversion is calculated in advance.)
- Separations: You can decide to select either all spot colors or only the spot colors with a particular name. You can type the name or click the **Load Spot Color** button to select it.
- DeviceN process colors: **allow spot colors in DeviceN color space**



**Note:** This Action works on stencil masks (next to text and line art), but not on images.

### Example

To catch all gray objects (either fill or stroke) with a brightness between 0% and 40 %, and turn them into CMYK objects with 100% Cyan color, you can do the following:

```
Select gray fill or stroke color
<!-- This is the "Select color range" Action with the options Fill and Stroke
selected.
Select "Color space is gray", and in the Gray from field, enter values between 0% and
40% -->
Change fill and stroke color
<!-- This is the "Change color" Action with Fill and Stroke selected.
Select "Device CMYK" and set Cyan to 100% -->
```

## 5.15.51. Select concealed objects

---

### ***Belongs to***

- **Category:** Position and Size
- **Type:** Selections
- **Since Version:** 2017

### ***What it does***

Selects completely hidden objects that do not affect the visual appearance of the PDF, such as redundant objects that were left behind on a hidden layer or original cropped content that is of no use.

Hidden objects can increase the file size, add to the file complexity and they may produce false hits during preflight. Therefore, you may want to use this Action to select these unneeded objects and ignore or remove them before preflighting the document.

Note that there are different options to determine whether or not an object is visible; you have the choice whether or not to take into account the objects on other layers, or you can limit the scope by adding another select Action.

### ***Example***

The following Action List can be used to remove all objects that are not needed to render or print a PDF.

```
Select concealed objects  
Remove selection
```

### ***Related Actions***

[Select visible objects](#) on page 499

## 5.15.52. Select corrupt font widths

---

### ***Belongs to***

- **Category:** Text
- **Type:** Selections

### ***What it does***

Allows you to select all text with a corrupt font width.

By default, horizontal writing is checked, but you can also include vertical writing by selecting the **Also check metrics for vertical writing** checkbox.

Corrupt font widths may occur in a PDF, when "artificial" bold or italic was used instead of the "bold" or "italic" version of the font concerned. For example, if "Futura" is used in your PDF, the "Futura-Bold" and "Futura-Oblique" fonts should be used instead of applying bold and italics on the regular Futura font. Artificial font may cause problems when printing the PDF.

As of PitStop 2022, you can set a threshold in the **Tolerance** field. This value, expressed in 1/1000 em, specifies the maximum acceptable deviation of the standard font width. For example, if the tolerance is set to 5, a font width that deviates 5/1000 em (or less) from the normal font width will not be selected.

Some PDF standards allow font size deviations. For example, PDF/X-4 allows a deviation of 5 1/1000 em, PDF/X-6 allows a deviation of 1 1/1000 em ... This Action can be used to select font widths that do not comply with certain PDF/X versions.

#### **About the em as unit**

The unit used to set the tolerance is '1/1000 em'. 'em' is used because the size of an 'em' is relative to the size of the font: it denotes the point size. For example: 1 em in a 16-point typeface is 16 points, 1 em in an 8-point typeface is 8 points. As a consequence, if the tolerance is set to 1, the relative size is the same, but the absolute size differs depending on the font size.

The name 'em' comes from the width of the capital M in the typeface.

#### **Related Actions**

- [Check corrupt font widths](#) on page 406
- [Change corrupt font widths](#) on page 281

## 5.15.53. Select default color spaces

---

#### **Belongs to**

- **Category:** Color
- **Type:** Selections

#### **What it does**

Allows you to select default color spaces or default color spaces that are not defined by PDF/X-3.

Default color spaces are defined on page level. They are used to systematically remap device-specific colors to device-independent colors.



**Note:** PitStop also provides an Action to [change default color spaces](#).

## 5.15.54. Select DeviceN with attributes

---

#### **Belongs to**

- **Category:** Color
- **Type:** Selections

#### **What it does**

Allows you to select the fill and/or stroke of DeviceN and/or NChannel objects.

You must specify which attributes must be present to select the object:

- Spot color definitions
- Process color mapping
- Mixing hints
- Solidities
- Printing order
- Dot gain

**Related Actions**

[Check DeviceN attributes](#) on page 301

## 5.15.55. Select document

---

**Belongs to**

- **Category:** Doc
- **Type:** Selections

**What it does**

Allows you to select the whole document.

## 5.15.56. Select document if document XMP metadata contains invalid types

---

**Belongs to**

- **Category:** Metadata
- **Type:** Selections

**What it does**

Selects the document if metadata streams defined in the PDF do not conform to the XMP schema.

**About XMP metadata streams**

There are two metadata locations in a PDF file:

- The **info dictionary** contains information about the file, such as the title, the author, the creation date ... and is visible through the file's Document properties. It's not in XML format.
- The **XMP metadata stream** also contains information about the file, but this information is represented as XMP metadata - XMP referring to Adobe's labeling technology **Extensible Metadata Platform**. All information in the info dictionary is also represented in the XMP metadata stream dictionary, in the form of XMP properties.

Inconsistencies may occur when only one of the metadata locations has been updated.

**Related Actions**

[Check if document XMP metadata types are valid](#) on page 360

## 5.15.57. Select document if XMP file identifiers are not present

---

### *Belongs to*

- **Category:** Metadata
- **Type:** Selections

### *What it does*

Selects document if XMP file identifiers are not present.

### *Related Actions*

- [Set XMP file identifiers](#) on page 194
- [Check file identifiers in document XMP metadata](#) on page 322

## 5.15.58. Select embedded fonts

---

### *Belongs to*

- **Category:** Text
- **Type:** Selections

### *What it does*

Allows you to select all embedded or unembedded fonts in a PDF document.

The selection of embedded fonts includes OpenType embedded fonts.

### *About embedding fonts*

**Embedding fonts** in a PDF document means that every character of this font is copied and stored in the PDF document. This is useful if you create PDF documents to be displayed on different systems and to be printed on different devices: these are often systems that do not contain exactly the same fonts.

Embedding a font as a **subset** means that only those characters of the font that are actually used in the text are embedded. This reduces the file size by not including superfluous font information.

### *About OpenType embedded fonts*

OpenType is an extension of the TrueType format that can contain TrueType and/or Type 1 font data. In PDF files it can only appear as an embedded font. It has been introduced in PDF 1.6.

### *Related Actions*

- [Check font embedding](#) on page 408
- [Unembed font](#) on page 293
- [Check embedded font is OpenType](#) on page 407

## 5.15.59. Select embedded PostScript fragments

---

### ***Belongs to***

- **Category:** General
- **Type:** Selections

### ***What it does***

Selects all fragments of embedded PostScript in the PDF document.

Embedded PostScript fragments do not show up in the screen preview, but could change the appearance of the printed document. They are generally undesirable in a print production environment.

### ***Related Actions***

- [Check for embedded PostScript fragments](#) on page 329
- [Remove PostScript](#) on page 140

## 5.15.60. Select empty pages

---

### ***Belongs to***

- **Category:** Page
- **Type:** Selections

### ***What it does***

Selects pages in a PDF document that contain no objects.

You can specify that elements outside of a specific page box should be ignored and/or visually empty pages (paper-white and invisible (fully transparent) objects).

### ***Related Actions***

- [Check for empty pages](#) on page 370
- [Remove empty page](#) on page 215

## 5.15.61. Select Esko barcode

---

### ***Belongs to***

- **Category:** Packaging
- **Type:** Selections
- **Since Version:** 13 update 2



**What it does**

Allows you to select Esko barcodes (both the new ArtPro Plus barcodes as well as the old XMP ones).

As of PitStop 25.07, the EAN-13 Iceland Foods barcode is also in the list.



**Note:** The selection is made based on the metadata attached to the barcode. If the metadata is absent, the Action won't be able to select the barcode.

**Related Actions**

- [Select Esko barcode type](#) on page 478
- [Check Esko barcode value](#) on page 368
- [Check Esko barcode type](#) on page 368
- [Add barcode](#) on page 68

## 5.15.62. Select Esko barcode type

---

**Belongs to**

- **Category:** Packaging
- **Type:** Selections
- **Since Version:** 13 update 2

**What it does**

Allows you to select Esko barcodes by type (chosen from a list).

As of PitStop 25.07, the EAN-13 Iceland Foods barcode is also in the list.

**Related Actions**

- [Select Esko barcode](#) on page 478
- [Check Esko barcode type](#) on page 368
- [Check Esko barcode value](#) on page 368
- [Add barcode](#) on page 68

## 5.15.63. Select external hyperlink annotations

---

**Belongs to**

- **Category:** Metadata
- **Type:** Selections

**What it does**

Selects annotations with external links to other files, applications and/or web Pages embedded in a PDF document.



**Tip:** You can check the validity of the links with [Check external hyperlink annotations](#) on page 355.

## 5.15.64. Select flatness

### **Belongs to**

- **Category:** Prepress
- **Type:** Selections

### **What it does**

Allows you to select objects with a flatness setting equal to or higher/lower than a certain value.

The default setting to produce a smooth curve is 1. A value higher than 1 can produce a jaggy edge; lower than 1 can slow down the RIP.

### **Example**

If the curves in a PDF are showing visible line segments, try the following to solve the problem:

```
Select flatness <!-- Option: Select objects with a flatness higher than 1.0 -->  
Change flatness <!-- Option: Change flatness to 1.00 -->
```

### **Related Actions**

- [Check flatness](#) on page 399
- [Change flatness](#) on page 160

## 5.15.65. Select fonts by license

### **Belongs to**

- **Category:** Text
- **Type:** Selections

### **What it does**

Allows you to select fonts that allow certain operations without obtaining permission from the font's owner.

These operations are:

- Embed
- Subset
- Outline
- Preview and print

### **Related Actions**

[Check font license](#) on page 408

## 5.15.66. Select fonts by name

---

### *Belongs to*

- **Category:** Text
- **Type:** Selections

### *What it does*

Allows you to select all the fonts with a particular name.



**Note:** From version 12 update 2 onwards, you can use regular expressions to define the font name.

---

### *Example*

To select all the Times, Arial, Helvetica and Courier fonts in a PDF, you could use the following sequence of Actions:

```
Select font Times
Select font Arial
OR
Select font Helvetica
OR
Select font Courier
OR
```

## 5.15.67. Select fonts by type

---

### *Belongs to*

- **Category:** Text
- **Type:** Selections

### *What it does*

Selects text using a particular font type.

You can select one of the following font types:

- TrueType
- Type1
- Type3
- Multiple Master
- Composite TT
- Composite T1
- Composite (all types)

### *About types of fonts*

Refer to the [PitStop Pro Reference Guide](#) (Chapter: Types of fonts and their usage), available on the Enfocus website.

Refer to the PitStop Pro Reference Guide (Chapter: Types of fonts and their usage).

**Example**

For example, to unembed TrueType fonts without unembedding any other font types, do the following:

```
Select TrueType fonts
Unembed font <!-- See Unembed font on page 293 -->
```

**Related Actions**

[Check font type](#) on page 409

## 5.15.68. Select fonts that can be emulated

---

**Belongs to**

- **Category:** Text
- **Type:** Selections

**What it does**

Selects fonts that can be emulated.

Fonts that can be emulated are fonts that can be represented on screen, even if the font is unavailable on your system and even though it has not been embedded. If you are certain the document only needs to be viewed on screen, and will not be printed, fonts that can be emulated do not need to be embedded. This makes your PDF lighter, for example for distribution on the internet.

**Example**

To select fonts and then unembed them:

```
Select fonts that can be emulated
Unembed font <!-- See Unembed font on page 293 -->
```

## 5.15.69. Select form contents according to form selection

---

**Belongs to**

- **Category:** General
- **Type:** Selections

**What it does**

Allows you to select or deselect the content of selected forms.

Forms are rectangular frames in a PDF which contain objects, for example an image or a placed PDF.

For more information, refer to [the PitStop Pro Reference Guide on the Enfocus website](#) (See Chapter "Editing forms").

**Related Actions**

[Select forms](#) on page 446

## 5.15.70. Select form if content is selected

---


**Belongs to**

- **Category:** General
- **Type:** Selections

**What it does**

Allows you to select forms based on selected objects. Note that by selecting the forms, the objects themselves are no longer selected.

You can choose whether or not to select nested forms, i.e. forms included inside other forms. For example, in the example below, the object is part of Form1 and Form2.

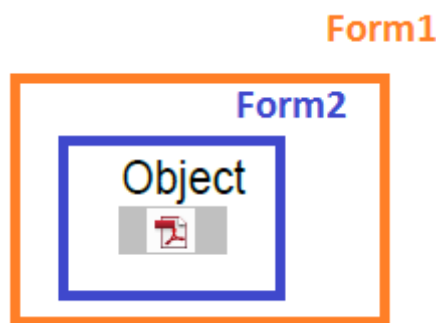

- If **Also selected nested forms** is cleared, only Form1 (= highest level) will be selected.
- If **Also selected nested forms** is selected, both forms will be selected.

**About forms**

Forms are rectangular frames in a PDF, which contain objects, for example an image or a placed PDF.

For more information about forms, refer to [the PitStop Pro Reference Guide on the Enfocus website](#) (See Chapter "Editing forms").

**Example**

The following example Action List consists of 2 Actions:

- The first Action selects all objects inside the art box.
- The second Action selects all forms of which the objects are selected by the first Action, and deselects the objects. Forms inside another form are not selected.

```
Select objects inside or outside region on page 495 <!-- select the art box -->
Select form if content is selected <!-- clear the option Also select nested forms -->
```

**Related Actions**

- [Select forms](#) on page 446
- [Select form contents according to form selection](#) on page 444

## 5.15.71. Select forms

---

**Belongs to**

- **Category:** General
- **Type:** Selections

**What it does**

Allows you to select all forms in a PDF document.

Forms are rectangular frames in a PDF which contain objects, for example an image or a placed PDF.

For more information, refer to [the PitStop Pro Reference Guide on the Enfocus website](#) (See Chapter "Editing forms").

For more information, refer to the PitStop Pro Reference Guide (See Chapter "Editing forms").

**Example**

To select all forms and log them as an error:

```
Select forms
Log selection <!-- enter "Forms were found in this document" and select "Log as error"
at the bottom -->
```

**Related Actions**

- [Log selection](#) on page 335
- [Select form contents according to form selection](#) on page 444

## 5.15.72. Select gray

---

**Belongs to**

- **Category:** Color
- **Type:** Selections

**What it does**

Allows you to make a selection based on the gray color of the fill and/or stroke color of the objects in the PDF.

You can specify how much the actual gray in the document is allowed to deviate from "true" gray (i.e. gray which doesn't have tones of any other color; for RGB this means that the percentage of Red, Green and Blue is the same; for CMYK, this holds for Cyan, Magenta and Yellow).

### 5.15.73. Select if document metadata is inconsistent

---

***Belongs to***

- **Category:** Metadata
- **Type:** Selections

***What it does***

Selects if document metadata is inconsistent, i.e. if the metadata values are not identical in the different metadata locations.

***How it works***

There are two metadata locations in a PDF file:

- The **info dictionary** contains information about the file, such as the title, the author, the creation date ... and is visible through the file's Document properties. It's not in XML format.
- The **XMP metadata stream** also contains information about the file, but this information is represented as XMP metadata - XMP referring to Adobe's labeling technology **E**xtensible **M**etadata **P**latform. All information in the info dictionary is also represented in the XMP metadata stream dictionary, in the form of XMP properties.

Inconsistencies may occur when only one of the metadata locations has been updated.

***Extra checks***

Optionally you can make the selection only if metadata in one location (selected from the list) is also present in the other location; if all metadata should be present in both locations, select **any metadata location**.

If multiple creators should not be considered an inconsistency, select the **Allow multiple creators** checkbox.

***Related Actions***

- [Check if document metadata is consistent](#) on page 359
- [Make document metadata consistent](#) on page 188

### 5.15.74. Select if document XMP contains an invalid name space prefix

---

***Belongs to***

- **Category:** Metadata
- **Type:** Selections

***What it does***

Selects if document XMP contains an invalid namespace prefix.

**About XMP metadata**

XMP metadata is descriptive information about the file embedded in the PDF, for example the name of the author, keywords, copyright information... XMP refers to labeling technology that is used, i.e. Adobe's Extensible Metadata Platform. You can view the XMP metadata in a file's Document Properties in Acrobat (Click the Additional Metadata button, then select Advanced).

**Related Actions**

[Check if date is present in document XMP metadata](#) on page 358

[Check file identifiers in document XMP metadata](#) on page 322

## 5.15.75. Select image by filter type

---

**Belongs to**

- **Category:** Image
- **Type:** Selections

**What it does**

Allows you to select images according to the compression type they use.

You can choose one or more of the following filters:

- ASCII hex
- CCITT
- ZIP
- RunLength
- JPEG 2000
- ASCII 85
- JPEG
- LZW
- JBIG2

Optionally, you can also include soft-mask images (of the chosen filter types) in your selection (i.e. the images that mask an image). These are not included by default.

## 5.15.76. Select image type

---

**Belongs to**

- **Category:** Image
- **Type:** Selections

**What it does**

Allows you to select a particular type of images.

You can select one of the following image types:

- 1-Bit images
- Grayscale images



- Color images
- Stencil mask
- Indexed images

**Example**

The following will convert color images to Grayscale but will not alter Black & White images:

```
Select image type <!-- In the popup, select Color -->
Convert color <!-- In the popup, select Grayscale -->
```

## 5.15.77. Select images

---

**Belongs to**

- **Category:** Image
- **Type:** Selections

**What it does**

Selects all the images in a PDF document.

**Example**

The following selects everything in a PDF except for the images:

```
Select all
Select images
NOT
AND
```

## 5.15.78. Select images with OPI info

---

**Belongs to**

- **Category:** Image
- **Type:** Selections

**What it does**

Selects all the images in a PDF document that contain OPI (Open Prepress Interface) information.

OPI images are treated special as they are assumed to be preview images. They will for example not be preflighted as other images would be.

**About OPI**

OPI (Open Prepress Interfaces) replaces high resolution images with "preview" images; low resolution substitutes which are stored in the PDF, together with the path to the high resolution images. This facilitates data storage and data transfer of PDFs with a large number of images.

**Example**

The following finds any such images and logs them as a caution:

```
Select images with OPI info
Log selection <!-- In the field, type your message (ex. 'Images with OPI comments were
found in this PDF'), then select Log as warning at the bottom -->
```

**Related Actions**

- [Check OPI path](#) on page 340
- [Check OPI type](#) on page 340
- [Gather OPI information](#) on page 418
- [Remove OPI](#) on page 146
- [Change OPI info](#) on page 144

## 5.15.79. Select incorrectly defined process color spaces in DeviceN

---

**Belongs to**

- **Category:** Color
- **Type:** Selections

**What it does**

Allows you to select objects that use a DeviceN color space containing a process color space which does not match the PDF/X Output intent.

**Related Actions**

[Check DeviceN for process color spaces](#) on page 302

## 5.15.80. Select inline image syntax

---

**Belongs to**

- **Category:** Image; PDF 2.0
- **Type:** Selections
- **New since:** PitStop 2022

**What it does**

Selects images based on the presence of an L key.

The L key specifies the length of the image data and allows users to skip inline images if required.

You can select images...

- Without an L key
- With an L key
- With an invalid L key

Note that PDF 2.0 allows (but does not impose) the presence of an L key, but if it's present, it must match the actual inline image data length.

#### **Related Actions**

- [Check inline image syntax](#)
- [Change inline image syntax](#) on page 144

## 5.15.81. Select inside or outside contour

---

#### **Belongs to**

- **Category:** Position and Size
- **Type:** Selections
- **Since version:** 13 update 1

#### **What it does**

Selects objects using the area defined by the current selection. This Action is useful to select objects only within a defined shape, such as a Dieline or a Cutter Guide.

There are several options. You can select:

- The objects inside or outside the contour.
- The objects inside or outside the contour or overlapping contour.
- The objects completely covering the area inside the contour.

Note that this Action must be preceded by a Select Action in the same Action List (for example a Select spot color or a Select objects on layer Action). You can use any "select" Action you want, e.g. select by layer, by color, by line weight and you can use even operators (AND, OR) as required, but remember that only the **basic shape of the selected line art objects** will contribute to the contour!

#### **Remarks**

- *Clipping* is taken into account when determining whether an object lies inside or outside the contour. For example, if an image is partly outside the contour, but this part is clipped, it's considered to be completely inside the contour. The clipping paths are not logged.
- As of PitStop 2022 update 1, in case of complex shapes, the non-zero winding rule (in the Inspector: Fill) is used to determine what lies inside the contour. For more information, refer to the [PDF Reference \(figure 7.9\)](#). This change is done to apply with the latest PDF specifications. In older versions of PitStop (2022 and earlier), the even-odd rule was applied. In the example below, the image on the left shows how PitStop 2022 interpreted the contour (the part in the middle will be cut out), the image on the right shows how PitStop 2022 update 1 will draw it.



- The line art that is used to determine the contour area (through the preceding "select" Action) is not selected by "Select inside contour"; only the objects (images, shadings - which may have exactly the same shape as selected the line art) in that area will be part of the selection. This is illustrated in example 2 and 3.
- You can even select objects inside or outside a non-closed contour or one with gaps using the **Ignore gaps in contour if smaller than ...** checkbox.
- Annotation objects are logged too.
- It's also possible to use text as a contour.

#### Example 1

This Action List logs all images inside the contour formed by all line art on the Cutting layer:

```
Select by layer "Cutting"
Select inside contour
Select images
Select AND
Log selection
```

#### Example 2

This Action List moves all elements belonging to the barcode to a separate layer. Note that the technical contour around the barcode is not moved!

```
Select spot color "Barcode area"
Select inside contour
Move to layer "Barcode"
```

#### Example 3

This Action List converts the color of all objects with spot color "Content area" to CMYK. The "content area" spot color itself is (obviously) not touched.

```
Select spot color "Content area"
Select inside contour
Convert selection to CMYK
```

**Related Action**

- [Close gaps in contours](#) on page 198

## 5.15.82. Select invisible objects without fill and stroke

---

**Belongs to**

- **Category:** General
- **Type:** Selections

**What it does**

Selects objects that have no fill or stroke color associated with them. Even though these objects are not visible in the document, you might want to remove them.



**Note:** This Action only works on vector art (paths) and text without fill and stroke.

**Related Actions**

- [Select objects that use neither stroke nor fill](#) on page 458 (same functionality)
- [Check for invisible objects without fill and stroke](#) on page 330
- [Remove invisible objects without fill and stroke](#) on page 277

## 5.15.83. Select last added objects

---

**Belongs to**

- **Category:** Operator
- **Type:** Selections

**What it does**

Selects the objects that were added recently (in the same Action List).

This Action must be preceded by an Action of the type "Add".

**Example**

The following Action List will first add graphics to the PDF. The added graphics will then be selected and used by the third Action.

```
Add copied graphics <!-- Add copied graphics on page 76 -->
Select last added objects
Check XY scaling difference <!-- Check XY scaling difference on page 392 -->
```

## 5.15.84. Select layers

---

**Belongs to**

- **Category:** Layers

- **Type:** Selections
- **Since version:** 12 update 3

**What it does**

Selects ALL layers in a PDF document.

**Related Actions**

[Select layers by name](#) on page 454

## 5.15.85. Select layers by name

---

**Belongs to**

- **Category:** Layers
- **Type:** Selections
- **Since version:** 12 update 3

**What it does**

Allows you to select layers with a particular layer name.



**Note:** You can use regular expressions to define the layer name (if you select **Equals/Does not equal** as operator method).

**Example**

To select "Layer1" and "Layer3" but not e.g. "Layer2", "Layer12" or any other layer, choose the following attributes:

```
Select layers where name equals [13] <!-- to exclude e.g. Layer2 and Layer12 -->
Select Match case <!-- to exclude e.g. layer1 -->
Select Use regular expressions <!-- to make sure [13] is considered a regular
expression instead of a string -->
```

## 5.15.86. Select layers by print state

---

**Belongs to**

- **Category:** Layers
- **Type:** Selections
- **Since Version:** 2018

**What it does**

Allows you to select all layers with a particular print state.

Print state options are:

- Always prints

- Prints when visible
- Never prints

**Example**

To change the print state 'Always prints' to 'Prints when visible', you could use the following Action List.

```
Select layers by print state <!-- with the option Print: Always prints -->  
Change layer print state <!-- with the option Print: Prints when visible -->
```

**Related Actions**

- [Change layer print state](#) on page 150
- [Check layer print state](#) on page 342

## 5.15.87. Select layers by processing steps - ISO 19593-1

---

**Belongs to**

- **Application:** PitStop Pro
- **Category:** Packaging
- **Type:** Selections
- **Since Version:** 13 update 2

**What it does**

Allows you to select layers based on the layer's processing steps information. Processing steps metadata is defined by ISO standard 19593-1. For more information, refer to [the website of ISO \(International Organization for Standardization\)](#).

Note that you can select layers based on the presence of any processing steps metadata (regardless of the processing step type), or restrict your selection to the layers that contain a particular processing steps group. If the group consists of different processing step types, you can further limit your selection to a specific type (**Restrict to processing steps type** checkbox).

Supported groups:

- Structural
- Dimensions
- Braille
- Legend
- Positions
- White
- Varnish

You can as well define a custom group and custom step types. To do so, enter the appropriate name in the text box.

**Related Actions**

- [Check processing steps - ISO 19593-1](#) on page 369
- [Change layer processing steps - ISO 19593-1](#) on page 197

- [Remove processing steps - ISO 19593-1](#) on page 277

## 5.15.88. Select line art

---

### *Belongs to*

- **Category:** Line Art
- **Type:** Selections

### *What it does*

Allows you to select objects that are drawn as line art (i.e. vector and not raster).

## 5.15.89. Select line art by total number of nodes

---

### *Belongs to*

- **Category:** Line Art
- **Type:** Selections
- **Since Version:** 2019

### *What it does*

Selects paths based on the number of nodes. The number of nodes can be counted based on compound paths or subpaths.

This Action can be useful in combination with [Select closed paths](#) on page 457 or with [Rasterize selection](#) on page 138.

### *Related Actions*

- [Select page by total number of nodes](#) on page 460

## 5.15.90. Select non-compliant Output Intent

---

### *Belongs to*

- **Category:** Color
- **Type:** Selections

### *What it does*

Selects the whole document if the Output Intent is:

- **Not compliant** with a particular PDF/X or PDF/A version, OR
- **Compliant** with a particular PDF/X or PDF/A version, **but the ICC profile or ICC characterization is not as specified.**

You can check the compliance with the following PDF/X versions:

- PDF/X-1a:2001



- PDF/X-3:2002
- PDF/X-1a:2003
- PDF/X-3:2003
- PDF/X-4
- PDF/X-4p
- PDF/X-6
- PDF/X-6p
- PDF/A-1
- PDF/A-2

## 5.15.91. Select non-PDF/X or PDF/A compliant TrueType fonts

---

### ***Belongs to***

- **Category:** Text
- **Type:** Selections

### ***What it does***

Allows you to select a TrueType font that is not compliant with a particular PDF/X or PDF/A version, for example a symbol font. Options are PDF/A-1, PDF/A-2, PDF/X-4 and PDF/X-6.

After this selection, you might want to remove or replace this font.

### ***About OpenType embedded fonts***

OpenType is an extension of the TrueType format that can contain TrueType and/or Type 1 font data. In PDF files it can only appear as an embedded font. It has been introduced in PDF 1.6.

### ***Related Actions***

- [Check if TrueType fonts are PDF/X compliant](#) on page 413
- [Make TrueType fonts PDF/X compliant](#) on page 291

## 5.15.92. Select objects close to the page edge

---

### ***Belongs to***

- **Category:** Page
- **Type:** Selections

### ***What it does***

Selects objects close to the page edge.

You must specify the distance to the trim box and the distance into the bleed.

Optionally, you can choose to treat subpaths of compound paths individually. In that case, each of the subpaths will be selected separately.

See also:

- [Check if object is close to the page edge](#) on page 373

- [Change objects that are close to the page edge](#) on page 205

### 5.15.93. Select objects if page is selected

---

**Belongs to**

- **Category:** Page
- **Type:** Selections

**What it does**

Allows you to select all objects on the selected page(s).

### 5.15.94. Select objects in areas with dense graphics

---

**Belongs to**

- **Category:** Prepress
- **Type:** Selections
- **Since version:** 2020

**What it does**

Detects and selects areas that have dense vector graphics (i.e. many line art or clip mask nodes).

Typically, the selection will then be rasterized to make the file less complex (and easier for the RIP to handle).

You should define the area to be detected (by entering the length of 1 side), and the minimum number of nodes in that area. Alternatively, PitStop can calculate the minimum number of nodes per area based on a selection in a document: to do so, select an area with many nodes and click **Grab settings**.



**Note:**

- The unit in which the length is expressed, depends on your user preferences (PitStop Preferences - Units & Guides category).
- Remember that the number of nodes (in the document or in a selected area) can also be found in the PitStop Inspector (on the Summary tab).

### 5.15.95. Select objects in layers by layer properties

---

**Belongs to**

- **Category:** Layers
- **Type:** Selections

**What it does**

Allows you to select content based on the layer properties of the layer it's placed on.

You can select content that is:

- **Optional:** placed on a layer
- **Not optional:** not placed on a layer
- **By default visible:** visible when the document is first opened (applies to both layered and "normal" content)
- **By default invisible:** invisible when the document is first opened
- **Visible:** set to "visible" e.g. by the user or by an application such as PitStop (regardless of the initial visibility state)
- **Invisible:** set to "invisible" e.g. by the user or by an application such as PitStop (regardless of the initial visibility state)

#### Example

The following Action List allows you to select layered content that is by default visible. Normal content (that is visible by default) is not selected.

```
Select objects in layers by layer properties <!-- Choose "Select content that is optional" -->
Select objects in layers by layer properties <!-- Choose "Select content that is visible" -->
AND <!-- This operator makes sure that only content is selected that is optional and visible at the same time -->
```

#### Related Actions

- [Change layer properties](#) on page 150
- [Select objects in layers by name](#) on page 456

## 5.15.96. Select objects in layers by name

---

#### Belongs to

- **Category:** Layers
- **Type:** Selections

#### What it does

Allows you to select objects inside layers with a certain name.

#### How to proceed

1. Select whether the layer name should (not) be equal to or (not) contain the value you specify.
2. Optionally, enable **Match case** or **Use regular expressions**.



**Note:** The option **Use regular expression** is available as of PitStop 12 update 2, if you select **equals** or **does not equal**. This option allows you to define the layer name using a regular expression (e.g Layer[1-3] will match the following layer names: Layer1, Layer2 and Layer3).

---

**Related Actions**

- [Select objects in selected layers](#) on page 456
- [Select objects in layers by layer properties](#) on page 455

## 5.15.97. Select objects in selected layers

---

**Belongs to**

- **Category:** Layers
- **Type:** Selections
- **Since version:** 12 update 3

**What it does**

Selects objects in the layer(s) selected by another Action in the same Action List.

**Example**

To select the objects on **all** layers of the PDF, create the following Action List:

```
Select layers <!-- Select layers on page 453 -->
Select objects in selected layers
```

**Related Actions**

- [Select objects in layers by name](#) on page 456
- [Select objects in layers by layer properties](#) on page 455

## 5.15.98. Select objects inside or outside region

---

**Belongs to**

- **Category:** Position and Size
- **Type:** Selections

**What it does**

Makes a selection across pages defined by a user-defined area or by PDF page boxes.

This is useful to select (and afterwards remove or move) objects that lay outside the trim box, hence will not be printed.

**How to proceed**

1. Define the area inside or outside which the objects should be selected. Choose on of the following options:
  - **Define the region relative to the lower left of the media box:** You can manually enter the values of the X and Y axis (the anchor point) and the height and with (the size) of the area, or grab them by clicking the icon . Note that you can grab them from a selection or from a page box.

- **Use** (one of the page boxes): You can choose one of the page boxes, the printing area or either the art or trim box, depending on what's defined (option **the art box (if defined) or trim box**).
  - **Use region relative to page box**: You can specify the exact location of the area to check, for example "place the center left of the region relative to the center right of the bleed box with a particular offset, height and width".
2. Indicate which objects relative to the defined area should be selected, for example the objects inside or overlapping the region.
  3. Indicate whether or not annotations and clipping paths should be included in the selection.
  4. If applicable, choose whether or not to take into account page rotation and scaling factor.

#### **Example**

To select any objects that lay outside of the trim box and delete them, you could use the following:

```
Select objects inside or outside region <!-- Select "Use trim box" and "Select objects
outside region" -->
Remove selection
```

## **5.15.99. Select objects of which ICC profile is equal to ICC profile in PDF/X output**

---

#### ***Belongs to***

- **Category:** Color
- **Type:** Selections

#### ***What it does***

Selects objects of which the ICC profile is equal to the ICC profile in PDF/X output. Choose either fill, stroke or both.

#### ***About ICC tagging***

Every input and output device reproduces color and grayscales in a slightly different way. As a result, the colors you see in a PDF file on your screen may not match the colors produced when you print the PDF to an output device.

ICC color profiles are used to avoid this. An ICC color profile is a mathematical description of the color space used by a specific device. In other words, the color profile describes how the colors produced by the device relate to the reference CIE LAB color space (a device-independent color space). As such, they allow you to set up a workflow in which all devices use color management to compensate for their individual color reproduction characteristics, based on the information in the ICC profiles.

#### ***Related Actions***

- [Remove ICC tag](#) on page 116
- [Select by tagged ICC Profile](#) on page 429

- [Check ICC tagging](#) on page 305
- [Check if ICC profile differs from ICC profile in PDF/X Output Intent](#) on page 307
- [Tag object with an ICC profile](#) on page 119
- [Check ICC profile version](#) on page 306

## 5.15.100. Select objects that are completely clipped away

---

### ***Belongs to***

- **Category:** Position and Size
- **Type:** Selections

### ***What it does***

Allows you to select objects that are hidden ("clipped away") by other objects of which the shape masks the artwork.

Optionally, you can include invisible objects that belong to this form.

### ***Related Actions***

[Select clipping objects](#) on page 444

## 5.15.101. Select objects that have a clipping path

---

### ***Belongs to***

- **Category:** General
- **Type:** Selections

### ***What it does***

Selects objects of which the shape (partly) masks other artwork. Only areas inside the clipping objects are visible.

### ***Related Actions***

- [Select clipping objects](#) on page 444
- [Select objects that are completely clipped away](#) on page 496

## 5.15.102. Select objects that use neither stroke nor fill

---

### ***Belongs to***

- **Category:** LineArt;Text
- **Type:** Selections

**What it does**

Selects vector or path objects that contain no stroke or fill color value in a PDF.

**Related Actions**

[Select invisible objects without fill and stroke](#) on page 446 (same functionality)

## 5.15.103. Select objects with negative dash pattern phase


**Belongs to**

- **Category:** LineArt
- **Type:** Selections
- **Since version:** 13

**What it does**

Select documents that have a dash pattern phase with a negative value.

The dash pattern phase specifies the distance into the dash pattern to start the dash. Negative values may not be supported by the RIP.

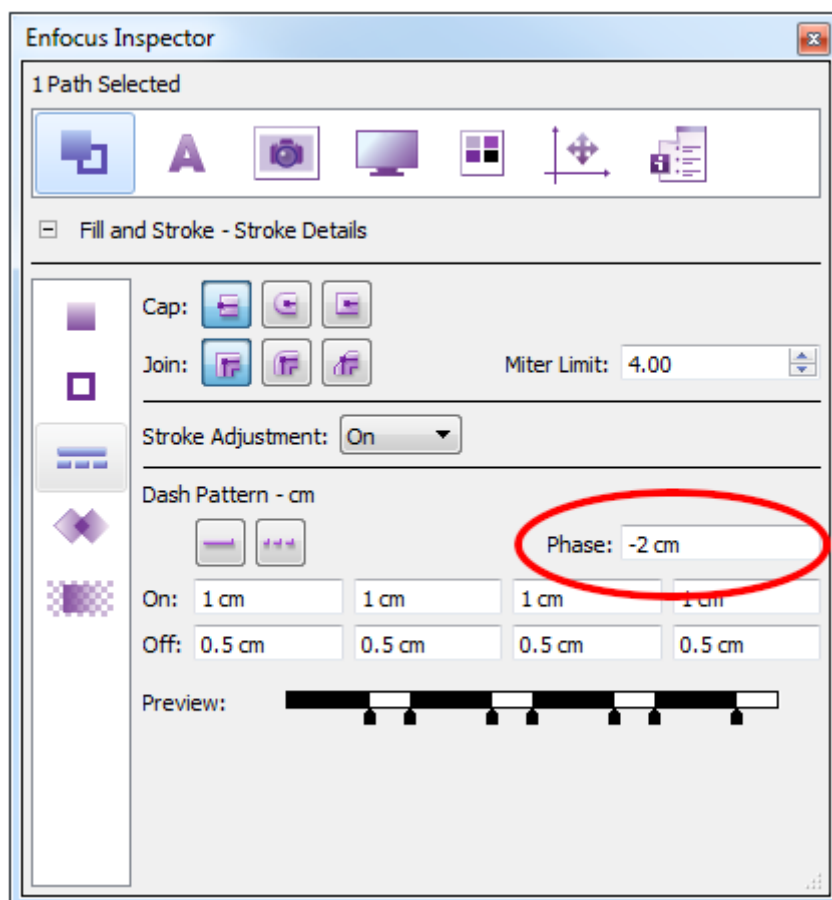

**Related Actions**

- [Check for objects with negative dash pattern phase](#) on page 345
- [Fix negative dash pattern phase](#) on page 169

## 5.15.104. Select OpenType embedded fonts

---

**Belongs to**

- **Category:** Text
- **Type:** Selections

**What it does**

Selects all embedded fonts that are OpenType, or alternatively, all embedded fonts that are not OpenType.

**About embedding fonts**

**Embedding fonts** in a PDF document means that every character of this font is copied and stored in the PDF document. This is useful if you create PDF documents to be displayed on different systems and to be printed on different devices: these are often systems that do not contain exactly the same fonts.

Embedding a font as a **subset** means that only those characters of the font that are actually used in the text are embedded. This reduces the file size by not including superfluous font information.

**About OpenType embedded fonts**

OpenType is an extension of the TrueType format that can contain TrueType and/or Type 1 font data. In PDF files it can only appear as an embedded font. It has been introduced in PDF 1.6.

**Example**

To search for all OpenType fonts and then unembed them, proceed as follows:

```
Select embedded fonts that are OpenType
Unembed font
```

**Related Actions**

- [Check embedded font is OpenType](#) on page 407
- [Unembed font](#) on page 293

## 5.15.105. Select overlapping objects

---

**Belongs to**

- **Category:** Position and Size
- **Type:** Selections



- **Since Version:** 2017

**What it does**

Selects objects based on their relationship with other objects they interact with, i.e. objects that (at least partly) lay on top of, or below other objects.

There are four options:

- The first option allows you to select objects that (at least partly) *overlap* any object on the page.
- The second option allows you to select object that (at least partly) *are overlapped* by any other object on the page
- The third option allows you to select objects that (at least partly) *are on top of other objects selected earlier* in the same Action List.
- The third option allows you to select objects that (at least partly) *are below other objects selected earlier* in the same Action List.

This Action is included in a number of default Action Lists:

- Find Images without an overlapping Varnish
- Check for Black Text sitting on Dark Color (does not include images)
- Check for White Text sitting on Light Color (does not include images)

**Example**

The following Action List will remove all objects that are on top of the text in your PDF:

```
Select text
Select overlapping objects (third option selected)
Remove selection
```

## 5.15.106. Select page by gray surface

---

**Belongs to**

- **Category:** Color
- **Type:** Selections
- **Since version:** 13

**What it does**

Selects gray pages in a PDF based on the total surface (%) of colored content on that page.

You can configure the following attributes:

- How big the non-gray area should be, e.g. less than 90% should be non-gray
- Whether or not a deviation from gray is allowed, e.g. if only "pure" gray should be selected, choose 0% as deviation.
- Which of the page boxes defines a page.

**Use cases:**

- Use this Action in combination with [Log selection](#) to detect whether a PDF should be printed in color or in black and white.
- Use this Action in combination with [Convert color](#) to select gray pages and convert the colors to grayscale (to save ink).

**Example**

The following Action List selects the pages in your PDF that have almost no colored content (less than 5% of the page - the page being defined by the trim box). There is a small tolerance allowed, meaning that colors that are "almost gray" are also considered "gray".

```
Select page by gray surface
    <!-- Select page if non-gray surface is less than 5% of the total
page area -->
    <!-- Ignore color that deviates less than 3% from gray -->
    <!-- Page area is defined by the trim box -->
```

**Related Actions**

- [Select gray](#) on page 432
- [Select page by ink coverage \(non-Black only\)](#) on page 435

## 5.15.107. Select page by ink coverage (non-Black only)

---

**Belongs to**

- **Category:** Color
- **Type:** Selections
- **Since version:** 13

**What it does**

Selects gray pages in a PDF.

This Action detects the ink coverage of color content (CMY and spot colors) in a page and selects the pages for which the maximum ink coverage of each non-black separation is below a particular percentage (as defined in the Action). You can ignore small non-gray areas (e.g. a company logo) and limit the check to an area inside a particular page box as required.

**Use cases:**

- Use this Action in combination with [Log selection](#) to detect whether a PDF should be printed in color or in black and white.
- Use this Action in combination with [Convert color](#) to select gray pages and convert the colors to grayscale (to save ink).

**Example**

The following Action List selects all pages with CMY or spot color values lower than 5%. These pages may have a very small colored area (< 5 cm) or colors outside the trimbox.

```
Select gray page <!-- Select page if ink coverage of each non-Black separation is less
than 5% -->
    <!-- Ignore non-gray areas smaller than 5 cm -->
```

```
<!-- Only check inside the trim box -->
```

**Related Actions**

- [Check ink coverage \(total page check\)](#) on page 309 : checks the ink coverage of *all* colors (including black)
- [Select page by gray surface](#) on page 434

## 5.15.108. Select page by its page box properties

---

**Belongs to**

- **Category:** Page
- **Type:** Selections

**What it does**

Allows you to select a number of pages based on one of the following criteria:

- Whether or not a certain page box is defined.
- The fact that the crop or art box differs from the trim box.
- The fact that a certain page box lies (partially) outside of the media box.
- The fact that the size of the bleed box is not sufficient compared to the trim or crop box.

This allows you to detect pages of which the page boxes are not well defined.

## 5.15.109. Select page by total number of nodes

---

**Belongs to**

- **Category:** Line Art
- **Type:** Selections
- **Since version:** 13 update 1

**What it does**

Selects pages based on the number of nodes present on that page. You can set the threshold (e.g. less than/more than (...)) e.g. 10.000 nodes) as required. This Action is useful to select (and afterwards change) complex pages with lots of points, which may take a considerable amount of time to rip and therefore may cause a production bottleneck. A common way of handling this issue is to select the offending pages and convert them to bitmaps.



**Note:** The new default Action List "Find complex pages (over 5,000 nodes) and rasterize them at 600 dpi" includes this functionality.

**Related Actions**

- [Check total number of nodes on page](#) on page 348
- [Select line art by total number of nodes](#) on page 458

## 5.15.110. Select page by number of images

---

### ***Belongs to***

- **Category:** Image
- **Type:** Selections
- **Since:** 2020

### ***What it does***

Selects all pages that contain a particular number of images.

You could for example select all pages with less than 4 images.

### ***Related Actions***

- [Check number of images on page](#) on page 339

## 5.15.111. Select page by number of paths

---

### ***Belongs to***

- **Category:** Line Art
- **Type:** Selections

### ***What it does***

Allows you to make a selection based on the number of paths on a page.

You could for example select all pages with less than 4 pages.

### ***Related Actions***

- [Check number of paths on page](#) on page 347

## 5.15.112. Select page if content is selected

---

### ***Belongs to***

- **Category:** Page
- **Type:** Selections

### ***What it does***

Allows you to select a page if the content is selected.

You can select or both the page object and the entire page content.

### ***How to proceed***

1. Specify **what** you want to select:
  - The page object only, or

- Both the page object and the entire page content.
2. Specify on what **condition** you want to select it, for example if more than one objects are selected.

### 5.15.113. Select pages

#### *Belongs to*

- **Category:** Page
- **Type:** Selections


#### *What it does*

Allows you to select a particular page, a set of pages, or a page range, for example the first or last page of a PDF, all odd pages, pages from 1 to 5, ...


You can also make a selection based on the *number of pages* in the PDF, for example: Select if number of pages is not a multiple of 10.

#### *New options added in 13 update 1*

- **Rn notation** allowed in page range selection. If you want to add pages starting from the end of the PDF, you can use this notation in the **Page range** text box. R1 refers to the last page (= 1 page from the end), R2 refers to the last but one (= 2 pages from the end), ...

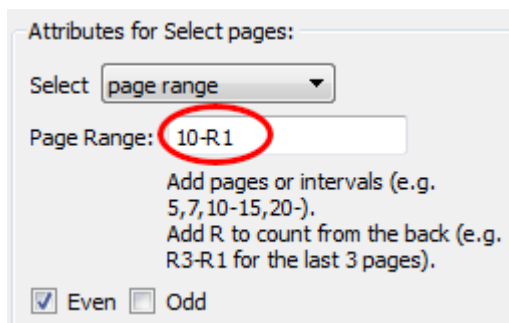

- **Extra option to select every Nth page**, e.g. every second page in the PDF in the first 20 pages of the PDF.

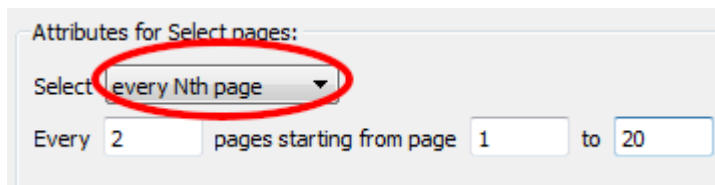

#### *Example*

To select every page but the first page of a PDF, and then add a copied graphic to that page, proceed as follows:

```
Select all pages <!-- Choose: Select all pages, Even and Odd -->
```

```
Select first page <!-- Choose: Select first page, Even and Odd -->  
NOT  
AND  
Add copied graphics <!-- See Add copied graphics on page 76 -->
```

## 5.15.114. Select pages with bookmarks

---

### ***Belongs to***

- **Category:** Page
- **Type:** Selections
- **Since Version:** 24.03

### ***What it does***

Selects pages based on the bookmarks in the PDF.

You can define the name of the bookmark, or specify a list of comma-separated names of bookmarks, or even use regular expressions. If the case of the entered names should be taken into account, you can select the **Case sensitive** checkbox.

### ***Use case***

Based on the selection, you can add inserts into the document, for example dividers between the chapters or add the end of a chapter, etc.

### ***Related Actions***

- [Check bookmarks](#) on page 351
- [Add bookmarks](#)
- [Remove bookmarks](#)

## 5.15.115. Select pages with page label

---

### ***Belongs to***

- **Category:** Page
- **Type:** Selections
- **Since Version:** 2019

### ***What it does***

Selects pages based on their label. You can enter the label or (a combination of) properties, such as the label prefix, the number style or the page range (odd, even, page numbers).

### ***Related Actions***

- [Change page labels](#) on page 207
- [Remove page labels](#) on page 216

## 5.15.116. Select objects with PieceInfo

---

### ***Belongs to***

- **Category:** Page
- **Type:** Selections

### ***What it does***

Searches for objects containing PieceInfo.

This can for example apply to pages coming from Illustrator, containing Illustrator PieceInfo. If a PDF contains PieceInfo, it was saved with editing capabilities from applications such as Illustrator, which may be lost if you edit the PDF with another application.

Removing PieceInfo will make the file smaller, but it won't be possible anymore to import the document in Illustrator.

### ***Related Actions***

- [Remove metadata](#) on page 192

## 5.15.117. Select pages with transparent objects

---

### ***Belongs to***

- **Category:** Page
- **Type:** Selections

### ***What it does***

Selects pages containing transparency.

### ***About transparency in PDF***

Transparency can cause some problems if you view documents in Adobe Acrobat 4.0 or earlier: transparent objects can be rendered incorrectly.

A transparent layer can also cause problems when you transpose the PostScript code of your PDF document to the halftone information of your printer (the 'ripping').

A typical example is saving graphics with transparent elements as PDF compatible with Acrobat 5.0 in Adobe Illustrator 9.0 or Adobe InDesign 2.0. In Adobe Acrobat 4.0, transparent objects in your PDF document are displayed and printed opaque, but transparency is not removed. If you open the same PDF document in Adobe Acrobat 5.x, the transparent objects will look (and print) fine again.

It can be useful to make the distinction between spot colors and CMYK colors when checking the transparency settings in your documents, because different rules govern the overprinting of spot colors.

### ***Related Actions***

- [Check for transparent objects](#) on page 399

- [Remove transparency](#) on page 274
- [Select transparent objects](#) on page 504
- [Change transparency](#) on page 265

## 5.15.118. Select parent content object

---

### ***Belongs to***

- **Category:** General
- **Type:** Selections

### ***What it does***

Allows you to select parent content objects, for example the page the object belongs to.

## 5.15.119. Select paths by fill type

---

### ***Belongs to***

- **Category:** LineArt
- **Type:** Selections
- **Since version:** 2023 update 1

### ***What it does***

Selects paths based on their fill type:

- Paths without fill
- Paths with Non-Zero Winding fill
- Paths with Even-odd fill

### ***About the fill type***

The fill type is an attribute of polygons and loops: compound paths with intersecting lines. To determine whether a point is part of the shape, two different rules can be applied:

- The **Non-Zero Winding** rule (or standard rule). This rule supposes that you draw a line from a point inside the shape to the outside of the shape, without passing through a vertex. You must now count the number of times edges wind around the point inside the shape, in a counter-clockwise direction:
  - For every edge that crosses the line from the point inside the shape in one direction, add 1 to the winding number.
  - For every edge that crosses the line in the opposite direction, subtract 1.If the winding number is not equal to zero, the shape area to which the point belongs, is filled. For more information, refer to <http://www.wikipedia.org/wiki/nonzero-rule>.
- The **Even-odd rule**: This rule also supposes that you draw a line between a point inside the shape outline and a point outside its outline.
  - If that line crosses the line of the shape an odd number of times, the shape area to which the point belongs, is filled.
  - If the number of crossings is even, the area is not filled.



**Checking the fill type of line art**

To see which rule is applied, check the object's fill attributes:

1. Select the object, using the Enfocus Select tool .
2. Click  to display the Enfocus Inspector and select  > .
3. At the bottom, check which button is selected:
  -  If **Fill** is selected, the **Non-zero Winding** rule applies.
  -  If **Eofill** is selected, the **Even-odd** rule applies.

**Related Actions**

- [Change fill type](#) on page 159

## 5.15.120. Select process colorant

---

**Belongs to**

- **Category:** Color
- **Type:** Selections
- **Since version:** 2020

**What it does**

Selects the colorant(s) of your choice (Cyan, Magenta, Yellow, Black).

It's typically used with [Add trace path](#) (to draw a path around the selected process colors) or with [Check ink coverage \(total page check\)](#) (to check the ink coverage of one or more process colors).

**Examples****Example 1:**

Using the following Action List, you can draw a path based on the selected colorants (CMY in this example).

```
Select process colorant (CMY on) - channels on which the Action will work
Select all - objects that will be used to trace the path
Trace path (Use colorant selection on) - draws the path based on the selected
colorants
```

**Example 2:**

```
Select process colorant
Check ink coverage (total page check)
```

**Related Actions**

- [Add trace path](#) on page 89

- [Check ink coverage \(total page check\)](#) on page 309

## 5.15.121. Select registration marks

---

### ***Belongs to***

- **Category:** Page
- **Type:** Selections

### ***What it does***

Allows you to select potential registration marks with a certain color.

### ***How to proceed***

Specify the potential color of the registration marks, by choosing one or more of the following:

- 400% CMYK
- Separation All (registration)
- 100% black
- A specific color

In case of a specific color, do one of the following:

- Select a color space from the list and use the sliders to select the appropriate color.
- Click  and select the appropriate color.
- Select an object with the Enfocus Selection tool and click  to grab the fill or stroke color from the selection.

### ***Related Actions***

[Add registration marks](#) on page 84

## 5.15.122. Select rendering objects

---

### ***Belongs to***

- **Category:** LineArt;Text;Image
- **Type:** Selections

### ***What it does***

Selects all objects with a rendering intent.

This includes paths, text and images with any of the following rendering intents:

- Absolute Colorimetric
- Relative Colorimetric
- Perceptual
- Saturation



**Note:** This Action does not allow you to make a selection based on **one particular** rendering intent. To select objects by **one** of the listed rendering intents, use [Select by rendering intent](#) on page 427.

### About rendering intents

A rendering intent is a remapping method, allowing to remap colors so that they best match the intended use. 'Remapping' means that colors from one output device's color space are mapped to the color space of another device.

For more information and examples, refer to [the PitStop Pro Reference Guide on the Enfocus website](#) (See Chapter "Rendering intents to remap colors").

For more information and examples, refer to the PitStop Pro Reference Guide (See Chapter "Rendering intents to remap colors").

### Related Actions

- [Change rendering intent](#) on page 104
- [Check rendering intent](#) on page 312
- [Remove rendering intent](#) on page 117
- [Select by rendering intent](#) on page 427

## 5.15.123. Select required color set

### Belongs to

- **Category:** Color
- **Type:** Selections
- **Since version:** 2023 update 1

### What it does

Selects objects by color by excluding a certain color, for example select all objects that do not have a certain tint of green.

### How to proceed

Define the color set to be excluded:

1. To exclude 100% black objects, select **Black**.



**Note:** If only black should be excluded in the PDF, **only** select the **Black** checkbox. Do not add any other color.

2. To add another color that should be excluded:
  - a. Click **New**. A new entry will appear in the text box.
  - b. To allow a spot color (optionally), select the **Spot color** checkbox and type the name of the spot color in the text field. You should define a CMYK equivalent too (see next step). The name of the spot color will be shown in the text box.
  - c. Enter the required values for CMYK (expressed in %) in the fields below the New/Remove button. Your changes will be shown in the text box.

3. If slight color deviations are allowed, enter a value in **Maximum ... % of color deviation of each channel**. The default value is 0.01%.
4. If images with a certain color should be selected, select that color from the **Images must use only** list.

**Related Actions**

- [Check required color set](#) on page 313

## 5.15.124. Select shading objects

---

**Belongs to**

- **Category:** Color
- **Type:** Selections

**What it does**

Selects all shading objects.

Shadings represent complex mathematical functions. That's why certain output devices may not be able to correctly interpret them. Shadings can also cause problems during color conversions.



**Note:** As of PitStop 7, shadings can be color converted.

**Related Actions**

- [Convert shading color space to solid color](#) on page 108

## 5.15.125. Select single image page images

---

**Belongs to**

- **Category:** Image
- **Type:** Selections

**What it does**

Selects single image page images, i.e. images that cover the entire page.

## 5.15.126. Select size

---

**Belongs to**

- **Category:** Position/Size
- **Type:** Selections

**What it does**

Allows you to select any object in a PDF of which the height or width is less than, equal to, or greater than a certain size.

You can choose whether or not to take into account page rotation and scaling factor.

## 5.15.127. Select spot color

---

### *Belongs to*

- **Category:** Color
- **Type:** Selections

### *What it does*

Allows you to select either all spot colors in a PDF file, or one or more particular colors, based on their names.



#### **Note:**

- From version 12 update 2 onwards, you can use regular expressions to define the spot color name.
  - From version 13 update 1 onwards, there is an extra option to select a spot color based on a list of names. This new option is useful if different spot color names refer to the same color, so you can easily run a fix on objects with differently named spot colors. It also allows you to select different spot colors in one go.
  - From version 2018 onwards, you can select spot colors by a Pantone Library.
- 

### *How to proceed*


In the attributes of the Select spot color Action, proceed as follows:

1. Select the appropriate option from the list:
  - If you choose **Select all spot colors**, no other options have to be set.
  - If you choose **Select Spot Color by PANTONE color library**, you should select the library of your choice from another list that is displayed.  
 You can further reduce your selection based on the alternate color values:
    - Ignore the alternate color values
    - Select only colors with correct alternate color values
    - Select only colors with wrong alternate color values
  - If you choose one of the other options, you have to specify the name of the spot color(s) that have to be selected. Proceed with step 2.
2. Enter the name of the spot color(s) concerned:
  - In case of **Select spot color by regular expression**, you can use regular expressions. PitStop supports Boost Regular Expressions. For an overview of the options, refer to [http://www.boost.org/doc/libs/1\\_55\\_0/libs/regex/doc/html/boost\\_regex/syntax/perl\\_syntax.html](http://www.boost.org/doc/libs/1_55_0/libs/regex/doc/html/boost_regex/syntax/perl_syntax.html).
  - In case of **Select spot color by name** or **Select spot color by name from list**, you can simply type the name of the spot color(s) concerned or use the color picker  or the Grab color button . Note that, in case of a list, you must enter the names one by one, each on a separate line. It is for example not possible to select two colors in the

document, and select them in one go, using the Grab color button . Instead, you must select the first color, grab it, then select the second color, and grab it and so on.

3. If the spot color should be selected regardless of its case (upper or lower case letters), select the **Ignore case** checkbox.

#### Example

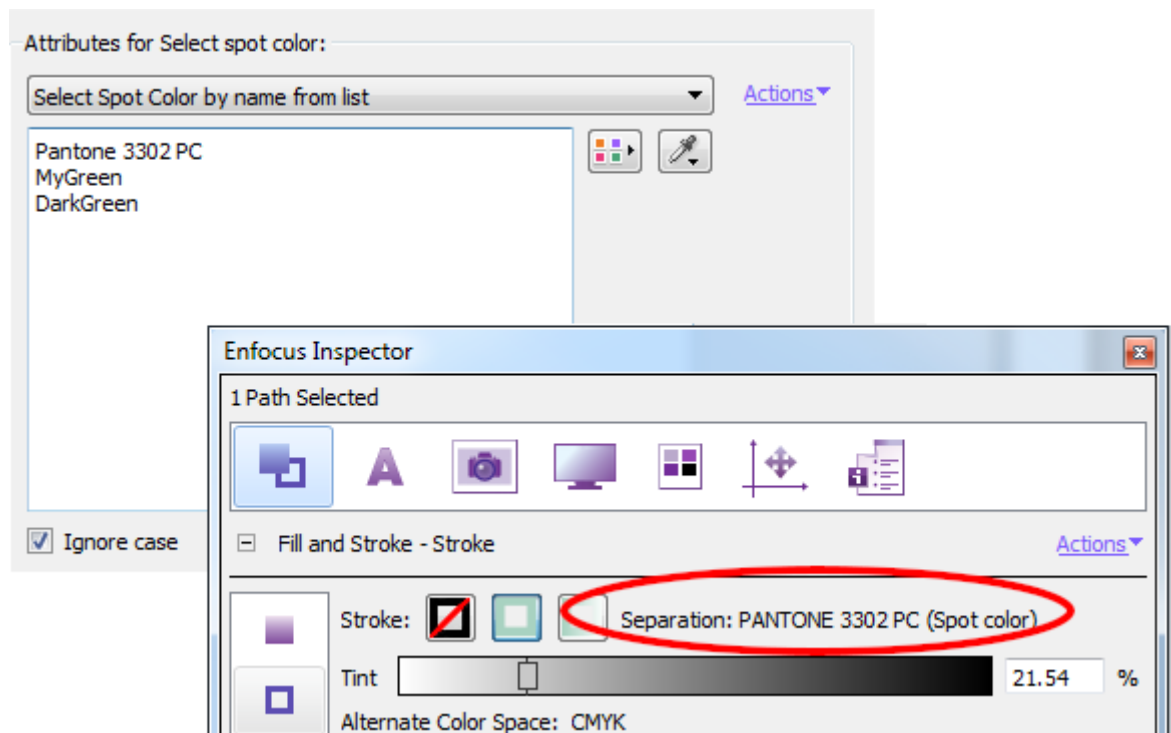

In this example, PitStop will search for three different spot color names (Pantone 3302 PC, MyGreen, DarkGreen, not taking into account the case of the names), which may (or may not) refer to the same color. Suppose the document contains a spot color called "PANTONE 3302 PC", then it will be found and selected.

#### Related Actions

- [Check spot color by name](#) on page 314
- [Check spot color by PANTONE library](#) on page 314

## 5.15.128. Select spot color by alternate color space

#### Belongs to

- **Category:** Color
- **Type:** Selections

#### What it does

Selects spot colors based on their alternate color space.

For example, select a spot color if its alternate color space is ICC tagged RGB or Device RGB.

### Example

To convert a spot color's alternate color space to another color space, for example CMYK, proceed as follows:

```
Select spot color by alternate color space <!-- select the appropriate alternate color space(s) -->
Convert alternate color space to CMYK <!-- (See Convert alternate color space to CMYK on page 106) -->
```

## 5.15.129. Select spot color by alternate values

### Belongs to

- **Category:** Color
- **Type:** Selections
- **Since Version:** 25.07

### What it does

Selects spot colors based on their alternate values. You can choose whether to check the fill, stroke or both of the selected objects.



**Note:** The alternate values may vary with changes in brightness, but the spot color itself remains unchanged. Therefore, you must enter the color's **alternate values at 100% tint** to ensure accuracy.

You can find a spot color's alternate values in one of the following ways:

- Using the *Color Picker* button  or the *Grab color* button . Just make sure to select the object concerned with the PitStop selection tool. The alternative values will be filled in automatically (at 100% tint).
- Using the Color Picker in the PitStop Color Panel
- Using the Enfocus Inspector (but note that the shown values may not be the values at 100% tint!)



### DeviceN colors

**Include spot color definitions from DeviceN spaces** is selected by default, but can be cleared to exclude DeviceN colors. Note that we advise using the Color Picker to find the alternate values of DeviceN colors, because in the Enfocus Inspector the alternate values of the *full deviceN color space* are shown, instead of the alternate values of the spot colors *inside* the DeviceN color space.

### Example

The color of the selected object in the screenshot below is PANTONE Yellow C. The brightness of the color is 79.03%. You can see this in the Enfocus Inspector. However, these are not the values you need to enter in the attributes of this Action.

When you want to configure the Action, you better click the *Color Picker* button  or the *Grab color* button . In both cases, the correct values at 100% tint are filled in automatically.

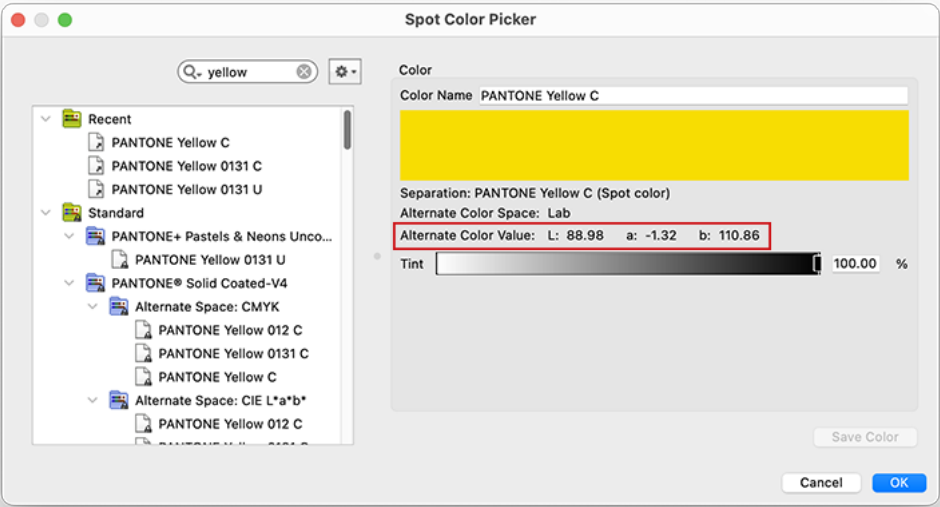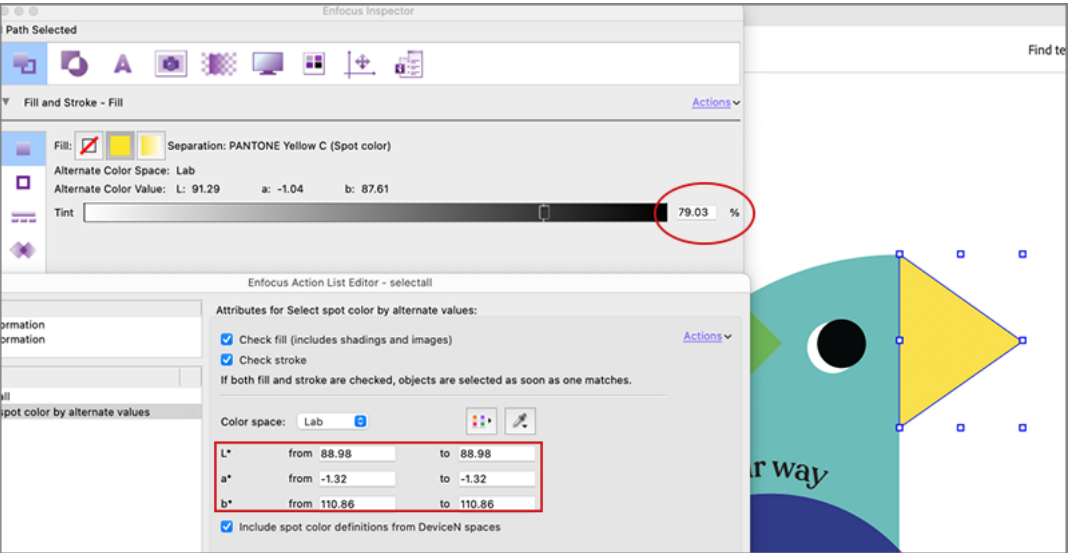

5.15.130. Select standard 14 fonts

*Belongs to*

- **Category:** Text
- **Type:** Selections

*What it does*

Selects the standard 14 PostScript fonts.



The 14 fonts are automatically installed with Adobe Acrobat and embedded by default (since PDF 1.5).

**Example**

To save on file size, you could select these fonts and unembed them. Proceed as follows:

```
Select standard 14 fonts
Unembed font <!-- Unembed font on page 293-->
```

## 5.15.131. Select subpaths

---

**Belongs to**

- **Category:** Line Art
- **Type:** Selections

**What it does**

Selects the subpaths if the entire path is selected.

**About subpaths**

A path is considered the combination of the path itself which represents most graphic state properties such as color, line-weight, etc. and the subpaths which represent the lines. For example, a doughnut is a single path with a single fill and stroke color, which consists of two subpaths (=two circles).

**Related Actions**

- [Combine subpaths](#) on page 162
- [Split in subpaths](#) on page 176

## 5.15.132. Select subset fonts

---

**Belongs to**

- **Category:** Text
- **Type:** Selections

**What it does**

Selects fonts that are subsetted.

If a font is subsetted, only the characters of the font that are actually used in the text are embedded in the document. This is done to keep a file as small as possible.

**Example**

If you have the original font on your system, you could choose the subsetted fonts and embed them completely for later editing. To do so, proceed as follows:

```
Select subset fonts
```

Embed font

**Related Actions**

- [Check font subsetting](#) on page 409
- [Check if a subset font contains a complete CharSet or CIDSet](#) on page 412

## 5.15.133. Select text by key phrase

**Belongs to**

- **Category:** Text
- **Type:** Selections

**What it does**

Allows you to select text objects containing a particular key word or phrase.

To take into account the case of the key phrase (uppercase/lowercase as entered in the text field), select the **Case sensitive** checkbox.



**Tip:** To only select a particular key word (and not the entire text object it belongs to), you could first split the text objects, using [Split in words](#) on page 293.

To specify a match pattern instead of a fixed string, select the **Use regular expressions** checkbox.



**Note:** PitStop supports Boost Regular Expressions. For more information, refer to [http://www.boost.org/doc/libs/1\\_47\\_0/libs/regex/doc/html/boost\\_regex/syntax/perl\\_syntax.html](http://www.boost.org/doc/libs/1_47_0/libs/regex/doc/html/boost_regex/syntax/perl_syntax.html).

**Example**

The below example expression matches every text containing “PitStop” or “Enfocus”.

|                                                                                                                                                     |                                                                                                                                                                                                                     |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Properties</b><br>General Information<br>Locking Information<br><hr/> <b>Actions</b><br>Select all<br>Select text containing (PitSt Enf)o(cus p) | <b>Attributes for Select text by key phrase:</b><br>Select text containing (PitSt Enf)o(cus p)<br><input checked="" type="checkbox"/> Case sensitive<br><input checked="" type="checkbox"/> Use regular expressions |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## 5.15.134. Select text by point size

**Belongs to**

- **Category:** Text
- **Type:** Selections

**What it does**

Selects text in a font that is below, above or equal to a certain size (expressed in points).

This Action is useful to select text that is too small to print correctly.

## 5.15.135. Select text by x-height

---

### *Belongs to*

- **Category:** Text
- **Type:** Selections

### *What it does*

Select text by x-height allows you to select text by a font size expressed in x-height. The x-height refers to the distance between the baseline and the mean line in a typeface; this is typically the height of the letters x, u, v, w, and z. You can set a threshold for the text x-height expressed in points.

Note that this Action only can work if at least one of the characters to be measured (x, u, v, w or z) is available in the PDF.

## 5.15.136. Select text segments

---

### *Belongs to*

- **Category:** Text
- **Type:** Selections

### *What it does*

Selects all text objects in a PDF.



**Tip:** This Action does not select clipping text, which is not visible in the PDF. If you want to select clipping text as well, you can use [Select clipping and non-clipping text](#) on page 506.

---

## 5.15.137. Select text with missing glyphs in its font

---

### *Belongs to*

- **Category:** Text
- **Type:** Selections
- **Since version:** 25.07

### *What it does*

Searches the PDF document for fonts that don't have the character set required to display and print the used characters correctly and selects them.

Optionally, you can include in your check the glyphs that were removed by subsetting fonts.

You can then replace these fonts by embedded or subset fonts that do have all required glyphs and metrics.

**Related Actions**

[Check if font contains all glyphs and metrics for all characters used](#) on page 412

## 5.15.138. Select thin objects

---

**Belongs to**

- **Category:** Line Art
- **Type:** Selections

**What it does**

Allows you to select objects based on the maximum thickness of the fill or stroke.

If desired, you can indicate that for objects of which stroke and fill have the same color, the width of the fill and stroke should be added together.

This Action is typically used to select and afterwards remove thin white lines that may be visible on small screens (e.g. on an iPad screen).

**Example**

If you choose the following options:

```
Select objects with width of Filled rectangle
smaller than 0.0353 cm
Calculate whole thickness when stroke and fill have the same color <!-- selected -->
```

Following objects will be included in the selection:

- Objects with different stroke and fill color, must have a **fill** smaller than 0.0353 cm.
- Objects with the same stroke and fill color, must have a **fill** and **stroke** (added together) smaller than 0.0353 cm.

**Related Actions**

[Check thin objects](#) on page 347

## 5.15.139. Select tiling pattern contents according to parent object selection

---

**Belongs to**

- **Category:** Color
- **Type:** Selections
- **Since version:** 2020

**What it does**

Allows you to select the tiling pattern content depending on whether or not the parent object (e.g. text or line art) is selected.

There are two options:

- Select the tiling pattern content if the parent object is selected.
- Select everything except the tiling pattern content of parent objects that are not selected.

## 5.15.140. Select transparent objects

---

### ***Belongs to***

- **Category:** Prepress
- **Type:** Selections

### ***What it does***

Allows you to select transparent objects.

You can check the transparency of different elements, such as the fill or stroke, the blend modes, ... For the whole list of options, check the attributes of the Action in PitStop.

As of PitStop 25.07 it's possible to restrict the selection based on the transparency level (alpha value). That way, you can detect for example 0% alpha objects, or objects where the transparency is below a certain level.

You can select all transparent objects or restrict your selection to objects that have *all* or *at least one* of the following properties:

- Fill is set to overprint
- Stroke is set to overprint
- Graphic element uses a spot color



**Note:** When checking for transparency groups, pages will be selected if they have an explicit transparency group key (i.e. when "Page is transparency group" is selected in the transparency group properties in the Enfocus Inspector. For more information, refer to the PitStop Reference Guide).

---

### ***About transparency in PDF***

Transparency can cause some problems if you view documents in Adobe Acrobat 4.0 or earlier: transparent objects can be rendered incorrectly.

A transparent layer can also cause problems when you transpose the PostScript code of your PDF document to the halftone information of your printer (the 'ripping').

A typical example is saving graphics with transparent elements as PDF compatible with Acrobat 5.0 in Adobe Illustrator 9.0 or Adobe InDesign 2.0. In Adobe Acrobat 4.0, transparent objects in your PDF document are displayed and printed opaque, but transparency is not removed. If you open the same PDF document in Adobe Acrobat 5.x, the transparent objects will look (and print) fine again.

It can be useful to make the distinction between spot colors and CMYK colors when checking the transparency settings in your documents, because different rules govern the overprinting of spot colors.

### ***Related Actions***

- [Check for transparent objects](#) on page 399
- [Select pages with transparent objects](#) on page 486
- [Remove transparency](#) on page 274

- [Change transparency](#) on page 265

## 5.15.141. Select trim marks

---

### ***Belongs to***

- **Category:** Page
- **Type:** Selections

### ***What it does***

Allows you to select potential trim or bleed marks with a certain color.

### ***How to proceed***


1. Indicate which marks you want to select: trim marks, bleed marks or both.
2. To help PitStop detect the trim marks, specify the potential color of the marks, by choosing one or more of the following:
  - 400% CMYK
  - Separation All (registration)
  - 100% black
  - A specific color

In case of a specific color, do one of the following:

  - Select a color space from the list and use the sliders to select the appropriate color.
  - Click  and select the appropriate color.
  - Select an object with the Enfocus Selection tool and click  to grab the fill or stroke color from the selection.
3. If desired, specify how much the marks are allowed to deviate from the expected position:
  - The unit is the unit set in the PitStop Preferences (Units & Guides category), for example: cm or pt
  - The maximum value is 2.7 pt; if you enter a higher value, it is automatically reset to 2.7 pt or an equivalent value, if you're using a different unit.

### ***Example***

In the image below, the red marks are detected as trim marks, although the position of the vertical marks in the top and bottom left corner is not as expected (they are not exactly on one vertical line). In this case, the deviation (= difference between the position of both marks) is less than the specified threshold.

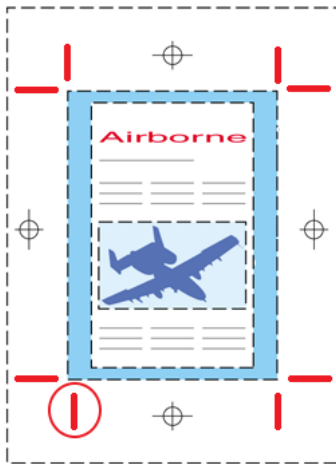**Remark**

A filled path with 3 lines is accepted as a trim mark if:

- The color is as specified in the attributes of this Action.
- It has no dash pattern.
- The 4 points of the 3 lines are a rectangle.
- The path is closed.
- The width is between 0.1 and 2 pt.
- The length is between 8 and 40 pt.

**Related Actions**

- [Use trim marks to set page box](#) on page 224
- [Check if trim marks match page box](#) on page 374

## 5.15.142. Select undefined DeviceN colorants

---

**Belongs to**

- **Category:** Color
- **Type:** Selections

**What it does**

Selects objects which use a DeviceN color space (including NChannel) that contains spot colors that are not defined in the colorants dictionary.

**About the DeviceN color space**

The DeviceN color space is defined as a list of names. These names can refer to the process colors (CMYK, RGB or Gray) or spot colors. Spot colors can have an alternate in CMYK for output devices that do not recognize their name, or they can just be a name without color definition. If the color is just a name (for example: "Silver" or "MySpot"), it cannot be used on other devices.

**Checking the colorants dictionary**

You can use the Enfocus PitStop Inspector to check whether a particular spot color has been defined in the colorants dictionary. Proceed as follows:

1. Select an object with the color you want to check (using the Enfocus Select Object Tool .
2. Click  to display the Enfocus Inspector and select  > . Next to the Fill icons, you will see "DeviceN (Spot + process colors)". Below you will see the number of components and their names.
3. Click the **Actions** link (in the top right corner) and select **Color Picker**.
4. In the left part of the Color Picker dialog, navigate to the **Document Spot Colors** folder. This folder contains all spot colors used in the document (not only the ones used for the selected object).
5. Select the spot color you want to check. If the color is just a color name, without a color definition, the Alternate Color Space is Gray.

**Related Actions**

[Check DeviceN colorants](#) on page 302

## 5.15.143. Select visible objects

---

**Belongs to**

- **Category:** Position and Size
- **Type:** Selections
- **Since Version:** 2017

**What it does**

Selects all objects that are needed to render and print a PDF and that affect the visual appearance of the PDF.



**Note:** This Action only takes into account the transparency of the objects, not the colors.

This Action can be useful to separate visible from invisible content, or to make sure that preflight checks are only applied to visible content, as it doesn't make sense to check and fix objects that are invisible. Note that PitStop comes with a default Restricting Action List created using this Action; you can use it in conjunction with a Preflight Profile to check only the elements needed to render the file, and ignore the rest.

To determine whether or not an object is visible, you can take into account the objects on other layers, or you can limit the scope by adding another select Action.



**Related Actions**

[Select concealed objects](#) on page 493

## 5.15.144. Select XObjects

---

**Belongs to**

- **Category:** General
- **Type:** Selections

**What it does**

Selects any XObject in the PDF file.

XObjects are PostScript objects, such as background images, that are defined only once in a PDF file, but used several times (e.g. on several pages). Using XObjects can speed up printing but requires extra printer memory.

XObjects are supported as of PDF 1.4.

**Example**

To log the presence of XObjects, use:

```
Select XObjects
Log Selection
```

**Related Actions**

[Check for reference Xobjects](#) on page 331

## 5.15.145. Separate stroke and fill

---

**Belongs to**

- **Category:** Line Art
- **Type:** Changes


**What it does**

Splits stroke and fill of line art that has both a stroke and a fill.


This is for example useful if you want [to add bleed around a contour](#), which is able to extend line art, but only if it's not both stroked and filled.

**Example**

**Before:**

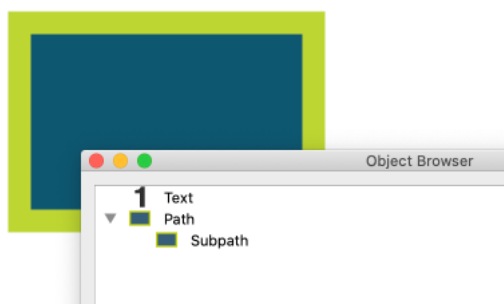

**After:**

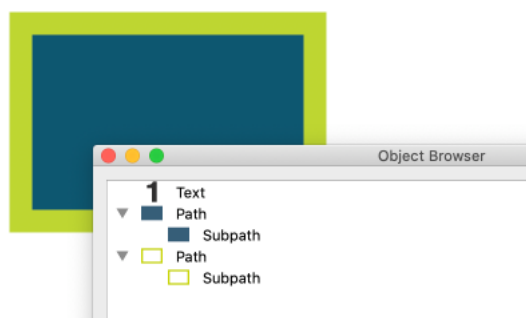

#### **Related Actions**

- [Add bleed around contour](#) on page 258

## **5.15.146. Set correct document XMP name spaces**

---

#### **Belongs to**

- **Category:** Metadata
- **Type:** Changes

#### **What it does**

The XMP metadata standard (used for labeling metadata in PDFs) defines namespaces for defined sets of core properties. This Action checks if the correct document XMP namespaces are used, and fixes issues as required.

#### **Related Actions**

- [Check if document XMP name space uses correct prefix](#) on page 360

## **5.15.147. Set black point compensation**

---

#### **Belongs to**

- **Category:** PDF 2.0
- **Type:** Changes


- **New since:** PitStop 2022

**What it does**

Allows you to set the black point compensation to a particular value (On, Off, or Default).

The black point compensation option is a feature of Adobe Photoshop to address color conversion problems caused by differences between the darkest level of black achievable on one device and the darkest level of black achievable on another.

Note that the black point compensation attribute of a selected object can be found and changed in the Enfocus Inspector, on the **Prepress - General** tab.

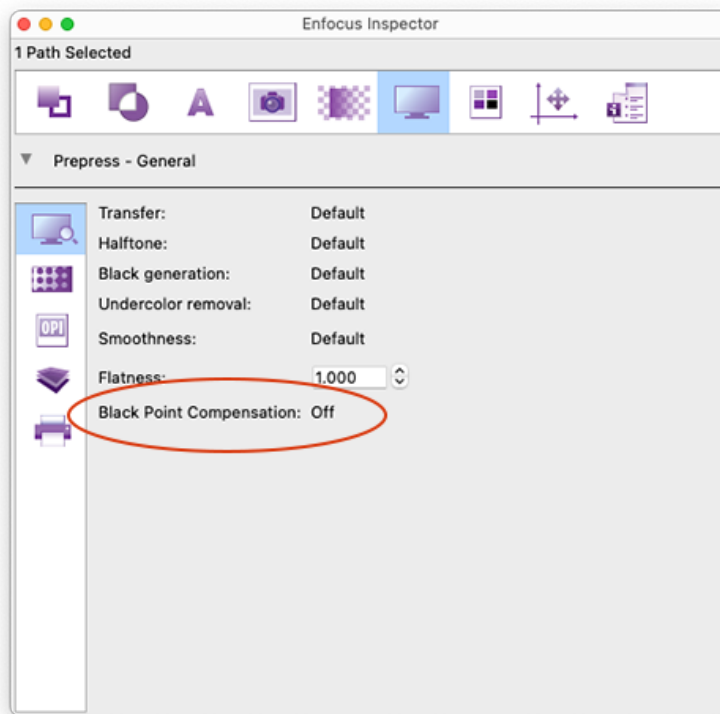**Related Actions**

- [Check black point compensation](#) on page 381
- [Select black point compensation](#) on page 489
- [Remove black point compensation](#) on page 232

## 5.15.148. Set page size to the largest in document

---

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Increases the size of smaller pages in a PDF document, so they are all equal to the size of the largest page.

If a PDF contains pages of different sizes, this may cause problems during the printing process. You can use this Action to fix this problem.

**Related Actions**

[Set page size to the smallest in document](#) on page 223

## 5.15.149. Set page size to the smallest in document

---

**Belongs to**

- **Category:** Page
- **Type:** Changes

**What it does**

Decreases the size of larger pages in a PDF document, so that they are all equal to the size of the smallest page.

If a PDF contains pages of different sizes, this may cause problems during the printing process. You can use this Action to fix this problem.

**Related Actions**

[Set page size to the largest in document](#) on page 223

## 5.15.150. Set XMP file identifiers

---

**Belongs to**

- **Category:** Metadata
- **Type:** Changes

**What it does**

Adds missing file identifiers to the PDF's XMP metadata stream, for example: the Version ID, the DocumentID, the RenditionClass.

**Related Actions**

[Check file identifiers in document XMP metadata](#) on page 322

## 5.15.151. Sharpen an image with unsharp mask

---

**Belongs to**

- **Category:** Image
- **Type:** Changes

**What it does**

Allows you to sharpen edges in pixel images by applying the unsharp mask filter.

This filter:

- Compares adjacent pixels (specified by **Radius** and **Threshold**) to determine which pixels to correct.
- Increases the contrast of these pixels (specified by **Amount**).

You can modify the amount of contrast to be applied when correcting pixels (Amount), the distance (Radius) and the brightness difference (Threshold) between adjacent pixels.

The effects of the unsharp mask filter are far more pronounced on-screen than in high-resolution output. For print, experiment to determine which options work best for your image.



**Note:** This option is also available in the PitStop Inspector (by selecting  >  ).

## 5.15.152. Shrink page content to fit

### *Belongs to*

- **Category:** Page; Position/Size
- **Type:** Changes

### *What it does*

Shrinks page content to fit the size of a particular page box. You can add extra margins, if necessary. You should also define the anchor point, for example "anchored at the lower left of the media box".

You can choose whether or not to take into account page rotation and scaling factor.

### *Related Actions*

- [Scale page content to fit](#) on page 221
- [Scale to fit page size](#) on page 222
- [Scale page content](#) on page 220
- [Scale page boxes](#) on page 219

## 5.15.153. Snap color to color set

### *Belongs to*

- **Category:** Color
- **Type:** Changes

### *What it does*

Allows you to remap any colors that vary a little from your desired colors back to the desired color. This Action can also remap images to Black or CMYK.

Snap color to color set can be useful to keep tight control over the range of colors in a document.

**How to proceed**

Define the color set to which the colors in the PDF must be changed as follows:

1. To remap variants of black to 100% black, select **Black**.



**Note:** If you want to remap **all colors** in your document to black, **only** select the **Black** checkbox. Do not add any other color.

2. To add another color the colors in the document should be remapped to if they are close to it:
  - a. Click **New**. A new entry appears in the text box.
  - b. If you want to use a spot color (optionally), select the **Spot color** checkbox and type the name of the spot color in the text field. You should define a CMYK equivalent too (see next step). The name of the spot color is shown in the text box.
  - c. Enter the required values for CMYK (expressed in %) in the fields below the New/Remove button. Your changes are shown in the text box.
3. If slight color deviations are allowed, enter a value in **Maximum ... % of color deviation of each channel**. The default value is 0.01%.
4. From the **Map images to** list, select the preferred color space for images. You can choose between black, CMYK, and (if applicable) the spot color(s) defined in the previous step.

## 5.15.154. Split Action List


**Belongs to**

- **Category:** General
- **Type:** Settings
- **Since Version:** 2019

**What it does**


This Action changes the way the content of an Action List is processed:

- Without this Action/default behavior: All Actions are executed one after the other, page after page, until the end of the document. There is no way to get back to the beginning of the document, for example to copy something from the end of the document to the beginning.

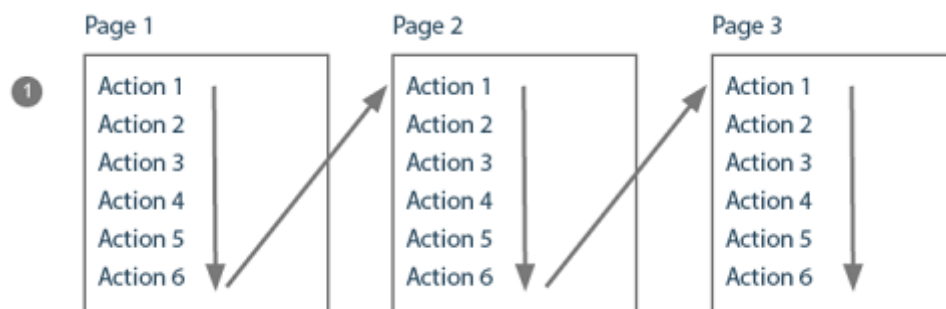

- With this Action:
  1. First all Actions **preceding** *Split Action List* are executed, one after the other, page after page, until the end of the document.
  2. Then the changes are saved. If anything is copied to the clipboard, it's preserved.

3. Next, the Actions **following** *Split Action List* are executed on the saved document, starting from the beginning of the document until the end or until another *Split Action List*. Note that after saving, the selection is lost, so a selection has to be made after *Split Action List*.

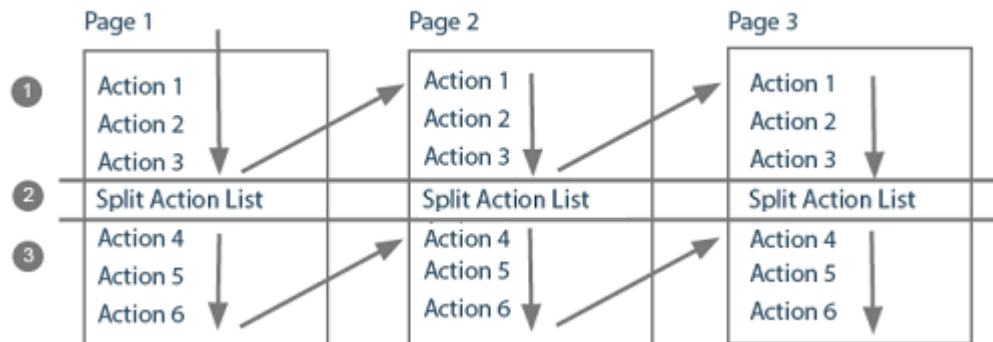

This approach makes it possible to go through a document multiple times.

### Example Action Lists

The following Action List copies the content of page 5 to page 2:

```
select page range          <!--Page range is "5" -->
copy content to clipboard  <!--Clipboard name e.g. content pg 5 -->
split Action List
select page range          <!--Select the target page: Page range is "2" -->
paste objects from clipboard <!--Clipboard name chosen higher -->
```

The following Action List splits pages and reorders them in one and the same Action List:

```
split pages in half        <!--To split the spreads -->
split Action List
select all                  <!--Make the selection -->
reorder pages              <!--Specify the new page order,
                           based on the split pages -->
```

### Related Actions

This Action is typically used to reorder split pages and to copy content backwards (from later pages to earlier pages). In that case, the following Actions may be useful:

- [Split pages in half](#) on page 224
- [Reorder pages](#) on page 217
- [Copy or cut objects to clipboard](#) on page 131
- [Paste objects from clipboard](#) on page 93

## 5.15.155. Simplify line art

### Belongs to

- **Category:** Line Art
- **Type:** Changes
- **Since:** 24.03

**What it does**

Simplifies a path by reducing the number of nodes.



**Note:** This option is also available in the Enfocus Inspector (Line Art Editing > Simplify Line Art).

**Attributes**

**Note:** Settings are remembered.

| Attribute                                                                         | Description                                                                                                                                                          |
|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Keep all original curves                                                          | Keep the curves that are already present, regardless of the curve fitting settings below. PitStop will only modify the straight lines in the original path.          |
| Target segment length                                                             | Increase the segment length to increase the space between the nodes and further reduce the number of nodes.<br><br>Default value is 20 pt.                           |
| Keep corners with angle greater than...                                           | Make sure to keep the segments that clearly form an angle, to avoid mistakes.                                                                                        |
| Curve fitting                                                                     | Combine as many curves as possible into one long curve. Use this option in combination with the target segment length.                                               |
| Straight line fitting <ul style="list-style-type: none"> <li>Tolerance</li> </ul> | Combine as many straight lines a possible into one long straight line, taking into account the tolerance, i.e. the maximum deviation allowed from the original path. |

**Use cases**

Cut paths with many nodes slow down cutting, because the cutting machine needs to stop and start again at every node; by reducing the number of nodes (approximating the original path), the speed will increase.


Line art with many nodes can also be challenging for RIPs.

**Tip**

This Action is also useful if you've [converted a fill to stroke](#), typically resulting in a path with a lot of nodes.



Example

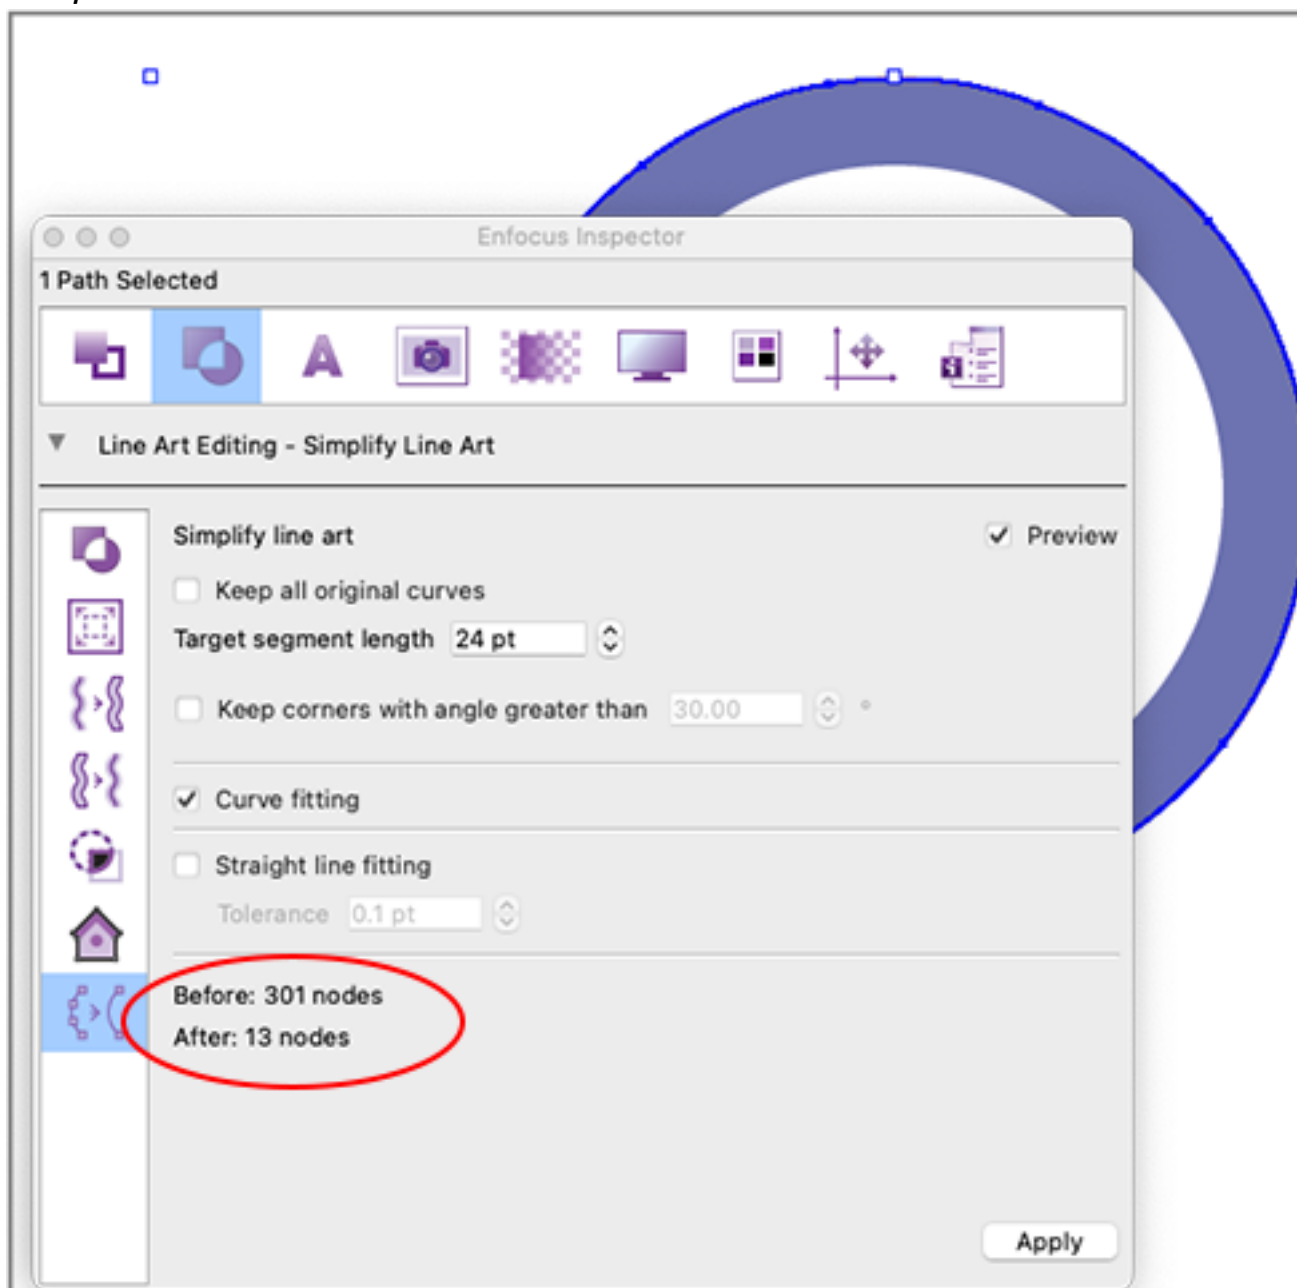

## 5.15.156. Split in characters

**Belongs to**

- **Category:** Text
- **Type:** Changes

**What it does**

Allows you to split text objects in a PDF in separate characters.

This allows you to change for example the font or format of single characters (e.g. increase the size of capital letters).

**Related Actions**

- [Split in words](#) on page 293
- [Merge into text lines](#) on page 291

## 5.15.157. Split in subpaths

---

**Belongs to**

- **Category:** Line Art
- **Type:** Changes

**What it does**

Allows you to split any compound path into separate paths, for example to give them a different color.

**Splitting compound paths in PitStop Pro**

In PitStop Pro, you can as well split compound paths. Proceed as follows:

1. Select the compound path (by using the PitStop Select Objects tool ).
2. Right-click it.
3. Click **Path > Compound Path > Release Compound Path**.

**Related Actions**

- [Combine subpaths](#) on page 162
- [Select subpaths](#) on page 462

## 5.15.158. Split in words

---

**Belongs to**

- **Category:** Text
- **Type:** Changes

**What it does**

Allows you to split the text objects in a PDF in separate words, for example to modify the spacing.

**Related Actions**

- [Split in characters](#) on page 292

- [Merge into text lines](#) on page 291

## 5.15.159. Split line art in segments

---

### ***Belongs to***

- **Category:** Line Art
- **Type:** Changes

### ***What it does***

Allows you to split a path in multiple individual segments.

**Only split at corners where the angle is at least <value>°** avoids that sequences of continuous lines get split.

### ***Use cases***

This Action can be useful for optimizing cut lines, because detecting and deleting duplicate lines is a critical process. It can help you break lines apart, remove hidden objects, and close gaps in contours.

### ***Related Actions***

- [Combine subpaths](#) on page 162
- [Select subpaths](#) on page 462
- [Split in subpaths](#) on page 176

## 5.15.160. Split pages in half

---

### ***Belongs to***

- **Category:** Page
- **Type:** Changes

### ***What it does***

Splits pages in half in a certain direction (horizontally, vertically, or orientation dependent), based on the desired page box.

Orientation depending means that the landscape pages are split vertically and portrait pages are split horizontally.



**Note:** PitStop provides three Actions Lists, allowing you split A4, A5 and US Letter documents in half.

---

This Action can be useful if you scanned two pages of a book as a single page, but want to have them as separate pages (e.g. for better readability); or if you have an image spread over two pages which has to be split in two for printing purposes.

## 5.15.161. Strip OpenType embedded fonts

---

### *Belongs to*

- **Category:** Text
- **Type:** Changes

### *What it does*

Allows you to remove the font's OpenType **info** from the PDF.

An OpenType embedded font is a PDF font resource that has its font embedded in the 'FontFile3' key with as 'SubType' the value 'OpenType'. This is not supported by older software. Running this Action will convert the PDF font resource to a format that is supported by older software as well.

## 5.16. T

---

### 5.16.1. Tag object with an ICC profile

---

#### *Belongs to*

- **Category:** Color
- **Type:** Changes

#### *What it does*

Tags objects with a Gray, RGB, CMYK or Lab color space with a chosen ICC profile.

You can only tag the stroke or fill color or both. If an object is tagged already, the ICC tag will not be modified, unless you select the **Change ICC profile if object is already tagged** checkbox.

#### *About ICC tagging*

Every input and output device reproduces color and grayscales in a slightly different way. As a result, the colors you see in a PDF file on your screen may not match the colors produced when you print the PDF to an output device.

ICC color profiles are used to avoid this. An ICC color profile is a mathematical description of the color space used by a specific device. In other words, the color profile describes how the colors produced by the device relate to the reference CIE LAB color space (a device-independent color space). As such, they allow you to set up a workflow in which all devices use color management to compensate for their individual color reproduction characteristics, based on the information in the ICC profiles.

**Related Actions**

- [Remove ICC tag](#) on page 116
- [Select by tagged ICC Profile](#) on page 429
- [Check ICC tagging](#) on page 305
- [Check if ICC profile differs from ICC profile in PDF/X Output Intent](#) on page 307
- [Select objects of which ICC profile is equal to ICC profile in PDF/X output](#) on page 433
- [Check ICC profile version](#) on page 306

## 5.17. U

---

### 5.17.1. Unembed font

---

**Belongs to**

- **Category:** Text
- **Type:** Changes

**What it does**

Removes embedded fonts from a document.

This can make the PDF lighter for internet distribution but risks messing up formatting if the font is not present on the end user's machine.

Optionally, you can choose not to execute this Action if the resulting font is unsafe.

**About embedding fonts**

**Embedding fonts** in a PDF document means that every character of this font is copied and stored in the PDF document. This is useful if you create PDF documents to be displayed on different systems and to be printed on different devices: these are often systems that do not contain exactly the same fonts.

Embedding a font as a **subset** means that only those characters of the font that are actually used in the text are embedded. This reduces the file size by not including superfluous font information.

**Related Actions**

[Embed font](#) on page 287

### 5.17.2. Use flags to select annotation

---

**Belongs to**

- **Category:** Metadata

- **Type:** Selections
- **New since:** PitStop 2022

**What it does**

Selects annotations based on the flag they have.

You can select the flags of your choice and indicate whether or not the flags should be enabled.

Following flags can be selected:

- Invisible
- Print
- NoRotate
- ReadOnly
- ToggleNoView
- Hidden
- NoZoom
- NoView
- Locked
- LockedContents

**Related Actions**

- [Check annotation flags settings](#) on page 348

### 5.17.3. Use trim marks to set page box

---

**Belongs to**

- **Category:** Page; Position and size
- **Type:** Changes

**What it does**

Allows you to set the trim box and/or the bleed box based on the trim or bleed marks found in the PDF.

**Note:**

- Crop marks with a **dash pattern** cannot be used to set the page box.
- Crop marks generated with Illustrator, InDesign and QuarkXpress are supported.


**How to proceed**

1. Indicate which page box you want to set: the trim box, the bleed box or both.
2. Specify the color of the trim marks by choosing one or more of the following:
  - 400% CMYK
  - Separation All (registration)
  - 100% black
  - A specific color.

3. If desired, specify how much the marks are allowed to deviate from the expected position:
- The unit is the unit set in the PitStop Pro Preferences (Units & Guides category), for example: cm or pt
  - The maximum value is 2.7 pt; if you enter a higher value, it is automatically reset to 2.7 pt or an equivalent value (if you're using a different unit).

**Example**

In the image below, the red marks are detected as trim marks and used to set the trim box (blue box). The position of the vertical marks in the top and bottom left corner is not as expected (they are not exactly on one vertical line), but the deviation (= difference between the position of both marks) is less than the specified threshold.

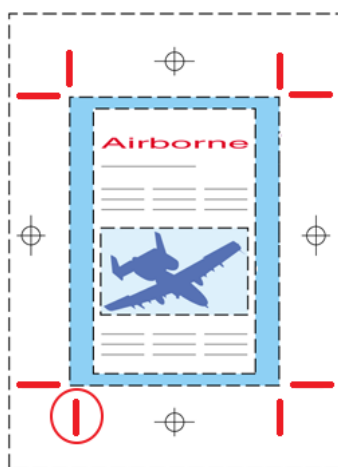**Related Actions**

- [Select trim marks](#) on page 488
- [Check if trim marks match page box](#) on page 374

## 6. Copyrights

---

© 2025 Enfocus BV all rights reserved. Enfocus is an Esko company.

Certified PDF is a registered trademark of Enfocus BV.

Enfocus PitStop Pro, Enfocus PitStop Workgroup Manager, Enfocus PitStop Server, Enfocus BoardingPass, Enfocus Connect YOU, Enfocus Connect ALL, Enfocus Connect SEND, Enfocus StatusCheck, Enfocus CertifiedPDF.net, Enfocus PDF Workflow Suite, Enfocus Switch, Enfocus SwitchClient, Enfocus SwitchScripter, Enfocus TestDrive, Enfocus SwitchScriptTool, Enfocus Browser, PitStop Library Container, Enfocus Griffin, Enfocus Review, Enfocus FastLane and Enfocus Appstore are product names of Enfocus BV.

Adobe, Acrobat, Distiller, InDesign, Illustrator, Photoshop, FrameMaker, PDFWriter, PageMaker, Adobe PDF Library™, the Adobe logo, the Acrobat logo and PostScript are trademarks of Adobe Systems Incorporated.

Datalogics, the Datalogics logo, PDF2IMG™ and DLE™ are trademarks of Datalogics, Inc.

Apple, Mac, macOS, Macintosh, iPad and ColorSync are trademarks of Apple Computer, Inc. registered in the U.S. and other countries. Windows and Windows Server are registered trademarks of Microsoft Corporation.

PANTONE® Colors displayed here may not match PANTONE-identified standards. Consult current PANTONE Color Publications for accurate color. PANTONE® and other Pantone, Inc. trademarks are the property of Pantone, Inc. ©Pantone, Inc., 2006.

OPI is a trademark of Aldus Corporation.

Quark, QuarkXPress, QuarkXTensions, XTensions and the XTensions logo among others, are trademarks of Quark, Inc. and all applicable affiliated companies, Reg. U.S. Pat. & Tm. Off. and in many other countries.

Docker and the Docker logo are trademarks or registered trademarks of Docker, Inc. in the United States and/or other countries. Docker, Inc. and other parties may also have trademark rights in other terms used herein.

This product and use of this product is under license from Markzware under U.S. Patent No. 5,963,641.

Other brand and product names may be trademarks or registered trademarks of their respective holders. All specifications, terms and descriptions of products and services are subject to change without notice or recourse.