


## Date Calculator

### Description

This app will give you the possibility to do simple calculations on dates and hours, you can add or subtract a number of days from a given date.

The resulting date will be stored in the job as Private Data

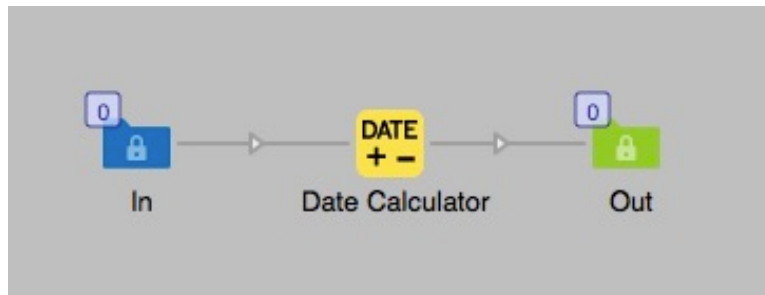

### Compatibility

Switch 2020 fall and higher. Windows or Mac OSX.

### Connections

This app can have several input or output connections. No settings are available of the outgoing connection.

### Properties detailed info

You can calculate days or hours with the selection in dropdown menu. If you want to go back in time you write a negative value (-2).

Properties	
Property	Value
Element type	Date Calculator
Name	Date Calculator
Description	
Calculate days or hours	Days
<i>Date to change (yyyy-MM-dd)</i>	Automatic
<i>Number of days</i>	1
<i>Only Monday to Friday</i>	No
<i>Private data key for Date</i>	newDate
<i>Private data key for Year</i>	newYear
<i>Private data key for Month</i>	newMonth
<i>Private data key for Date number</i>	newDateNumber
<i>Private data key for Week Day number</i>	newWeekDayNumber
<i>Private data key for Date to change</i>	dateToChange
<i>Private data key for week number</i>	newWeekNumber

## Flow element properties

### Calculate days

- Date to change (yyyy-MM-dd)
  - **Automatic** will use the current date on the system, this is default
  - **Inline value** here you can set a specific date.  
Enter a specific date or use Switch variables to pick up the information in the job. The format of the date has to be yyyy-MM-dd ( 2017-01-01 ) if it is in any other format the calculation will fail.
- Number of days
  - Enter the number of days that needs to be added or subtracted to the date. This value can use Switch variables. A negative value will give you a date earlier than entered in “Date to change”.
- Only Monday to Friday
  - This setting will skip weekend days and continue on the Monday. If your calculated day end up on a Saturday or Sunday the result will be the Monday. Default is “No”.

### Resulting date value

The calculated date will be stored as a private data Switch variable in the job. The job can have several private data entries and they are labeled with a key, in this case the key is “newDate”

Groups	Job variables	Job.PrivateData (Text)
Connection Database Doc Email Image Iptc <b>Job</b> Metadata Office Photo Stats Switch	ByteCount EmailAddress EmailBody Extension FailElement FailFlow FailMessage FailModule FailTime FileCount FileCreationDate Hierarchy IsFile IsFolder JobState Name NameProper NestedName Origin Path Priority <b>PrivateData</b> Size UniqueNamePrefix UserEmail UserFullName UserName	Returns the value of the private data with the specified key, or empty if no private data with that key was set for the job  2017-12-27

Key:

Space:

Case:

After:

Before:

Segment:

Search:

Text with variables

Sample value:

If you want to build your own date format you can access the year, month and date of the calculated date from private data with the following keys:

[Job.PrivateData:Key="newDate"] give you the date (yyyy-MM-dd)

[Job.PrivateData:Key="newYear"] give you the year (yyyy)

[Job.PrivateData:Key="newMonth"] give you the months number (1-12)

[Job.PrivateData:Key="newDateNumber"] give you the day number (1-31)

[Job.PrivateData:Key="newWeekDayNumber"] give you the week day number (1-7), week starts with Monday.

[Job.PrivateData:Key="dateToChange"] give you the date you calculate from.

[Job.PrivateData:Key="newWeekNumber"] give you the ISO week number for the calculated date.

Properties	
Property	Value
Element type	Date Calculator
Name	Date Calculator
Description	
Calculate days or hours	Hours
<i>Number of hours</i>	1
<i>Private data key for new hour</i>	newHour
<i>Private data key for new time</i>	newTime
<i>Private data key for new time and date</i>	newHourDate

### Calculating hours

- Number of hours
  - Enter the number of hours that needs to be added or subtracted to the date/time value. This calculation starts from current time on system. This value can use Switch variables. A negative value will give you a time earlier than current time.
- Private data keys
  - Private data key for new hour  
The calculated hour from current time
  - Private data key for new time  
The calculated time HH.MM.SS from current time
  - Private data key for new time and date  
The calculated time and date yyyy-MM-ddTHH:MM:SS from current date and time

**Version 2**

Added option to name the Private Data keys.

**Version 3**

Added Private data key for week day number.

**Version 4**

Added calculation of hours and private data keys for that.

Also private date key for ISO week number of the calculated date.

The app is now written in Node.js and uses the package “Moment” for the date calculations.